

Prüfbericht-Nr.: <i>Test report no.:</i>	CN26LUR6 001	Auftrags-Nr.: <i>Order no.:</i>	48285857	Seite 1 von 34 <i>Page 1 of 34</i>
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2025-12-30	
Auftraggeber: <i>Client:</i>	VIA Technologies, Inc. 8F., No. 533, Zhongzheng Rd., Xindian Dist., New Taipei City, Taiwan			
Prüfgegenstand: <i>Test item:</i>	mmWave Radar			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	99G97-01335HK			
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 95 Test report			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 95 Subpart M			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2025-12-17			
Prüfmuster-Nr.: <i>Test sample no:</i>	A004167315-010, 011, 012			
Prüfzeitraum: <i>Testing period:</i>	2025-12-30 - 2026-01-08			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland Taiwan Ltd. New Taipei Branch			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories			
Prüfergebnis*: <i>Test result*:</i>	Pass			
zusammengestellt von: <i>compiled by:</i>	genehmigt von: <i>authorized by:</i>			
Datum: <i>Date:</i> 2026-01-13	 Ryan Chen		 Brenda Chen	
Stellung / Position:	Senior Project Manager	Ausstellungsdatum: <i>Issue date:</i> 2026-01-13	Senior Project Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet				
* Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.:
Test report no.:

CN26LUR6 001

Seite 2 von 34
Page 2 of 34

Anmerkungen
Remarks

- | | |
|----------|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.
Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.
Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i>
<i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	95.3367(a)(b)	Radiated Power	Pass
5.1.2	2.1049 95.3379(b)	Occupied Bandwidth	Pass
5.1.3	95.3379(a)	Radiated Emissions	Pass
5.1.4	2.1055 95.3379(b)	Frequency Stability	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS	10
4. TEST SET-UP AND OPERATION MODES	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 TEST OPERATION AND TEST SOFTWARE	11
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4 TEST SETUP DIAGRAM	13
5. TEST RESULTS	14
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1 Radiated Power Measurement	14
5.1.2 Occupied Bandwidth	18
5.1.3 Radiated Emissions	20
5.1.4 Frequency Stability	33

APPENDIX A - TEST RESULT OF RADIATED EMISSIONS

APPENDIX SP - PHOTOGRAPHS TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: CN26LUR6 001
Test Report No.

Seite 5 von 34
Page 5 of 34

HISTORY OF THIS TEST REPORT

Revision	Description	Date Issued
R01	Original Release	2026-01-13

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Radiated Emissions

Appendix SP - Photographs Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 2
FCC 47CFR Part 95 Subpart M
ANSI C63.10-2020
ANSI C63.26-2015
KDB 653005 D01 76-81 GHz Radars v01r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 180491
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.30 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.30 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.54 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.52 dB
Radiated Emission (40 GHz ~ 231 GHz)	± 2.84 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a mmWave Radar. It contains a 76-81G compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	mmWave Radar
Type Identification	99G97-01335HK
FCC ID	NCI-RADCUB01

Technical Specification of EUT

Item		EUT information
Operating Frequency		76 ~ 81 GHz
Modulation		FMCW
Operation Voltage		12 Vdc 24 Vdc
Maximum EIRP (dBm)	12 Vdc	Average Power: 39.29
		Peak Power: 45.09
	24 Vdc	Average Power: 39.29
		Peak Power: 45.11
Antenna Information		PCB Type S antenna with 12.2 dBi gain
Accessory Device		Refer to 4.3

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: Test sample is provided with test mode firmware which makes it possible to continuously transmitting and receiving when power on the device. It was used to enable the operation modes listed as below.

The samples were used as follows:

A004167315-010, 011, 012

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Radiated Power (e.i.r.p.)	Occupied Bandwidth	Radiated Spurious Emissions	Frequency Stability	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Y-plane**.
2. "-" means no effect.
3. Two voltage conditions were evaluated. The worst-case condition was 24 Vdc, which was included in the evaluation.

Radiated Power (e.i.r.p.)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (GHz)	Tested Frequency (GHz)
-	76 ~ 81	76.25, 76.65, 77.25

Occupied Bandwidth

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (GHz)	Tested Frequency (GHz)
-	76 ~ 81	76.25, 76.65, 77.25

Radiated Spurious Emissions

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (GHz)	Tested Frequency (GHz)
-	76 ~ 81	76.25, 76.65, 77.25

Frequency Stability

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (GHz)	Tested Frequency (GHz)
-	76 ~ 81	76.65

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Radiated Power (e.i.r.p.)	20.6-23.4 °C	60-66 %	Roger Liao
Occupied Bandwidth	20.6-23.4 °C	60-66 %	Roger Liao
Radiated Spurious Emissions	20.6-23.4 °C	60-66 %	Roger Liao
Frequency Stability	22-25 °C	55-60 %	Peter Chiou

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None.

Support Unit

Support Unit								
No	Description	Brand	Model	S/N	Shielded	Ferrite Core (Qty)	Length (cm)	Remark
Radiated Test								
A	Cable with RS232	CUB	OT25-110150	-	-	30	-	--
1	Power Supply	GWINSTEK	GPS-3303	-	-	-	-	--
2	DC Power Cable	TUV	TUV-01	-	-	-	200	--
Conducted Test								
-	Power Supply	GWINSTEK	GPS-3303	GEU915620	-	-	-	-

4.4 Test Setup Diagram

<Radiated Spurious Emissions Mode>

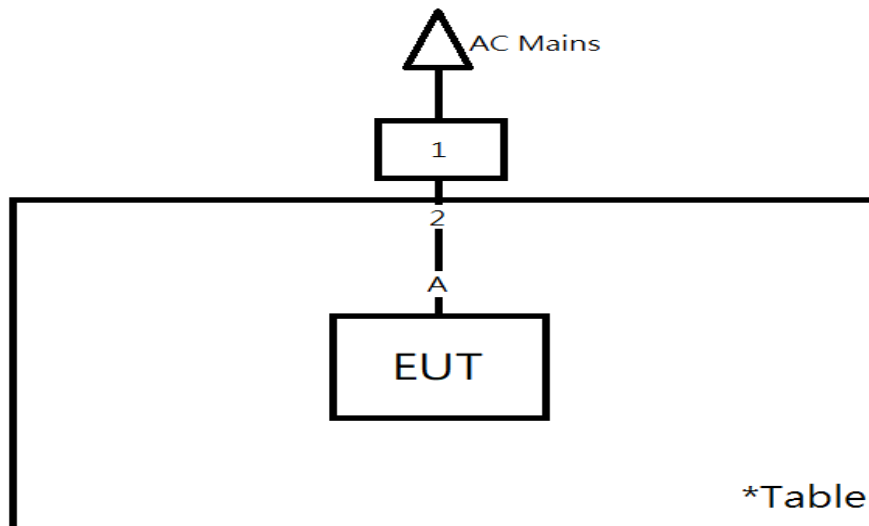


5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Radiated Power Measurement

Limit	FCC Part 95.3367 (a), Average E.I.R.P. $\leq 50\text{dBm/MHz}$ FCC Part 95.3367 (b), Peak E.I.R.P. $\leq 55\text{dBm/MHz}$
Test standard	FCC Part 95.3367
Basic standard	ANSI C63.10: 2020, Clause 9
Kind of Test Site	3m Semi-anechoic Chamber
Test Setup	

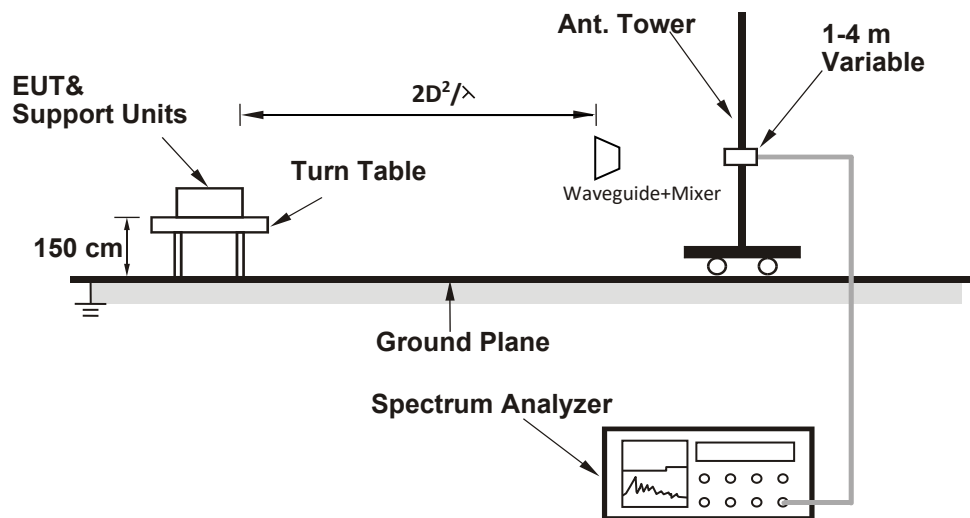

Test Instruments

Test Date: 2025/12/30 ~ 2026/01/08

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV40	101512	2025/2/26	2026/2/25
Horn Antenna	ETS-Lindgren	3117	00218929	2025/11/20	2026/11/19
HF-AMP + AC source	EMCI	EM01G18GA	980967	2025/4/2	2026/4/1
HF-AMP + AC source	EMCI	EMC184045SE	980657	2025/2/4	2026/2/3
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2025/3/28	2026/3/27
Coincal Horn Antenna	VDI	WR15CH	1-15	2023/8/22	2026/8/21
Coincal Horn Antenna	VDI	WR12CH	RCH012RL	2023/8/22	2026/8/21
Coincal Horn Antenna	VDI	WR10CH	1-10	2023/8/22	2026/8/21
Coincal Horn Antenna	VDI	WR8.0CH	1-8.0	2023/8/22	2026/8/21
Coincal Horn Antenna	VDI	WR5.1CH	1-5.1	2023/8/28	2026/8/27
Coincal Horn Antenna	VDI	WR3.1CH	1-33	2023/8/28	2026/8/27
Mixer SA	VDI	SAX WR15	US54250104	2023/8/23	2026/8/22
Mixer SA	VDI	SAX WR12	US54250151	2023/8/23	2026/8/22
Mixer SA	VDI	SAX WR10	US53250005	2023/8/23	2026/8/22
Mixer SA	VDI	SAX WR8.0	US53250003	2023/8/24	2026/8/23
Mixer SA	VDI	SAX WR5.1	US53250002	2023/8/28	2026/8/27
Mixer SA	VDI	SAX WR3.4	US53250013	2023/8/28	2026/8/27
Horn Antenna	OML	M19RH	16070501	2023/8/21	2026/8/20
Harmonic Mixer	OML	M19HWDX	160118-1	2023/8/23	2026/8/22
Signal Analyzer	Agilent	N9010A	MY52221334	2025/3/13	2026/3/12
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
Receiver	R&S	ESR7	102108	2025/7/2	2026/7/1
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2025/4/8	2026/4/7
LF-AMP	Agilent	8447D	2727A05146	2025/1/15	2026/1/14
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2025/12/16	2026/12/15

Test Result for 12 Vdc

<Horizontal>

Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
76.25	1.2	-26.76	21	23.91	55 (Peak)
76.25	1.2	-33.33	21	17.34	50 (Average)
76.65	1.2	-30.9	21	19.82	55 (Peak)
76.65	1.2	-36.45	21	14.27	50 (Average)
77.25	1.2	-29.3	21	21.48	55 (Peak)
77.25	1.2	-34.9	21	15.88	50(Average)

<Vertical>

Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
76.25	1.2	-7.02	21	43.65	55 (Peak)
76.25	1.2	-13.31	21	37.36	50 (Average)
76.65	1.2	-6.43	21	44.29	55 (Peak)
76.65	1.2	-12.11	21	38.61	50 (Average)
77.25	1.2	-5.69	21	45.09	55 (Peak)
77.25	1.2	-11.49	21	39.29	50(Average)

Remark:

1. Rx antenna is the receiver antenna from the test equipment.
2. The measured power level is converted to EIRP using the Friis equation:

$$EIRP = P_T * G_T = (P_R / G_R) * (4 * \pi * D / \lambda)^2$$

Where :

P_R is the power of the receive measurement

G_R is the gain of the receive measurement antenna

D is the measurement distance

λ is the wavelength

Test Result for 24 Vdc

<Horizontal>

Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
76.25	1.2	-28.83	21	21.84	55 (Peak)
76.25	1.2	-35.84	21	14.83	50 (Average)
76.65	1.2	-30.95	21	19.77	55 (Peak)
76.65	1.2	-36.58	21	14.14	50 (Average)
77.25	1.2	-28.5	21	22.28	55 (Peak)
77.25	1.2	-34.15	21	16.63	50(Average)

<Vertical>

Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
76.25	1.2	-6.68	21	43.99	55 (Peak)
76.25	1.2	-12.38	21	38.29	50 (Average)
76.65	1.2	-6.76	21	43.96	55 (Peak)
76.65	1.2	-12.3	21	38.42	50 (Average)
77.25	1.2	-5.67	21	45.11	55 (Peak)
77.25	1.2	-11.49	21	39.29	50(Average)

Remark:


3. Rx antenna is the receiver antenna from the test equipment.
4. The measured power level is converted to EIRP using the Friis equation:

$$EIRP = P_T * G_T = (P_R / G_R) * (4 * \pi * D / \lambda)^2$$
 Where :
 P_R is the power of the receive measurement
 G_R is the gain of the receive measurement antenna
 D is the measurement distance
 λ is the wavelength

5.1.2 Occupied Bandwidth

Limit	Within assigned band (76GHz to 81GHz)
Test standard	FCC Part 2.1049;FCC Part 95.3379 (b)
Basic standard	ANSI C63.26: 2015, Clause 5.4
Kind of Test Site	3m Full-anechoic Chamber


Test Setup

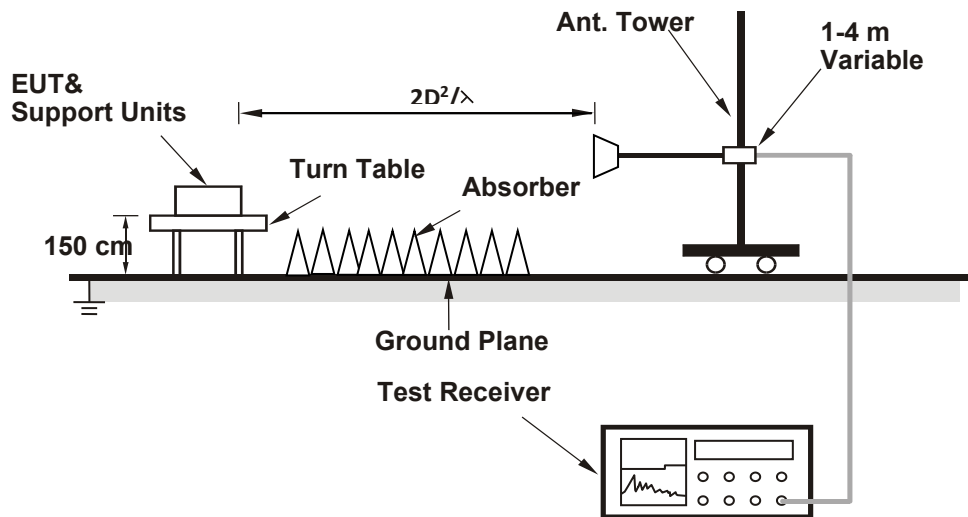

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	Agilent	N9010A	MY52221334	2025/03/13	2026/03/12	2026/01/06	2026/01/08
Thermal Chamber	GIANT FORCE	GCT-099-40-S	MAF0103-007	2025/02/24	2026/02/23	2026/01/06	2026/01/08
Coincal Horn Antenna	VDI	WR10CH	1-10	2023/08/22	2026/08/21	2026/01/06	2026/01/08
Mixer SA	VDI	M1971W	MY56390137	2023/11/01	2026/10/31	2026/01/06	2026/01/08

Test Results

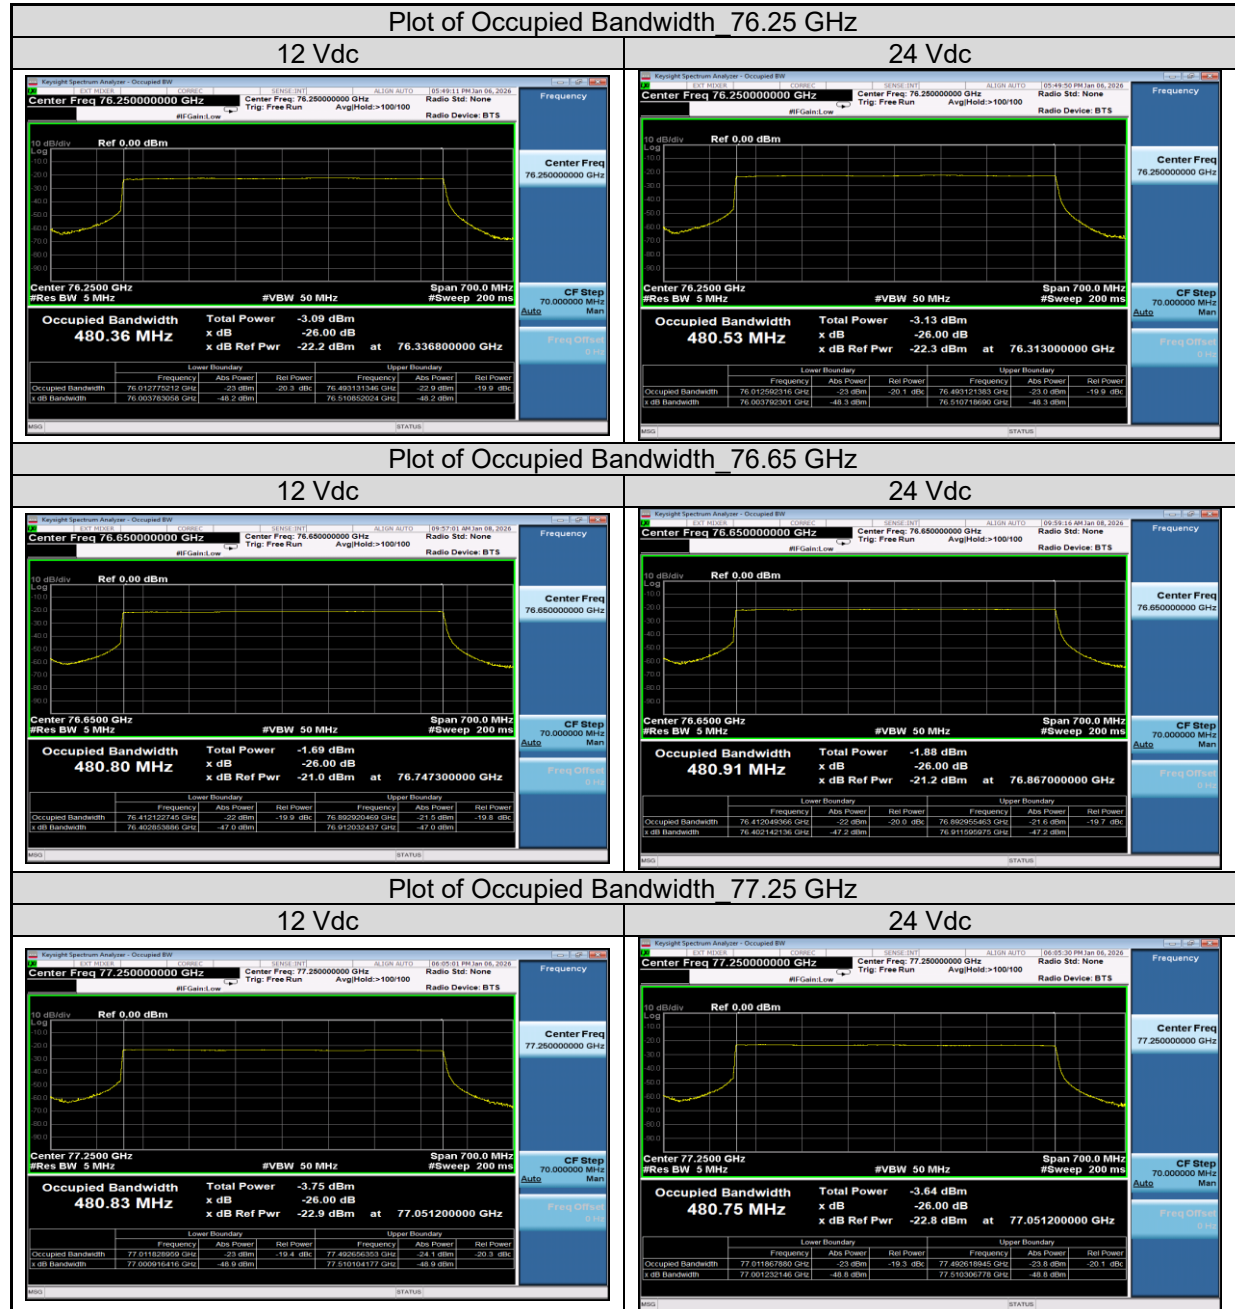


5.1.3 Radiated Emissions


Limit	FCC Part 95.3379 (a)(1) FCC Part 95.3379 (a)(2) FCC Part 95.3379 (a)(3)
Test standard	FCC Part 95.3379
Basic standard	ANSI C63.26: 2015, Clause 5.5
Kind of Test Site	3m Semi-anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

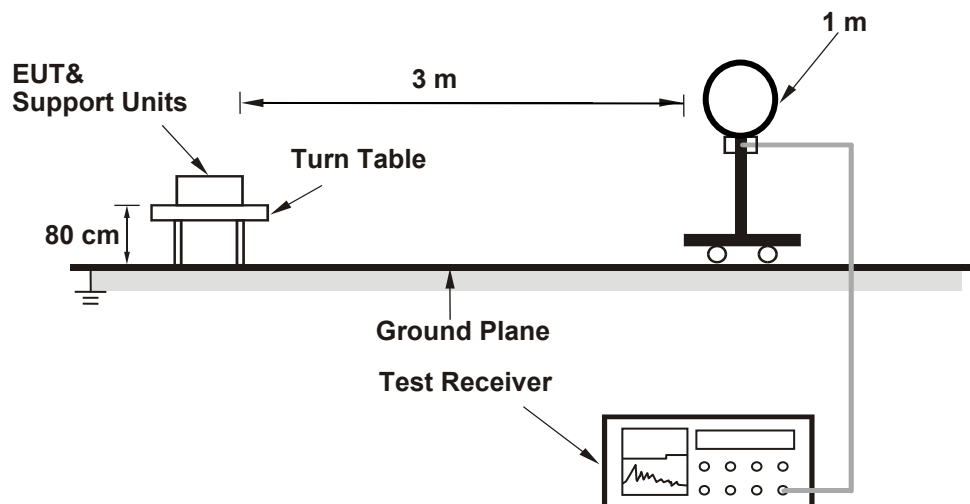


<Radiated Emissions 30 MHz to 1 GHz>

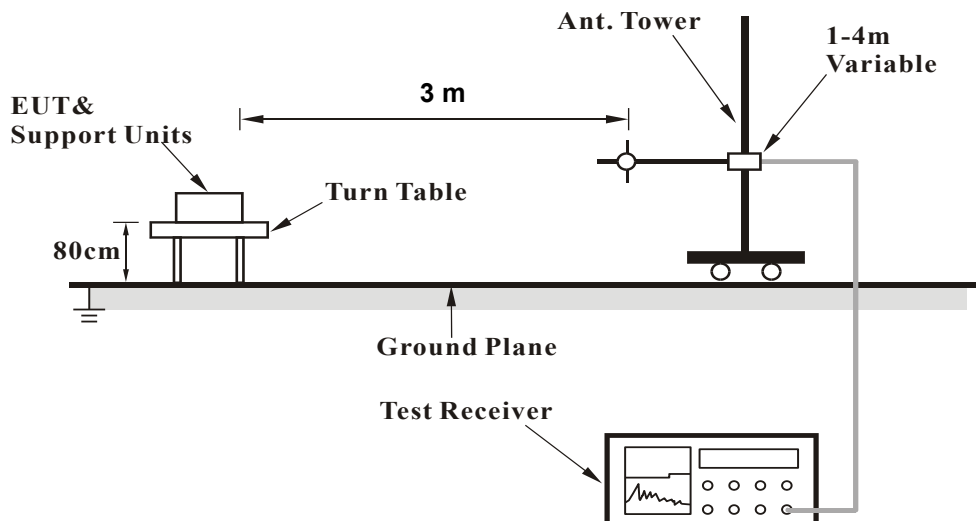

<Radiated Emissions 1 GHz to 40 GHz>

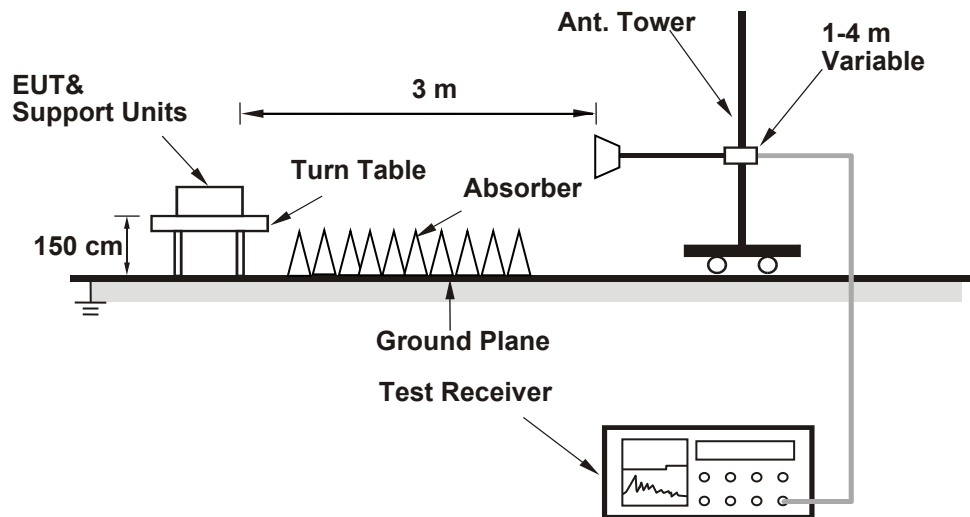

<Radiated Emissions 40 GHz to 231 GHz>

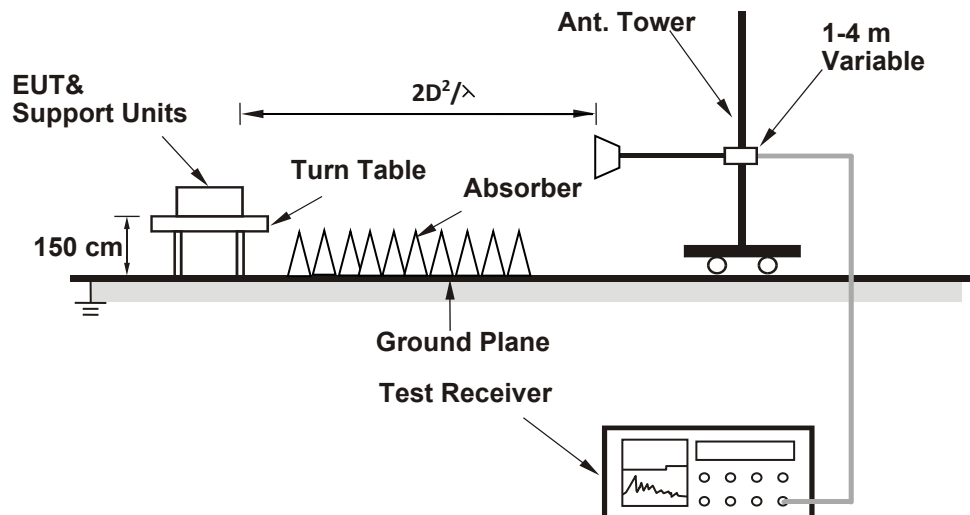

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Refer to 5.1.1 Test Instruments

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions from 30 MHz to 40 GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.

For Radiated Emissions above 40GHz

- a. The EUT was placed on the top of a rotating table 1.5 meters (for above 40 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set $2D^2/\lambda$ away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to average detected function and specified bandwidth with maximum hold mode when the test frequency is above 40 GHz.

Note:

1. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1MHz or 3MHz for Average detection (AV) at frequency above 40GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.
3. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.

Test Results

Below 40GHz Please refer to Appendix A.

Above 40GHz as below:

76.25 GHz

TX_40G~50G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
44.691	1.2	-92.302	21	-46.27
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000002	3	0.0000000002	0.02	600

TX_40G~50G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
44.869	1.2	-92.162	21	-46.10
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000002	3	0.0000000002	0.02	600

TX_50G~75G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
65.227	1.2	-98.725	21	-49.41
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000001	3	0.0000000001	0.01	600

TX_50G~75G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
65.377	1.2	-81.875	21	-32.54
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000056	3	0.000000005	0.49	600

TX_75G~110G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
83.242	1.2	-96.454	21	-45.02
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000003	3	0.0000000003	0.03	600

TX_75G~110G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
83.295	1.2	-86.678	21	-35.24
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000030	3	0.000000003	0.26	600

TX_110G~140G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
135.662	1.2	-102.336	21	-46.66
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000002	3	0.0000000002	0.02	600

TX_110G~140G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
133.505	1.2	-102.268	21	-46.73
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000002	3	0.0000000002	0.02	600

TX_140G~231G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
140.072	1.2	-101.133	21	-45.18
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000003	3	0.0000000003	0.03	600

TX_140G~231G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
140.123	1.2	-101.092	21	-45.14
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000003	3	0.0000000003	0.03	600

Remark: Rx antenna is the receiver antenna from the test equipment.

76.65 GHz

TX_40G~50G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
44.882	1.2	-89.299	21	-43.23
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000005	3	0.0000000004	0.04	600

TX_40G~50G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
44.565	1.2	-88.556	21	-42.55
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000006	3	0.0000000005	0.05	600

TX_50G~75G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
65.732	1.2	-91.707	21	-42.33
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000006	3	0.0000000005	0.05	600

TX_50G~75G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
65.552	1.2	-61.458	21	-12.10
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00006165	3	0.000000545	54.51	600

TX_75G~110G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
83.627	1.2	-83.929	21	-32.46
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000057	3	0.000000005	0.50	600

TX_75G~110G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
83.816	1.2	-65.988	21	-14.50
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00003551	3	0.000000314	31.40	600

TX_110G~140G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
129.56	1.2	-92.26	21	-36.99
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.000000020	3	0.000000002	0.18	600

TX_110G~140G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
124.982	1.2	-92.06	21	-37.10
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.000000020	3	0.000000002	0.17	600

TX_140G~231G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
140.026	1.2	-91.782	21	-35.83
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000026	3	0.000000002	0.23	600

TX_140G~231G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
142.092	1.2	-91.902	21	-35.83
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000026	3	0.000000002	0.23	600

Remark: Rx antenna is the receiver antenna from the test equipment.

77.25 GHz

TX_40G~50G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
45.285	1.2	-91.959	21	-45.81
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000003	3	0.0000000002	0.02	600

TX_40G~50G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
44.873	1.2	-91.124	21	-45.06
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000003	3	0.0000000003	0.03	600

TX_50G~75G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
66.172	1.2	-99.551	21	-50.11
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000001	3	0.0000000001	0.01	600

TX_50G~75G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
66.107	1.2	-85.836	21	-36.41
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000023	3	0.000000002	0.20	600

TX_75G~110G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
84.061	1.2	-96.357	21	-44.84
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000003	3	0.0000000003	0.03	600

TX_75G~110G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
84.058	1.2	-84.846	21	-33.33
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000046	3	0.000000004	0.41	600

TX_110G~140G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
122.267	1.2	-102.39	21	-47.62
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000002	3	0.0000000002	0.02	600

TX_110G~140G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
127.184	1.2	-102.243	21	-47.13
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000002	3	0.0000000002	0.02	600

TX_140G~231G_H				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
140.162	1.2	-101.172	21	-45.21
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000003	3	0.0000000003	0.03	600

TX_140G~231G_V				
Frequency (GHz)	Measurement Distance (m)	Measured Power (dBm)	Rx Antenna Gain (dBi)	EIRP (dBm)
142.072	1.2	-101.63	21	-45.55
EIRP (W)	Specification Distance (m)	Power Density (W/cm ²)	Power Density (pW/cm ²)	Limit (pW/cm ²)
0.00000003	3	0.0000000002	0.02	600

Remark: Rx antenna is the receiver antenna from the test equipment.

5.1.4 Frequency Stability


Limit Within assigned band (76 GHz to 81 GHz)

Test standard FCC Part 95.3379 (b)

Basic standard ANSI C63.26: 2015, Clause 5.6

Kind of Test Site Temperature and Humidity Chamber

Test Setup

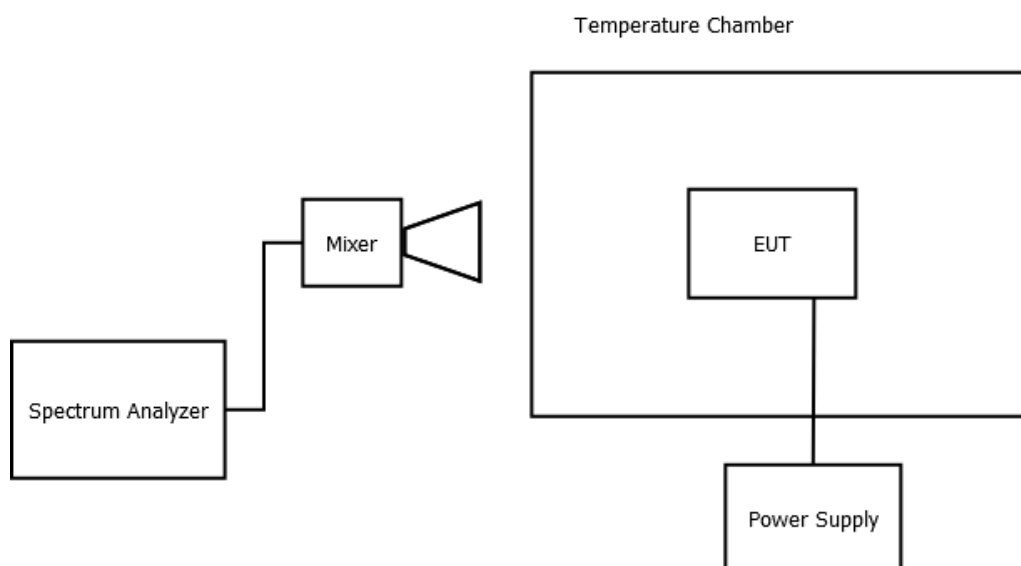

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	Agilent	N9010A	MY52221334	2025/03/13	2026/03/12	2025/12/30	2026/1/8
Thermal Chamber	GIANT FORCE	GCT-099-40-S	MAF0103-007	2025/02/24	2026/02/23	2025/12/30	2026/1/8
Coincal Horn Antenna	VDI	WR10CH	1-10	2023/08/22	2026/08/21	2025/12/30	2026/1/8
Mixer SA	VDI	M1971W	MY56390137	2023/11/01	2026/10/31	2025/12/30	2026/1/8


Test Results

Power Supply (Vdc)	Temperature (°C)	Measured Frequency (MHz)	Operating Frequency (MHz)	Limit (GHz)
24	-20	76653.5	76650	76-81
24	-10	76652.5		
24	0	76652.5		
24	10	76652.5		
24	20	76651.5		
24	30	76652		
24	40	76651.5		
24	50	76651		

Power Supply (Vdc)	Temperature (°C)	Measured Frequency (MHz)	Operating Frequency (MHz)	Limit (GHz)
32	20	76651.5	76650	76-81
24		76651.5		
9		76652		

Appendix A: Test Results of Radiated Spurious Emissions

Tx Mode, 9kHz ~ 30MHz

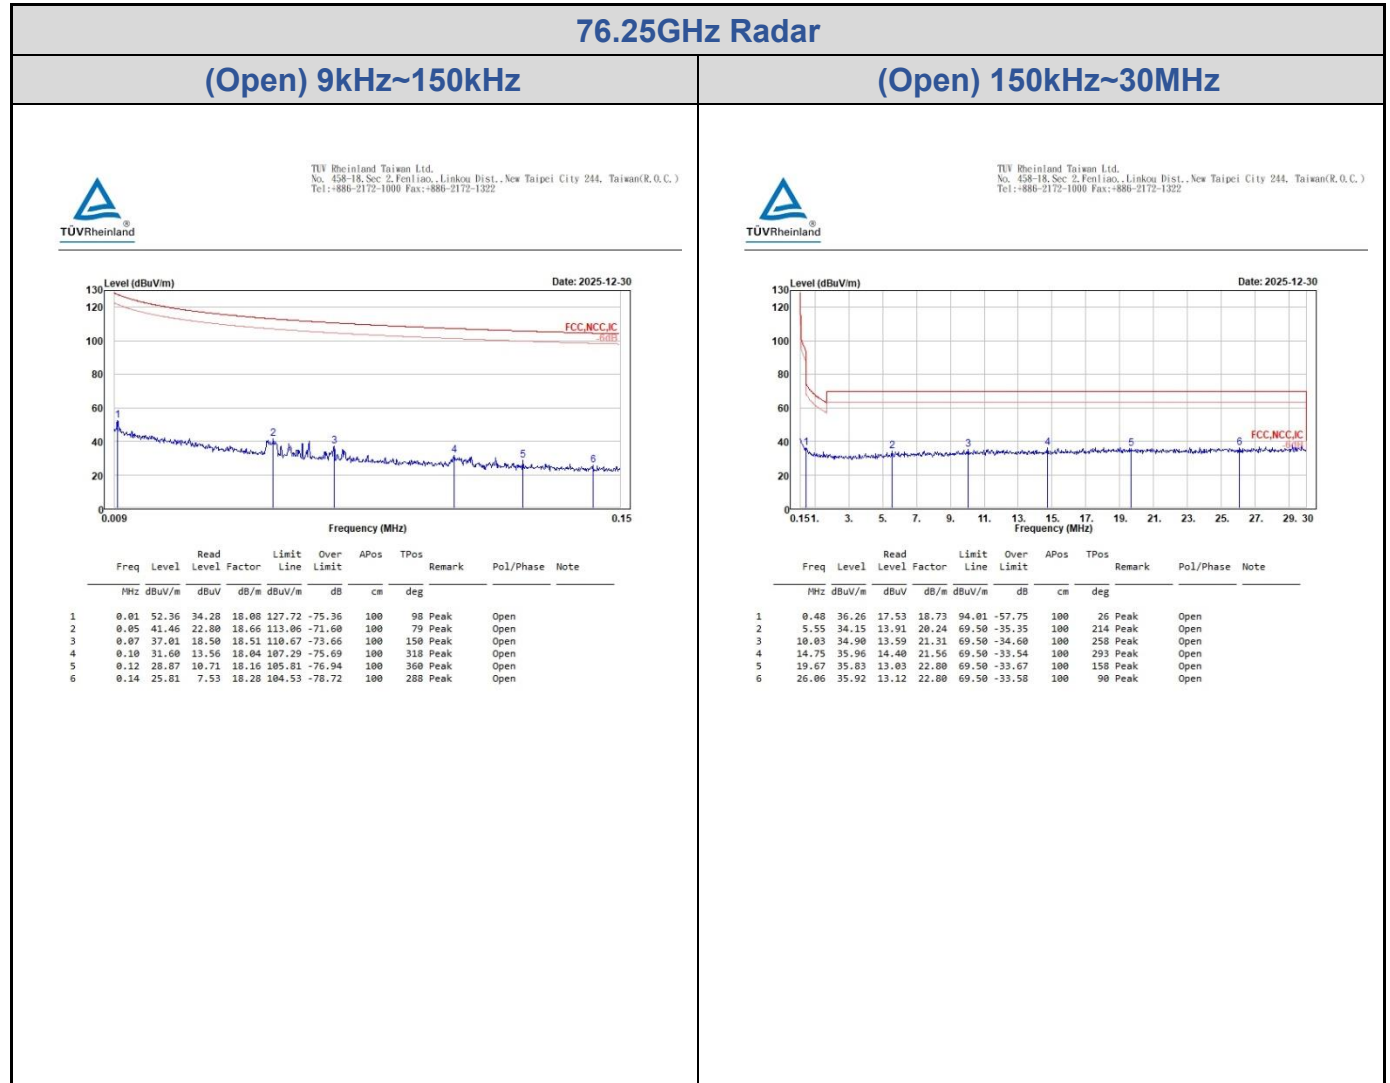

Tx Mode, 30MHz ~ 1GHz


76.25GHz Radar

Horizontal

Vertical




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

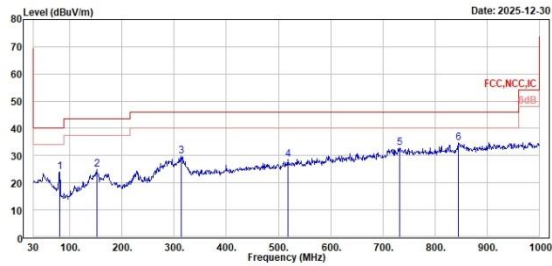

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	80.44	23.99	35.79	-11.80	40.00	-16.01	199	360	Peak	Horizontal		
2	151.25	24.99	31.74	-6.75	43.50	-18.51	200	79	Peak	Horizontal		
3	313.24	29.86	35.59	-5.73	46.00	-16.14	100	139	Peak	Horizontal		
4	518.88	28.66	29.99	-1.33	46.00	-17.34	100	33	Peak	Horizontal		
5	732.28	32.62	30.18	2.64	46.00	-13.18	200	121	Peak	Horizontal		
6	844.80	34.74	30.70	4.04	46.00	-11.26	200	108	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

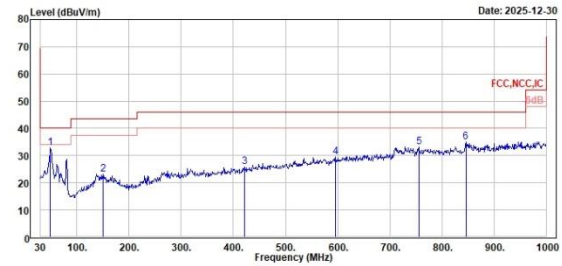

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	49.40	32.78	39.52	-6.74	40.00	-7.22	100	1	Peak	Vertical		
2	150.28	23.20	29.96	-6.76	43.50	-20.30	200	332	Peak	Vertical		
3	420.91	25.91	29.27	-3.36	46.00	-20.09	100	360	Peak	Vertical		
4	596.48	29.39	29.20	0.19	46.00	-16.61	100	199	Peak	Vertical		
5	755.56	33.01	29.78	3.23	46.00	-12.99	100	18	Peak	Vertical		
6	845.77	34.86	30.78	4.08	46.00	-11.14	100	331	Peak	Vertical		


Tx Mode, 1GHz ~ 40GHz

76.25GHz Radar

Horizontal



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

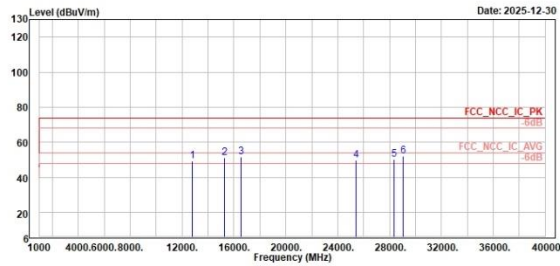


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1 12777.00	49.21	39.05	10.16	74.00	-24.79	100	164	Peak	Horizontal		
2 15250.00	51.11	43.10	8.01	74.00	-22.89	200	150	Peak	Horizontal		
3 16549.00	51.55	43.15	8.40	74.00	-22.45	100	2	Peak	Horizontal		
4 25400.82	49.68	47.38	2.30	74.00	-24.32	100	310	Peak	Horizontal		
5 28352.94	50.19	46.98	3.21	74.00	-23.81	200	76	Peak	Horizontal		
6 29059.53	52.23	48.67	3.56	74.00	-21.77	200	110	Peak	Horizontal		

Vertical



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

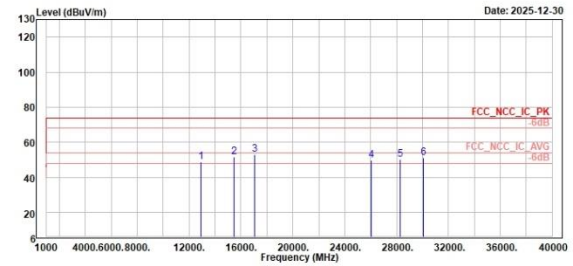

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1 12894.00	48.06	38.78	10.00	74.00	-25.14	100	279	Peak	Vertical		
2 15483.00	51.66	43.46	8.20	74.00	-22.34	100	262	Peak	Vertical		
3 17068.00	53.05	44.54	8.51	74.00	-20.95	200	134	Peak	Vertical		
4 26072.71	50.01	47.40	2.61	74.00	-23.99	200	9	Peak	Vertical		
5 28266.23	50.28	47.11	3.17	74.00	-23.72	100	246	Peak	Vertical		
6 30094.82	51.30	48.08	3.22	74.00	-22.70	200	336	Peak	Vertical		

Tx Mode, 9kHz ~ 30MHz


76.65GHz Radar

(Open) 9kHz~150kHz

(Open) 150kHz~30MHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

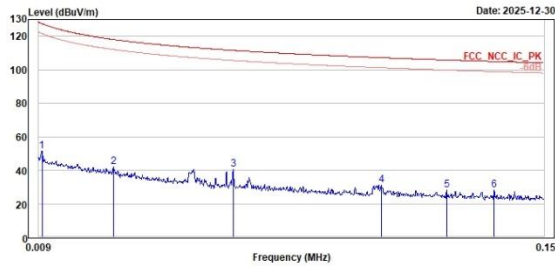

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Factor	Line	Limit					
	MHz	dBuV/m	dB/m	dBuV/m	dB	cm	deg			
1	0.01	51.43	33.32	18.11	127.60	-76.17	100	189 Peak	Open	
2	0.03	42.07	22.06	20.01	118.05	-75.98	100	257 Peak	Open	
3	0.06	40.32	22.20	18.12	111.57	-71.25	100	6 Peak	Open	
4	0.10	31.14	13.09	18.05	107.21	-76.07	100	74 Peak	Open	
5	0.12	28.20	10.04	18.16	105.81	-77.61	100	199 Peak	Open	
6	0.14	28.24	9.99	18.25	104.92	-76.68	100	15 Peak	Open	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

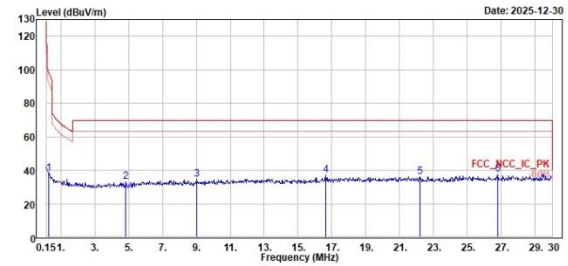

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	Factor	Line	Limit					
	MHz	dBuV/m	dB/m	dBuV/m	dB	cm	deg			
1	0.30	38.27	19.73	18.54	98.08	-59.81	100	187 Peak	Open	
2	4.84	33.06	13.47	19.59	69.50	-36.44	100	352 Peak	Open	
3	9.05	34.38	13.57	20.81	69.50	-35.12	100	135 Peak	Open	
4	16.63	37.26	15.12	22.14	69.50	-32.24	100	142 Peak	Open	
5	22.21	35.93	13.64	22.29	69.50	-33.57	100	226 Peak	Open	
6	26.81	37.42	14.46	22.96	69.50	-32.08	100	66 Peak	Open	

Tx Mode, 30MHz ~ 1GHz


76.65GHz Radar

Horizontal

Vertical




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

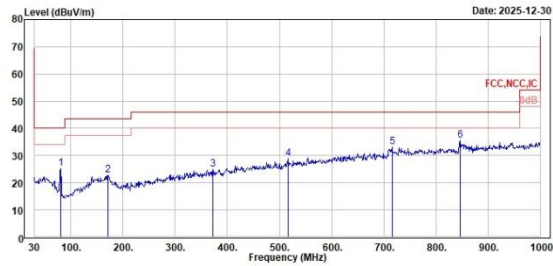

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	80.44	25.10	36.90	-11.80	40.00	-14.90	100	219 Peak	Horizontal	
2	170.65	22.69	29.78	-7.09	43.50	-20.81	100	290 Peak	Horizontal	
3	372.41	25.02	29.29	-4.27	46.00	-20.98	200	325 Peak	Horizontal	
4	515.97	28.92	30.39	-1.47	46.00	-17.08	100	273 Peak	Horizontal	
5	715.79	33.14	30.66	2.48	46.00	-12.86	200	133 Peak	Horizontal	
6	846.74	35.61	31.48	4.13	46.00	-10.39	100	110 Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

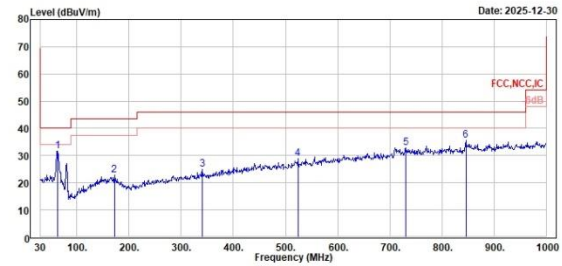

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	62.98	31.76	39.55	-7.79	40.00	-8.24	100	360 Peak	Vertical	
2	171.62	22.66	29.60	-6.94	43.50	-20.84	200	172 Peak	Vertical	
3	340.40	25.04	29.97	-4.93	46.00	-20.96	100	221 Peak	Vertical	
4	523.73	28.87	30.14	-1.27	46.00	-17.13	200	157 Peak	Vertical	
5	731.31	32.92	30.20	2.64	46.00	-13.80	162	360 Peak	Vertical	
6	845.77	35.49	31.41	4.08	46.00	-10.51	200	115 Peak	Vertical	

Tx Mode, 1GHz ~ 40GHz


76.65GHz Radar

Horizontal

Vertical




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

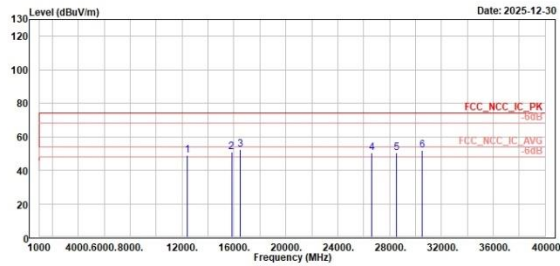

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	12399.00	48.88	38.99	9.89	74.00	-25.12	100	53	Peak	Horizontal	
2	15814.00	51.08	42.84	8.24	74.00	-22.92	100	214	Peak	Horizontal	
3	16513.00	52.33	43.91	8.42	74.00	-21.67	100	127	Peak	Horizontal	
4	26646.00	50.35	47.33	3.02	74.00	-23.65	140	360	Peak	Horizontal	
5	28547.00	50.18	46.87	3.31	74.00	-23.82	200	236	Peak	Horizontal	
6	30534.82	51.84	48.63	3.21	74.00	-22.16	100	170	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

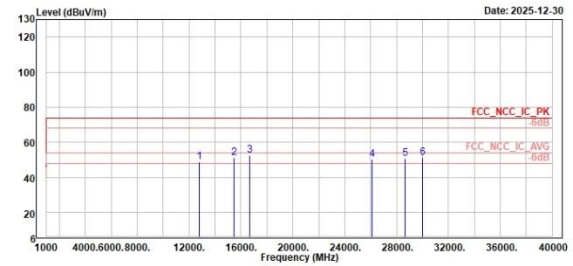

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	12787.00	48.67	38.50	10.17	74.00	-25.33	200	290	Peak	Vertical	
2	15484.00	51.18	42.98	8.20	74.00	-22.82	133	360	Peak	Vertical	
3	16668.00	52.52	44.11	8.41	74.00	-21.48	100	286	Peak	Vertical	
4	26128.35	50.27	47.65	2.62	74.00	-23.73	100	281	Peak	Vertical	
5	28681.65	50.82	47.40	3.34	74.00	-23.19	200	300	Peak	Vertical	
6	29991.29	51.50	48.26	3.24	74.00	-22.50	200	221	Peak	Vertical	

Tx Mode, 9kHz ~ 30MHz


77.25GHz Radar

(Open) 9kHz~150kHz

(Open) 150kHz~30MHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

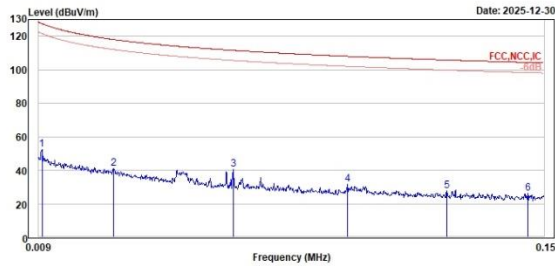

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	0.01	52.34	34.23	18.11	127.60	-75.26	100	93	Peak	Open		
2	0.03	40.91	20.91	20.00	118.09	-77.18	100	218	Peak	Open		
3	0.06	40.31	22.19	18.12	111.57	-71.26	100	163	Peak	Open		
4	0.10	31.75	13.73	18.02	108.01	-76.26	100	149	Peak	Open		
5	0.12	27.64	9.48	18.16	105.81	-78.17	100	259	Peak	Open		
6	0.15	26.00	7.70	18.30	104.35	-78.35	100	36	Peak	Open		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

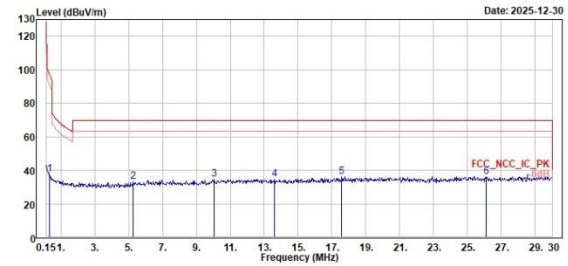

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	0.33	37.52	18.95	18.57	97.26	-59.74	100	332	Peak	Open		
2	5.25	33.24	13.33	19.91	69.50	-36.26	100	285	Peak	Open		
3	10.06	34.42	13.11	21.31	69.50	-35.08	100	49	Peak	Open		
4	13.61	34.53	12.98	21.55	69.50	-34.97	100	191	Peak	Open		
5	17.58	35.93	13.46	22.47	69.50	-33.57	100	239	Peak	Open		
6	26.09	36.12	13.31	22.81	69.50	-33.38	100	240	Peak	Open		

Tx Mode, 30MHz ~ 1GHz


77.25GHz Radar

Horizontal

Vertical




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

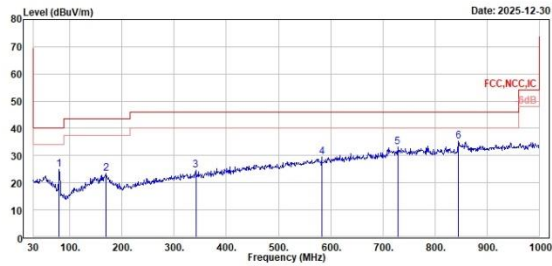

	Freq	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	79.47	24.90	36.41	-11.51	40.00	-15.10		100	186	Peak	Horizontal	
2	168.71	23.34	29.81	-6.47	43.50	-20.16		200	69	Peak	Horizontal	
3	341.37	24.59	29.50	-4.91	46.00	-21.41		200	352	Peak	Horizontal	
4	582.90	29.50	29.72	-0.22	46.00	-16.50		100	325	Peak	Horizontal	
5	728.40	33.22	30.63	2.59	46.00	-12.78		170	360	Peak	Horizontal	
6	844.80	35.42	31.38	4.04	46.00	-10.58		100	68	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

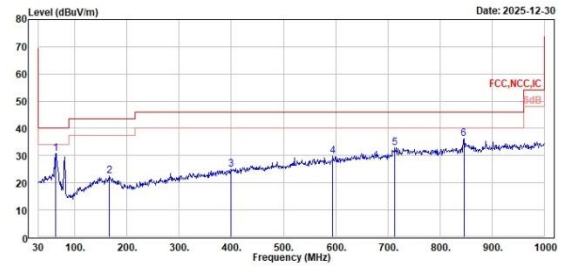

	Freq	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	62.98	30.78	38.57	-7.79	40.00	-9.22		114	360	Peak	Vertical	
2	165.80	22.53	28.95	-6.42	43.50	-20.97		200	115	Peak	Vertical	
3	399.57	24.99	28.60	-3.61	46.00	-21.01		200	284	Peak	Vertical	
4	594.54	29.93	29.83	0.10	46.00	-16.07		200	210	Peak	Vertical	
5	713.85	32.77	30.35	2.42	46.00	-13.23		100	185	Peak	Vertical	
6	845.77	36.33	32.25	4.08	46.00	-9.67		200	360	Peak	Vertical	

Tx Mode, 1GHz ~ 40GHz


77.25GHz Radar

Horizontal

Vertical




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

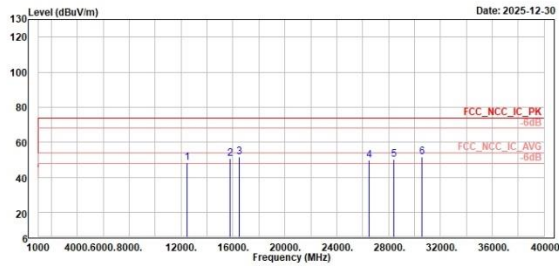

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	12480.00	48.41	38.46	9.95	74.00	-25.59	200	300	Peak	Horizontal	
2	15802.00	50.77	42.48	8.29	74.00	-23.23	200	200	Peak	Horizontal	
3	16471.00	51.54	43.18	8.36	74.00	-22.46	100	250	Peak	Horizontal	
4	26494.59	49.74	46.95	2.79	74.00	-24.26	126	360	Peak	Horizontal	
5	28381.41	50.19	46.95	3.24	74.00	-23.81	100	345	Peak	Horizontal	
6	30683.41	51.60	48.34	3.26	74.00	-22.40	100	331	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

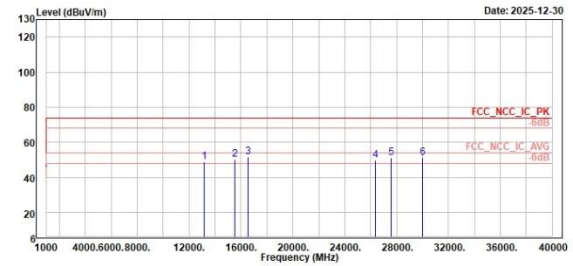

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	13169.00	48.96	39.31	9.65	74.00	-25.04	171	360	Peak	Vertical	
2	15559.00	50.26	42.16	8.10	74.00	-23.74	100	96	Peak	Vertical	
3	16548.00	51.70	43.30	8.40	74.00	-22.30	100	235	Peak	Vertical	
4	26379.41	50.03	47.31	2.72	74.00	-23.97	200	272	Peak	Vertical	
5	27697.53	51.13	48.27	2.86	74.00	-22.87	163	360	Peak	Vertical	
6	29982.23	51.46	48.24	3.22	74.00	-22.54	155	360	Peak	Vertical	