

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 1 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

This drawing consists of pages issued or re-issued on dates shown in the following list.
Italic underlined words indicate content changes or additions on revised pages.

PAGE	ISSUED
1 - 47	05 Apr 2002

COMPANY CONFIDENTIAL

This report is the property of Pulver Laboratories Inc. The information contained in this report can only be divulged to persons authorized by Pulver Laboratories Inc.

Portions of this report contain information proprietary to 8x8, Inc.; other portions of this report contain information proprietary to Pulver Laboratories and the RFI Controls Company. Except for agencies like the Federal Communications Commission, companies must sign Non-Use and Non-Disclosure Agreements before authorized to read this report.

All rights reserved. No part of this report may be reproduced or transmitted in any form or by any means without permission in writing from Pulver Laboratories Inc.

Copyright 1983 - 2002 Pulver Laboratories Inc.
PLI223F11W.FRMx10
Q528929FCCW.DWG

Pulver Laboratories Inc.
320 North Santa Cruz Avenue Los Gatos, California 95030-7243
Telephone: 408.399.7000 Facsimile: 408.399.7001 www.PulverLabs.com

TABLE OF CONTENTS

Page	Section	Description
1	0.0	Drawing; Client; Product; Standards
6	1.0	Engineering Considerations
	1.1	General Engineering Considerations
	1.1.1	24 May 2001 FCC Conformance Statement
7	1.2	Specific Engineering Considerations
	1.3	Product Description and Intended Use
8	1.4	Abbreviated List of Photographs
9	1.5	Equipment Used During Measurements
17	2.0	Mandatory Labeling, Manual Information, and Shipping Documents
	2.1	FCC Label
18		Illustration 1.0: FCC Label
19	2.2	Operators' Manual Information
19	2.3	FCC User Information
22	2.4	Illustration 2.0: Industry Canada
23	2.5	BZT Declaration
26		Oscillator Frequencies
27		EUT Orientation
29	3.0	Radiated Electromagnetic Interference - Test Configuration
32	4.0	Radiated EMI – Results
42	5.0	Conducted EMI -Test Configuration
42	6.0	Conducted EMI - Results
47		Last Page of Report
		Certificate of Conformance

Page 3 of 47

Pulver Laboratories Inc.
320 North Santa Cruz Avenue Los Gatos, California 95030-7243
Telephone: 408.399.7000 Facsimile: 408.399.7001 www.PulverLabs.com

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 4 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

Evaluated to the Following Standards

PLI Certification.

Certified by Pulver Laboratories Inc. to comply with the following standards.

FCC Certification.

Federal Communications Commission (FCC, USA)

Category Classification: Class B - Residential

FCC ID number - NEP5289U

- American National Standards Institute C63.4-1992 entitled Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- Federal Communications Commission Rules and Regulations located in the Code of Federal Regulations, Title 47, Part 2 entitled Frequency Allocations and Radio Treaty Matters; General Rules and Regulations; and Part 15 entitled Radio Frequency Devices, 18 December 2001 Edition.

ICAN Verification.

Industry Canada (ICAN)

Category Classification: Class B - Residential

- Canadian Standards Association (CSA) C108.8-M1983 entitled Electromagnetic Emissions for Data Processing Equipment and Electronic Office Machines.
- Canadian Standards Association (CSA) CAN3-C108.3.1-M84 entitled Limits and Measurement Methods of Electromagnetic Noise from AC Power Systems.
- Industry Canada (ICAN) Interference-Causing Equipment Standard ICES-003, Issue 1, June 1991, entitled "Digital Apparatus".
- Industry Canada (ICAN) Radio Interference Regulation amendment dated 15 September 1988 (Radio Act Registration SOR/88-475); 3862 01 Data Processing Equipment.

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 5 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

CE Certification mark.
International Community

Category Classification: Class B - Residential

- EN55022 / CISPR 22 entitled Limits and methods of measurement of radio disturbance characteristics of information technology equipment, 1995 Edition.
- EN55022 / CISPR 22 entitled Limits and methods of measurement of radio disturbance characteristics of information technology equipment, 1998 Edition.

Referenced Test Standards

- EN55011 entitled Specification for Limits and methods of measurement of radio disturbance characteristics of industrial, scientific, and medical (ISM) radio-frequency equipment. 15 Sept 1998.
- EN55022 / CISPR 22 entitled Limits and methods of measurement of radio disturbance characteristics of information technology equipment, First Edition 1985.

Trademarks

All trademarks and registered trademarks shown or mentioned in this Pulver Laboratories Product Evaluation Report belong to their respective holders.

Pulver Laboratories Inc.
320 North Santa Cruz Avenue Los Gatos, California 95030-7243
Telephone: 408.399.7000 Facsimile: 408.399.7001 www.PulverLabs.com

1.0 Engineering Considerations

1.1 General Engineering Considerations

1.1.1 This report deals with conformance to the:

- Code of Federal Regulations, 47 CFR, Part 2 and Part 15, issued 18 December 2001;
- American National Standards Institute standard number C63.4-1992 entitled Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz;
- EN55022 / CISPR 22 entitled Limits and methods of measurement of radio disturbance characteristics of information technology equipment, Second Edition 1993, with amendment A1, May 1995 Edition.

1.1.2 To assist the Federal Communications Commission in the continuing education of applicants and grantees, Pulver Laboratories has advised 8x8, Inc. to review a copy of the Rules and Regulations located in the Code of Federal Regulations, Title 47, Part 2 entitled Frequency Allocations and Radio Treaty Matters; General Rules and Regulations; and Part 15 entitled Radio Frequency Devices, issued 18 December 2001.

1.1.3 The manufacturer has a contractual obligation to Pulver Laboratories to incorporate into production all modifications photographed and outlined in this report with associated documentation.

1.1.4 The Pulver Laboratories Certificate of Conformance issued with this report allows the manufacturer to ship and sell product using the Pulver Laboratories Product Certification Label. This label can only be used if the manufacturer allows Pulver Laboratories to conduct a Follow Up Service at the manufacturing facilities and conduct an Electromagnetic Interference test of the finished product every six months.

1.2 Specific Engineering Considerations

1.2.1 Interconnecting low voltage computer cables lengths:

Cable Description	Length (feet)	Length (meters)	Shielded / Unshielded
EUT Sensor Data Cable	9.50	2.90	Unshielded
Printer: Parallel Data cable	6.00	1.83	Shielded
Keyboard: Data Cable	6.00	1.83	Unshielded
Keyboard: Extension Cable	9.67	2.95	Unshielded
Monitor: Data Cable	4.17	1.27	Shielded
Mouse: Data Cable	6.00	1.83	Unshielded
Modem: Serial Data Cable	5.75	1.75	Unshielded
Computer: Input Power Cable	6.00	1.83	Shielded
Monitor: Input Power Cable	6.50	1.98	Shielded
Printer: Input Power Cable	6.00	1.83	Unshielded
Modem: Input Power Cable	6.00	1.83	Unshielded

1.2.2 Input / Output (I / O) Cables coiled and wrapped to maximum lengths of 30 to 40 cm, at least 40 cm from ground plane as recommended by ANSI 63.4-1992.

1.2.3 In order to meet the agency criteria listed in this PLI Evaluation Report, the following modifications were made to the original design of the Equipment Under Test:

1.2.3.1 Added 0.01 μ f capacitor in parallel with C6 (1000 μ f capacitor).

1.2.3.2 Placed 0.01 μ f parallel to 1000pf capacitor at C3. No capacitor in this location, previously.

1.2.3.3 Added 0.01 μ f capacitor in parallel to C1 capacitor.

1.2.3.4 Added 0.01 μ f capacitor in parallel to C4 capacitor.

1.2.4 There is one possible Equipment Under Test (Behind-U Workstation Alert System, RVP 100) input power configuration:

1.2.4.1 The EUT is powered from a keyboard which is connected to the PS2 port of a host computer system.

1.2.5 There are two possible EUT test configurations:

1.2.5.1 **Test Configuration #1:** The [mounted] Behind-U **Sensor** and Behind-U **Base Unit** placed on the test table, along with the host computer, monitor, modem, mouse, printer, and keyboard. Note: the [mounted] Behind-U **Sensor** is perpendicular to test table, with the permanently connected telephone type cable closest to the table.

1.2.5.1.1 Test Configuration #1 yielded one Radiated test and one Conducted test.

1.2.5.2 **Test Configuration #2:** Only the [mounted] Behind-U **Sensor** is on the test table. The Behind-U **Base Unit**, host computer, monitor, modem, mouse, printer, and keyboard are located on a cart 9 feet away from the test table.

1.2.5.2.1 Test Configuration #2 yielded one Radiated test.

1.3 **Product Description and Intended Use**

1.3.1 The 8x8, Inc. Behind-U Workstation Alert System actively monitors an area up to 25 feet from your monitor screen. When the Behind-U software is activated, the sensor module sends a signal to a PC to automatically switch screens when an individual is detected within the sensor area.

1.4 **List of Photographs Accompanying in this Report**

FIGURE 1: PLI Photograph Number 529076 illustrates the rear view of the Equipment Under Test with all peripherals attached in **Test Configuration #1**. The "open field" radiated Radio Frequency Interference / Electromagnetic Interference test programs utilized this equipment and cable configuration.

Pulver Laboratories Inc.

320 North Santa Cruz Avenue Los Gatos, California 95030-7243
Telephone: 408.399.7000 Facsimile: 408.399.7001 www.PulverLabs.com

FIGURE 2: PLI Photograph Number 529078 illustrates the rear view of the Equipment Under Test with all peripherals attached in **Test Configuration #2**. The "open field" radiated Radio Frequency Interference / Electromagnetic Interference test programs utilized this equipment and cable configuration.

FIGURE 3: PLI Photograph Number 529167 illustrates the rear view of the Equipment Under Test with all peripherals attached in Conducted Electromagnetic Interference **Test Configuration #1**.

FIGURE 4: PLI Photograph Number 529107 illustrates the component side of the Mother Board Printed Circuit Assembly for the EUT Sensor (Serial Number PLI5289C4431Sensor).

FIGURE 5: PLI Photograph Number 529108 illustrates the circuit side of the Mother Board Printed Circuit Assembly for the EUT Sensor (Serial Number PLI5289C4431Sensor).

FIGURE 6: PLI Photograph Number 529102 illustrates the component side of the Mother Board Printed Circuit Assembly for the EUT Base Unit (Serial Number PLI5289C443102).

FIGURE 7: PLI Photograph Number 529103 illustrates the circuit side of the Mother Board Printed Circuit Assembly for the EUT Base Unit (Serial Number PLI5289C443102).

- 1.5 Equipment used during measurements calibrated according to internationally acceptable laboratory procedures. Calibration data along with Certificates of Conformance and Traceability are on file at the testing facility. Each calibrated equipment item is individually labeled with date calibrated; due date for next calibration; initials of person who calibrated the equipment; and the name of the organization that performed the calibration service.

Table of Laboratory Test Equipment Used

Equipment Type	Manufacturer	Model Number	Frequency Range
Spectrum Analyzer	Hewlett-Packard	8568A	100 Hz - 1.5 GHz
Quasi-peak Adapter	Hewlett-Packard	85650A	10 kHz - 1.00 GHz
Biconical Antenna	EMCO	3109	30 - 200 MHz
Log Periodic Antenna	EMCO	3146	200 - 1000 MHz
Magnetic Loop Antenna	Electro-Metrics	ALR-25M	10 kHz - 30 MHz
Oscilloscope Camera	Tektronix	C-5C	
Amplifier	Hewlett-Packard	8447D Option 010	0.1 - 1300 MHz
Attenuator	Narda	757C (35797)	3 dB (DC - 12.4 GHz)
Attenuator	Narda	757C (36808)	6 dB (DC - 12.4 GHz)
Attenuator	Narda	757C (40604)	10 dB (DC - 12.4 GHz)
Attenuator	Narda	757C (40998)	20 dB (DC - 12.4 GHz)

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 11 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

Equipment Type	Manufacturer	Model Number	Frequency Range
Close Field Antenna	Electro-Metrics	EFP-25	
Oscilloscope	Tektronix	2445	up to 150 MHz
Capacitor/ Inductor Z Meter	Sencore		1 pF to 200,000 μ F 1 μ H to 10 H
L.I.S.N	Solar Electronics Co.	8012-50-R-24 BNC	50 - 60 Hz
Equipment Testing Turn Table	EMCO	1061-06	
Antenna Positioning Tower	EMCO	1050	
Radio Interference Receiver	PRD Electronics Inc.	R-1040/URM-85	(two complete systems)
Antenna Coupler	PRD Electronics Inc.	CU-893/URM-85	80 - 220 MHz
Antenna Coupler	PRD Electronics Inc.	MT-2459/URM-85	
Frequency Converter	Empire Devices Products Corp.	CV-1102/URM-85	20 - 220 MHz
Frequency Converter	PRD Electronics Inc.	CV-1104A/URM-85	400 - 1000 MHz
Frequency Converter	PRD Electronics Inc.	CV-1101A/URM-85	0.15 - 30 MHz

Pulver Laboratories Inc.
320 North Santa Cruz Avenue Los Gatos, California 95030-7243
Telephone: 408.399.7000 Facsimile: 408.399.7001 www.PulverLabs.com

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 12 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

Equipment Type	Manufacturer	Model Number	Frequency Range
Frequency Converter	PRD Electronics Inc.	CV-1103/URM-85	200 - 400 MHz
Frequency Converter	PRD Electronics Inc.	CV-1102A/URM-85	20 - 220 MHz
Antenna Coupler (two systems)	PRD Electronics Inc.	CU-890/URM-85	0.15 - 30 MHz
Loop Antenna (two systems)	PRD Electronics Inc.	AT-1026/URM-85	0.15 - 30 MHz
Frequency Comb Generator	Hewlett-Packard	8406A	20 - 1200 MHz
Tunable Band Pass Filter	K & L Microwave Inc.	5BT-95/190-5/B	95 - 195 MHz
Tunable Band Pass Filter	K & L Microwave Inc.	5BT-48/95-5/B	50 - 95 MHz
High Pass Filter	Solar Electronics Co.	7801-5.0	5 kHz
Absorbing Clamp	Schaffner EMC Inc.	MDS-21	30 - 1000 MHz
Line Probe	EMCO	3701	
Antenna Set	EMCO	3121C	30 - 1000 MHz
L.I.S.N	Solar Electronics Co.	8328-50-TS-50-N	

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 13 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

Equipment Type	Manufacturer	Model Number	Frequency Range
Frequency Generator	Hewlett-Packard	TS-418B/U	400 - 1000 MHz
Frequency Generator	Hewlett-Packard	TS-510A/U	10 - 420 MHz
Antenna Set	Electro-Metrics	TDA-25	30 - 200 MHz
Antenna Set	Electro-Metrics	TDS-25-1	200 - 500 MHz
Antenna Set	Electro-Metrics	TDS-25-2	500 - 1000 MHz
Antenna (two sets)	PRD Electronics Inc.	AT-1030/URM-85	400 - 1000 MHz
Coupler Antenna	PRD Electronics Inc.	CU-895/URM-85	20 - 1000 MHz
Electronic Field Probe	PRD Electronics Inc.	MX-3411/URM-85	0.15 - 1000 MHz
Fixed Attenuator	PRD Electronics Inc.	CN-721/URM-85	0.15 - 1000 MHz
Magnetic Field Probe	PRD Electronics Inc.	MX-3412/URM-85	20 - 1000 MHz
Coupler	PRD Electronics Inc.	CU-896/URM-85	20 - 1000 MHz
Coupler	PRD Electronics Inc.	CU-897/URM-85	20 - 1000 MHz

Pulver Laboratories Inc.
320 North Santa Cruz Avenue Los Gatos, California 95030-7243
Telephone: 408.399.7000 Facsimile: 408.399.7001 www.PulverLabs.com

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 14 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

Equipment Type	Manufacturer	Model Number	Frequency Range
Ground Rod	PRD Electronics Inc.	GP-117/URM-85	
Coupler Antenna	PRD Electronics Inc.	CU-894/URM-85	200 - 400 MHz
Reflector Antenna	PRD Electronics Inc.	AT-1027/URM-85	0.15 - 30 MHz
Cable Assembly Set	PRD Electronics Inc.	MX-3410/URM-85	
Cord Assembly	PRD Electronics Inc.	CX-4305/U	
Mega Cycle Tape	Disston Carlson	TM6625-351-12-8	17 - 1000 MHz
Antenna Discone	Empire Devices Products Corp.	AS-1158/URM-85	Broad Band
Headset	Empire Devices Products Corp.	H-113/U	
Mast Section	Empire Devices Products Corp.	AB-21/GR	
Antenna Tripod			
EMI Line Filter	Stanford Applied Engineering	D30B	50 - 60 Hz, 3 phase
Digital Power Meter	Fluke and Phillips	FLUKE 39	

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 15 of 47
 DRAWING: 243851 Issued: 05 Apr 2002
 BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

Equipment Type	Manufacturer	Model Number	Frequency Range
Multimeter	Fluke and Phillips	FLUKE 87 True RMS	
Feed Through Caps	Solar Electronics Co.	6512-106 R 10 μ F capacitors	275V RMS, 60 Hz
Multimeter	Beckman Industrial Corp.	Circuitmate DM15B	250V RMS, 400 Hz
RMS Multimeter	Beckman Industrial Corp.	Tech 310	
Multimeter	Fluke and Phillips	FLUKE 85	
RMS Multimeter	Fluke and Phillips	FLUKE 87	
ELF Field Monitor	Walker Magnetic Group	ELF-50D	
RMS Multimeter	Fluke and Phillips	FLUKE 87	

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 16 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

- 1.6 List of Exhibits accompanying this report for FCC submission to help describe and clarify the Equipment Under Test.
 - 1.6.1 Schematics or detailed block diagrams.
 - 1.6.2 Equipment manual for operator or user showing enough detail to operate the equipment.
 - 1.6.3 Proposed identification label representative of the production label to be placed on the equipment upon grant of the application. Positioned on equipment as shown in block rough in Section 2.1 of this report.


2.0 Mandatory Labeling and Operators' Manual Information and Shipping Documents

2.1 FCC Label

Illustration 1.0 on the next page illustrates the actual FCC label (three times the actual size) with the appropriate wording. Note the letters "EMI" on the label which abbreviate "Electromagnetic Interference". Organizations like the Federal Communications Commission and their respective limits are listed on the label.

Also notice the letters "NRTL", which abbreviate "Nationally Recognized Testing Laboratory" as recommended by OSHA and the National Electrical Code for the United States. For Pulver Laboratories product Certification labels used for safety Certification, the phrase "SAFETY" appears on the label. Safety Certifying organizations like Pulver Laboratories are listed on the label adjacent to the testing standards used during equipment evaluation.

A rough sketch of the label location is shown below.

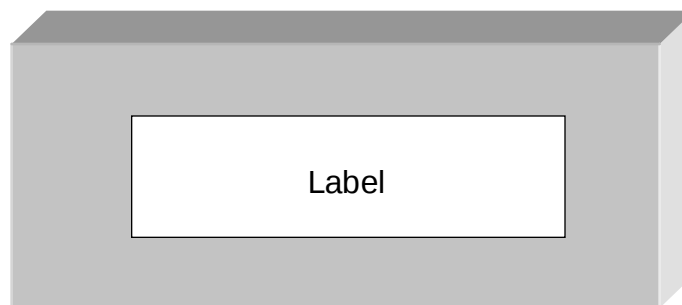

Back Panel of EUT Base

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U**
DRAWING: 243851
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen

Page 18 of 47
Issued: 05 Apr 2002
Approved: Lee Pulver

Illustration 1.0
{actual FCC Label}



Pulver Laboratories Inc.
320 North Santa Cruz Avenue Los Gatos, California 95030-7243
Telephone: 408.399.7000 Facsimile: 408.399.7001 www.PulverLabs.com

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 19 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

2.2 **Operators' Manual Information**

2.2.1 The following information is inserted directly into the equipment user instruction manual to meet the requirements of product safety and Radio Frequency Interference (RFI) rules and regulations.

CAUTION - Connections between peripherals of the computer equipment must be made with low voltage shielded computer data cables. Network connections may consist of non-shielded CAT 5 cable. Unshielded telephone type cables may connect to RJ-11 receptacles on product.

WARNING - A non-shielded power cord may be used to connect AC power to every component and peripheral of the system.

2.3 **FCC User Information** - The following statements are placed in the front of the operators' manual so that the user of the EUT is aware of its interference potential. Additional information about corrective measures may also be provided to the user at the manufacturer's option.

For a Class B Digital Device or Peripheral

**FCC NOTICE
INFORMATION FOR THE USER**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- 1) Reorient or relocate the receiving antenna.
- 2) Increase the separation between the equipment and receiver.
- 3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- 4) Consult the dealer or an experienced radio/TV technician for help.

The user may find the following publication prepared by the Federal Communications Commission helpful:

"How to Identify and Resolve Radio-TV Interference Problems" (Stock Number 004-000-00345-4).

Available exclusively from the Superintendent of Documents, Government Printing Office, Washington, DC 20402 (telephone 202-512-1800).

FCC WARNING

Changes or modifications not expressly approved by the party responsible for compliance to Part 15 of the FCC Rules could void the user's authority to operate the equipment.

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 21 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

For a Class B or Class 2 Digital Device

**CE NOTICE
INFORMATION FOR THE USER**

This equipment has been tested and found to comply with the limits for a Class B or Class 2 digital device, pursuant to EN 55022 Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

The user may find the following publication prepared by the Federal Communications Commission helpful:

"How to Identify and Resolve Radio-TV Interference Problems"
(Stock Number 004-000-00345-4).

Available exclusively from the Superintendent of Documents, Government Printing Office, Washington, DC 20402 (telephone 202-512-1800).

WARNING

Changes or modifications not expressly approved by the party responsible for compliance to EN 55022 Rules could void the user's authority to operate the equipment.

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 23 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

**2.5 Bundesamt für Zulassungen in der Telekommunikation (BZT)
Declaration**

This declaration for the newly formed BZT in English and German shown on the next pages will be provided to the operator of the Equipment Under Test. This declaration shall be provided along with the Pulver Laboratories Certificate of Conformance in a conspicuous location in the operators' manual and be placed with the shipping documents of each unit marketed in Germany and the European Community and specifically Argentina, Australia, Austria, Belgium, Bolivia, Brazil, Chile, Denmark, Dominican Republic, Finland, France, Greece, Guatemala, Haiti, Hong Kong, Iceland, India, Indonesia, Ireland, Israel, Italy, Jamaica, Kuwait, Luxembourg, Netherlands, New Zealand, Norway, Pakistan, Paraguay, Peru, Philippines, Portugal, Singapore, Saudi Arabia, South Africa, Spain, Sweden, Switzerland, Syria, Taiwan, Turkey, United Kingdom, and Uruguay.

THE FOLLOWING STATEMENTS CAN ONLY BE USED IF Pulver Laboratories CERTIFIES THAT THE PRODUCT CONFORMS TO EUROPEAN SAFETY. This report is strictly for Electromagnetic Interference and does not cover safety.

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 24 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

BZT Declaration by Pulver Laboratories Inc. and Manufacturer or Importer in German:

Bescheinigung des Pulver Laboratories Inc. und 8x8, Inc. hiermit wird bescheinigt, dass die Behind-U Workstation Alert System RVP 100 in Übereinstimmung mit den Bestimmungen der VFG 523/1969, DIN 57871 / VDE 0871 / 09.84, und DIN 57875 Part 1 A2 / 10.90 (Amtsblattvertretung) funk-entstört ist.

Der Deutschen Bundespost wurde das Inverkehrbringen dieses Geräts angezeigt und die Berechtigung zur Überprüfung der Serie auf Einhaltung der Bestimmungen eingeräumt.

Einhaltung mit betreffenden Bestimmungen kommt darauf an, dass geschirmte Ausführungen gebraucht werden. Für die Beschaffung richtiger Ausführungen ist der Betreiber Verantwortlich.

Dieses Gerät wurde sowohl einzeln als auch in einer Anlage, die einen normalen Anwendungsfall nachbildet, auf die Einhaltung der Funk-entstörbestimmungen geprüft. Es ist jedoch möglich, dass die Funk-entstörbestimmungen unter Ungünstigen Umständen bei anderen Gerätekombinationen nicht Eingehalten werden. Der Betreiber ist für die Einhaltung der funk-eutstörungsbestimmungen seiner gesamten Anlage verantwortlich, in der dieses Gerät betrieben wird.

Pulver Laboratories Inc.
Testing and Certification Laboratories

8x8, Inc.
Name des Herstellers / Importeurs

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 25 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

BZT Declaration by Pulver Laboratories Inc. and Manufacturer or Importer in English:

Pulver Laboratories Inc. and 8x8, Inc. hereby certify that the Behind-U Workstation Alert System, RVP 100 (Equipment, Type, Model Number) is in compliance with VFG 523/1969, DIN 57871 / VDE 0871 / 09.84, and DIN 57875 Part 1 A2 / 10.90 (product standards) and is RFI suppressed.

The marketing and sale of this equipment in Germany has been reported to the German Postal service. They have also been given the right to retest this equipment to verify compliance with product regulations.

Compliance with applicable regulations depends on the use of shielded cables. The user is responsible for procuring the appropriate cables.

This equipment has been tested concerning compliance with the relevant RFI protection requirements both individually and on a system level (to simulate normal operation conditions). However, it is possible that these RFI requirements are not met under certain unfavorable conditions in other installations. The user is responsible for compliance of his particular installation.

Pulver Laboratories Inc.
Testing and Certification Laboratories

8x8, Inc.
Name of Manufacturer or Importer

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 26 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver


**Block Diagram of Equipment Under Test (EUT)
Showing Clock Oscillators and Frequencies of Operation**

EUT Contains No Crystal Oscillators

**Use this diagram to simplify locating the oscillators
in the accompanying schematics.**

Equipment Under Test Orientation and Configuration - Test Configuration # 1


Zero Degrees (front: no cables)

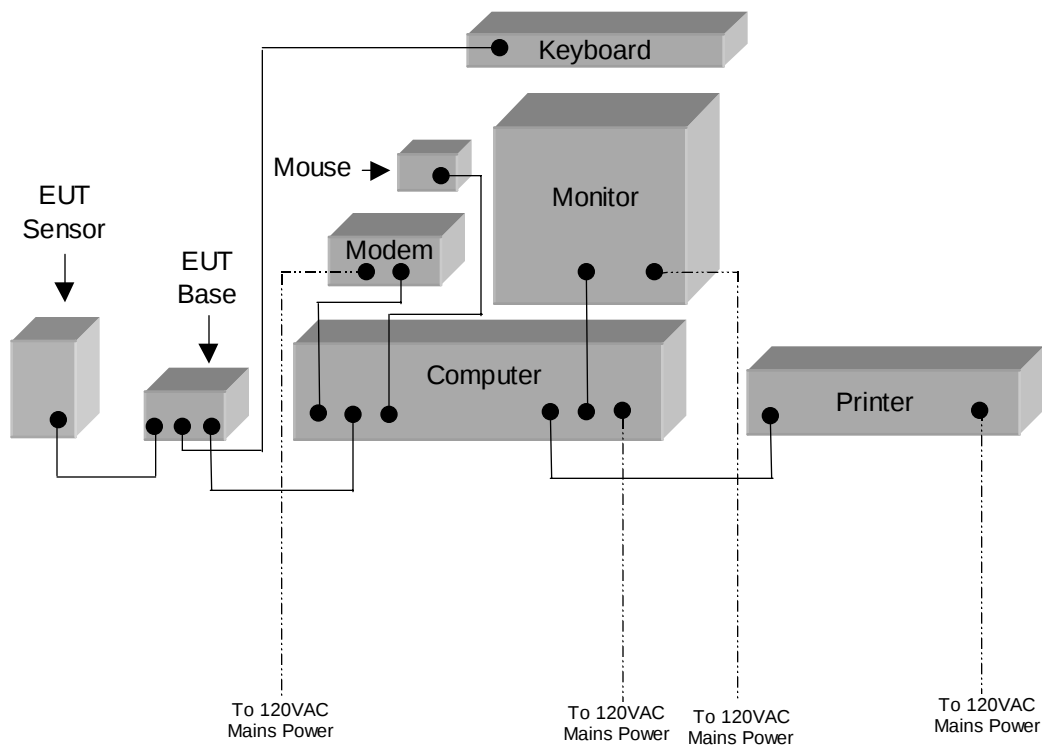

180 Degrees (back: all cables)

Equipment Under Test Orientation and Configuration - Test Configuration # 2

Zero Degrees

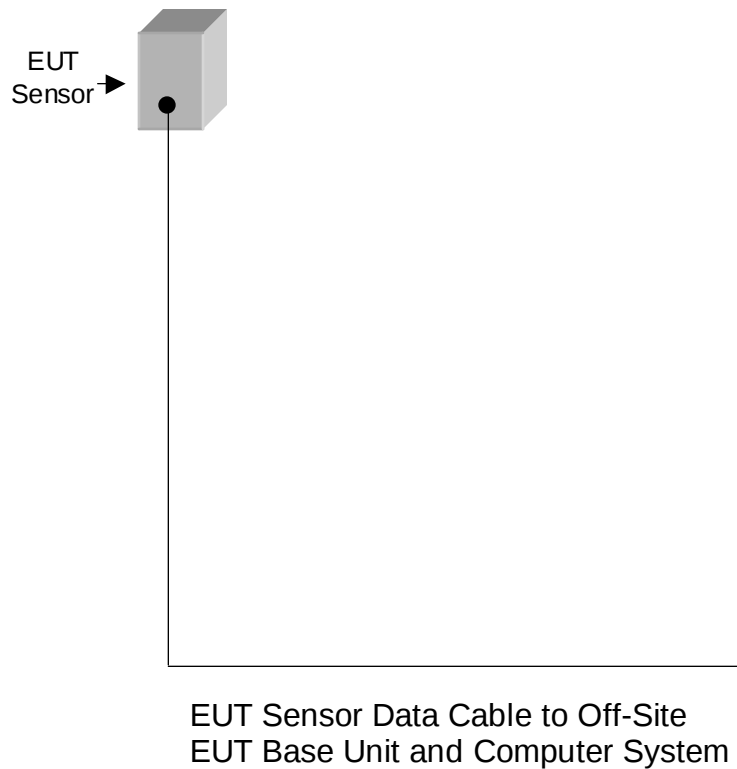

180 Degrees

3.0 Radiated Electromagnetic Interference (EMI) - Test Configuration

- 3.1 PLI placed the Equipment Under Test (EUT) on an 80 centimeter high table located on a 12.70 millimeter (0.5 inch) thick, 1.83 meter (6.00 foot) diameter, remote controlled steel turntable positioned 3.00 meters away from a receiving antenna assembly. This steel gear driven turntable has a 2400 pound capacity. The grounded turntable top surface is flush with a grounded screen consisting of 6.35 millimeter (0.25 inch) squares forming a wire mesh. The automated 4.00 meter mast and antenna assembly connects to an RF amplifier attached to a spectrum analyzer with quasi-peak adapter.
- 3.2 The Equipment Under Test (EUT) was operated at its specified load condition for which it was designed. After 30 minutes of continuous operation the EUT reached normal operating temperature. Recorded EMI data in this report was accumulated during the normal load and operating temperature of the EUT.
- 3.3 The EUT and system configuration follows:
 - 3.3.1 **Test Configuration #1:** On the test table, a computer monitor was connected to and placed on top of the Personal Computer with the keyboard connected to and placed in front of the same unit. The modem was connected to and placed on the top left side of the same unit. The printer was then connected and placed to the left side of the Personal Computer. The Equipment Under Test Base Unit was placed to the right of the Personal Computer and connected to the PS2 Keyboard port of the Personal Computer with a keyboard extension cable. The EUT Sensor was placed to the right of and connected to the "Host Port" of the EUT Base Unit.
 - 3.3.2 **Test Configuration #2:** The computer system and peripherals were connected in the same manner as in Test Configuration #1, except were placed off-site. Only the EUT Sensor was placed on the test table.

3.3.3 A continuous software test routine was utilized to exercise the system. The software is activated utilizing the following steps:

- a. Power computer "ON".
- b. Login using password "John".
- c. Click "Start" button, go to "Programs", select "Behind-U" program.
- d. A small window pops-up and displays the text ""Behind-U" signifying the Sensor is active.
- e. When something activates the Sensor (like a wave of the hand in front of it), a small window appears in the lower right hand corner of the monitor screen which displays an image of two eyes. This signifies that something has activated the Sensor. The "two eyes" window disappears after a few seconds and is re-activated when the Sensor is re-activated.
- f. A slip of paper was attached to the front of the EUT Sensor with adhesive tape. The breezy conditions on the Open Area Test site made the slip of paper move continuously. This caused the EUT Sensor to activate continuously for the duration of the test program.

The following equipment list defines the system configuration:

EUT	:Behind-U Workstation Alert System (consists of Base and Sensor)
Model Number	:RVP 100
Serial Number	:PLI5289C443102 (EUT Base Unit)
Serial Number	:PLI5289C4431Sensor (EUT Sensor)
FCC ID Number	:NEP5289U
Manufacturer	:8x8, Inc.
Product	:Computer
Model Number	:6578-NDU
Serial Number	:78-HCBTB
FCC ID Number	:DOC Authorized
Manufacturer	:IBM

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 31 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

Product :Monitor
Model Number :PB8528SVGL
Serial Number :32478505
FCC ID Number :BJMCM14SB
Manufacturer :Packard Bell

Product :Keyboard
Model Number :KB-9910
Serial Number :0273364
FCC ID Number :DOC Authorized
Manufacturer :IBM

Product Name :Mouse
Model Number :93633
Serial Number :02220847
FCC ID Number :C3KKMP1
Manufacturer :Microsoft Corporation

Product Name :Modem
Model Number :SUP2730 (Supra Express 56E V.90)
Serial Number :0514400165456
FCC ID Number :DOC Authorized
Manufacturer :Diamond Multimedia Systems

Product Name :Printer
Model Number :KX-P1091i
Serial Number :7KKALH86534
FCC ID Number :ACJ5Z6KX-P1091i
Manufacturer :Panasonic (Matsushita)

- 3.4 The Equipment Under Test was evaluated per the American National Standards Institute standard number C63.4-1992 entitled Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. To maximize Electromagnetic Interference signal strength, PLI rotated the System Under Test 360 degrees and then adjusted the receiving antenna height until the maximum signal appeared on the spectrum analyzer. The input/output interface cables between units of the system were always positioned to yield maximum field strength.

4.0 Radiated EMI – Results

- 4.1 The investigated frequency spectrum revealed radiated EMI signals. The highest interference in the horizontal polarization occurred when the front of the unit was facing 180 degrees clockwise with respect to the antenna. The highest interference in the vertical polarization occurred when the front of the unit was facing 180 degrees clockwise with respect to the antenna.
- 4.2 The "ACF" (Antenna Correction Factor) shown in the test data in this report includes compensation for the antenna factor; cable attenuation; the series RF attenuator; the RF amplifier; and pre-selector system losses. The spectrum analyzer data is shown as quasi-peak amplitudes.
- 4.3 The test facility is FCC registered; the procedures are CISPR registered, ICAN registered, VCCI registered, VDE approved, and BZT approved.

Type of Test	Radiated Electromagnetic Interference
Specification	FCC, ICAN, and EN55022 Class B
Date Data Collected	19 - 21 March 2002
Detection Technique	Spectrum Analyzer with Quasi-peak Adapter
Resolution Bandwidth	100 kHz
Video Bandwidth	100 kHz
Antennas	30 to 200 MHz High Field Biconical 200 to 1000 MHz Log-Periodic

TITLE:	PLI Evaluation Report (RFI) FCC ID number - NEP5289U	Page 33 of 47
DRAWING:	243851	Issued: 05 Apr 2002
BY:	Lee Pulver, Clyde Pineda, and Phuong Nguyen	Approved: Lee Pulver

Test Configuration #1

Frequency MHz	EMI Data dBµV/M	ACF	Field Strength dBµV/M	EN Limit dBµV/M	Margin to Limit dBµV/M
Horizontal					
145.25	39.50	-9.66	29.84	40.46	-10.62
150.23	40.50	-9.30	31.20	40.46	-9.26
150.28	39.90	-9.29	30.61	40.46	-9.85
150.30	37.80	-9.28	28.52	40.46	-11.94
154.35	36.40	-8.38	28.02	40.46	-12.44
169.35	37.70	-9.97	27.73	40.46	-12.73
169.35	42.80	-9.97	32.83	40.46	-7.63
174.13	36.90	-8.85	28.05	40.46	-12.41
178.80	36.10	-7.34	28.76	40.46	-11.70
240.00	40.10	-8.73	31.37	47.46	-16.09
282.25	40.60	-5.78	34.82	47.46	-12.64
332.65	37.20	-6.05	31.15	47.46	-16.31
338.68	36.70	-6.13	30.57	47.46	-16.89
366.93	38.10	-5.21	32.89	47.46	-14.57
439.03	35.00	-2.09	32.91	47.46	-14.55
440.20	34.60	-2.05	32.55	47.46	-14.91
440.23	35.00	-2.05	32.95	47.46	-14.51
466.68	34.30	-1.61	32.69	47.46	-14.77
479.80	32.90	-1.46	31.44	47.46	-16.02
479.83	35.70	-1.46	34.24	47.46	-13.22
649.15	32.00	-0.68	31.32	47.46	-16.14
649.18	33.40	-0.68	32.72	47.46	-14.74
705.60	30.90	1.85	32.75	47.46	-14.71
762.08	31.00	1.39	32.39	47.46	-15.07
785.95	28.20	1.98	30.18	47.46	-17.28

Test Configuration #1

Frequency MHz	EMI Data dBµV/M	ACF	Field Strength dBµV/M	EN Limit dBµV/M	Margin to Limit dBµV/M
Vertical					
79.10	44.20	-9.66	34.54	40.46	-5.92
79.15	42.30	-9.66	32.64	40.46	-7.82
79.98	42.10	-9.60	32.50	40.46	-7.96
80.03	41.70	-9.60	32.10	40.46	-8.36
80.05	39.70	-9.60	30.10	40.46	-10.36
83.08	45.90	-9.48	36.42	40.46	-4.04
83.15	42.30	-9.47	32.83	40.46	-7.63
141.13	40.50	-6.92	33.58	40.46	-6.88
150.30	39.90	-6.27	33.63	40.46	-6.83
169.35	43.80	-4.60	39.20	40.46	-1.26*
366.93	36.90	-0.56	36.34	47.46	-11.12
466.68	37.00	1.50	38.50	47.46	-8.96
479.83	38.30	1.77	40.07	47.46	-7.39
497.58	36.50	2.14	38.64	47.46	-8.82
649.15	34.90	4.96	39.86	47.46	-7.60
649.18	34.90	4.96	39.86	47.46	-7.60
705.60	33.00	6.11	39.11	47.46	-8.35
705.63	30.20	6.11	36.31	47.46	-11.15
713.45	31.90	6.26	38.16	47.46	-9.30
713.48	32.70	6.26	38.96	47.46	-8.50
713.50	29.40	6.26	35.66	47.46	-11.80
762.05	31.30	7.19	38.49	47.46	-8.97
762.08	31.00	7.19	38.19	47.46	-9.27
818.50	32.40	8.32	40.72	47.46	-6.74
818.53	32.60	8.32	40.92	47.46	-6.54

Test Configuration #1

Frequency MHz	EMI Data dBµV/M	ACF	Field Strength dBµV/M	FCC Limit dBµV/M	Margin to Limit dBµV/M
Horizontal					
145.25	39.50	-9.66	29.84	43.50	-13.66
150.23	40.50	-9.30	31.20	43.50	-12.30
150.28	39.90	-9.29	30.61	43.50	-12.89
150.30	37.80	-9.28	28.52	43.50	-14.98
154.35	36.40	-8.38	28.02	43.50	-15.48
169.35	37.70	-9.97	27.73	43.50	-15.77
169.35	42.80	-9.97	32.83	43.50	-10.67
174.13	36.90	-8.85	28.05	43.50	-15.45
178.80	36.10	-7.34	28.76	43.50	-14.74
240.00	40.10	-8.73	31.37	46.00	-14.63
282.25	40.60	-5.78	34.82	46.00	-11.18
332.65	37.20	-6.05	31.15	46.00	-14.85
338.68	36.70	-6.13	30.57	46.00	-15.43
366.93	38.10	-5.21	32.89	46.00	-13.11
439.03	35.00	-2.09	32.91	46.00	-13.09
440.20	34.60	-2.05	32.55	46.00	-13.45
440.23	35.00	-2.05	32.95	46.00	-13.05
466.68	34.30	-1.61	32.69	46.00	-13.31
479.80	32.90	-1.46	31.44	46.00	-14.56
479.83	35.70	-1.46	34.24	46.00	-11.76
649.15	32.00	-0.68	31.32	46.00	-14.68
649.18	33.40	-0.68	32.72	46.00	-13.28
705.60	30.90	1.85	32.75	46.00	-13.25
762.08	31.00	1.39	32.39	46.00	-13.61
785.95	28.20	1.98	30.18	46.00	-15.82

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 36 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

Test Configuration #1

Frequency MHz	EMI Data dBµV/M	ACF	Field Strength dBµV/M	FCC Limit dBµV/M	Margin to Limit dBµV/M
Vertical					
79.10	44.20	-9.66	34.54	40.00	-5.46
79.15	42.30	-9.66	32.64	40.00	-7.36
79.98	42.10	-9.60	32.50	40.00	-7.50
80.03	41.70	-9.60	32.10	40.00	-7.90
80.05	39.70	-9.60	30.10	40.00	-9.90
83.08	45.90	-9.48	36.42	40.00	-3.58
83.15	42.30	-9.47	32.83	40.00	-7.17
141.13	40.50	-6.92	33.58	43.50	-9.92
150.30	39.90	-6.27	33.63	43.50	-9.87
169.35	43.80	-4.60	39.20	43.50	-4.30
366.93	36.90	-0.56	36.34	46.00	-9.66
466.68	37.00	1.50	38.50	46.00	-7.50
479.83	38.30	1.77	40.07	46.00	-5.93
497.58	36.50	2.14	38.64	46.00	-7.36
649.15	34.90	4.96	39.86	46.00	-6.14
649.18	34.90	4.96	39.86	46.00	-6.14
705.60	33.00	6.11	39.11	46.00	-6.89
705.63	30.20	6.11	36.31	46.00	-9.69
713.45	31.90	6.26	38.16	46.00	-7.84
713.48	32.70	6.26	38.96	46.00	-7.04
713.50	29.40	6.26	35.66	46.00	-10.34
762.05	31.30	7.19	38.49	46.00	-7.51
762.08	31.00	7.19	38.19	46.00	-7.81
818.50	32.40	8.32	40.72	46.00	-5.28
818.53	32.60	8.32	40.92	46.00	-5.08

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 37 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

Test Configuration #2

Frequency MHz	EMI Data dBµV/M	ACF	Field Strength dBµV/M	EN Limit dBµV/M	Margin to Limit dBµV/M
Horizontal					
143.05	37.50	-9.80	27.70	40.46	-12.76
145.28	37.10	-9.66	27.44	40.46	-13.02
233.33	39.30	-9.16	30.14	47.46	-17.32
440.28	36.40	-2.05	34.35	47.46	-13.11
441.63	32.20	-2.02	30.18	47.46	-17.28
464.50	33.70	-1.63	32.07	47.46	-15.39
468.38	32.70	-1.59	31.11	47.46	-16.35
469.83	33.50	-1.57	31.93	47.46	-15.53
482.50	31.50	-1.42	30.08	47.46	-17.38
487.05	34.00	-1.37	32.63	47.46	-14.83
491.73	32.00	-1.32	30.68	47.46	-16.78
492.53	32.10	-1.31	30.79	47.46	-16.67
495.23	31.40	-1.28	30.12	47.46	-17.34
497.55	33.90	-1.25	32.65	47.46	-14.81
536.28	32.30	-1.07	31.23	47.46	-16.23
573.23	33.10	-0.81	32.29	47.46	-15.17
573.25	31.20	-0.81	30.39	47.46	-17.07
577.00	31.40	-0.78	30.62	47.46	-16.84
654.80	33.00	-0.43	32.57	47.46	-14.89
708.93	33.10	1.79	34.89	47.46	-12.57
708.95	32.50	1.79	34.29	47.46	-13.17
708.98	29.80	1.79	31.59	47.46	-15.87
709.00	29.30	1.79	31.09	47.46	-16.37
789.28	28.60	2.06	30.66	47.46	-16.80
790.33	28.50	2.08	30.58	47.46	-16.88

Test Configuration #2

Frequency MHz	EMI Data dBµV/M	ACF	Field Strength dBµV/M	EN Limit dBµV/M	Margin to Limit dBµV/M
Vertical					
83.03	39.40	-9.48	29.92	40.46	-10.54
83.07	39.80	-9.48	30.32	40.46	-10.14
83.08	43.70	-9.48	34.22	40.46	-6.24
86.95	38.80	-9.32	29.48	40.46	-10.98
86.98	39.50	-9.32	30.18	40.46	-10.28
87.03	38.60	-9.32	29.28	40.46	-11.18
87.08	38.60	-9.32	29.28	40.46	-11.18
169.35	41.00	-4.60	36.40	40.46	-4.06
188.75	35.90	-4.30	31.60	40.46	-8.86
188.78	36.00	-4.30	31.70	40.46	-8.76
188.80	36.20	-4.30	31.90	40.46	-8.56
240.40	39.30	-3.35	35.95	47.46	-11.51
240.43	38.80	-3.35	35.45	47.46	-12.01
240.45	38.10	-3.35	34.75	47.46	-12.71
469.73	33.40	1.57	34.97	47.46	-12.49
479.80	34.50	1.77	36.27	47.46	-11.19
479.83	34.70	1.77	36.47	47.46	-10.99
499.03	32.20	2.17	34.37	47.46	-13.09
573.23	32.10	3.55	35.65	47.46	-11.81
652.58	30.50	5.03	35.53	47.46	-11.93
687.25	30.10	5.75	35.85	47.46	-11.61
718.98	28.30	6.36	34.66	47.46	-12.80
741.03	28.10	6.77	34.87	47.46	-12.59
757.65	28.20	7.10	35.30	47.46	-12.16
760.33	28.00	7.15	35.15	47.46	-12.31

Test Configuration #2

Frequency MHz	EMI Data dBµV/M	ACF	Field Strength dBµV/M	FCC Limit dBµV/M	Margin to Limit dBµV/M
Horizontal					
143.05	37.50	-9.80	27.70	43.50	-15.80
145.28	37.10	-9.66	27.44	43.50	-16.06
233.33	39.30	-9.16	30.14	46.00	-15.86
440.28	36.40	-2.05	34.35	46.00	-11.65
441.63	32.20	-2.02	30.18	46.00	-15.82
464.50	33.70	-1.63	32.07	46.00	-13.93
468.38	32.70	-1.59	31.11	46.00	-14.89
469.83	33.50	-1.57	31.93	46.00	-14.07
482.50	31.50	-1.42	30.08	46.00	-15.92
487.05	34.00	-1.37	32.63	46.00	-13.37
491.73	32.00	-1.32	30.68	46.00	-15.32
492.53	32.10	-1.31	30.79	46.00	-15.21
495.23	31.40	-1.28	30.12	46.00	-15.88
497.55	33.90	-1.25	32.65	46.00	-13.35
536.28	32.30	-1.07	31.23	46.00	-14.77
573.23	33.10	-0.81	32.29	46.00	-13.71
573.25	31.20	-0.81	30.39	46.00	-15.61
577.00	31.40	-0.78	30.62	46.00	-15.38
654.80	33.00	-0.43	32.57	46.00	-13.43
708.93	33.10	1.79	34.89	46.00	-11.11
708.95	32.50	1.79	34.29	46.00	-11.71
708.98	29.80	1.79	31.59	46.00	-14.41
709.00	29.30	1.79	31.09	46.00	-14.91
789.28	28.60	2.06	30.66	46.00	-15.34
790.33	28.50	2.08	30.58	46.00	-15.42

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 40 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

Test Configuration #2

Frequency MHz	EMI Data dBµV/M	ACF	Field Strength dBµV/M	FCC Limit dBµV/M	Margin to Limit dBµV/M
Vertical					
83.03	39.40	-9.48	29.92	40.00	-10.08
83.07	39.80	-9.48	30.32	40.00	-9.68
83.08	43.70	-9.48	34.22	40.00	-5.78
86.95	38.80	-9.32	29.48	40.00	-10.52
86.98	39.50	-9.32	30.18	40.00	-9.82
87.03	38.60	-9.32	29.28	40.00	-10.72
87.08	38.60	-9.32	29.28	40.00	-10.72
169.35	41.00	-4.60	36.40	43.50	-7.10
188.75	35.90	-4.30	31.60	43.50	-11.90
188.78	36.00	-4.30	31.70	43.50	-11.80
188.80	36.20	-4.30	31.90	43.50	-11.60
240.40	39.30	-3.35	35.95	46.00	-10.05
240.43	38.80	-3.35	35.45	46.00	-10.55
240.45	38.10	-3.35	34.75	46.00	-11.25
469.73	33.40	1.57	34.97	46.00	-11.03
479.80	34.50	1.77	36.27	46.00	-9.73
479.83	34.70	1.77	36.47	46.00	-9.53
499.03	32.20	2.17	34.37	46.00	-11.63
573.23	32.10	3.55	35.65	46.00	-10.35
652.58	30.50	5.03	35.53	46.00	-10.47
687.25	30.10	5.75	35.85	46.00	-10.15
718.98	28.30	6.36	34.66	46.00	-11.34
741.03	28.10	6.77	34.87	46.00	-11.13
757.65	28.20	7.10	35.30	46.00	-10.70
760.33	28.00	7.15	35.15	46.00	-10.85

4.4 **Calculations and Notes Concerning Data Presentation**

4.4.1 "ACF" means the Antenna Correction Factor for either Horizontal or Vertical antenna orientation.

4.4.2 "H" designates the Horizontal antenna orientation.

4.4.3 "V" designates the Vertical antenna orientation.

4.4.4 "*" means the data shown in the "Margin to Limit" column exceeds the data in the "EN Limit" column, or exceeds the data in the "FCC Limit" column. "*" could also mean that the Margin to the Limit is greater than -2.00 dB μ V per meter.

4.4.5 "A" designates an ambient signal.

4.4.6 "(-.-)" means the signal level is lower than the adjacent data or within the background ambients.

4.4.7 "EMI DATA" plus "ACF" equals "Field Strength".

4.4.8 "Field Strength" minus "EN Limit" and/or minus "FCC Limit" equals "Margin to Limit".

4.4.9 "Margin to Limit" negative numbers show Equipment Under Test "Field Strength" below the "EN Limit" and/or below the "FCC Limit". "Margin to Limit" positive numbers show Equipment Under Test "Field Strength" above the "EN Limit" and/or above the "FCC Limit".

4.5 The field strengths in this section were measured at 3.0 meters. None of the Electromagnetic Interference quasi-peaks are in excess of the ICAN (Industry Canada), FCC (Federal Communications Commission), and EC (European Community) Class B maximums, even when the field strength readings in the above table are reduced by 20 dB μ V (to represent 30 meter test site measurements, since an antenna positioned at 30.0 meters receives one tenth of the field strength recorded at 3.0 meters).

4.6 **Conclusion** - The radiated Electromagnetic Interference of the Equipment Under Test meets the requirements for Industry Canada (ICAN), Federal Communications Commission (FCC), and the European Community (EC) Class B devices.

5.0 Conducted EMI - Test Configuration

- 5.1 Current input power leads of the Equipment Under Test were connected to a Line Impedance Stabilization Network (LISN), which isolate and couple the conducted interference from the power lines to a spectrum analyzer. The LISN and the Equipment Under Test were connected and positioned according to the Industry Canada and the Federal Communications Commission test recommendations. The Equipment Under Test was configured exactly as outlined in the Radiated Electromagnetic Interference Section of this report. The spectrum analyzer data is shown in the following table as quasi-peak amplitudes.
- 5.2 To increase data integrity and also meet the recommendations of the American National Standards Institute standard number C63.4-1992, all electrical devices comprising the system being tested with the Equipment Under Test were connected to the VAC mains using a second Line Impedance Stabilization Network.

6.0 Conducted EMI – Results

- 6.1 Investigation of the EUT revealed conducted interference levels as shown in the table below.

Type of Test	Conducted Electromagnetic Interference
Specification	FCC, ICAN, and EN55022 Class B
Date Data Collected	04 April 2002
Detection Technique	Spectrum Analyzer with Quasi-peak Adapter
Frequency Range	0.150 to 30.0 MHz
Resolution Bandwidth	10 kHz
Video Bandwidth	10 kHz
Line Impedance Stabilization Network	50 micro Henry; 50 ohm

Test Configuration #1

Frequency MHz	Line Data dBμV	Neutral Data dBμV	EN Limit dBμV	EN Margin to Limit (Line) dBμV	EN Margin to Limit (Neutral) dBμV
0.65	39.70	41.30	73.00	-33.30	-31.70
0.87	35.30	-.-	73.00	-37.70	-.-
2.08	33.20	-.-	73.00	-39.80	-.-
2.13	-.-	32.50	73.00	-.-	-40.50
2.36	33.50	-.-	73.00	-39.50	-.-
3.03	34.80	32.60	73.00	-38.20	-40.40
3.24	34.80	32.20	73.00	-38.20	-40.80
3.46	-.-	32.20	73.00	-.-	-40.80
3.89	33.50	-.-	73.00	-39.50	-.-
4.10	31.80	-.-	73.00	-41.20	-.-
4.32	-.-	33.00	73.00	-.-	-40.00
4.76	-.-	31.40	73.00	-.-	-41.60
4.98	34.90	-.-	73.00	-38.10	-.-
5.84	32.70	32.70	73.00	-40.30	-40.30
6.06	33.80	34.90	73.00	-39.20	-38.10
6.28	-.-	34.40	73.00	-.-	-38.60
7.57	-.-	29.00	73.00	-.-	-44.00
19.65	31.00	-.-	73.00	-42.00	-.-
19.83	-.-	31.30	73.00	-.-	-41.70
20.19	33.30	-.-	73.00	-39.70	-.-
20.37	-.-	32.30	73.00	-.-	-40.70
20.63	33.20	-.-	73.00	-39.80	-.-
20.73	-.-	33.20	73.00	-.-	-39.80
21.06	-.-	34.20	73.00	-.-	-38.80
21.17	35.10	-.-	73.00	-37.90	-.-
21.38	35.60	-.-	73.00	-37.40	-.-
21.67	-.-	34.80	73.00	-.-	-38.20
22.04	34.40	-.-	73.00	-38.60	-.-
22.33	-.-	32.50	73.00	-.-	-40.50
22.36	33.00	-.-	73.00	-40.00	-.-
23.05	-.-	28.50	73.00	-.-	-44.50
23.66	31.70	-.-	73.00	-41.30	-.-

Test Configuration #1

Frequency MHz	Line Data dBμV	Neutral Data dBμV	FCC Limit dBμV	FCC Margin to Limit (Line) dBμV	FCC Margin to Limit (Neutral) dBμV
0.65	39.70	41.30	48.00	-8.30	-6.70
0.87	35.30	-.-	48.00	-12.70	-.-
2.08	33.20	-.-	48.00	-14.80	-.-
2.13	-.-	32.50	48.00	-.-	-15.50
2.36	33.50	-.-	48.00	-14.50	-.-
3.03	34.80	32.60	48.00	-13.20	-15.40
3.24	34.80	32.20	48.00	-13.20	-15.80
3.46	-.-	32.20	48.00	-.-	-15.80
3.89	33.50	-.-	48.00	-14.50	-.-
4.10	31.80	-.-	48.00	-16.20	-.-
4.32	-.-	33.00	48.00	-.-	-15.00
4.76	-.-	31.40	48.00	-.-	-16.60
4.98	34.90	-.-	48.00	-13.10	-.-
5.84	32.70	32.70	48.00	-15.30	-15.30
6.06	33.80	34.90	48.00	-14.20	-13.10
6.28	-.-	34.40	48.00	-.-	-13.60
7.57	-.-	29.00	48.00	-.-	-19.00
19.65	31.00	-.-	48.00	-17.00	-.-
19.83	-.-	31.30	48.00	-.-	-16.70
20.19	33.30	-.-	48.00	-14.70	-.-
20.37	-.-	32.30	48.00	-.-	-15.70
20.63	33.20	-.-	48.00	-14.80	-.-
20.73	-.-	33.20	48.00	-.-	-14.80
21.06	-.-	34.20	48.00	-.-	-13.80
21.17	35.10	-.-	48.00	-12.90	-.-
21.38	35.60	-.-	48.00	-12.40	-.-
21.67	-.-	34.80	48.00	-.-	-13.20
22.04	34.40	-.-	48.00	-13.60	-.-
22.33	-.-	32.50	48.00	-.-	-15.50
22.36	33.00	-.-	48.00	-15.00	-.-
23.05	-.-	28.50	48.00	-.-	-19.50
23.66	31.70	-.-	48.00	-16.30	-.-

6.2 Calculations and Notes Concerning Data Presentation

- 6.2.1 "*" means the "Margin to Limit" Exceeds the "FCC Limit" and/or Exceeds the "EN Limit" or is within a -2 dB µV margin.
- 6.2.2 "(-.-)" means the signal level as lower than the adjacent data or within the background ambients.
- 6.2.3 "Line Data" minus "FCC Limit" and/or minus "EN Limit" equals "Margin to Limit" for the Line side of the input power cord.
- 6.2.4 "Neutral Data" minus "FCC Limit" and/or minus "EN Limit" equals "Margin to Limit" for the Neutral side of the input power cord.
- 6.2.5 "Margin to Limit" negative numbers show Equipment Under Test "Field Strength" **below** the "FCC Limit" and/or **below** the "EN Limit". "Margin to Limit" positive numbers show Equipment Under Test "Field Strength" **above** the "FCC Limit" and/or **above** the "EN Limit".
- 6.2.6 "A" means an Ambient signal.
- 6.2.7 The symbol " " adjacent to a line of conducted Electromagnetic Interference data means that the "Field Strength" was recorded directly as a quasi-peak measurement, and then reduced by 13 dB µV. The data obtained in quasi-peak mode was 6 dB µV or higher than the level of the same emission measured with the spectrum analyzer detector function set to the average mode. The emission was considered broadband, since the quasi-peak mode bandwidth setting was identical to the average mode bandwidth setting. 100 samples were recorded represented by the following equation:

$$\left(\frac{1}{n}\right)\sum_{i=1}^n X_i$$

- 6.3 **Conclusion** - The conducted Electromagnetic Interference of the Equipment Under Test meets the requirements for Industry Canada (ICAN), Federal Communications Commission (FCC), and the European Community (EC) Class B devices.

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 46 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

- 6.4 Graphs of PEAK conducted Electromagnetic Interference for frequency ranges on Line and Neutral are shown on the following pages.
- 6.5 The recorded conducted data utilized a quasi-peak measurement procedure. Hence, any differences between the graphs and the data are merely the differences between peak and quasi-peak measurements.
- 6.6 There are 33 AM and 56 FM radio stations in the immediate San Jose, California, area which create large ambient signals. Typical radio stations are:
- 0.810 MHz KGO
 - 1.170 MHz KLOK
 - 1.370 MHz KEEN
 - 1.500 MHz KHTT
 - 1.590 MHz KLIV
- 6.7 The conducted Electromagnetic Interference graphs in this report show some of the large ambient signals for several of these radio stations.
- 6.8 The final Electromagnetic Interference conducted test and measurement equipment configuration was evaluated to assure that Data Compression or Intermodulation Distortion did not occur due to these large ambient signals.

TITLE: PLI Evaluation Report (RFI) **FCC ID number - NEP5289U** Page 47 of 47
DRAWING: 243851 Issued: 05 Apr 2002
BY: Lee Pulver, Clyde Pineda, and Phuong Nguyen Approved: Lee Pulver

Signature Page - Last Page of Report

Project Coordinated by

Signed _____
Laura A. Bramschreiber

Data and Technical Details by

Signed _____
Clyde Pineda and Phuong Nguyen

Quality Assurance by

Signed _____
Alethea Bywaters

Report Approved by

Signed _____
Lee J. Pulver