

# **F C C - TEST REPORT**

REPORT NO.: 45595

# **FCC – Test Report**

Date: 2006-06-28

**No. 45595**

Page 2 of 19

**FCC listed testlab  
acc. to Section 2.948 of the FCC - Rules  
in compliance with the requirements of  
ANSI C63.4 - 2003**

**Product** : Radio Control Car - Knight Rider  
(Transmitter)

**Product Class** : Low Power Communication Device -  
Transmitter

**Brand Name** : Hitari

**Model** : 8244

**Applicant** : HITARI LTD.

# **FCC – Test Report**

**No. 45595**

Date: 2006-06-28

Page 3 of 19

## **TABLE OF CONTENTS**

1. Cover sheet
2. Introduction
3. Table of Contents
4. Laboratory Report
5. Test Location and Summary of Test Results
6. Test Equipment List
7. Radiated Emission Test Configuration (> 30MHz)
8. Radiated Emission Test Configuration (9kHz – 30MHz)
9. Test Results
10. Measurement Data
- 11-12. Time Domain Plot
13. Measurement Data
14. Notes for Radiated Emission Measurement (acc. to ANSI C63.4 – 2003)
15. Measurement of Emissions within Band Edges (Band Edges Plot)
16. Notes for Measurement of Emissions within Band Edges
- 17-19. Photographs

# FCC – Test Report

No. 45595

Date: 2006-06-28

Page 4 of 19

## LABORATORY - REPORT

**APPLICANT:** HITARI LTD.  
**ADDRESS:** Random House, 14 Hall Drive  
Bramhope, Leeds  
LS16 9 JE, United Kingdom

**DATE OF SAMPLE RECEIVED:** 2006-06-22

**DATE OF TESTING:** 2006-06-23 to 2006-06-26

### DESCRIPTION OF SAMPLE:

Product: Radio Control Car - Knight Rider (Transmitter)  
Product class: Low Power Communication Device - Transmitter  
Model number: 8244  
Rating: DC 9V ('6F22' Size Battery x 1)

### INVESTIGATIONS REQUESTED:

Measurements to the relevant clauses of F.C.C. Rules and Regulations  
Part 15 Subpart C - Intentional Radiators

**RESULTS:** See the attached sheets

**CONCLUSIONS:** From the measurement data obtained, the tested sample was considered to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.



Authorized Signature

# FCC – Test Report

No. 45595

Date: 2006-06-28

Page 5 of 19

## Test Location

International Electrical Certification Centre Ltd.  
Unit 602-605, 31 Lok Yip Road, On Lok Tsuen, Fanling, N.T., Hong Kong

## Summary of Test Results

### Radiated Emission:

Test result: O.K.  
Test data: See attached data sheet

### Conducted Emission:

Test result: N.A.  
Test data: N.A.

### Measurement of Emissions within Band Edges

Test result: O.K.  
Test data: See attached data sheet

# FCC – Test Report

Date: 2006-06-28

No. 45595

Page 6 of 19

## TEST EQUIPMENT LIST

| Equipment                      | Manufacturer    | Model                    | Serial No. | Last Calibration Date | Next Calibration Date |
|--------------------------------|-----------------|--------------------------|------------|-----------------------|-----------------------|
| Test Receiver                  | Rohde & Schwarz | ESVP                     | 860688/022 | 14/11/2005            | 13/11/2006            |
| Test Receiver                  | Rohde & Schwarz | ESH 3                    | 863497/015 | 14/11/2005            | 13/11/2006            |
| Antenna                        | Schaffner       | CBL6111C                 | 2791       | 25/05/2005            | 24/05/2008            |
| Antenna                        | Schwarzbeck     | BBA 9106 /<br>UHALP 9107 | --         | 29/03/2005            | 28/03/2008            |
| Antenna Mast System            | Schwarzbeck     | AM9104                   | --         | --                    | --                    |
| Loop Antenna                   | Rohde & Schwarz | HFH2-Z2                  | 871336/48  | 03/12/2003            | 02/12/2006            |
| Turntable with Controller      | Drehtisch       | DT312                    | --         | --                    | --                    |
| Spectrum Analyzer with Q. Peak | Advantest       | R3132                    | 140101852  | 16/11/2005            | 15/11/2006            |


# FCC – Test Report

No. 45595

Date: 2006-06-28

Page 7 of 19

## Radiated Emission Test Configuration (> 30MHz)

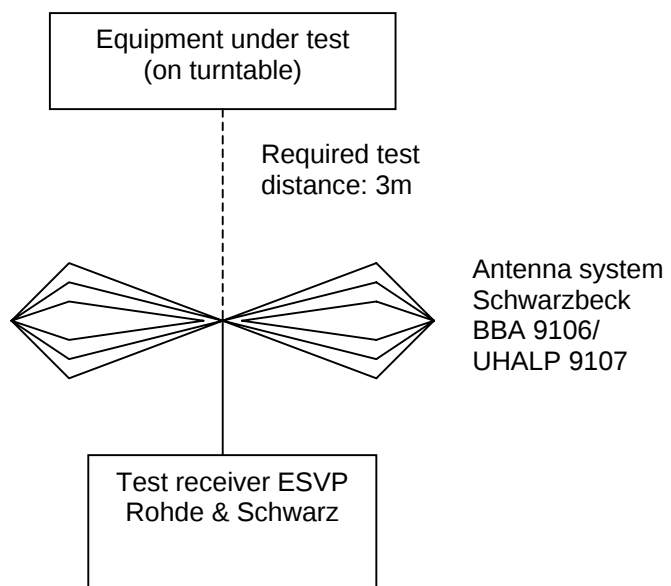


# FCC – Test Report

No. 45595

Date: 2006-06-28

Page 8 of 19

## Radiated Emission Test Configuration ( 9kHz – 30MHz)

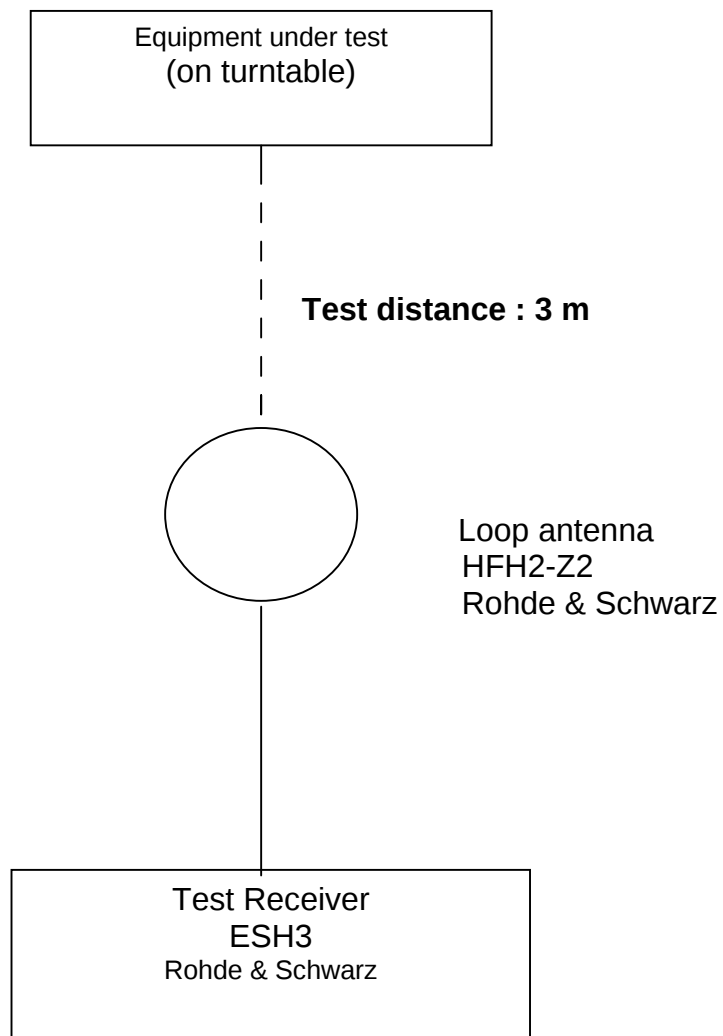

# FCC – Test Report

No. 45595

Date: 2006-06-28

Page 9 of 19

## Test Results

### **Radiated Emission :**

|                       |                                                                                                     |
|-----------------------|-----------------------------------------------------------------------------------------------------|
| Test Requirement:     | FCC Part 15 Subpart C Section 15.227, 15.209                                                        |
| Test Method:          | ANSI C63.4 : 2003                                                                                   |
| Frequency Range:      | 9kHz – 1000MHz                                                                                      |
| Measurement Distance: | 3 m                                                                                                 |
| Detector:             | Peak (Measurement within the operation band)<br>Quasi-Peak (Measurement outside the operation band) |

### **Sample Operation and Measurement :**

The sample was tested under normal operation with supply from new batteries. An initial pre-scan was performed in the Open Area Test Site to find out the maximum emission level of the sample placed at 3 orthogonal planes. Final measurement was then performed and the measurement data were shown in page 10 -13.

Refer to page 14 for notes for radiation measurement.

The operation frequency of the sample was checked to within the specified band 26.96 – 27.28 MHz. The band edge plot was shown in page 15.

# Radiated Emission

Date : 2006-06-28

Page: 10 of 19

Measurement of Radiated Emissions  
FCC Part 15 Subpart C (15.227)

IECC Ref: 45595  
Model: 8244  
Applicant: HITARI LTD.  
Sample No.: 1  
Set under test: Radio Control Car - Knight Rider  
Connected sets: -  
Operating mode: Operate

Test Equipment  
Receiver: ESVP Rohde & Schwarz  
Antenna: HFH2-Z2 Rohde & Schwarz

## Radiation Measurement (3 m) below 30MHz

a. Fundamental Frequency

| Frequency (MHz) | Maximum Test Result (dB(μV/m)) |           | FCC Limit (dB(μV/m)) |         |
|-----------------|--------------------------------|-----------|----------------------|---------|
|                 | Peak                           | Average * | Peak                 | Average |
| 27.145          | 75.0                           | 68.3      | 100                  | 80      |

Note : (1) The above peak value is the maximum value of the measurement in 3 orthogonal planes

(2) \* Calculation for radiation (average) :

Formula :

$$\text{Duty cycle} = (N1L1 + N2L2 + \dots + Nn-1Ln-1 + NnLn) / 100 \text{ or } T$$

where N1 is number of type 1 pluse, L1 is length of type 1 pulse, etc.  
T is the period of the pulse train (if less than 100 ms)

According to the time domain plots shown in page 11 & 12 :

$$\text{Duty cycle of the EUT} = (6 \times 1.56 + 10 \times 0.540) / 32.04 = 0.4607$$

$$\begin{aligned} \text{Av correction factor} &= 20 \times \log(0.4607) \text{ dB} \\ &= -6.73 \text{ dB} \end{aligned}$$

$$\text{Radiation (average)} = \text{Radiation (peak)} + \text{Av correction factor}$$

$$\begin{aligned} \text{Radiation (average) of the EUT} &= 75.0 - 6.73 \text{ dB(}\mu\text{V/m)} \\ &= 68.3 \text{ dB(}\mu\text{V/m)} \end{aligned}$$


b. The measured radiation outside the operation band were negligible

# Radiated Emission

Date : 2006-06-28

Page: 11 of 19

## Transmitter Emission - Time Domain Plots

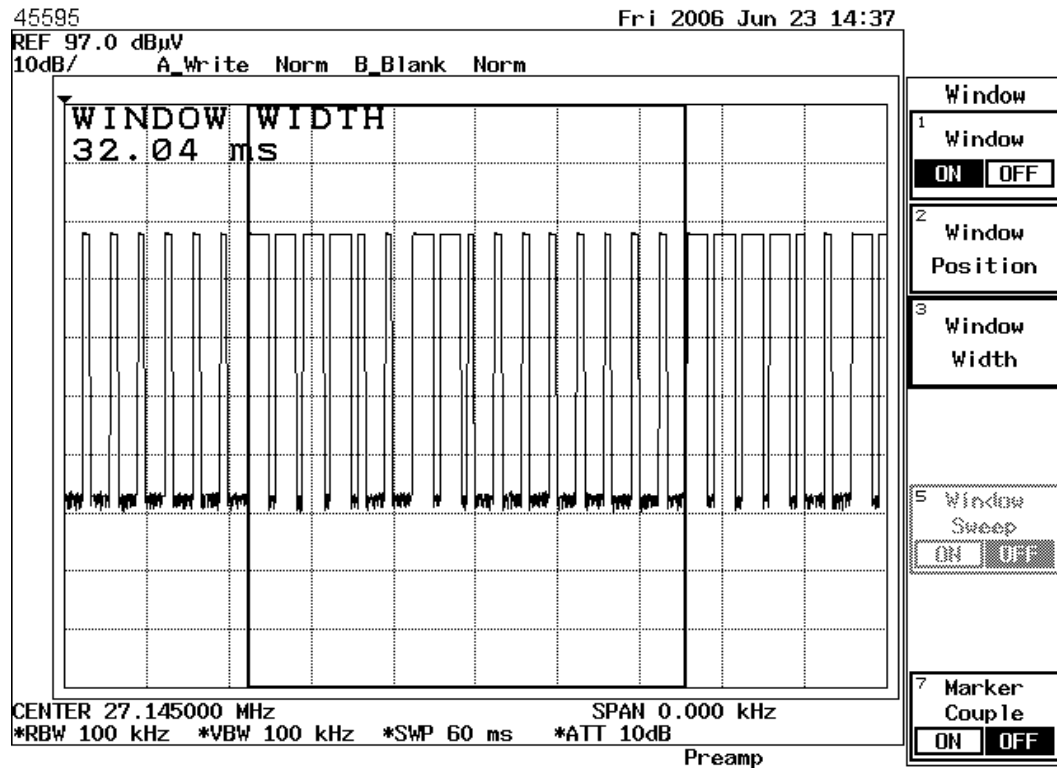


Pulse cycle period = 32.04 ms

# Radiated Emission


Date : 2006-06-28

Page: 12 of 19

## Transmitter Emission - Time Domain Plots

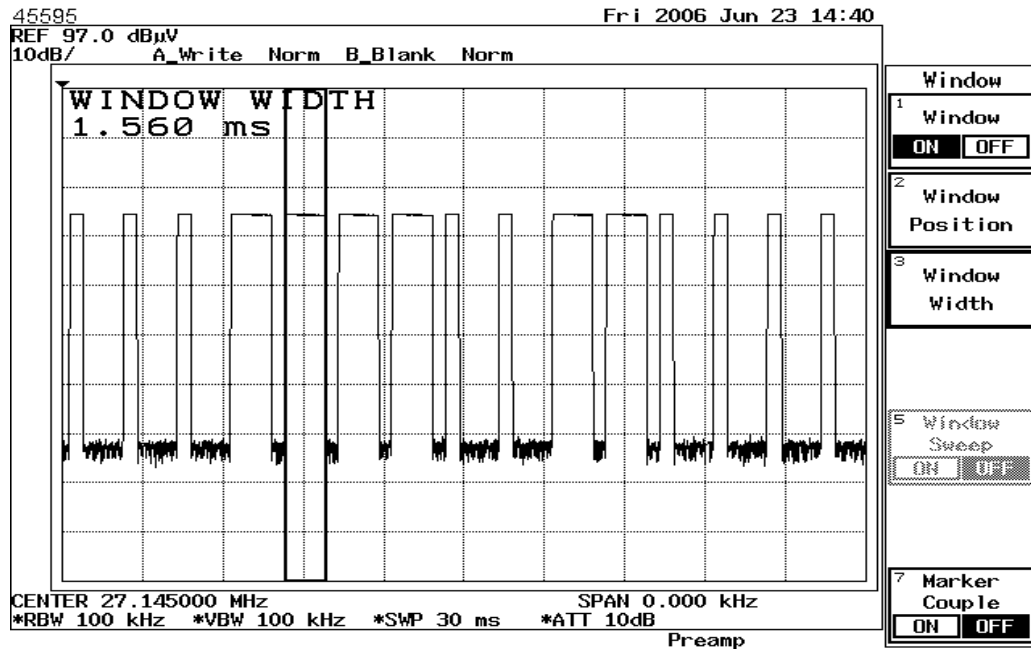

Pulse width = 1.56 ms (total number of pulse : 6)

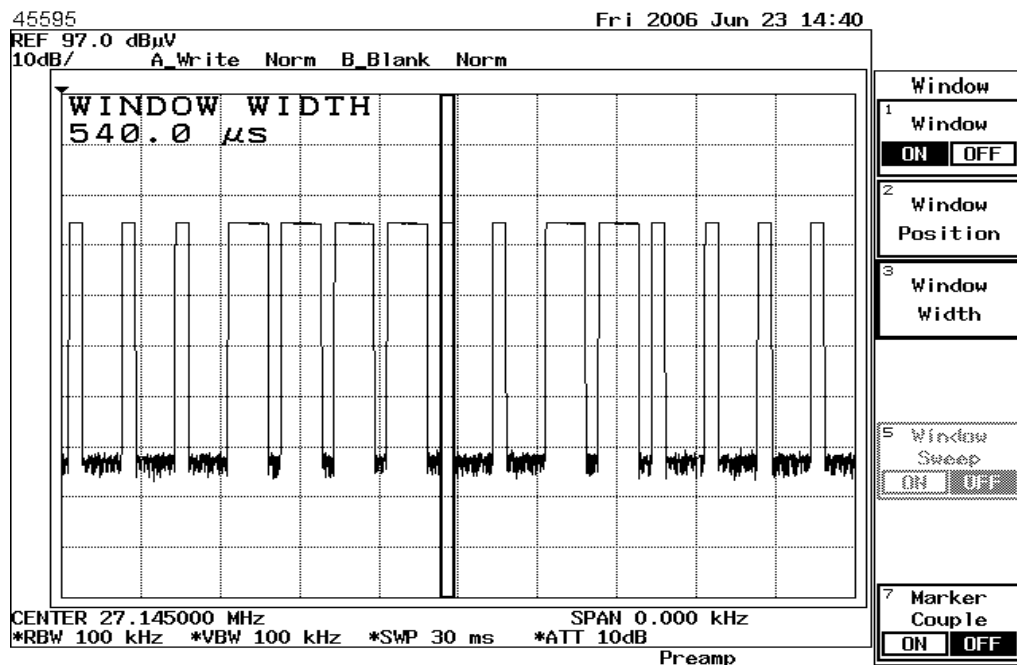

Pulse width = 0.540 ms (total number of pulse : 10)

# Radiated Emission

Measurement of Radiated Emissions  
FCC Part 15 Subpart C (15.209)

Date : 2006-06-28  
Page 13 of 19

IECC Ref: 45595  
Model: 8244  
Applicant: HITARI LTD.  
LIMITED  
Sample No. : 1  
Set under test: Radio Control Car - Knight Rider  
Connected sets: -  
Operating mode: Operate

Test Equipment  
Receiver: ESVP Rohde & Schwarz  
Antenna: BBA 9106 / UHALP 9107  
Schwarzbeck

Fundamental Frequency : 27.145 MHz

## Radiation Measurement over 30MHz

|          | Frequency (MHz) | Horz. Reading dB(μV) | Vert. Reading dB(μV) | Corr. Factor (dB) | Horiz. Test Result dB(μV/m) | Vert. Test Result dB(μV/m) | Limit dB(μV/m) |
|----------|-----------------|----------------------|----------------------|-------------------|-----------------------------|----------------------------|----------------|
| Harm. 2  | 54.29           | < 16                 | 28.5                 | 10.2              | < 26.2                      | 38.7                       | 40.0           |
| Harm. 3  | 81.44           | < 16                 | < 16                 | 7.1               | < 23.1                      | < 23.1                     | 40.0           |
| Harm. 4  | 108.58          | < 16                 | < 16                 | 11.6              | < 27.6                      | < 27.6                     | 43.5           |
| Harm. 5  | 135.73          | < 16                 | < 16                 | 14.3              | < 30.3                      | < 30.3                     | 43.5           |
| Harm. 6  | 162.87          | < 16                 | < 16                 | 15.6              | < 31.6                      | < 31.6                     | 43.5           |
| Harm. 7  | 190.02          | < 16                 | < 16                 | 16.3              | < 32.3                      | < 32.3                     | 43.5           |
| Harm. 8  | 217.16          | < 16                 | < 16                 | 16.9              | < 32.9                      | < 32.9                     | 46.0           |
| Harm. 9  | 244.31          | < 16                 | < 16                 | 17.6              | < 33.6                      | < 33.6                     | 46.0           |
| Harm. 10 | 271.45          | < 16                 | < 16                 | 18.5              | < 34.5                      | < 34.5                     | 46.0           |
| Harm. 11 | 298.60          | < 16                 | < 16                 | 19.9              | < 35.9                      | < 35.9                     | 46.0           |
| Harm. 12 | 325.74          | < 16                 | < 16                 | 16.8              | < 32.8                      | < 32.8                     | 46.0           |
| Harm. 13 | 352.89          | < 16                 | < 16                 | 17.5              | < 33.5                      | < 33.5                     | 46.0           |
| Harm. 14 | 380.03          | < 16                 | < 16                 | 18.0              | < 34.0                      | < 34.0                     | 46.0           |
| Harm. 15 | 407.18          | < 16                 | < 16                 | 18.4              | < 34.4                      | < 34.4                     | 46.0           |
| Harm. 16 | 434.32          | < 16                 | < 16                 | 18.8              | < 34.8                      | < 34.8                     | 46.0           |
| Harm. 17 | 461.47          | < 16                 | < 16                 | 19.2              | < 35.2                      | < 35.2                     | 46.0           |
| Harm. 18 | 488.61          | < 16                 | < 16                 | 19.5              | < 35.5                      | < 35.5                     | 46.0           |
| Harm. 19 | 515.76          | < 16                 | < 16                 | 19.9              | < 35.9                      | < 35.9                     | 46.0           |
| Harm. 20 | 542.90          | < 16                 | < 16                 | 20.1              | < 36.1                      | < 36.1                     | 46.0           |
| Harm. 21 | 570.05          | < 16                 | < 16                 | 20.5              | < 36.5                      | < 36.5                     | 46.0           |
| Harm. 22 | 597.19          | < 16                 | < 16                 | 20.9              | < 36.9                      | < 36.9                     | 46.0           |
| Harm. 23 | 624.34          | < 16                 | < 16                 | 21.2              | < 37.2                      | < 37.2                     | 46.0           |
| Harm. 24 | 651.48          | < 16                 | < 16                 | 21.6              | < 37.6                      | < 37.6                     | 46.0           |
| Harm. 25 | 678.63          | < 16                 | < 16                 | 22.1              | < 38.1                      | < 38.1                     | 46.0           |
| Harm. 26 | 705.77          | < 16                 | < 16                 | 22.5              | < 38.5                      | < 38.5                     | 46.0           |
| Harm. 27 | 732.92          | < 16                 | < 16                 | 22.8              | < 38.8                      | < 38.8                     | 46.0           |
| Harm. 28 | 760.06          | < 16                 | < 16                 | 23.2              | < 39.2                      | < 39.2                     | 46.0           |
| Harm. 29 | 787.21          | < 16                 | < 16                 | 23.5              | < 39.5                      | < 39.5                     | 46.0           |
| Harm. 30 | 814.35          | < 16                 | < 16                 | 23.9              | < 39.9                      | < 39.9                     | 46.0           |
| Harm. 31 | 841.50          | < 16                 | < 16                 | 24.3              | < 40.3                      | < 40.3                     | 46.0           |
| Harm. 32 | 868.64          | < 16                 | < 16                 | 24.6              | < 40.6                      | < 40.6                     | 46.0           |
| Harm. 33 | 895.79          | < 16                 | < 16                 | 24.9              | < 40.9                      | < 40.9                     | 46.0           |
| Harm. 34 | 922.93          | < 16                 | < 16                 | 25.4              | < 41.4                      | < 41.4                     | 46.0           |
| Harm. 35 | 950.08          | < 16                 | < 16                 | 25.8              | < 41.8                      | < 41.8                     | 46.0           |
| Harm. 36 | 977.22          | < 16                 | < 16                 | 26.2              | < 42.2                      | < 42.2                     | 54.0           |

**Remark:** All frequencies in the required range have been scanned and only those significant and representative readings are reported above.  
All emissions not reported above are all well below the limit.

**Note:** Unless otherwise indicated, the recorded readings are in quasi-peak values.

## Notes for Radiated Emission Measurement

**1. Measurement facility:**

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules (FCC Registration No. : 97774).

**2. Distance between the EUT and measuring antenna:**

3 meters.

**3. Measuring instrumentations:**

Rohde & Schwarz ESH3 Test Receiver (9kHz – 30MHz), ESVP Test Receiver ( 20 - 1300 MHz ) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

**4. Measuring antenna:**

Broad-band antenna for the frequency range 30 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antenna is capable of measuring both horizontal and vertical polarizations. The antenna was raised from 1 to 4 meters to find out the maximum emission level from the EUT.

Loop antenna for the frequency range 9kHz - 30MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the measurement data. The center of the loop 1 m above the ground plane, positioned with its plane vertical at the specified distance and rotated about its vertical axis and placed horizontal for maximum response at each azimuth about the EUT.

**5. Frequency range scanned:**

The frequency ranges 9kHz - 30MHz, 30 - 1000 MHz have been scanned. Readings of the highest emissions relating to the limit were reported as above.

**6. Arrangement of EUT:**

During the test, the sample was placed on a turn table and operated under various modes at rated supply voltage. The table is 0.8 meter above ground and can rotate 360 degrees to determine the position of the maximum emission level.

**7. Measuring Procedure:**

In **accordance** with the relevant sections of the American National Standards Institute (ANSI) C63.4-2003 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.


# FCC – Test Report

Date: 2006-06-28

No. 45595

Page 15 of 19

## Measurement Data of Emissions within Band Edges

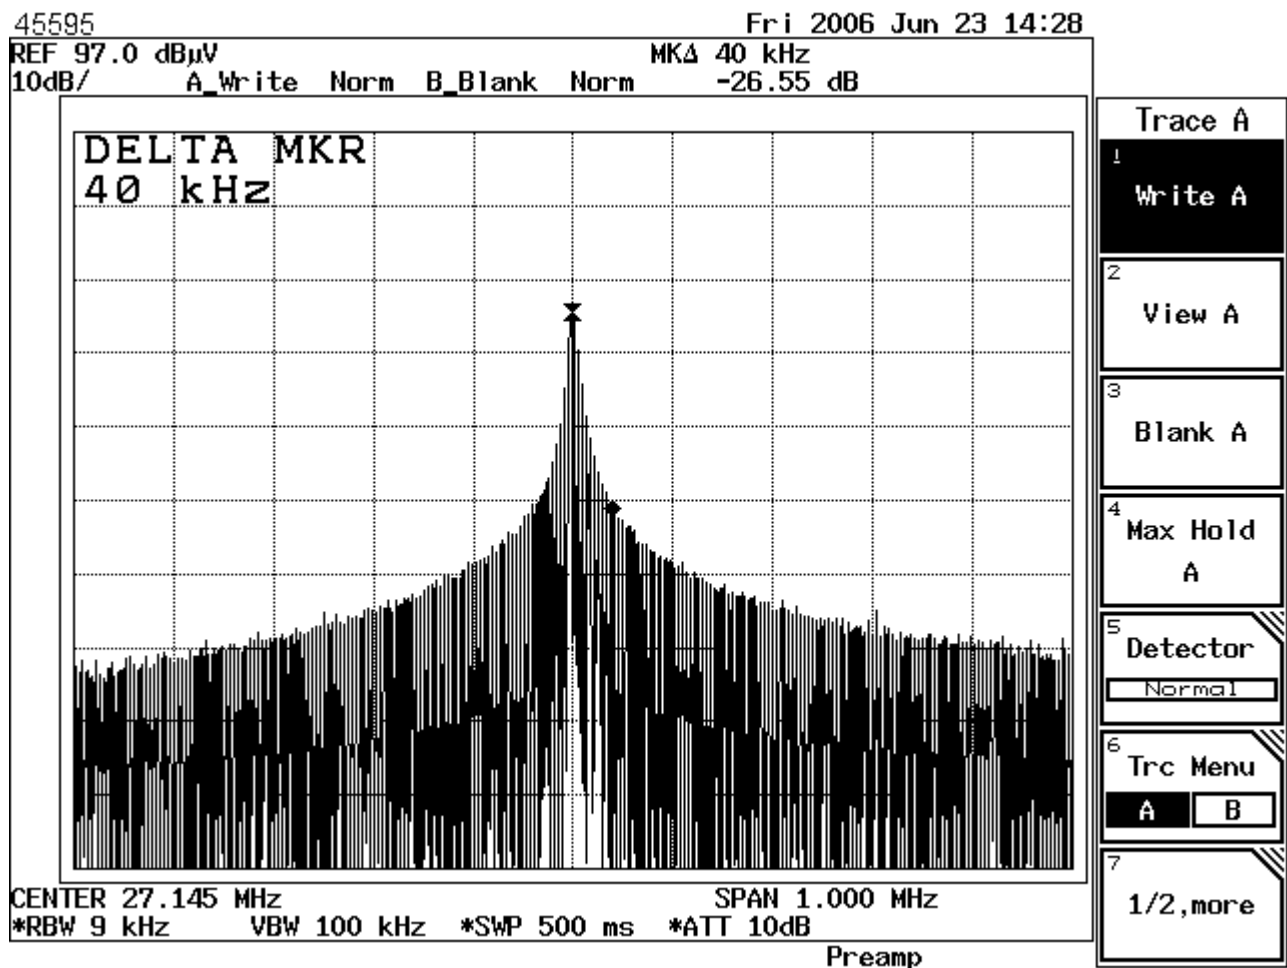

Result : The field strength of any emission within the operation band did not exceed 80 dB(μV/m) for average value or 100 dB(μV/m) for peak value. Refer to page 10 for the recorded value for the emission at the fundamental frequency.

## **Notes for Measurement of Emissions within Band Edges**

1. **Measurement facility:**  
Measurement facility located at Fanling (Hong Kong) placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.
2. **Measuring instrumentations:**  
Spectrum Analyzer: Advantest R3132
3. **Frequency range scanned:**  
The frequency range acc. to FCC rules and regulations part 15 subpart C - Intentional Radiators.
4. **Arrangement of EUT:**  
During the test, the sample was operated.
5. **Measuring Procedure:**  
In accordance with the relevant sections of American National Standards Institute (ANSI) C63.4 - 2003 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz'.

# FCC – Test Report

No. 45595

Date: 2006-06-28

Page 17 of 19

## Photographs

Radiated Emission Test setup



# FCC – Test Report

No. 45595

Date: 2006-06-28

Page 18 of 19

## Sample Construction Details



# FCC – Test Report

No. 45595

Date: 2006-06-28

Page 19 of 19

## Sample Construction Details

