

10/16/02

D2450V2 S/N:706, Frequency: 2450 MHz

Frequency: 2450 MHz; Crest factor: 1.0

Medium: Head 2450MHz: $\sigma = 1.93 \text{ mho/m}$ $\epsilon_r = 38.4$ $\rho = 1.00 \text{ g/cm}^3$

SAM-1 Phantom; Flat Section; Position: (90°,90°)

Probe: ET3DV6 - SN1578; ConvF(4.50,4.50,4.50);


SAR:Cube 5x5x7: Peak: 29.3 mW/g, SAR (1g): 14.2 mW/g, SAR (10g): 6.55 mW/g, (Worst-case extrapolation)

Penetration depth: 6.5 (6.3, 7.2) [mm]; Powerdrift: -0.11 dB

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Ambient Temperature (degree C): 23

Liquid Temperature (degree C): 21.3

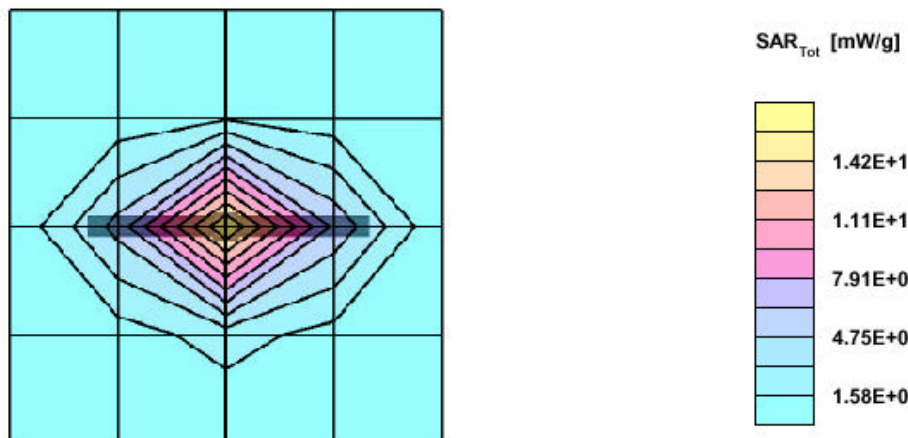

COMPLIANCE CERTIFICATION SERVICES

10/16/02

D2450V2 S/N:706, Frequency: 2450 MHz

Frequency: 2450 MHz; Crest factor: 1.0

Medium: Head 2450MHz: $\sigma = 1.93$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³

SAM-1 Phantom; Section; Position:

Probe: ET3DV6 - SN1578; ConvF(4.50,4.50,4.50);


SAR:: , , ()

Penetration depth: 6.6 (6.3, 7.3) [mm];

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 2.0

Ambient Temperature (degree C): 23

Liquid Temperature (degree C): 21.3

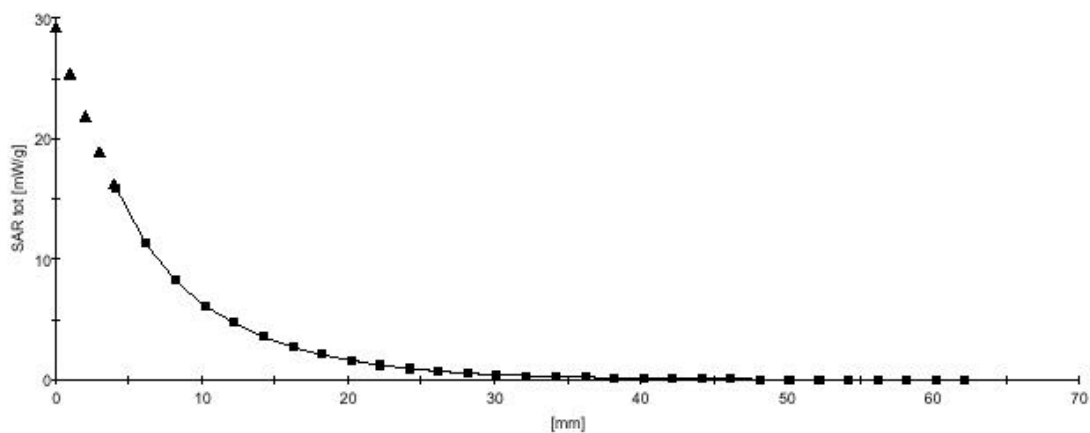

COMPLIANCE CERTIFICATION SERVICES