FCC TEST REPORT

for

47 CFR, Part 22H, 24E

Equipment	:	802.11b USB Wireless LAN+GPRS modem
Model No.	:	SCWi275u
FCC ID	:	NIT-SCWI275U
Filing Type	:	Certification
Applicant	:	SOLOMON Technology Corp. No. 42, Sing Zhong Rd., Nei Hu Dist., Taipei, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced
  except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

The applicant has been cautioned as to the following:

15.21 Information to User.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

Table of Contents

Rule	Description	Page
	Test Report	4
2.1033(c)	General Information Required	5
2.1033(c)(14)	Rule Summary	8
	General Information	9
	Standard Test Conditions and Engineering Practices	10
2.1046(a)	ERP Carrier Power (Radiated)	11
2.1049(c)(1), 22	Emission Masks (Occupied Bandwidth)	19
2.1051, 2.1049(c), 24, 24.238(b)	Transmitter Conducted Measurements	24
2.1053(a)	Field Strength of Spurious Radiation	30
2.1055(a)(1)	Frequency Stability (Temperature Variation)	65
2.1055(b)(1)	Frequency Stability (Voltage Variation)	68
Antenna Factor & Cable Loss		69
List of Measuring Equipments Used		70
Uncertainty of Test Site		71
Appendix A	External Product Photograph	
Appendix B	Internal Photograph	
Appendix C	Set up Photograph	

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a) **Test Report**

b) Laboratory: Sporton International Inc.
No.52, Hwa-Ya 1st RD., Hwa Ya Technology Park, Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.

c) Report Number: F412810-01

d) Client: SOLOMON Technology Corp.
No. 42, Sing Zhong Rd., Nei Hu Dist., Taipei, Taiwan, R.O.C.

e) Identification: SCWi275u
FCC ID: NIT-SCWI275U
Description: GSM850/1900 Radio

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: April 10, 2004
EUT Received: March 30, 2004

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with Sporton internal quality manual.

m) Supervised by:

Daniel Lee 4/12/2004

Daniel Lee

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

Accessories Used During Testing:

Type	**Model**
EUT	SCWi275u
Laptop	DELL/PP05L

List of General Information Required for Certification

In Accordance with FCC Rules and Regulations,
Volume II, Part 2 and to

22H, 24E, Confidentiality

Sub-Part 2.1033

(c)(1): **Name and Address of Applicant**:

SOLOMON Technology Corp.
No. 42, Sing Zhong Rd., Nei Hu Dist., Taipei,
Taiwan, R.O.C.

Manufacturer

As above

(c)(2): **FCC ID**: NIT-SCWI275U

Model Number: SCWi275u

(c)(3): **Instruction Manual(s)**:

Please See Attached Exhibits

(c)(4): **Type of Emission**: 300KGXW

(c)(5): **FREQUENCY RANGE, MHz**: 824.2 to 848.8 GSM850
1850.2 to 1909.8 GSM1900

(c)(6): **Power Rating, Watts**: 0.827 ERP (850)
0.634 EIRP (1900)

Switchable x Variable N/A

(c)(7): **Maximum Power Rating, Watts**: 0.794 GSM 850
1 GSM 1900

Subpart 2.1033 (continued)
(c)(8): Voltages & Currents in All Elements in Final RF Stage, Including Final Transistor or Solid State Device:

Collector Current, A =	0.5
Collector Voltage, Vdc =	5.0
Supply Voltage, Vdc =	5.0

(c)(9): **Tune-Up Procedure**:

Please See Attached Exhibits

(c)(10): **Circuit Diagram/Circuit Description**:

Please See Attached Exhibits

(c)(11): **Label Information**:

Please See Attached Exhibits

(c)(12): **Photographs**:

Please See Attached Exhibits

(c)(13): **Digital Modulation Description**:

___ Attached Exhibits
_x_ N/A

(c)(14): **Test and Measurement Data**:

Follows

Certificate of NVLAP Accreditation

United States Department of Commerce
National Institute of Standards and Technology

NVLAP®

ISO/IEC 17025:1999
ISO 9002:1994

Certificate of Accreditation

DEPARTMENT OF COMMERCE ★ UNITED STATES OF AMERICA ★

SPORTON INTERNATIONAL, INC.
TAIPEI HSIEN 221
TAIWAN

is recognized by the National Voluntary Laboratory Accreditation Program for satisfactory compliance with criteria set forth in NIST Handbook 150:2001, all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994. Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

December 31, 2004
Effective through

For the National Institute of Standards and Technology
NVLAP Lab Code: 200079-0

NVLAP-01C (06-01)

Sub-part
2.1033(c)(14): **Test and Measurement Data**

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

	21 – Domestic Public Fixed Radio Services
x	22 – Public Mobile Services
	22 Subpart H - Cellular Radiotelephone Service
	22.901(d) - Alternative technologies and auxiliary services
	23 – International Fixed Public Radiocommunication services
x	24 – Personal Communications Services
	74 Subpart H - Low Power Auxiliary Stations
	80 – Stations in the Maritime Services
	80 Subpart E - General Technical Standards
	80 Subpart F - Equipment Authorization for Compulsory Ships
	80 Subpart K - Private Coast Stations and Marine Utility Stations
	80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
	80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
	80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
	80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
	80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
	80 Subpart X - Voluntary Radio Installations
	87 – Aviation Services
	90 – Private Land Mobile Radio Services
	94 – Private Operational-Fixed Microwave Service
	95 Subpart A - General Mobile Radio Service (GMRS)
	95 Subpart C - Radio Control (R/C) Radio Service
	95 Subpart D - Citizens Band (CB) Radio Service
	95 Subpart E - Family Radio Service
	95 Subpart F - Interactive Video and Data Service (IVDS)
	97 - Amateur Radio Service
	101 – Fixed Microwave Services

General Information

Product Feature & Specification	
1. Type of Modulation	GMSK/GSM850, 1900; CCK/WLAN
2. Number of Channels	GSM850 : 128 to 251
	GSM1900 : 512 to 810
	WLAN : 1 to 11
3. Tx Frequency Band (MHz)	GSM850 : 824 to 849
	GSM1900 : 512 to 810
	WLAN : 2412 to 2462
4. Bandwidth of each channel	200 kHz/GSM850, 1900; 5MHz/WLAN
5. Maximum Output Power to Antenna	GSM850 : 29 dBm
	GSM1900 : 30 dBm
	WLAN : 11.5 dBm
6. Power Rating (DC/AC , Voltage)	DC 5V, 500mA max
7. Antenna Gain	GPRS: 1 dBi
	WLAN: 1.5 dBi
8. Basic function of product	802.11b USB Wireless LAN+GPRS modem
9. Temperature Range (Operating)	0~60C
10. Humidity	0~95%
11. Other Special	N/A
12. Remark	N/A

Standard Test Conditions

and

Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with TIA603, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.

Name of Test: ERP/EIRP Carrier Power (Radiated)

Specification: TIA/EIA 603A (Substitution Method)

Definition: The average radiated power of device is the equivalent power required, when delivered to a substitution antenna, to produce at a distant point the same average received power as produced by the licensed device.

Method Of Measurement:

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

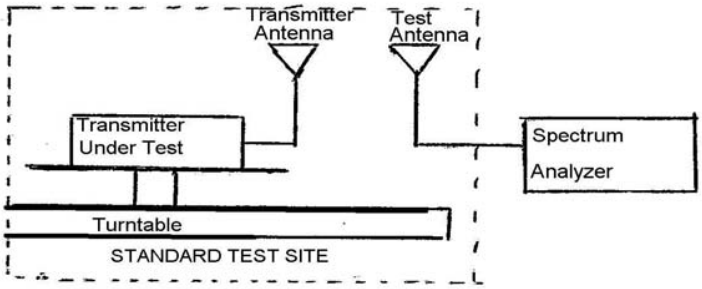

b) Raise and lower the test antenna from 1m to 4m and rotate turntable from 0° to 360°. Record the highest received signal showed in spectrum analyzer as Rt . Calculate electric field strength in receive antenna as Et.

Et = Rt + AF

AF (dB/m): Receive Antenna Factor

c) Replace the transmitter under test with a substitution antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power level Ps. Raise and lower the test antenna like in step b) and record the highest received signal showed in spectrum analyzer as R_S. Calculate electric field strength in receive antenna as Es.

Es = Rs + AF

AF (dB/m): Receive Antenna Factor

d) Calculate radiated power as following:

E(I)RP = Ps + Et – Es + Gs

Ps (dBm): Input Power to Substitution Antenna

Gs (dBd or dBi): Substitution Antenna Gain

Results Attached

Test Results For: ERP/EIRP Carrier Power (Radiated)

Conducted Power

Bands	Channel	Frequency (MHz)	Conducted Power (dBm)
GSM850	128	824.2 (Low)	27.2
	189	836.4 (Mid)	27.3
	251	848.8 (High)	27.5
GSM1900	512	1850.2 (Low)	28.1
	661	1880.0 (Mid)	27.9
	810	1909.8 (High)	28.3

GSM850 ERP

Freq MHz	Pol	Substitution Antenna Input Power dBm	Substitution Antenna Gain dBd	Et	Es	Et - Es dB	Radiated P Out dBm	Radiated P Out Watts
824.18	V	-2.49	-1.62	125.16	93.63	31.53	27.43	0.553
836.38	V	-2.49	-1.54	125.08	93.85	31.23	27.20	0.525
848.86	V	-2.48	-1.46	125.41	94.09	31.32	27.38	0.547
824.15	H	-2.49	-1.62	125.18	93.63	31.55	27.45	0.556
836.31	H	-2.49	-1.54	126.36	93.85	32.51	28.48	0.705
848.75	H	-2.48	-1.46	127.20	94.09	33.11	29.17	0.827

GSM1900 EIRP

Freq MHz	Pol	Substitution Antenna Input Power dBm	Substitution Antenna Gain dBi	Et	Es	Et - Es dB	Radiated P Out dBm	Radiated P Out Watts
1850.07	V	-3.76	6.64	124.43	101.70	22.73	25.62	0.364
1879.90	V	-3.78	6.65	126.79	101.64	25.15	28.02	0.634
1909.71	V	-3.81	6.66	125.58	101.58	24.00	26.85	0.485
1850.15	H	-3.76	6.64	124.14	101.70	22.44	25.33	0.341
1879.98	H	-3.78	6.65	124.86	101.64	23.22	26.09	0.406
1909.79	H	-3.81	6.66	126.38	101.58	24.80	27.65	0.583

GSM 850 Vertical

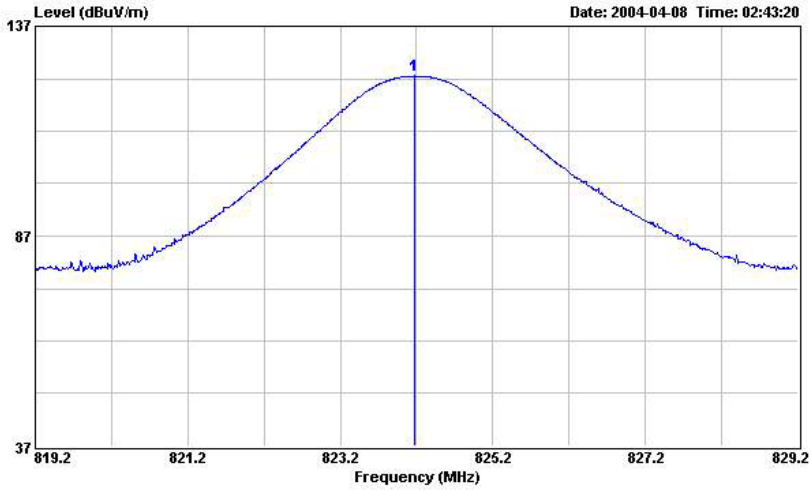

Site : 03CH03-HY
Condition : 3m LOG-9111-221 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850 CH128

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	824.180	125.16	------	------	99.39	20.62	5.15	0.00	Peak	---	---

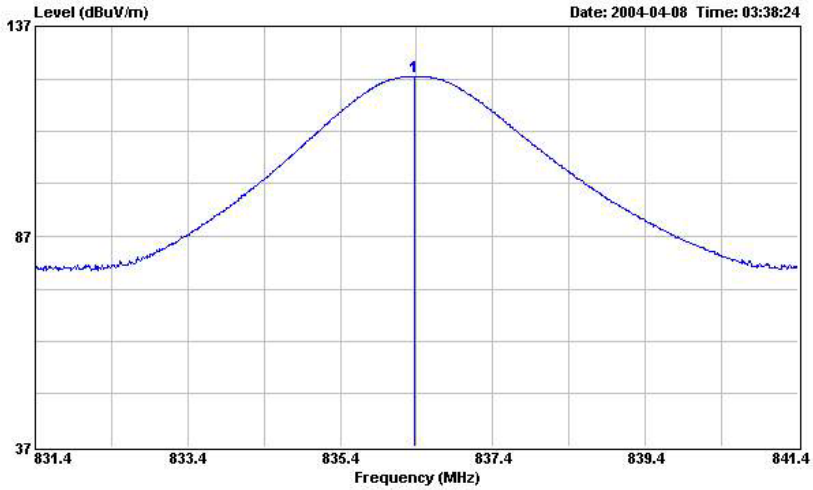

Site : 03CH03-HY
Condition : 3m LOG-9111-221 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850 CH189

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	836.380	125.08	------	------	99.08	20.74	5.26	0.00	Peak	---	---

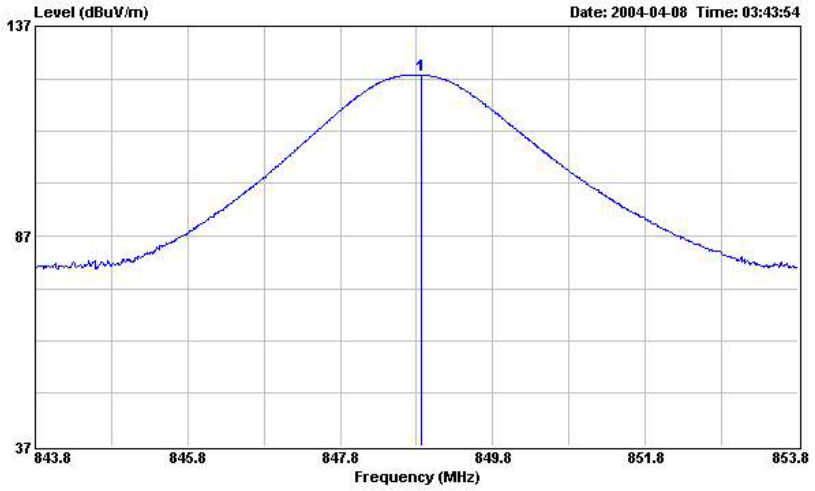

Site : 03CH03-HY
Condition : 3m LOG-9111-221 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850 CH251

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	848.860	125.41	------	------	99.29	20.86	5.26	0.00	Peak	---	---

GSM 850 Horizontal

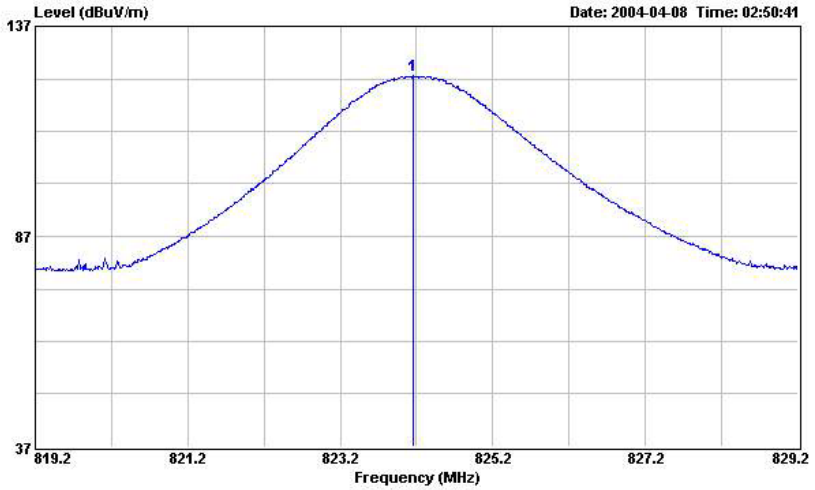

Site : 03CH03-HY
Condition : 3m LOG-9111-221 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850 CH128

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	824.150	125.18	------	------	99.41	20.62	5.15	0.00	Peak	---	---

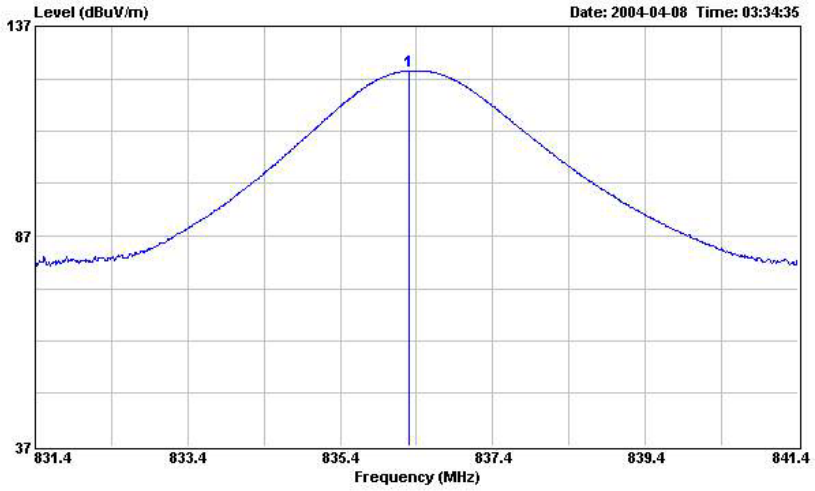

Site : 03CH03-HY
Condition : 3m LOG-9111-221 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850 CH189

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	836.310	126.36	------	------	100.36	20.74	5.26	0.00	Peak	---	---

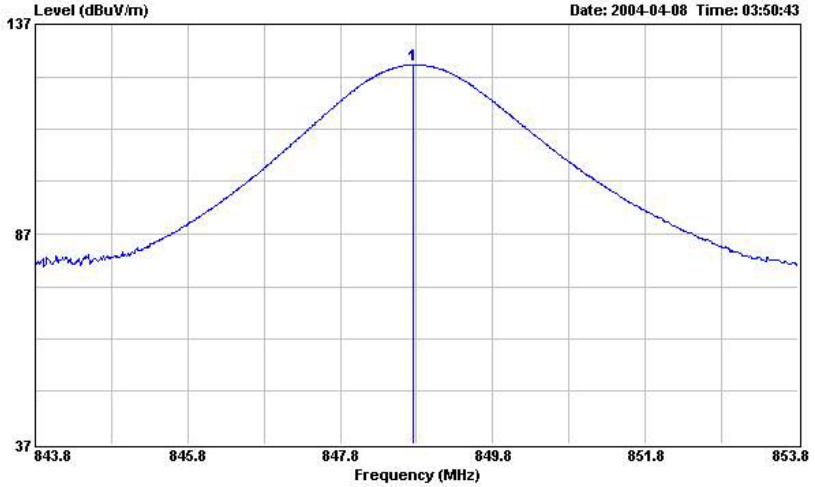

Site : 03CH03-HY
Condition : 3m LOG-9111-221 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850 CH251

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	848.750	127.20	------	------	101.08	20.86	5.26	0.00	Peak	---	---

GSM 1900 Vertical

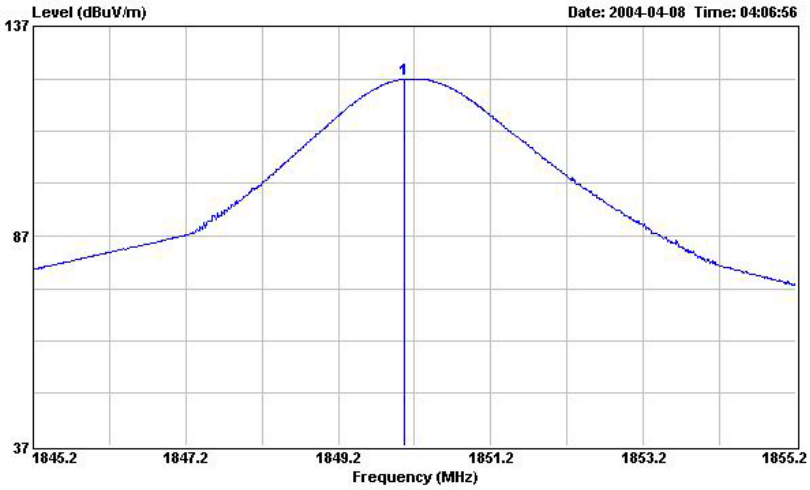

Site : 03CH03-HY
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900 CH512

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1850.070	124.43	------	------	96.01	26.77	1.65	0.00	Peak	107	286

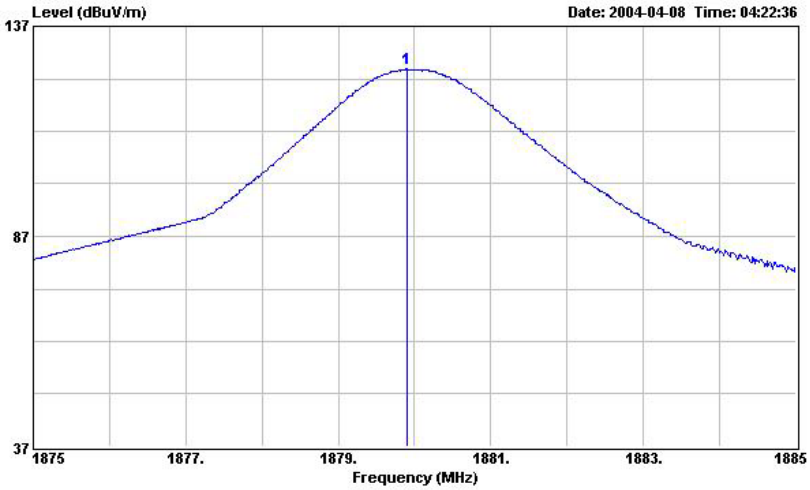

Site : 03CH03-HY
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900 CH661

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1879.900	126.79	------	------	98.29	26.91	1.59	0.00	Peak	---	---

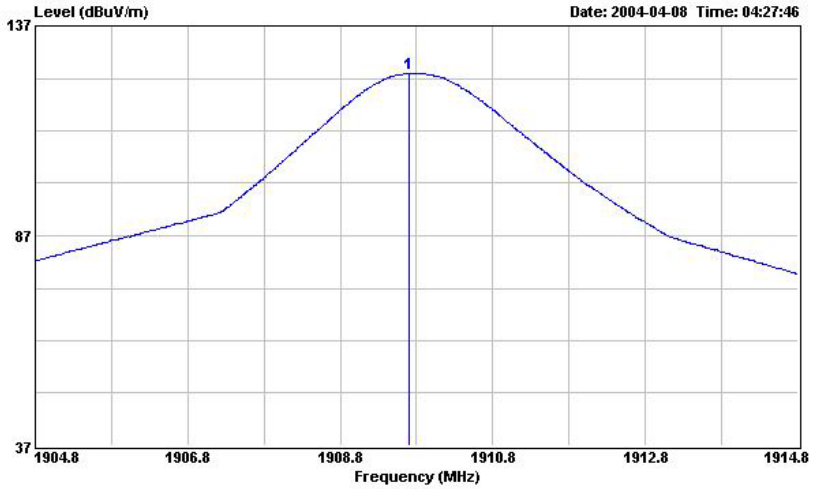

Site : 03CH03-HY
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900 CH810

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1909.710	125.58	------	------	96.94	27.05	1.59	0.00	Peak	---	---

GSM 1900 Horizontal

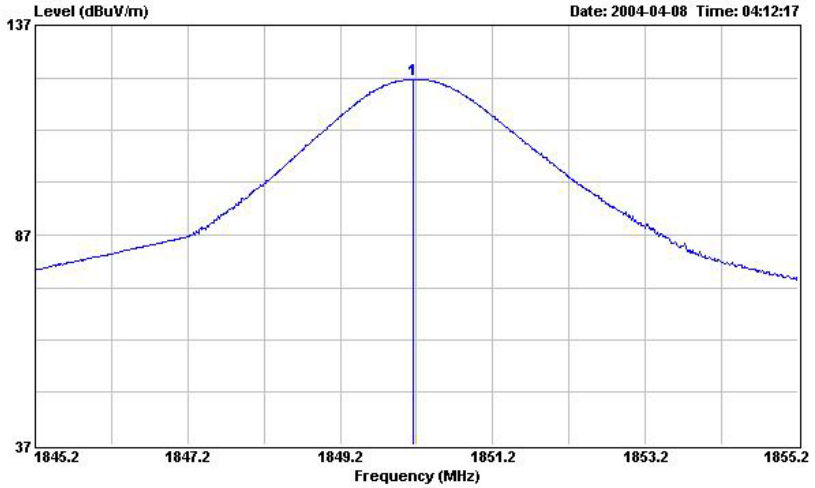

Site : 03CH03-HY
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900 CH512

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1850.150	124.14	------	------	95.72	26.77	1.65	0.00	Peak	---	---

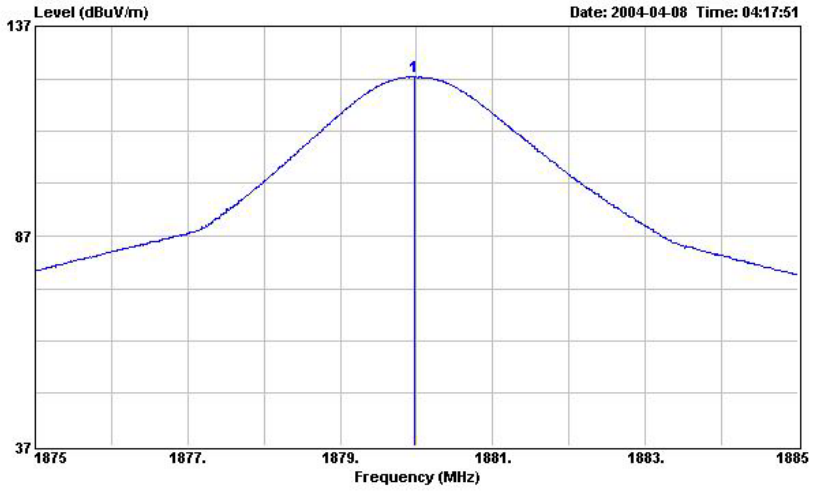

Site : 03CH03-HY
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900 CH661

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1879.980	124.86	------	------	96.36	26.91	1.59	0.00	Peak	107	263

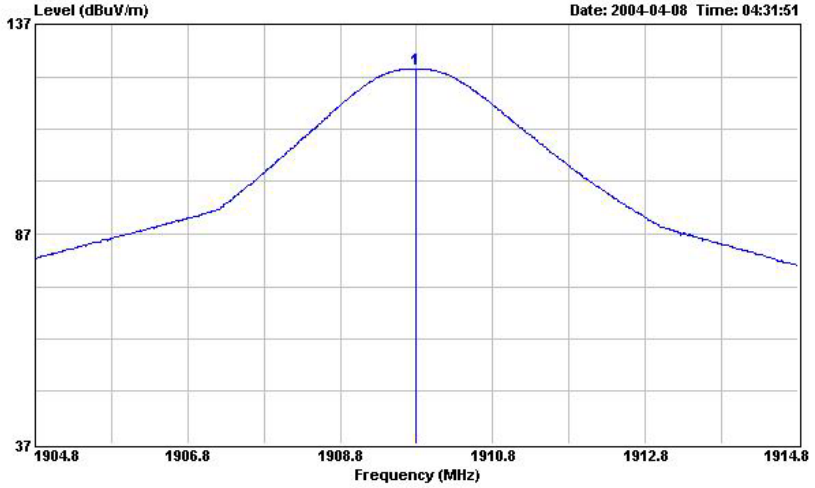

Site : 03CH03-HY
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900 CH810

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1909.790	126.38	------	------	97.74	27.05	1.59	0.00	Peak	105	266

Name of Test: Emission Masks (Occupied Bandwidth)

Specification: 47 CFR 2.1049(c)(1), 22

Test Equipment: As per previous page

Measurement Procedure

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.

3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.

4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.

5. Measurement Results: Attached

Name of Test: Emission Masks (Occupied Bandwidth)
State: 1:Low Power

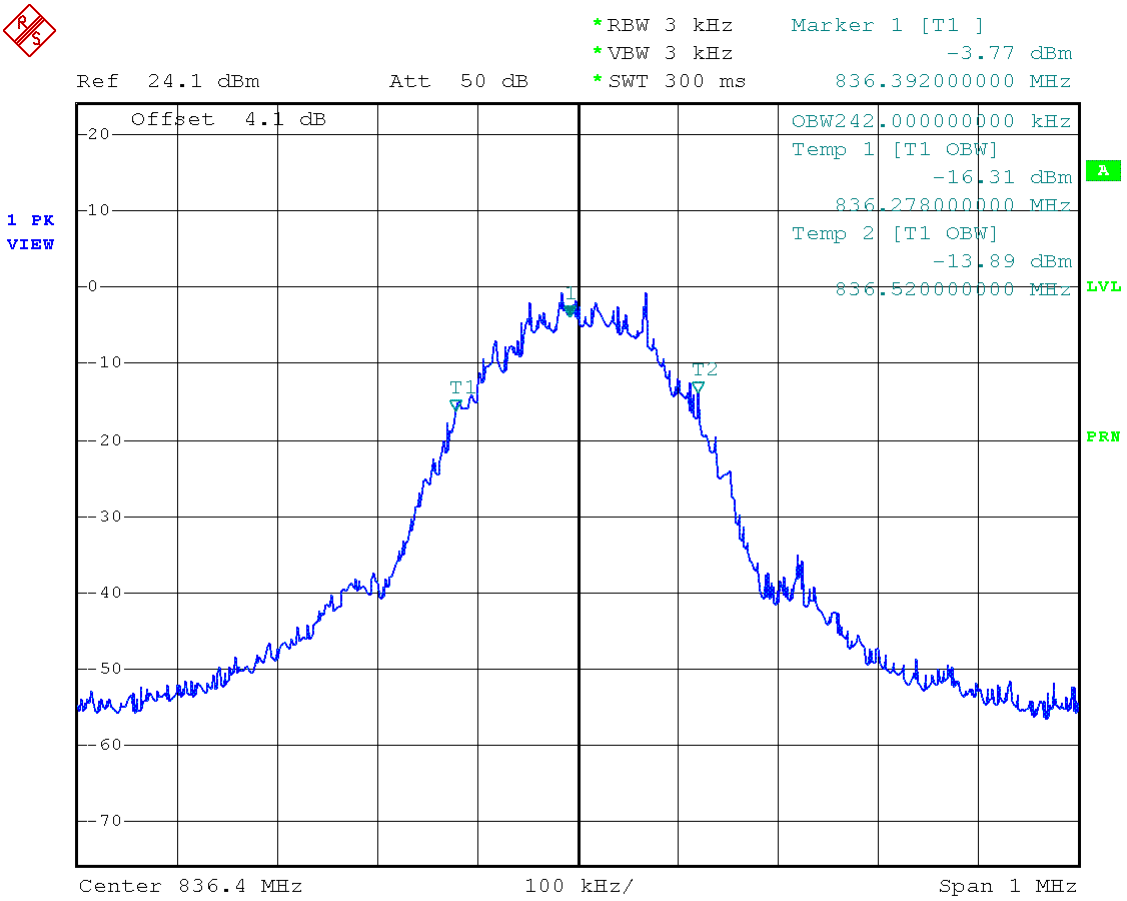

Date: 16.NOV.2003 01:20:39

Power: LOW
Modulation: GSM/GPRS850
99% BANDWIDTH

Performed By: Hendry Yang

Name of Test: Emission Masks (Occupied Bandwidth)
State: 2:High Power

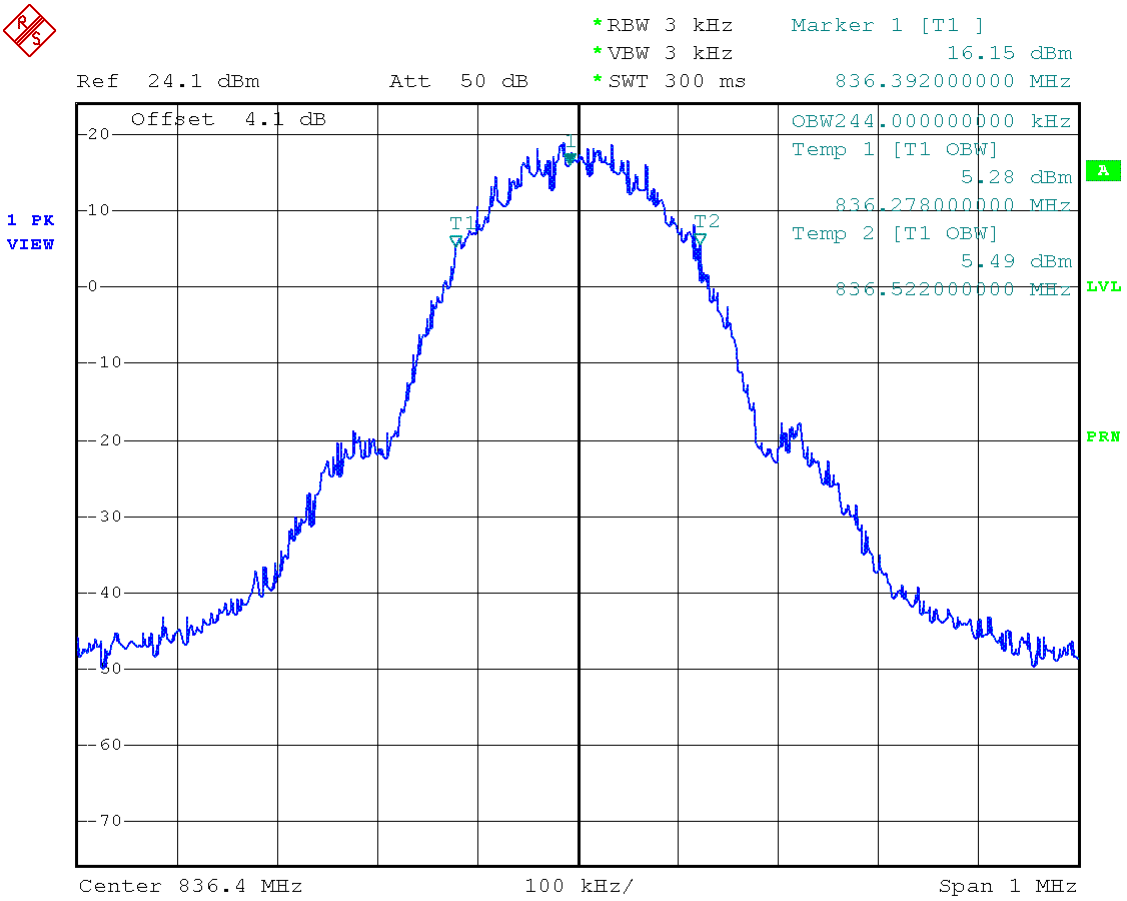

Date: 16.NOV.2003 01:21:48

Power: HIGH
Modulation: GSM/GPRS850
99% BANDWIDTH

Hendry Yang

Performed By: Hendry Yang

Name of Test: Emission Masks (Occupied Bandwidth)
State: 2:High Power

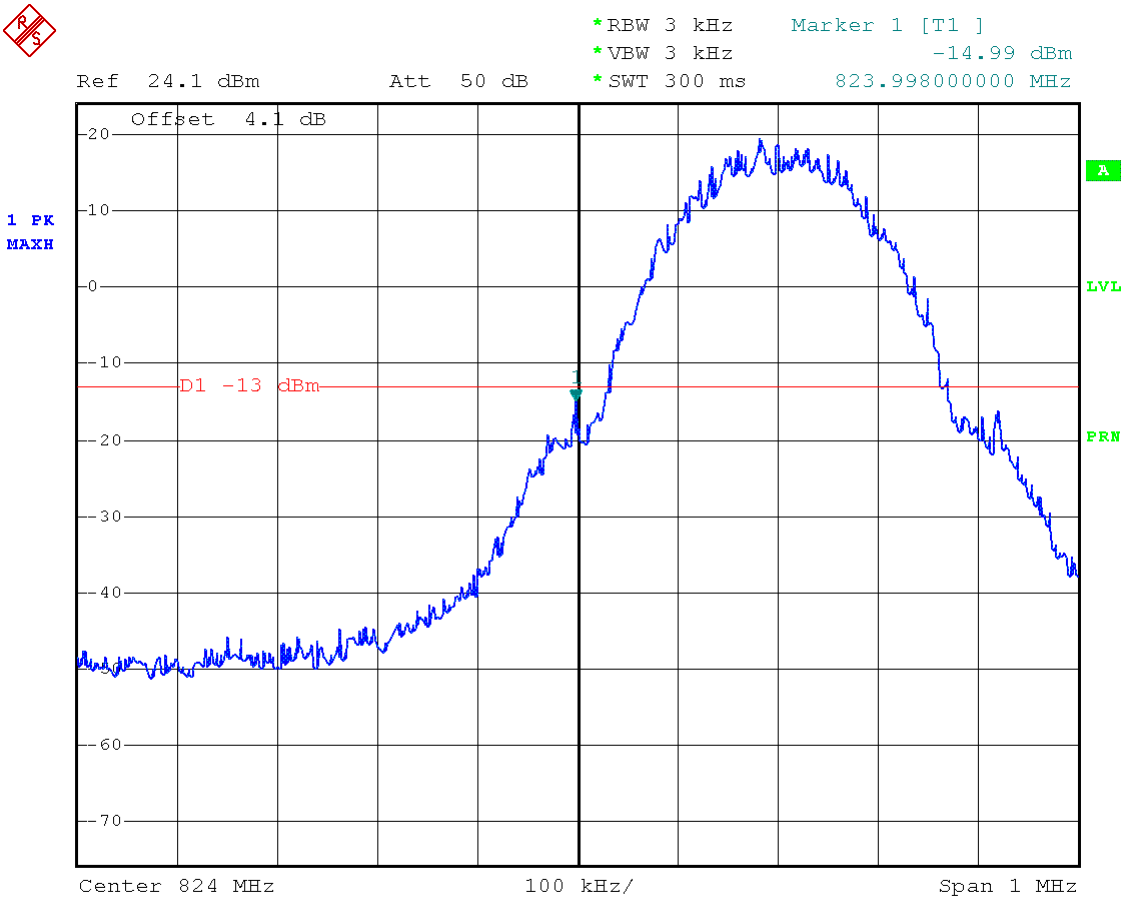

Date: 31.OCT.2003 22:08:47

Power: HIGH
Modulation: GSM/GPRS850
A LOWER BAND EDGE

Performed By: Hendry Yang

Name of Test: Emission Masks (Occupied Bandwidth)
State: 2:High Power

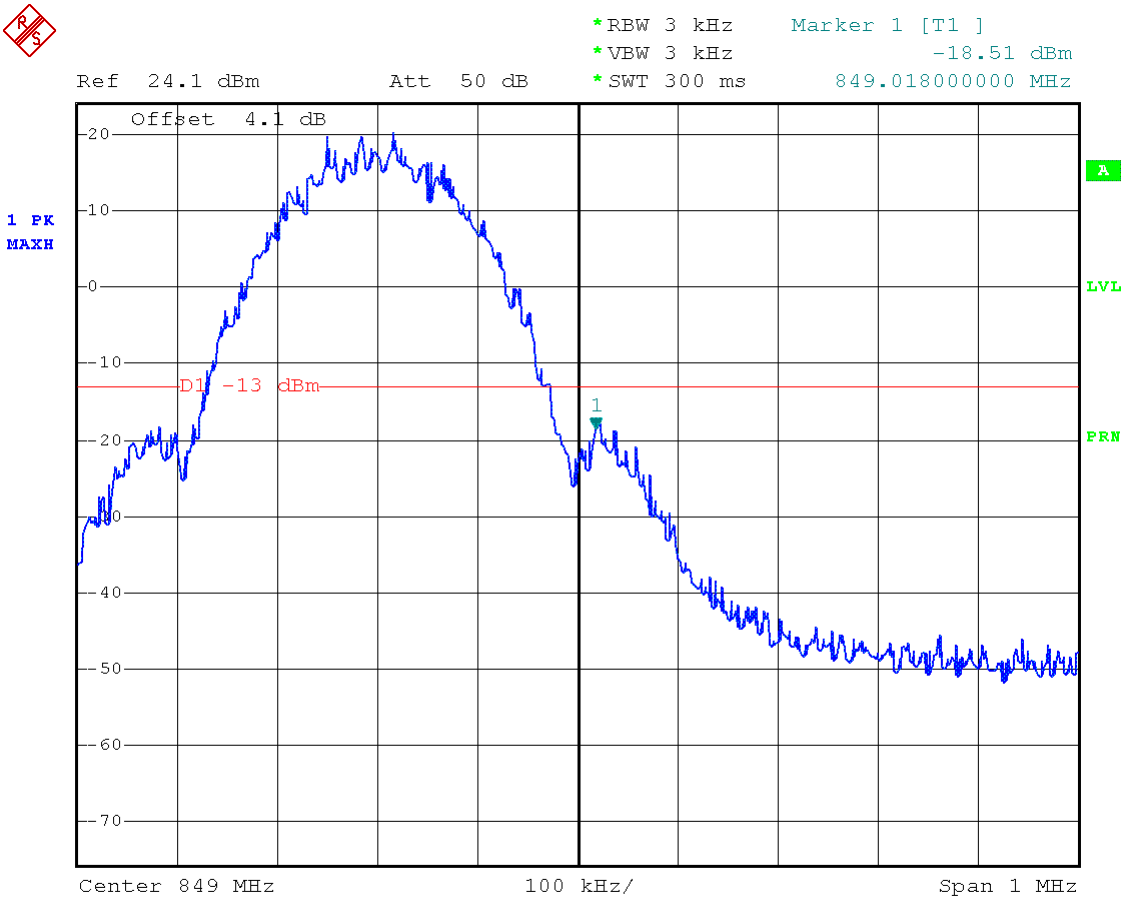

Date: 31.OCT.2003 22:12:13

Power: HIGH
Modulation: GSM/GPRS850
UPPER BAND EDGE

Performed By: Hendry Yang

Name of Test: Transmitter Conducted Measurements

Specification: 47 CFR 2.1051: Unwanted (spurious) Emissions
2.1049(c), 24.238(b): Occupied Bandwidth
24: Emissions at Band Edges

Test Equipment: As per attached page

Measurement Procedure

1. The EUT and test equipment were set up as shown on the following page with the Spectrum Analyzer connected.

2. The low and high channels for all RF powers within the Transmitting frequency band were measured.

3. Measurement Results: Attached

Hendry Yang

Performed By: Hendry Yang

Transmitter Spurious Emission

Test A. Occupied Bandwidth (In-Band Spurious)
Test B. Out-of-Band Spurious

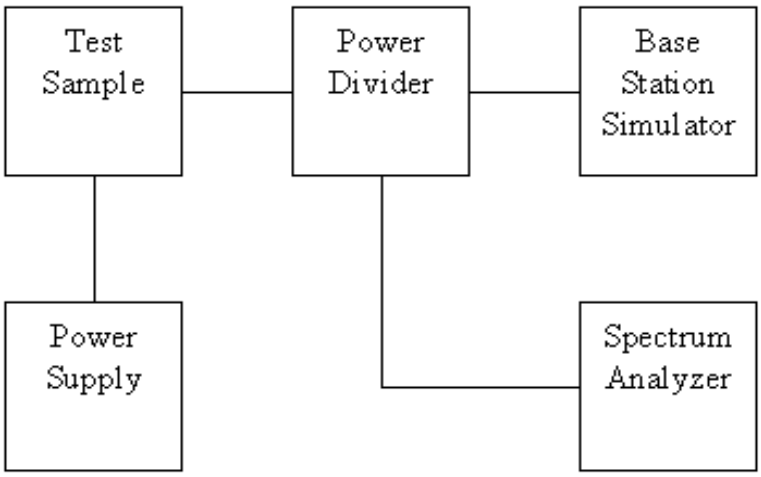

Asset	Model Name	S/N
Base Station Simulator	CMU200	102278
Spectrum Analyzer	FSP30	838858/014
AC/DC Power Source	HPA-500W	HPA0100024

Name of Test: Emission Masks (Occupied Bandwidth)
State: 2:High Power

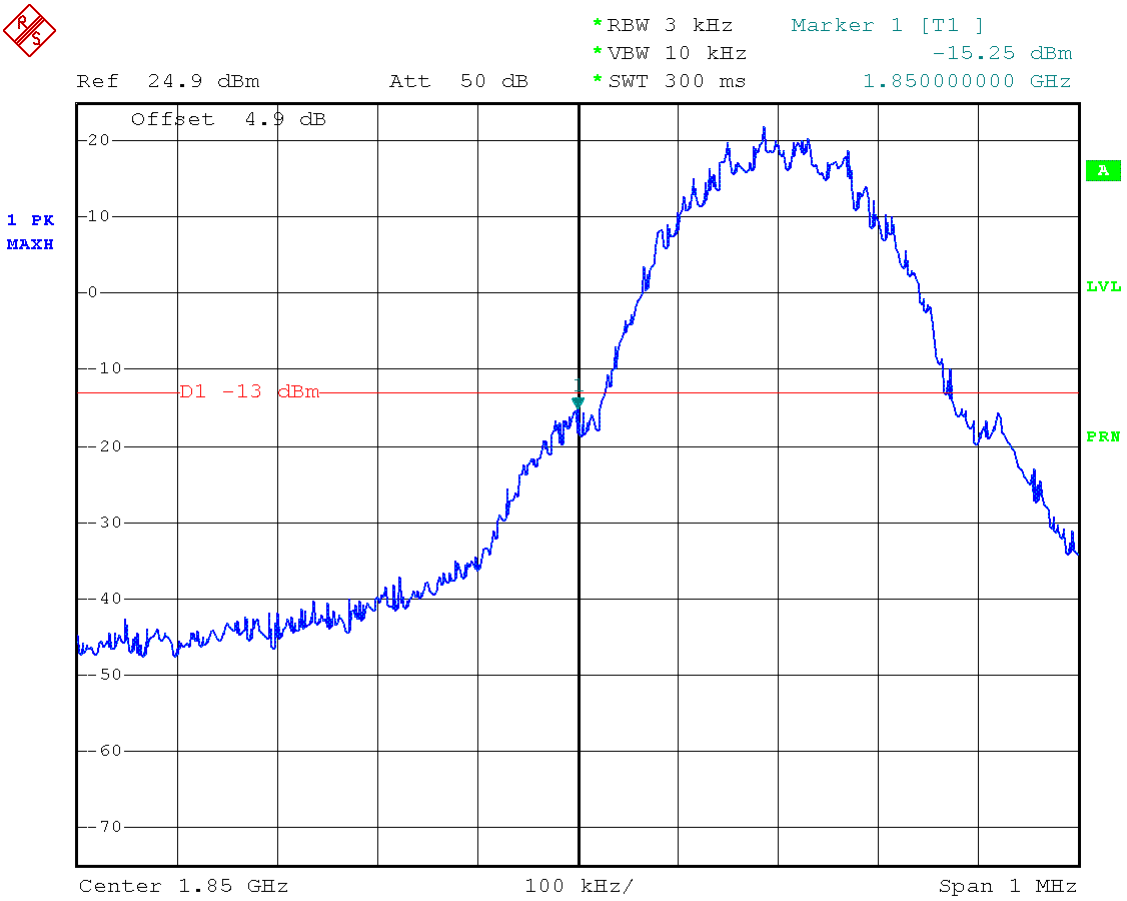

Date: 31.OCT.2003 22:26:58

Power: HIGH
Modulation: GSM/GPRS1900
LOWER BAND EDGE

Performed By: Hendry Yang

Name of Test: Emission Masks (Occupied Bandwidth)
State: 2:High Power

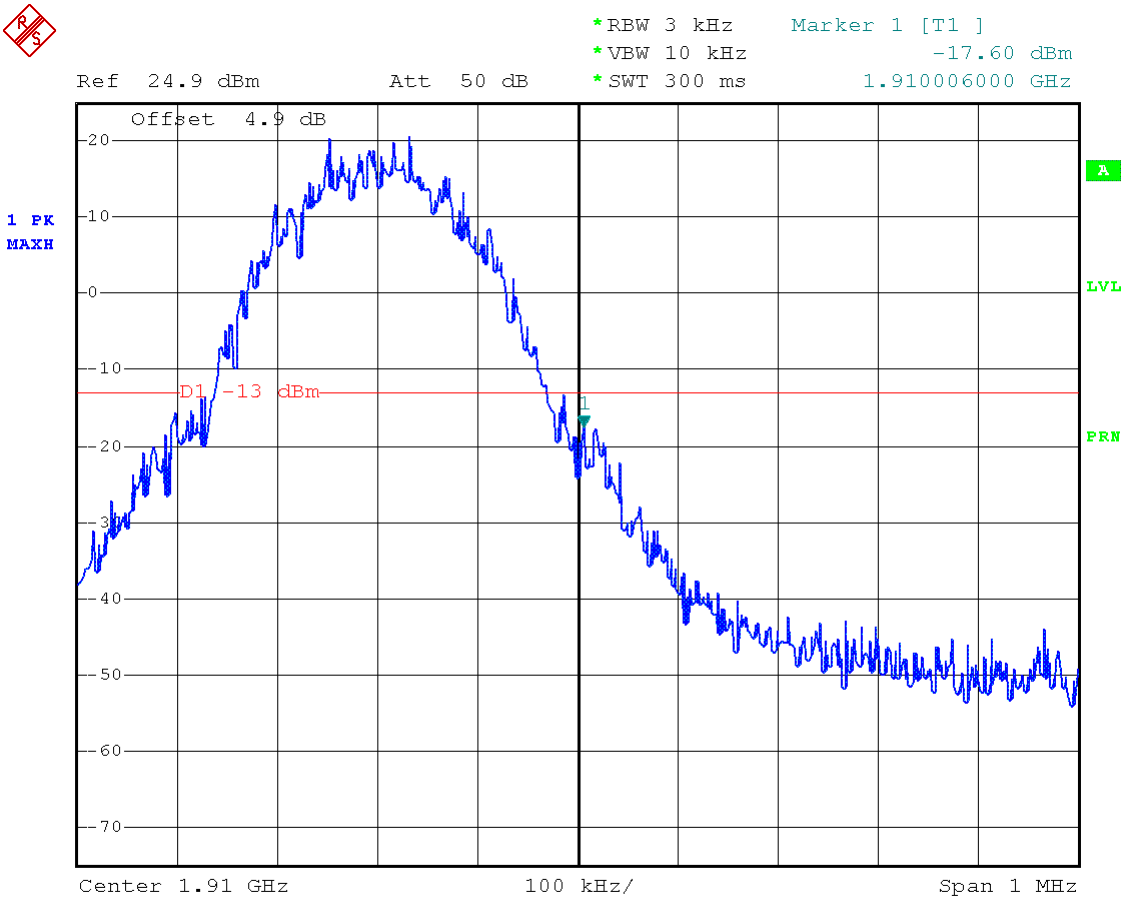

Date: 31.OCT.2003 22:38:05

Power: HIGH
Modulation: GSM/GPRS1900
UPPER BAND EDGE

Performed By: Hendry Yang

Name of Test: Emission Masks (Occupied Bandwidth)
State: 1:Low Power

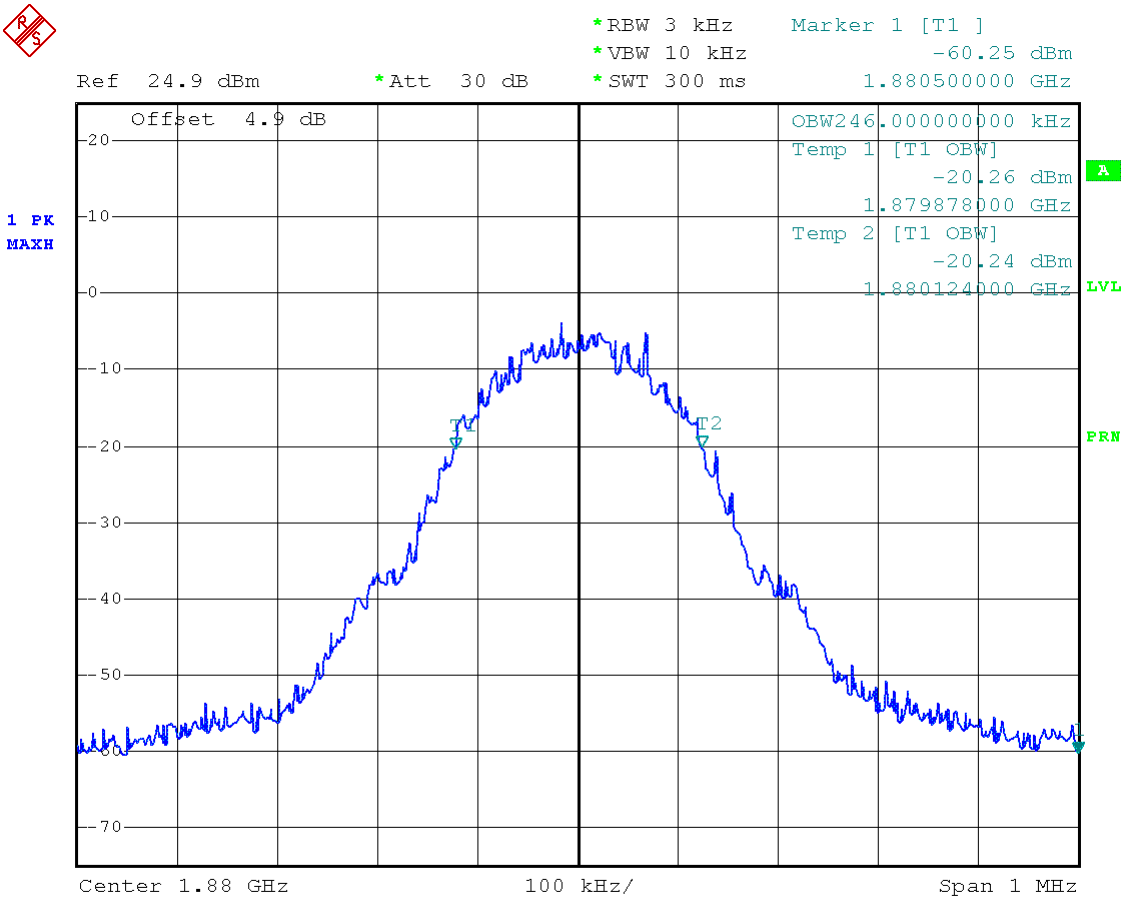

Date: 24.OCT.2003 05:42:11

Power: LOW
Modulation: GSM/GPRS1900
99% BANDWIDTH

Performed By: Hendry Yang

Name of Test: Emission Masks (Occupied Bandwidth)
State: 2:High Power

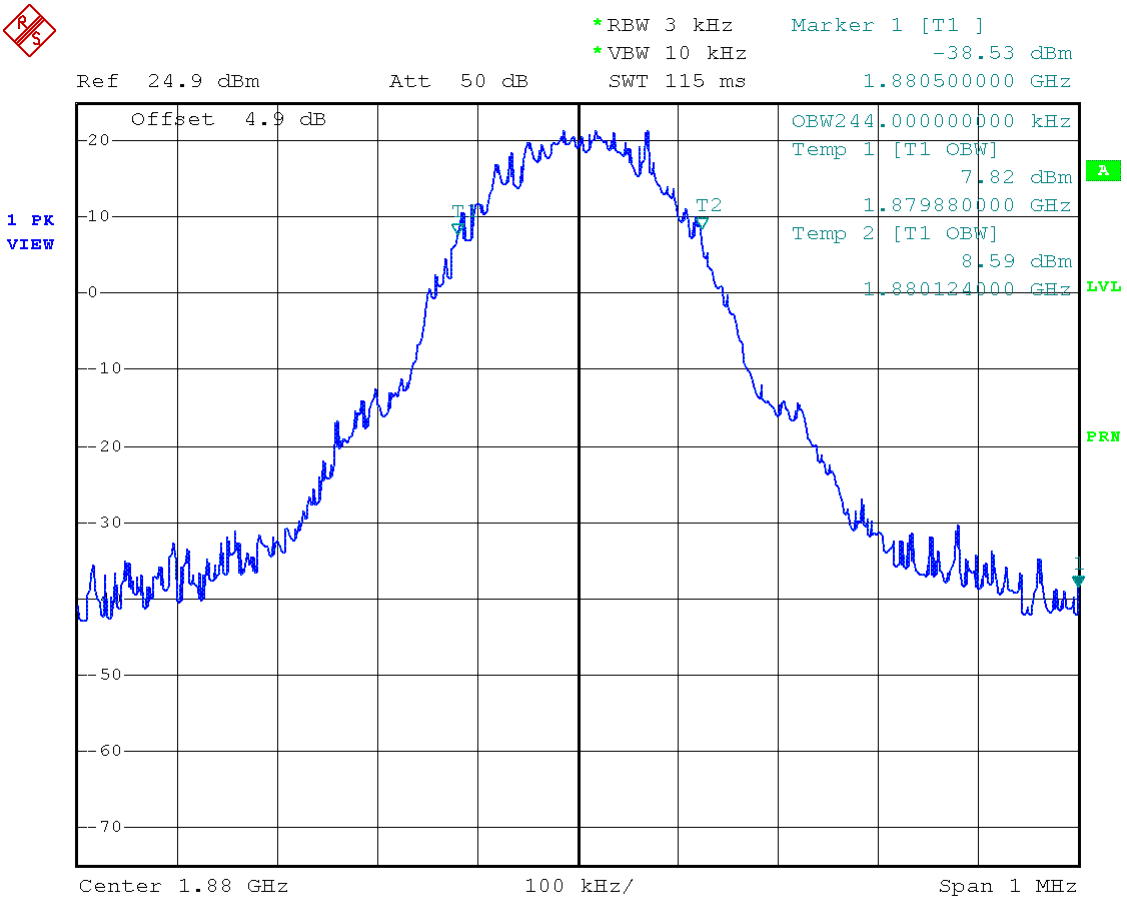

Date: 29.OCT.2003 17:12:41

Power: HIGH
Modulation: GSM/GPRS1900
99% BANDWIDTH

Performed By: Hendry Yang

Name of Test: Field Strength of Spurious Radiation

Specification: 47 CFR 2.1053(a)

Guide: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

Measurement Procedure

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement

A) Connect the equipment as illustrated

B) Adjust the spectrum analyzer for the following settings:
1) Resolution Bandwidth 100 kHz (<1 GHZ), 1 MHZ (> 1GHz).
2) Video Bandwidth ≥ 3 times Resolution Bandwidth
3) Sweep Speed ≤2000 Hz/second
4) Detector Mode = Mean or Average Power

C) Place the transmitter to be tested on the turntable in the standard test site. If the antenna is detatchable, The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

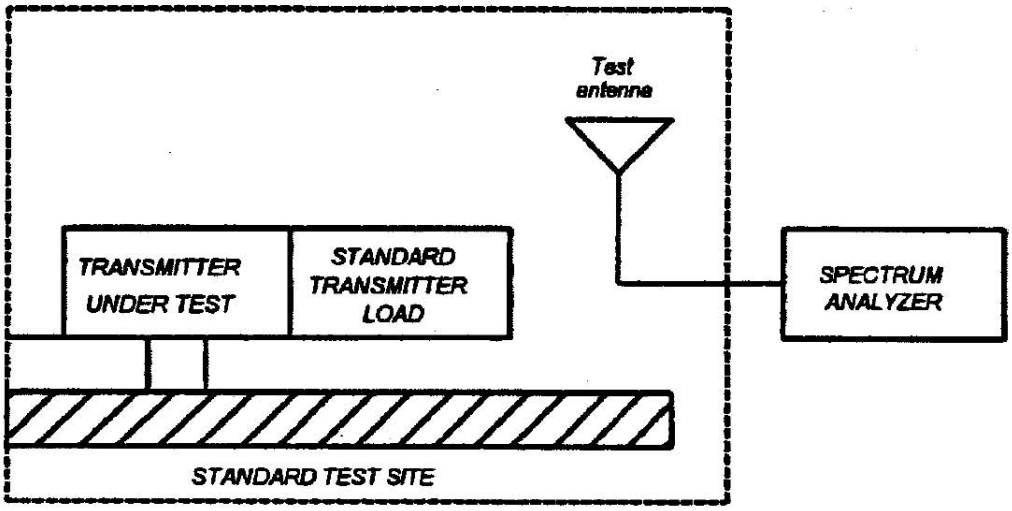

Name of Test: Field Strength of Spurious Radiation (Cont.)

D) For each spurious measurement the test antenna should cover the measured frequency. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to ± the test bandwidth (see section 1.3.4.4).

E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.

F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

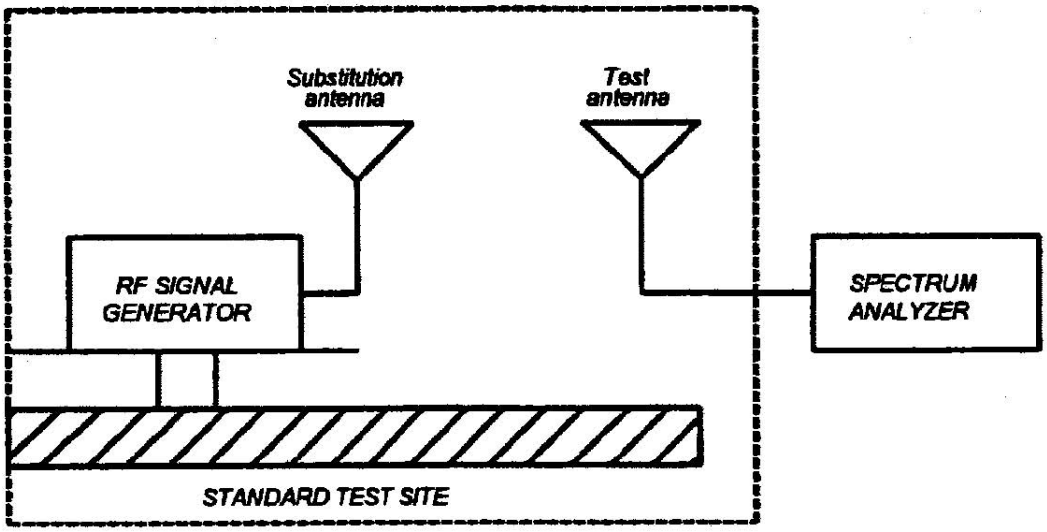

G) Reconnect the equipment as illustrated.

H) Keep the spectrum analyzer adjusted as in step B).

I) Remove the transmitter and replace it with a substitution antenna. The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

Name of Test: Field Strength of Spurious Radiation (Cont.)

J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

K) Repeat step J) with both antennas vertically polarized for each spurious frequency.

L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Name of Test: Field Strength of Spurious Radiation

Test Mode: GSM 850 Channel 189

Freq MHz	Pol	Substitution Antenna Input Power dBm	Substitution Antenna Gain dBd	Et	Es	Et - Es dB	ERP, dBm	Limit (dBm)	Margin (dB)
35.78	V	-0.63	-1.65	28.04	68.59	-40.55	-42.82	-13.0	-29.82
880.80	V	-2.52	-1.27	53.61	93.93	-40.32	-44.11	-13.0	-31.11
1086.00	V	-2.79	2.61	49.29	98.40	-49.11	-49.29	-13.0	-36.29
1460.00	V	-3.38	4.18	42.75	102.01	-59.26	-58.46	-13.0	-45.46
2182.00	V	-4.17	4.84	41.33	100.10	-58.77	-58.10	-13.0	-45.10
2966.00	V	-5.03	5.26	58.07	99.60	-41.53	-41.31	-13.0	-28.31
3326.00	V	-4.92	5.32	55.96	99.64	-43.68	-43.28	-13.0	-30.28
4462.00	V	-6.06	6.08	63.68	99.82	-36.14	-36.11	-13.0	-23.11
5942.00	V	-6.92	6.59	41.52	99.22	-57.70	-58.03	-13.0	-45.03
6878.00	V	-7.83	6.75	56.72	96.19	-39.47	-40.55	-13.0	-27.55
8982.00	V	-9.39	6.56	75.19	95.29	-20.10	-22.93	-13.0	-9.93
10670.00	V	-10.54	6.75	47.65	96.33	-48.68	-52.47	-13.0	-39.47
12990.00	V	-13.73	8.35	49.05	84.71	-35.66	-41.04	-13.0	-28.04
32.38	H	-0.63	-1.44	28.92	68.61	-39.69	-41.76	-13.0	-28.76
880.80	H	-2.52	-1.27	47.89	93.93	-46.04	-49.83	-13.0	-36.83
1092.00	H	-2.80	2.64	47.52	98.46	-50.94	-51.10	-13.0	-38.10
2180.00	H	-4.17	4.84	38.96	100.11	-61.15	-60.48	-13.0	-47.48
3334.00	H	-4.91	5.32	54.37	99.64	-45.27	-44.86	-13.0	-31.86
4460.00	H	-6.05	6.08	54.80	99.81	-45.01	-44.99	-13.0	-31.99
6884.00	H	-7.84	6.74	49.03	96.15	-47.12	-48.22	-13.0	-35.22
8958.00	H	-9.32	6.58	48.33	95.14	-46.81	-49.55	-13.0	-36.55
9956.00	H	-10.36	6.85	48.01	96.05	-48.04	-51.55	-13.0	-38.55
12998.00	H	-13.75	8.35	49.19	84.64	-35.45	-40.85	-13.0	-27.85

Name of Test: Field Strength of Spurious Radiation

Test Mode: PCS channel 661

Freq MHz	Pol	Substitution Antenna Input Power dBm	Substitution Antenna Gain dBi	Et	Es	Et - Es dB	EIRP, dBm	Limit (dBm)	Margin (dB)
193.54	V	-1.24	1.33	17.93	90.46	-72.53	-72.44	-13.0	-59.44
957.60	V	-2.58	0.67	27.48	93.29	-65.81	-67.72	-13.0	-54.72
1450.00	V	-3.36	6.29	55.28	101.92	-46.64	-43.71	-13.0	-30.71
1873.00	V	-3.78	6.65	60.58	101.65	-41.07	-38.20	-13.0	-25.20
3757.00	V	-5.25	7.45	77.46	99.07	-21.61	-19.41	-13.0	-6.41
5641.00	V	-6.68	8.44	65.46	98.79	-33.33	-31.56	-13.0	-18.56
7513.00	V	-8.44	8.51	62.71	94.66	-31.95	-31.88	-13.0	-18.88
9397.00	V	-9.78	8.94	67.69	95.76	-28.07	-28.91	-13.0	-15.91
11278.00	V	-11.60	9.71	55.92	94.43	-38.51	-40.39	-13.0	-27.39
179.43	H	-1.09	1.72	18.26	90.30	-72.04	-71.42	-13.0	-58.42
912.00	H	-2.67	0.93	26.45	92.93	-66.48	-68.22	-13.0	-55.22
1450.00	H	-3.36	6.29	50.50	101.92	-51.42	-48.49	-13.0	-35.49
1873.00	H	-3.78	6.65	52.45	101.65	-49.20	-46.33	-13.0	-33.33
3757.00	H	-5.25	7.45	73.51	99.07	-25.56	-23.36	-13.0	-10.36
5638.00	H	-6.67	8.44	62.97	98.79	-35.82	-34.05	-13.0	-21.05
7513.00	H	-8.44	8.51	63.23	94.66	-31.43	-31.36	-13.0	-18.36
9397.00	H	-9.78	8.94	68.05	95.76	-27.71	-28.55	-13.0	-15.55
11278.00	H	-11.60	9.71	52.12	94.43	-42.31	-44.19	-13.0	-31.19

Radiated Scanned Data

GSM850, Vertical Polarization

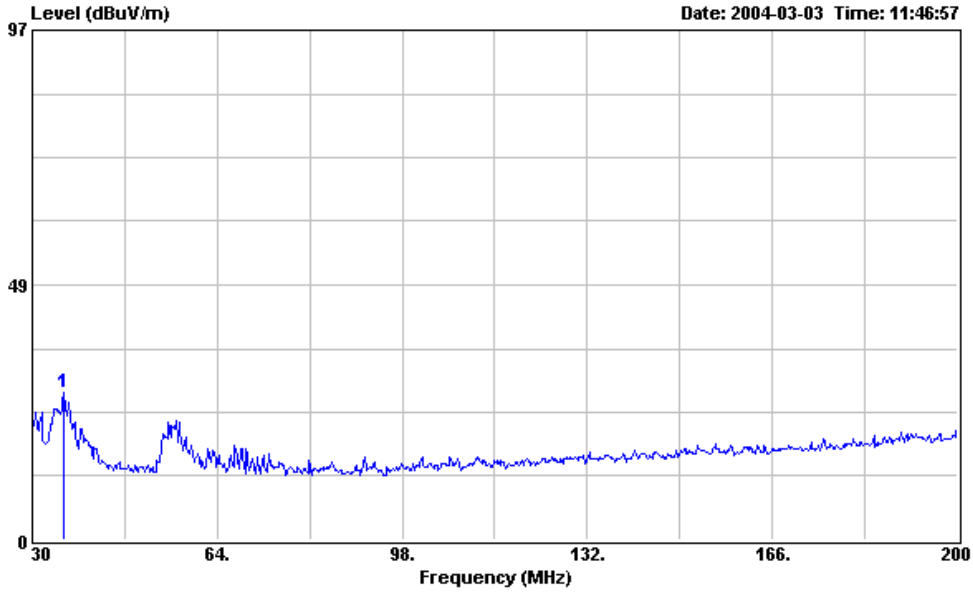

Site : site
Condition : 3m BIC-9124--301 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	35.780	28.04	------	------	42.25	12.79	1.03	28.03	Peak	---	---

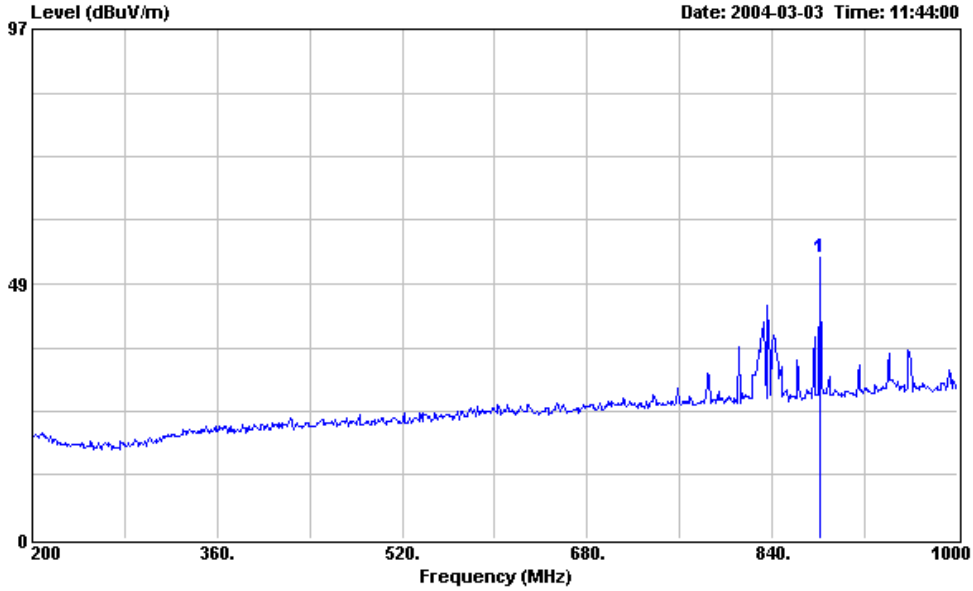

Site : site
Condition : 3m LOG-9111-221 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	880.800	53.61	------	------	55.72	21.00	5.28	28.39	Peak	---	---

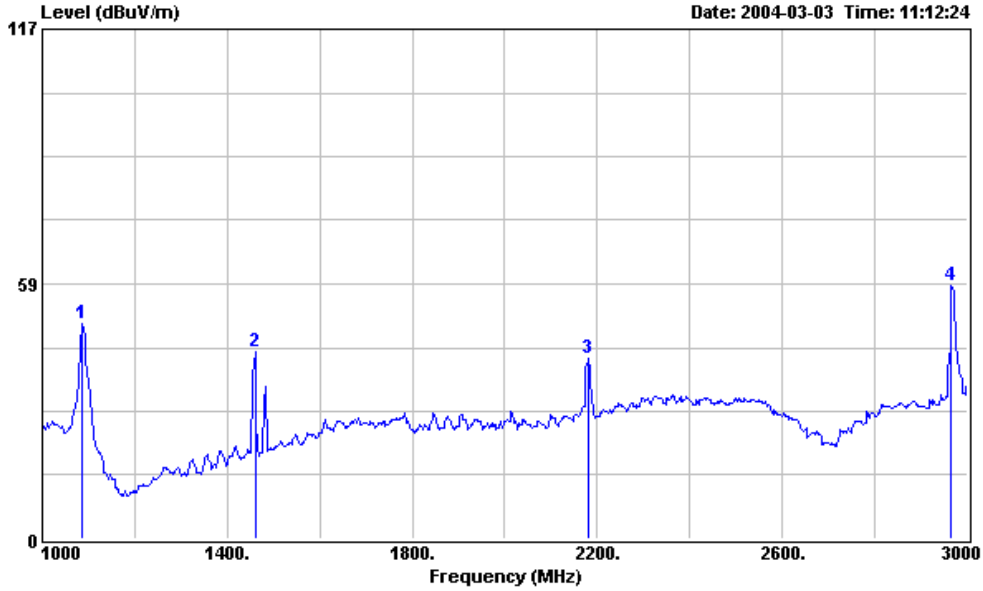

Site : site
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1086.000	49.29	------	------	63.95	24.33	1.21	40.20	Peak	---	---
2	1460.000	42.75	------	------	56.62	25.24	1.46	40.57	Peak	---	---
3	2182.000	41.33	------	------	52.88	27.78	1.69	41.02	Peak	---	---
4	2966.000	58.07	------	------	67.13	29.90	2.24	41.20	Peak	---	---

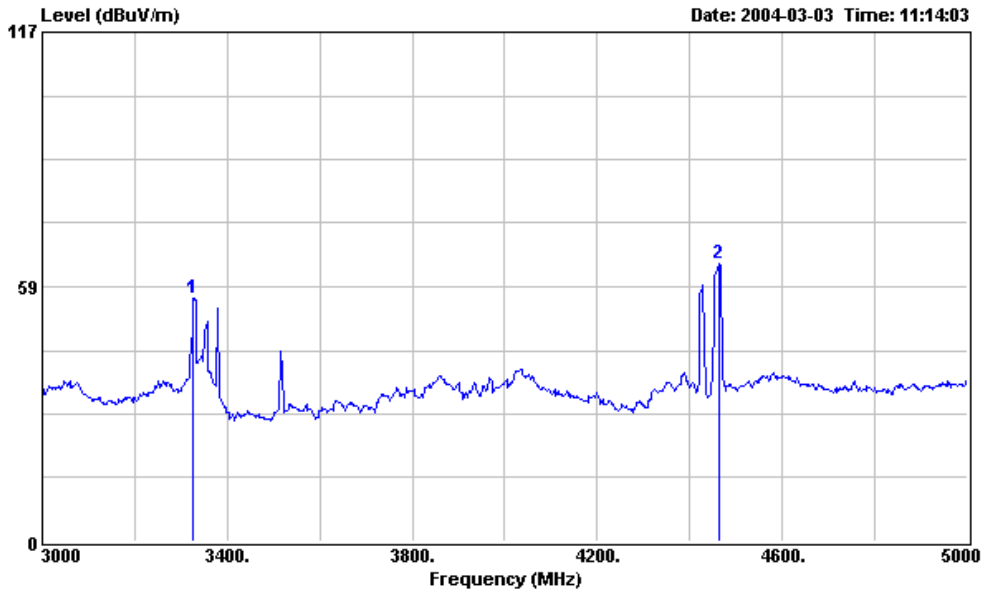

Site : site
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3326.000	55.96	------	------	64.27	30.80	2.16	41.27	Peak	---	---
2	4462.000	63.68	------	------	70.74	32.41	2.41	41.88	Peak	---	---

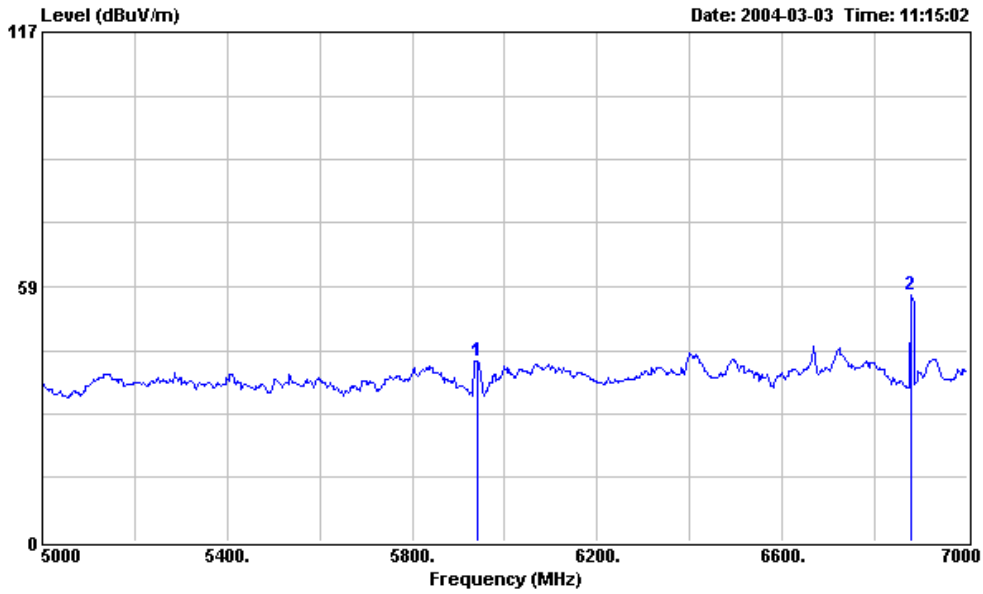

Site : site
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	5942.000	41.52	------	------	48.08	34.18	2.54	43.28	Peak	---	---
2	6878.000	56.72	------	------	61.67	35.07	3.05	43.07	Peak	---	---

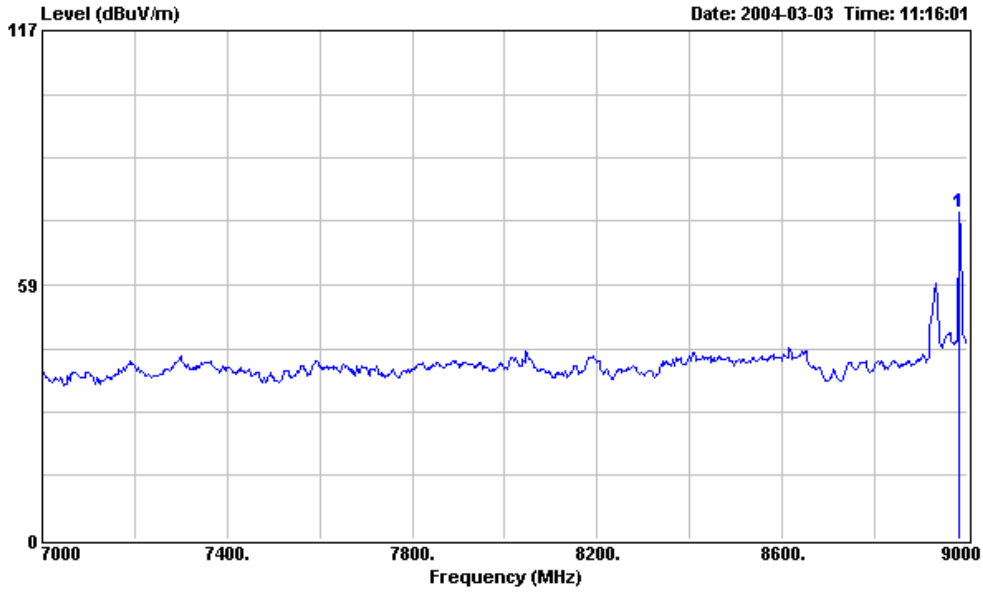

Site : site
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	8982.000	75.19	------	------	74.74	38.09	3.27	40.91	Peak	---	---

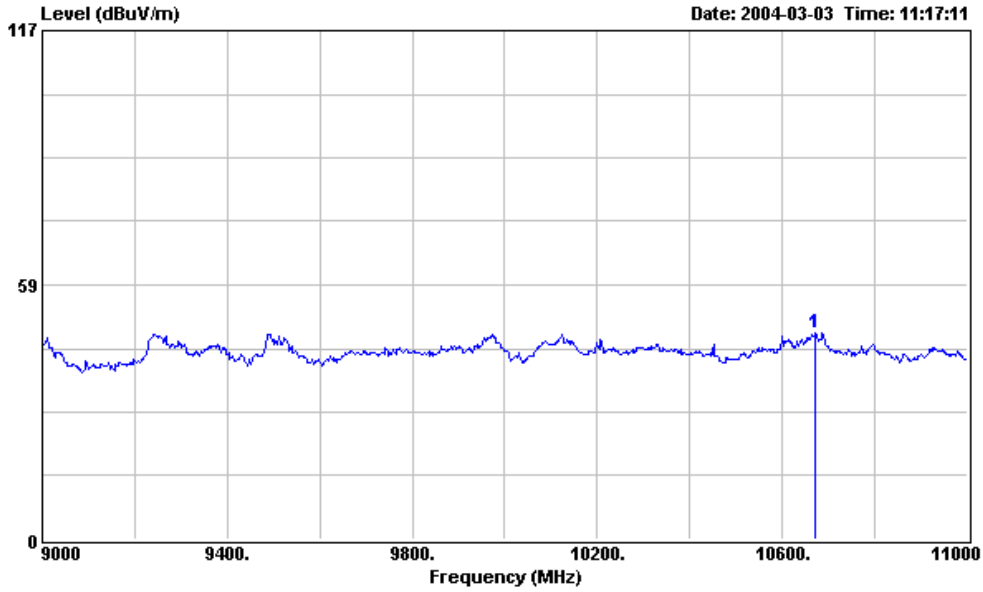

Site : site
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	10670.000	47.65	------	------	43.90	38.92	4.19	39.36	Peak	---	---

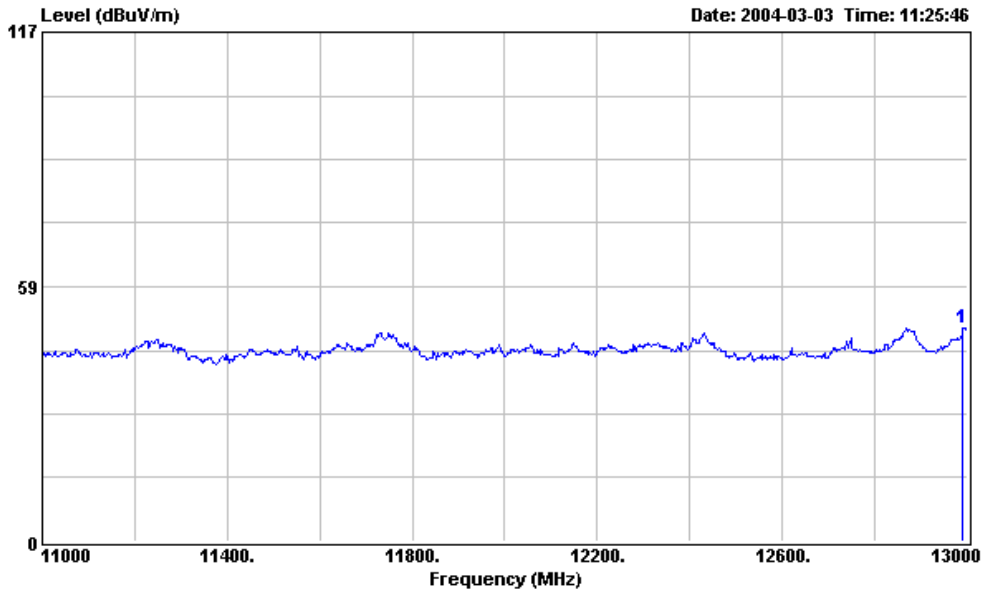

Site : site
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	12990.000	49.05	------	------	46.49	39.30	4.96	41.70	Peak	---	---

GSM850, Horizontal Polarization

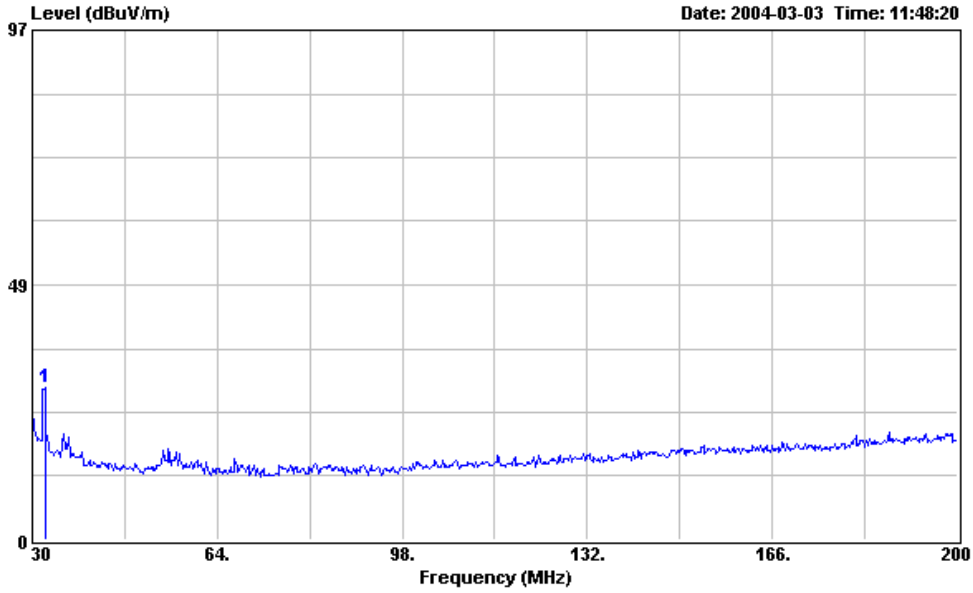

Site : site
Condition : 3m BIC-9124--301 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	32.380	28.92	------	------	42.41	13.57	0.98	28.04	Peak	---	---

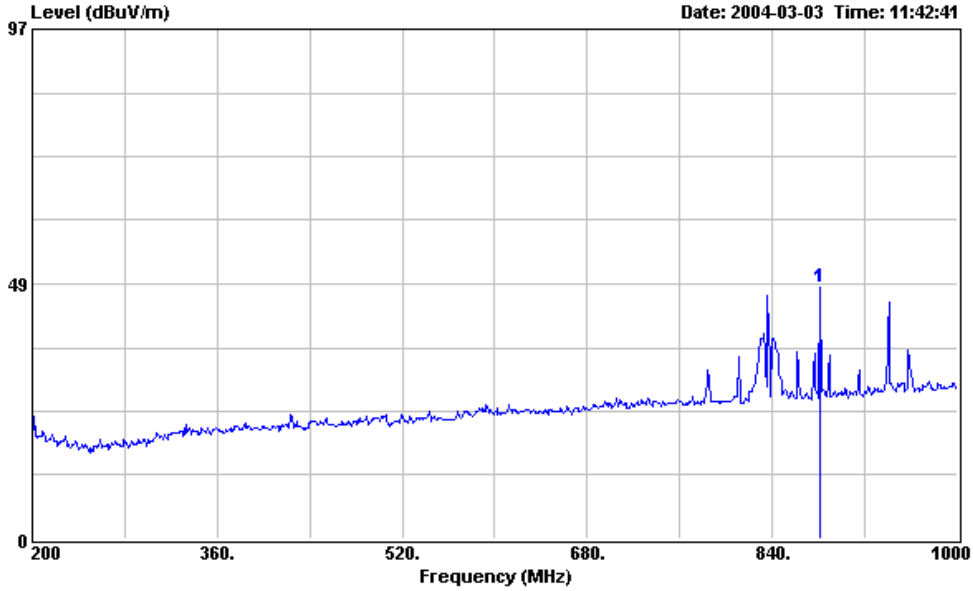

Site : site
Condition : 3m LOG-9111-221 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	880.800	47.89	------	------	50.00	21.00	5.28	28.39	Peak	---	---

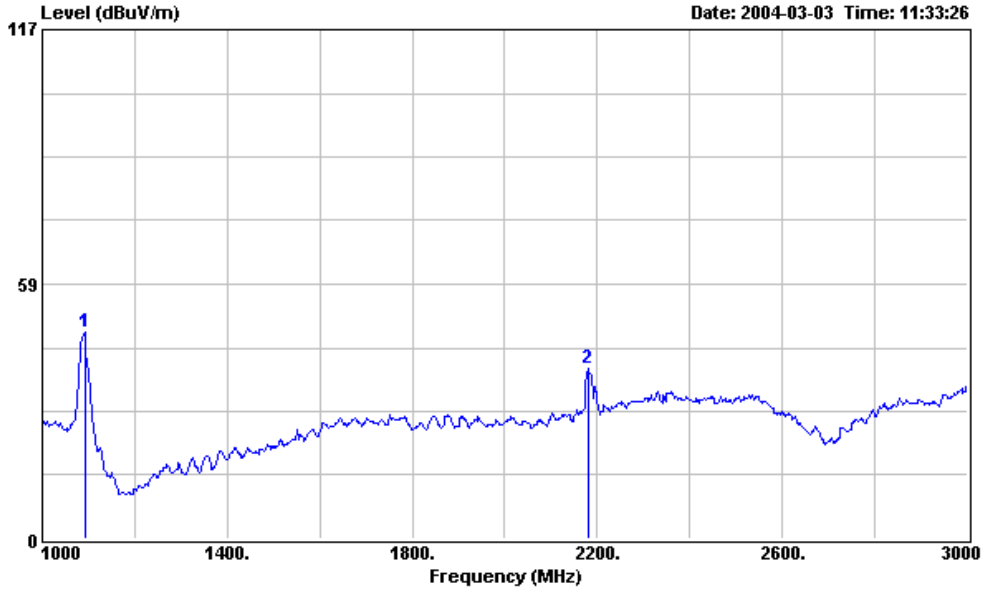

Site : site
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1092.000	47.52	------	------	62.16	24.34	1.22	40.20	Peak	---	---
2	2180.000	38.96	------	------	50.51	27.77	1.69	41.01	Peak	---	---

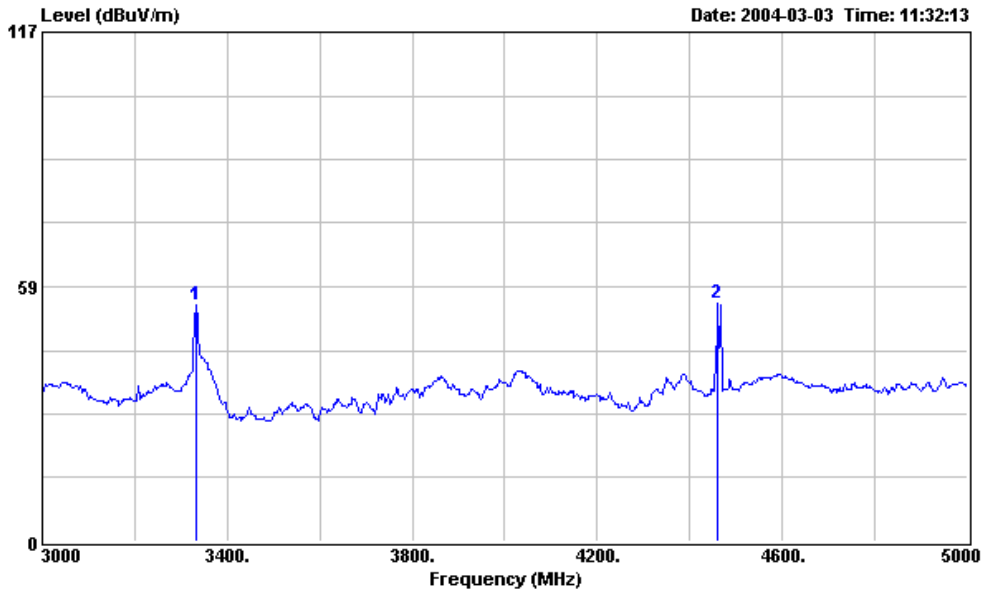

Site : site
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3334.000	54.37	------	------	62.66	30.82	2.16	41.27	Peak	---	---
2	4460.000	54.80	------	------	61.86	32.41	2.41	41.88	Peak	---	---

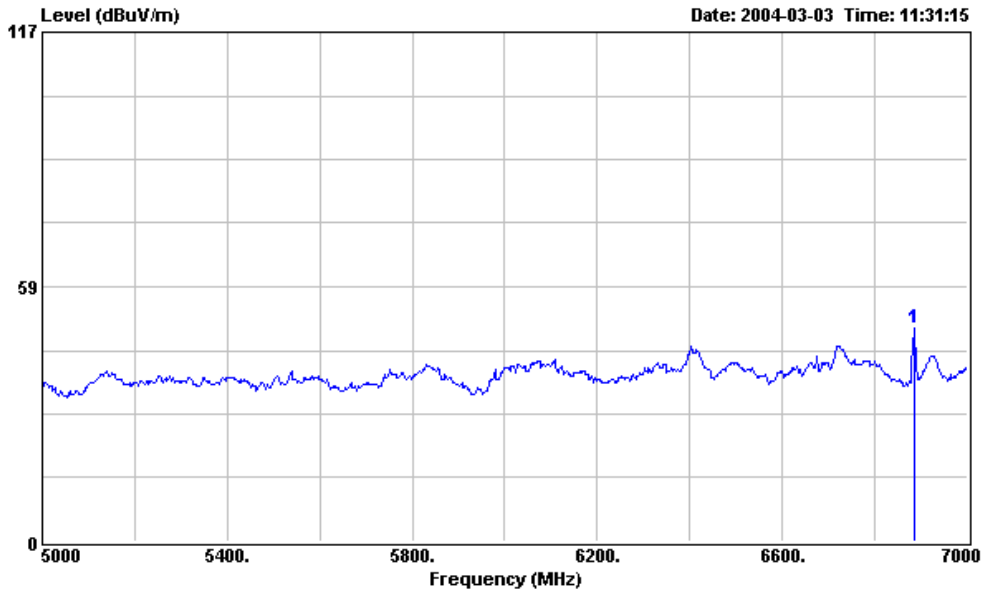

Site : site
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	6884.000	49.03	------	------	53.95	35.08	3.06	43.06	Peak	---	---

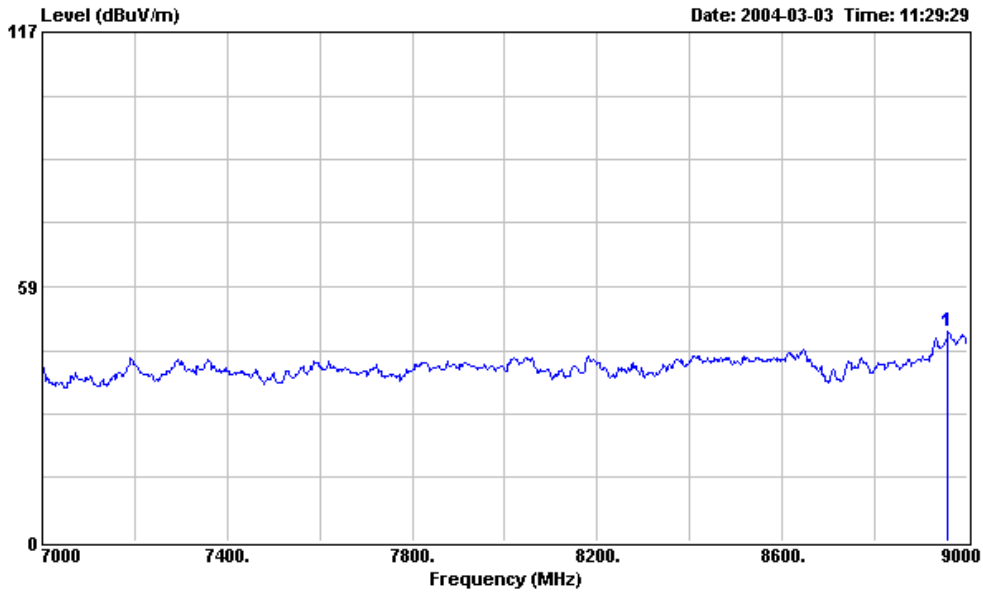

Site : site
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	8958.000	48.33	------	------	47.93	38.08	3.26	40.94	Peak	---	---

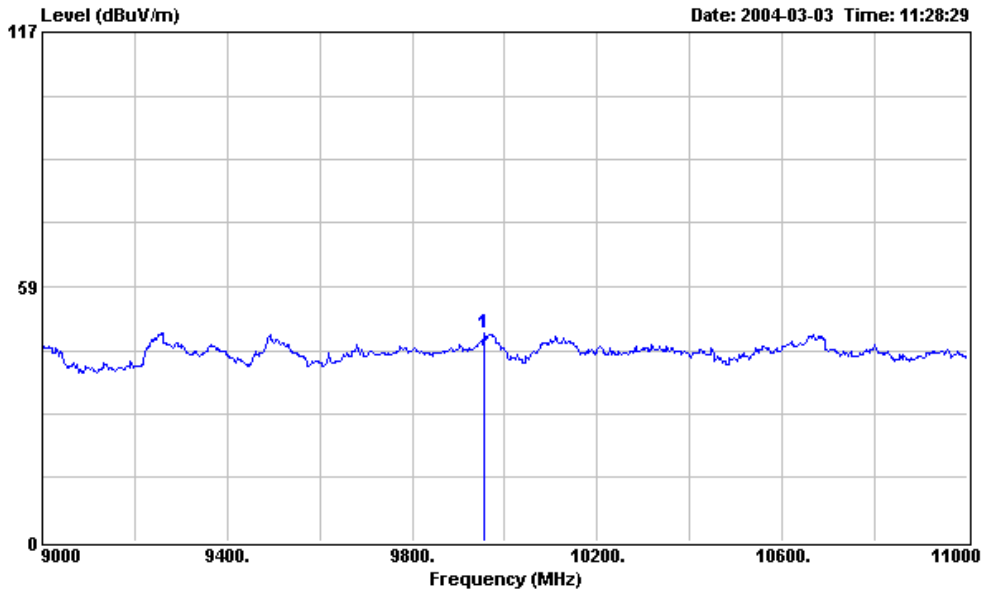

Site : site
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	9956.000	48.01	------	------	44.78	38.93	3.83	39.53	Peak	---	---

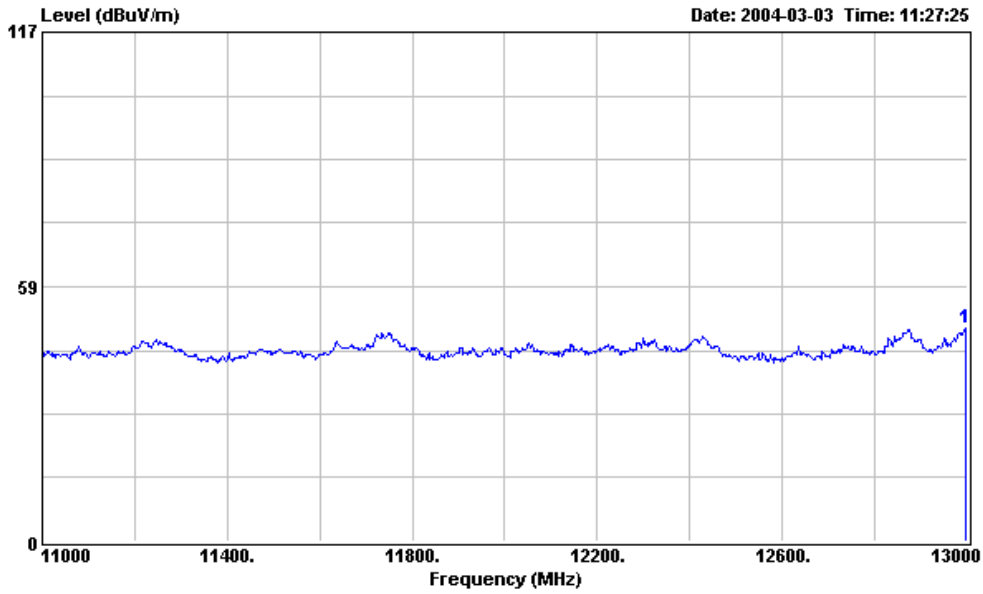

Site : site
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS850

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	12998.000	49.19	------	------	46.63	39.30	4.96	41.70	Peak	---	---

GSM1900, Vertical Polarization

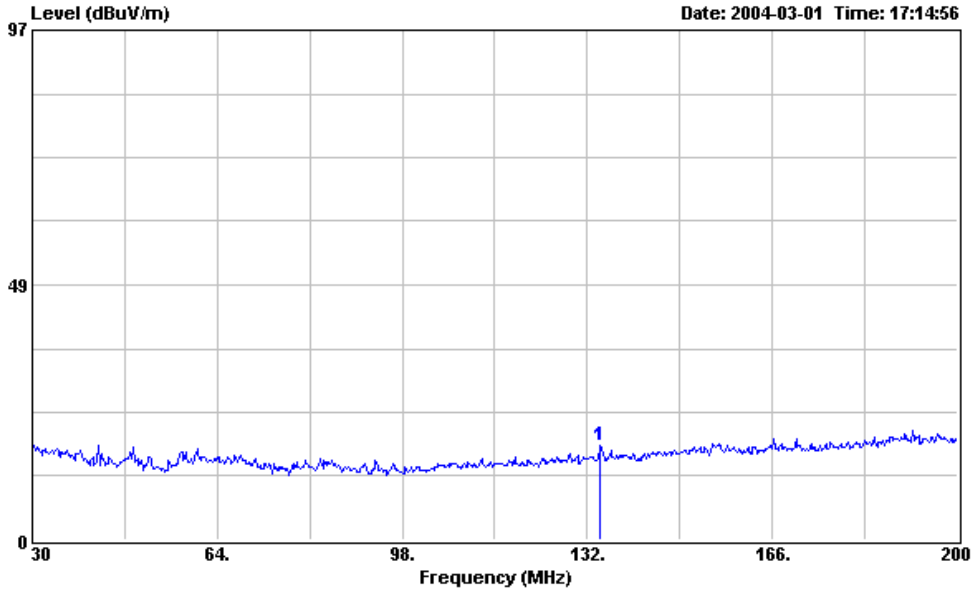

Site : site
Condition : 3m BIC-9124--301 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	134.380	17.82	------	------	31.89	11.53	2.23	27.83	Peak	---	---

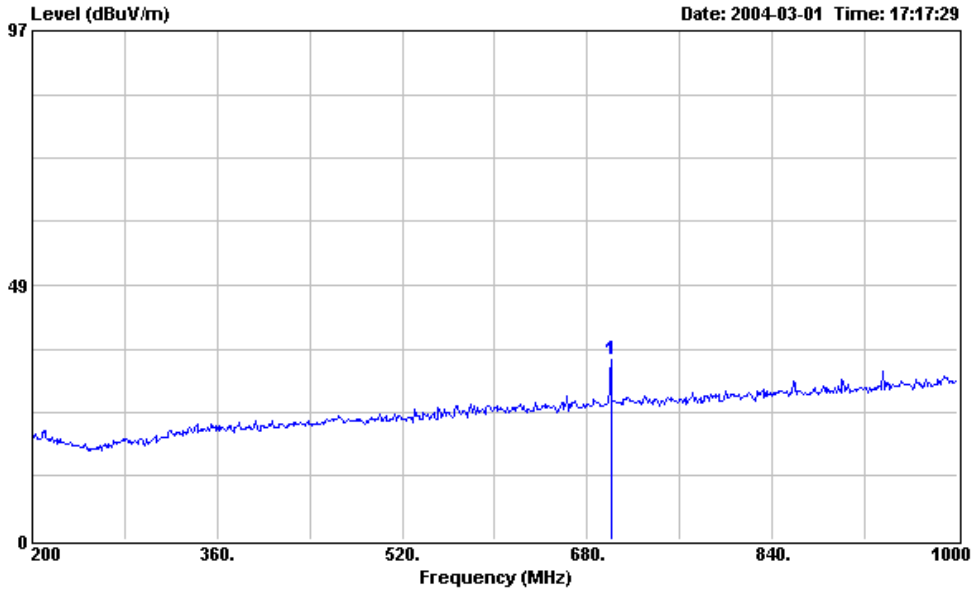

Site : site
Condition : 3m LOG-9111-221 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	700.800	34.40	------	------	37.94	19.80	5.36	28.70	Peak	---	---

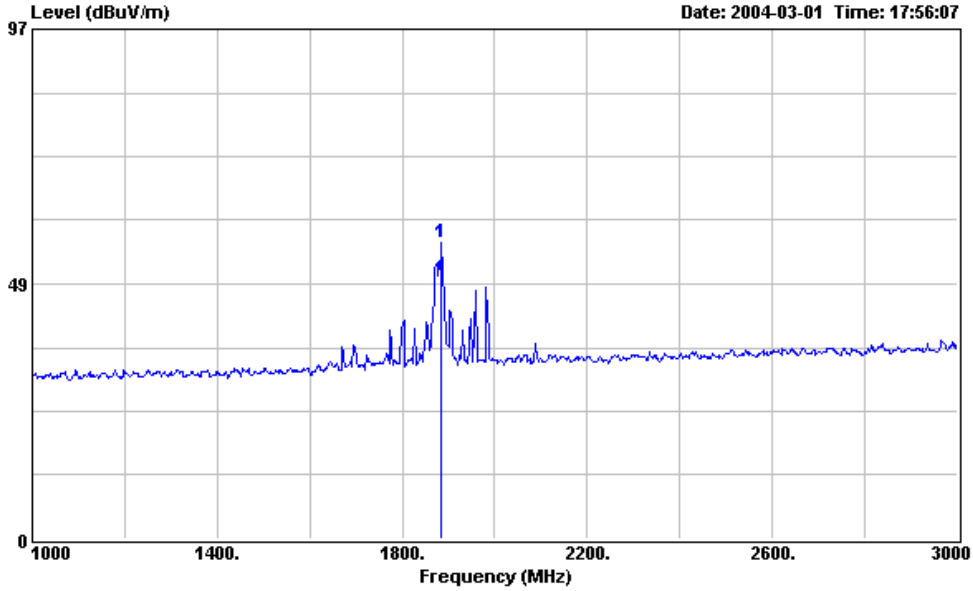

Site : site
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1884.000	56.27	------	------	68.58	26.94	1.59	40.84	Peak	---	---

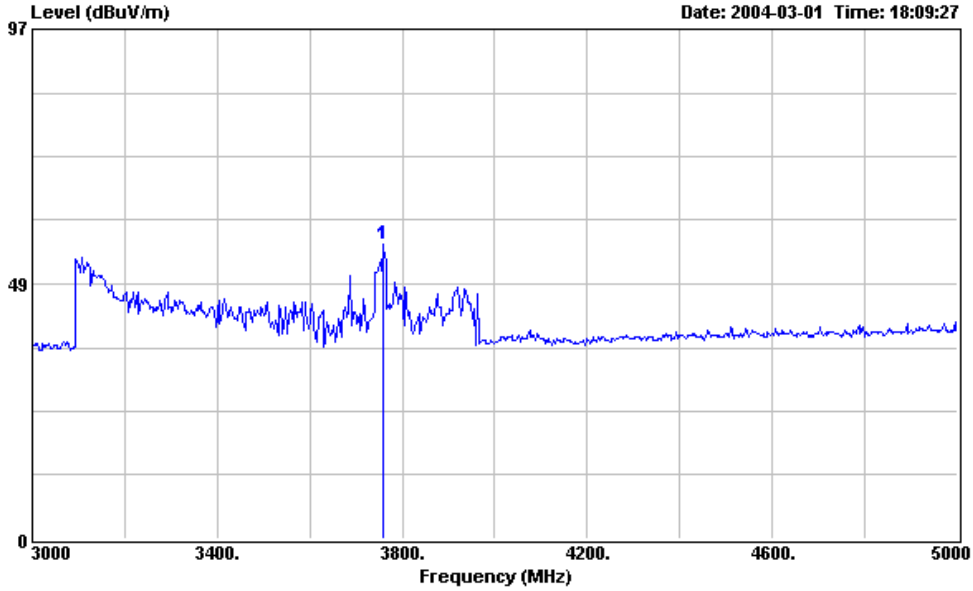

Site : site
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3758.000	56.19	------	------	63.82	31.96	1.82	41.41	Peak	---	---

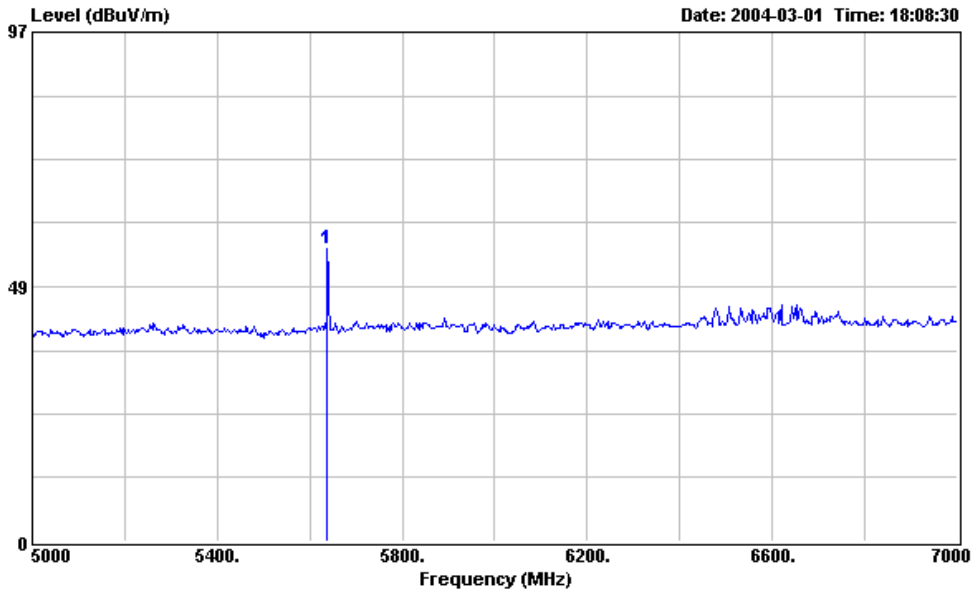

Site : site
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	5638.000	55.75	------	------	62.32	34.06	2.53	43.16	Peak	---	---

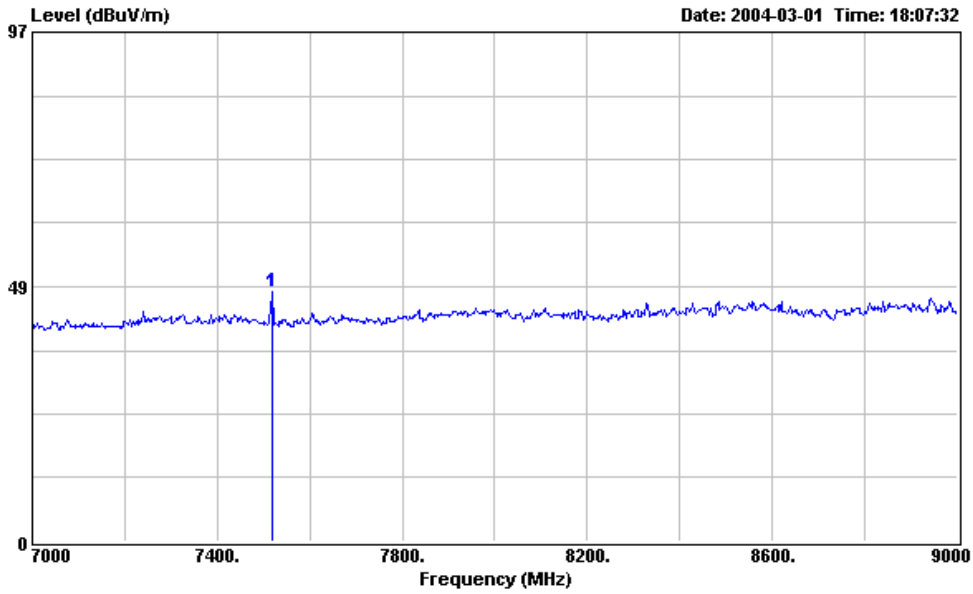

Site : site
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	7518.000	47.69	------	------	50.82	36.53	2.72	42.38	Peak	---	---

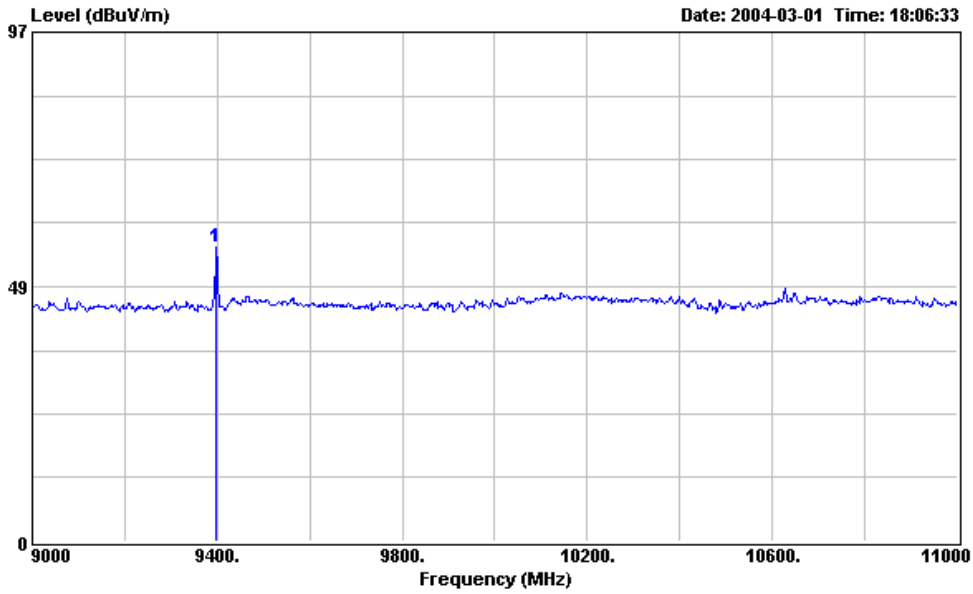

Site : site
Condition : 3m HORN-ANT-6741 VERTICAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	9398.000	56.12	------	------	54.59	37.94	3.75	40.16	Peak	---	---

GSM1900, Horizontal Polarization

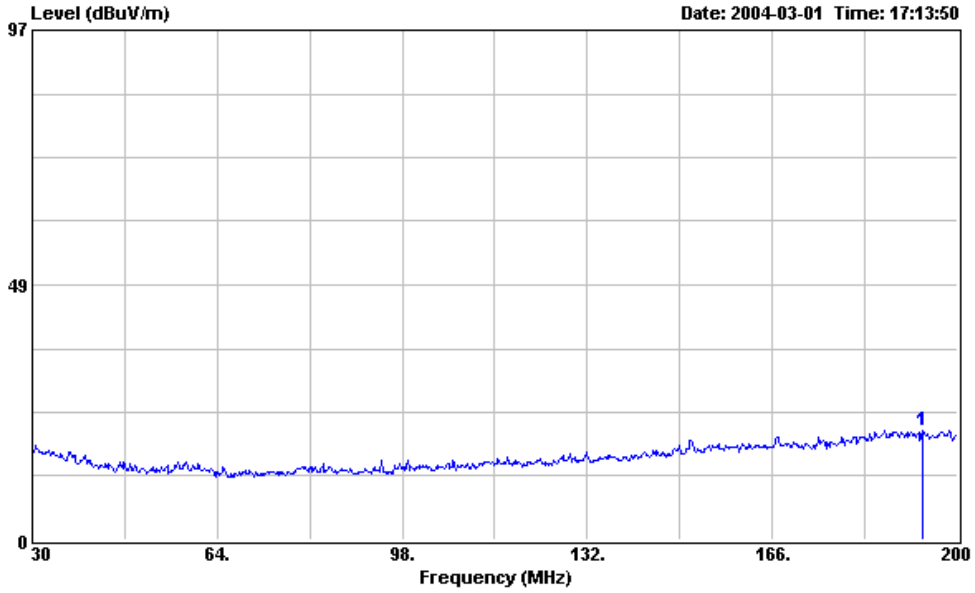

Site : site
Condition : 3m BIC-9124--301 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	193.540	20.82	------	------	31.23	14.65	2.65	27.71	Peak	---	---

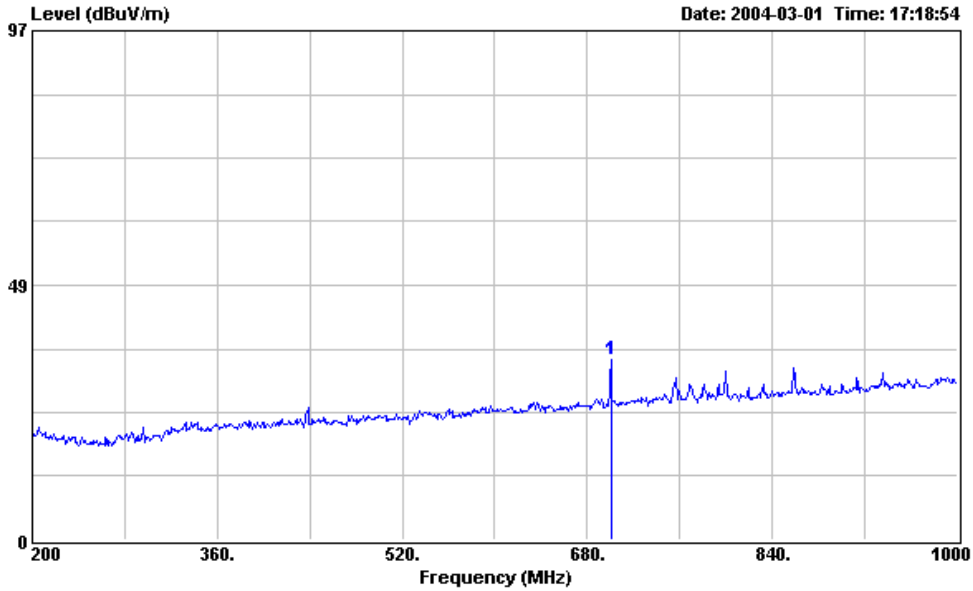

Site : site
Condition : 3m LOG-9111-221 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	700.800	34.19	------	------	37.73	19.80	5.36	28.70	Peak	---	---

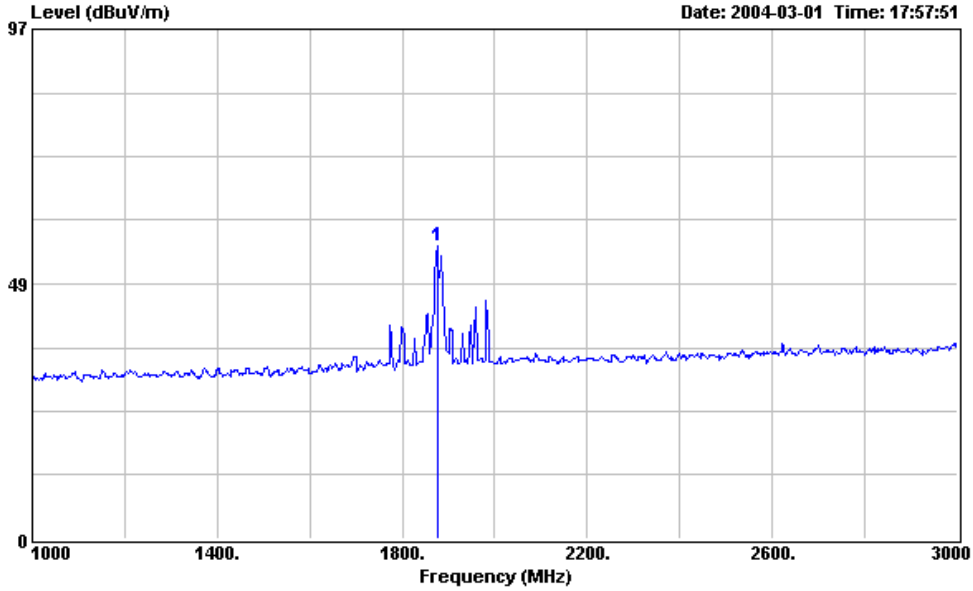

Site : site
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1876.000	55.79	------	------	68.12	26.91	1.59	40.83	Peak	---	---

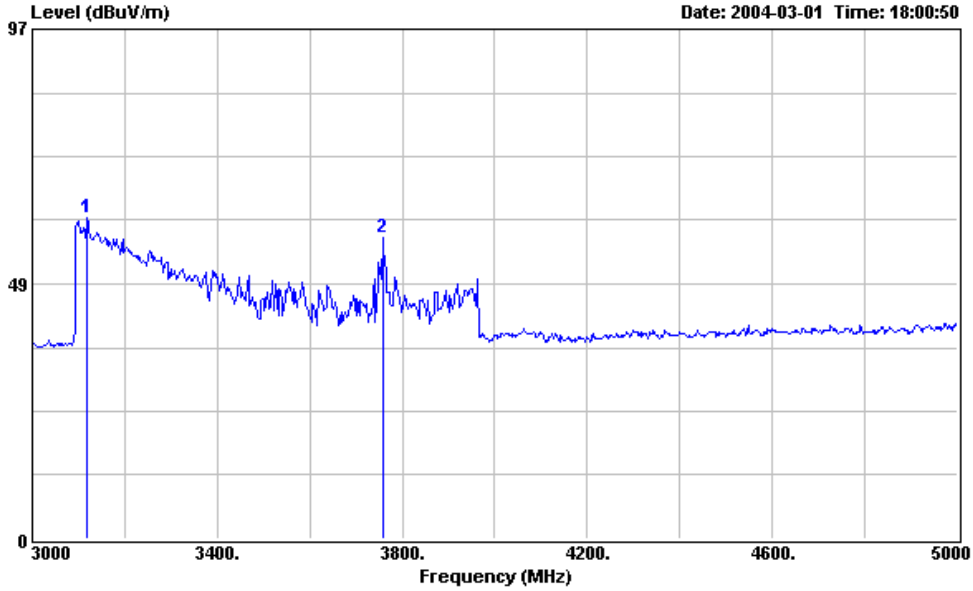

Site : site
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3118.000	60.96	------	------	69.75	30.29	2.15	41.23	Peak	---	---
2	3758.000	57.18	------	------	64.81	31.96	1.82	41.41	Peak	---	---

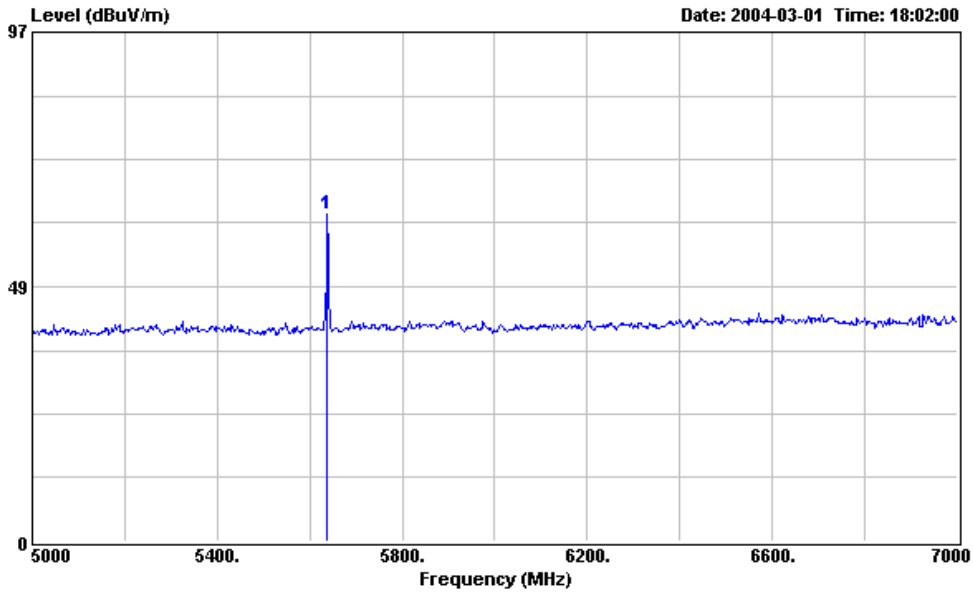

Site : site
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	5638.000	62.42	------	------	68.99	34.06	2.53	43.16	Peak	---	---

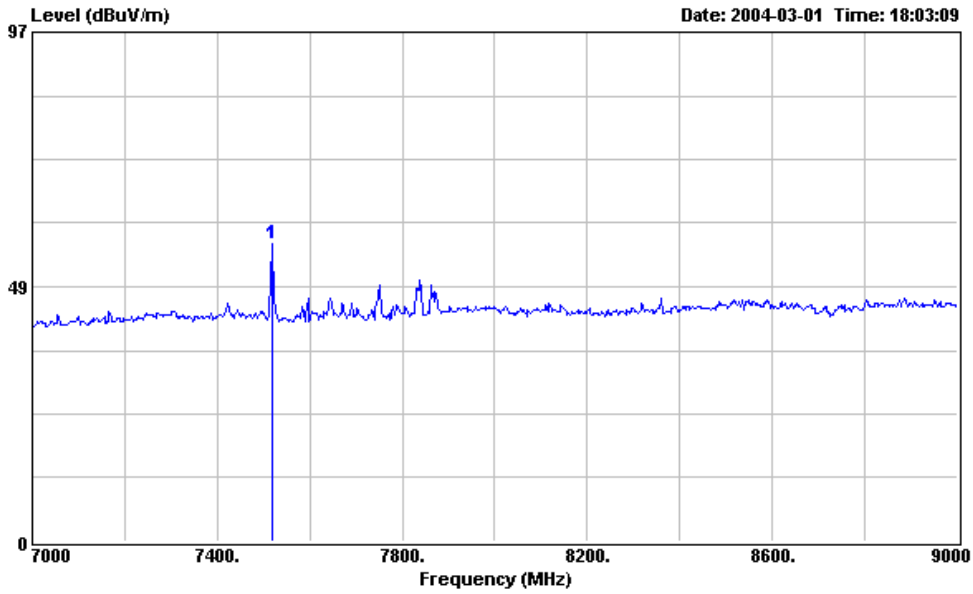

Site : site
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	7518.000	56.56	------	------	59.69	36.53	2.72	42.38	Peak	---	---

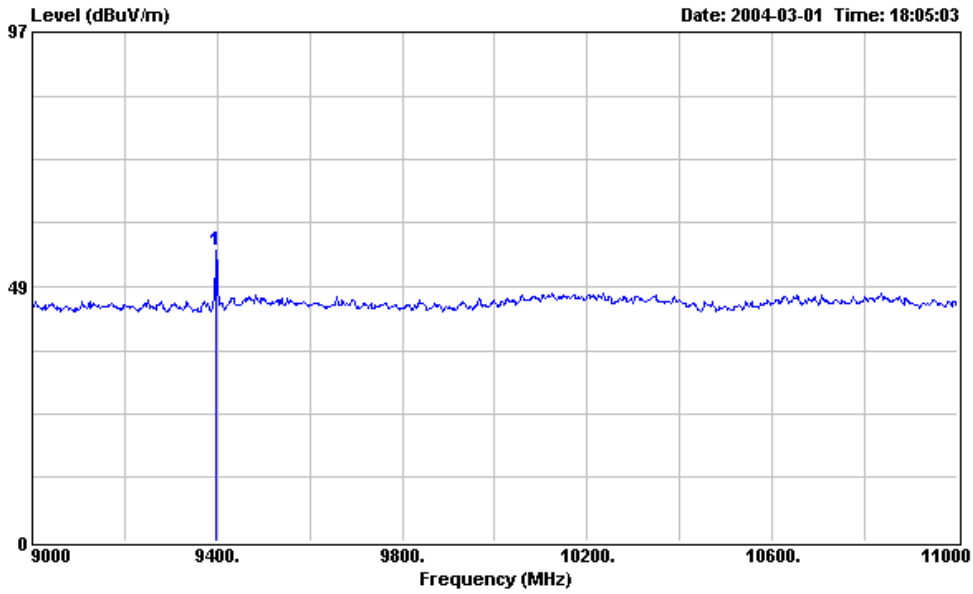

Site : site
Condition : 3m HORN-ANT-6741 HORIZONTAL
EUT : 802.11b USB Wireless LAN?GPRS modem
Power : AC 110V / 60Hz
Model : SCWi275u(WLAN+GPRS)
Memo : GPRS1900

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	9398.000	55.52	------	------	53.99	37.94	3.75	40.16	Peak	---	---

Name of Test: Frequency Stability (Temperature Variation)

Specification: 47 CFR 2.1055(a)(1)

Test Conditions: As Indicated

Test Equipment: As per previous page

Measurement Procedure

1. The EUT and test equipment were set up as shown on the following page.

2. With all power removed, the temperature was decreased to –30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.

3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.

4. The temperature tests were performed for the worst case.

5. Measurement Results: Attached

Transmitter Test Set-Up

Frequency Stability: Temperature Variation
Frequency Stability: Voltage Variation

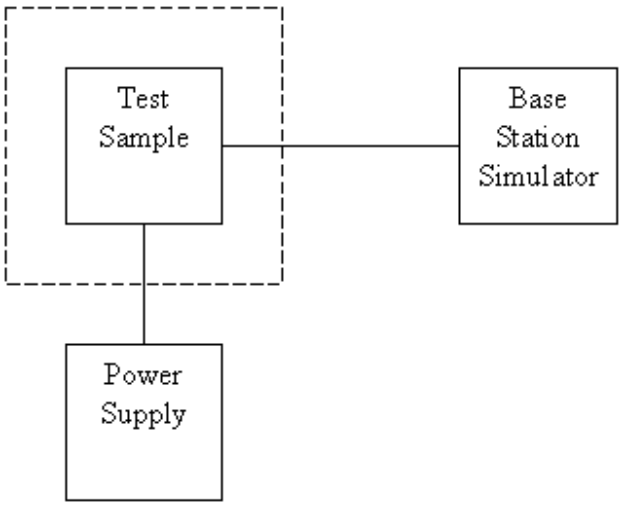

Asset	Model Name	S/N
Temperature & Humidity Controller	P-9000	612
AC/DC Power Source	HPA-500W	HPA0100024
Base Station Simulator	CMU200	102278

Name of Test: Frequency Stability (Temperature Variation)

GSM/GPRS CELLULAR BAND
Frequency Tuned : 836.4 MHz

Temperature(^oC)	Change, Hz	Change, ppm
-30	-284	-0.33
-20	-172	-0.20
-10	-75	-0.09
0	-67	-0.08
10	-75	-0.09
20	-64	-0.08
30	-58	-0.07
40	-44	-0.05
50	-84	-0.10

GSM/GPRS PCS BAND
Frequency Tuned : 1880 MHz

Temperature(^oC)	Change, Hz	Change, ppm
-30	-345	-0.18
-20	-232	-0.12
-10	-192	-0.10
0	-187	-0.10
10	-205	-0.11
20	-143	-0.08
30	-126	-0.07
40	-164	-0.09
50	-176	-0.09

Name of Test: Frequency Stability (Voltage Variation)

Specification: 47 CFR 2.1055 (b)(1)

Test Equipment: As per previous page

Measurement Procedure

1. The EUT was placed in a temperature chamber at 25±5°C and connected as for "Frequency Stability - Temperature Variation" test.

2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.

3. The variation in frequency was measured for the worst case.

Results: Frequency Stability (Voltage Variation)

GSM/GPRS CELLULAR BAND
Frequency Tuned : 836.4 MHz

Nominal Value (Voltage) = 5.0

Voltage(Volt)	Change, Hz	Change, ppm
5.00	-44	-0.05
4.25	-39	-0.05
5.75	-59	-0.07

GSM/GPRS PCS BAND
Frequency Tuned : 1880 MHz

Nominal Value (Voltage) = 5.0

Voltage(Volt)	Change, Hz	Change, ppm
5.00	-110	-0.06
4.25	-161	-0.08
5.75	-101	-0.05

Limit: Must remain within authorized frequency block.

Performed By: Hendry Yang

Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	1.01	1000	24.10	3.92
35	13.63	1.04	2000	27.40	5.66
40	11.11	1.09	3000	30.00	7.20
45	10.59	1.24	4000	32.60	9.36
50	6.47	1.43	5000	33.40	9.16
55	5.83	1.39	6000	34.20	10.70
60	5.18	1.59	7000	35.30	12.16
65	4.81	1.41	8000	36.90	13.12
70	4.43	1.43	9000	38.10	13.81
75	5.10	1.55	10000	39.00	14.83
80	5.91	1.56	11000	38.60	15.83
85	7.33	1.62	12000	39.50	17.11
90	8.74	1.41	13000	39.30	17.62
95	9.05	1.81	14000	41.60	18.37
100	9.36	1.68	15000	40.60	19.10
110	9.65	1.73	16000	37.20	19.72
120	9.97	1.79	17000	40.20	21.98
130	10.51	1.93	18000	48.90	21.22
140	10.32	2.06	19000	37.60	23.90
150	9.42	2.09	20000	37.30	24.07
160	8.09	2.12	21000	37.00	25.49
170	7.43	2.12	22000	38.00	24.92
180	7.60	2.12	23000	38.70	25.60
190	7.43	2.21	24000	38.60	25.70
200	7.26	2.29	25000	24.10	3.92
220	9.11	2.42	14000	27.40	5.66
240	10.88	2.54	15000	30.00	7.20
260	11.75	2.66	16000	32.60	9.36
280	11.55	2.76	17000	33.40	9.16
300	11.36	2.85	18000	34.20	10.70
320	12.03	3.10	19000	35.30	12.16
340	12.69	3.36	20000	36.90	13.12
360	13.33	3.49	21000	38.10	13.81
380	14.00	3.50	22000	39.00	14.83
400	14.63	3.51	23000	38.60	15.83
450	15.33	3.55	24000	39.50	17.11
500	16.03	3.81	25000	39.30	17.62
550	16.65	4.05			
600	17.29	4.23			
650	17.64	4.63			
700	18.00	4.74			
750	18.39	4.95			
800	18.79	5.06			
850	19.10	5.18			
900	19.42	5.40			
950	19.58	5.91			
1000	19.75	5.58			

List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2003	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP40	100004	9KHZ~40GHz	Aug. 23, 2003	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Nov. 05, 2003	Radiation (03CH03-HY)
Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz –200MHz	Jul. 24, 2003	Radiation (03CH03-HY)
Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz -1GHz	Jul. 24, 2003	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Dec. 03, 2003	Radiation (03CH03-HY)
Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Jul. 23, 2003	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	3115	6741	1GHz – 18GHz	Apr. 08, 2003	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Horn Antenna	Schwarzbeck	BBHA9170	154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Dec. 05, 2003	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year, except for Horn Antenna, BBHA9170.

Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch Receiver VSWR Γ1= 0.20 Antenna VSWR Γ2= 0.23 Uncertainty=20log(1-Γ1*Γ2)	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty Uc(y)	**1.27**		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	**2.54**		

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	Ci	$Ci*u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR Γ1= 0.197 Antenna VSWR Γ2= 0.194 Uncertainty=20log(1-Γ1*Γ2*Γ3)	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty Uc(y)	**2.36**				
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	**4.72**				

U=√{(1/2)²+(0.3/2)²+(2²+0.5²+2²+0.25²+2²)/3+(0.54)²/2}=2.2 for 10m test distance

U=√{(1/2)²+(0.3/2)²+(2²+3²+2²+0.25²+2²)/3+(0.54)²/2}=2.7 for 3m test distance

END OF TEST REPORT

Testimonial
and
Statement of Certification

This is to certify that:

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Daniel Lee 4/12/2004

Certified by: Daniel Lee