

FCC TEST REPORT

REPORT NO.: RF950803L12

MODEL NO.: L-372BFA

RECEIVED: Aug. 03, 2006

TESTED: Aug. 16 ~ Aug. 21, 2006

ISSUED: Aug. 22, 2006

APPLICANT: Wintecronics Ltd.

ADDRESS: No. 716, 11F-3, Jung Jeng Rd., Chung Ho City
235, Taipei Hsien, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen,
Kwei Shan Hsiang, Taoyuan Hsien 333,
Taiwan, R.O.C.

This test report consists of 25 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



No. 2177-01



0528

Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS.....	4
2.1	MEASUREMENT UNCERTAINTY	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	6
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	6
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.4	DESCRIPTION OF SUPPORT UNITS	8
4	TEST PROCEDURE AND RESULT	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.2	RADIATED EMISSION MEASUREMENT.....	9
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	9
4.2.2	TEST INSTRUMENT.....	11
4.2.3	TEST PROCEDURE	12
4.2.4	TEST SETUP	13
4.2.5	EUT OPERATING CONDITION	13
4.2.6	TEST RESULTS	14
4.3	EMISSION BANDWIDTH MEASUREMENT	18
4.3.1	LIMITS OF BAND EDGES MEASUREMENT	18
4.3.2	TEST INSTRUMENT.....	18
4.3.3	TEST PROCEDURE	18
4.3.4	DEVIATION FROM TEST STANDARD	19
4.3.5	TEST SETUP	19
4.3.6	TEST RESULTS	19
4.4	DEACTIVATION TIME.....	21
4.4.1	LIMITS OF DEACTIVATION TIME MEASUREMENT	21
4.4.2	TEST INSTRUMENTS	21
4.4.3	TEST PROCEDURES.....	21
4.4.4	DEVIATION FROM TEST STANDARD	21
4.4.5	TEST SETUP	22
4.4.6	TEST RESULTS.....	22
5	INFORMATION ON THE TESTING LABORATORIES	24
	APPENDIX-A.....	A-1

1 CERTIFICATION

PRODUCT: 372.5MHz Wireless Remote Controller Transceiver
BRAND NAME: Wintec
MODEL NO: L-372BFA
TEST SAMPLE: MASS-PRODUCTION
TESTED: Aug. 16 ~ Aug. 21, 2006
APPLICANT: Wintecronics Ltd.
STANDARDS: **FCC Part 15, Subpart C (Section 15.231)**
ANSI C63.4-2003

The above equipment (model: L-372BFA) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Jessie Wang , **DATE:** Aug. 22, 2006
(Jessie Wang)

TECHNICAL
ACCEPTANCE : Long Chen , **DATE:** Aug. 22, 2006
Responsible for
RF (Long Chen)

APPROVED BY : Gary Chang , **DATE:** Aug. 22, 2006
(Gary Chang / Supervisor)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C; RSS-210 Issue 6			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	NA	NA
15.209 15.231(b)	Radiated Emission Test	PASS	Meet the requirement of limit. Minimum passing margin is -1.90dB at 372.45MHz
15.231(c)	Emission Bandwidth Measurement	PASS	Meet the requirement of limit
15.231(a)	De-activation	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.64 dB
	200MHz ~1000MHz	3.65 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	372.5MHz Wireless Remote Controller Transceiver
MODEL NO.	L-372BFA
FCC ID	NJQ372BFA
POWER SUPPLY	12Vdc from battery
MODULATION TYPE	ASK
CARRIER FREQUENCY OF EACH CHANNEL	372.5MHz
NUMBER OF CHANNEL	1
ANTENNA TYPE	Spiral antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA


NOTE: The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

One channel was provided to this EUT.

Channel	Frequency
1	372.5MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

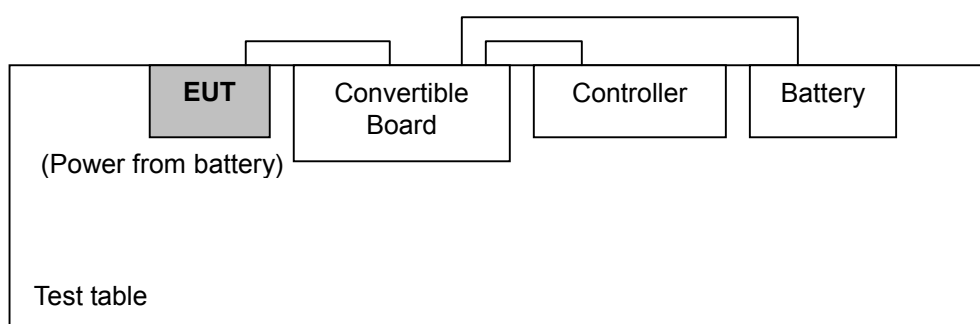

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT configure mode	Applicable to					Description
	PLC	RE<1G	RE≥1G	EB	DT	
-	-	V	V	V	V	-

Where **PLC**: Power Line Conducted Emission **RE<1G**: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz **EB**: Emission Bandwidth Measurement
DT: Deactivation Time measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and XYZ axis.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	AXIS
1	1	ASK	Y

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and XYZ axis.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	AXIS
1	1	ASK	Y

EMISSION BANDWIDTH MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
1	1	ASK

DEACTIVATION TIME MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
1	1	ASK

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 372.5MHz Wireless Remote Controller Transceiver. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.231)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Convertible Board	NA	NA	NA	NA
2	Controller	NA	NA	NA	NA
3	Battery	DELKOK	NT50-N24LMF	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	NA

NOTE: All power cords of the above support units are non-shielded (1.8m).

4 TEST PROCEDURE AND RESULT

4.1 CONDUCTED EMISSION MEASUREMENT

NA

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.231 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental		Field Strength of Spurious	
	uV/meter	dBuV/meter	uV/meter	dBuV/meter
40.66 ~ 40.70	2250	67.04	225	48.04
70 ~ 130	1250	61.94	125	41.94
130 ~ 174	1250 ~ 3750	61.94 ~ 71.48	125 ~ 375	41.94 ~ 51.48
174 ~ 260	3750	71.48	75	37.50
260 ~ 470	3750 ~ 12500	71.48 ~ 81.94	375 ~ 1250	51.48 ~ 61.94
Above 470	12500	81.94	1250	61.94

NOTE:

1. Where F is the frequency in MHz, the formula for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818(F)-6136.3636$; for the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F)-7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.
2. The above field strength limits are specified at a distance of 3meters. The tighter limits apply at the band edges.

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 20, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 27, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Jan. 15, 2007
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Jan. 22, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170147	Jan. 26, 2007
Preamplifier Agilent	8449B	3008A01961	Oct. 23, 2006
Preamplifier Agilent	8447D	2944A10629	Oct. 27, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	214380/4	Jan. 16, 2007
RF signal cable HUBER+SUHNER	SUCOFLEX 104	219266/4	Jan. 16, 2007
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 1.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-2.


4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1MHz for Peak detection (PK) at frequency above 1GHz.

4.2.4 TEST SETUP

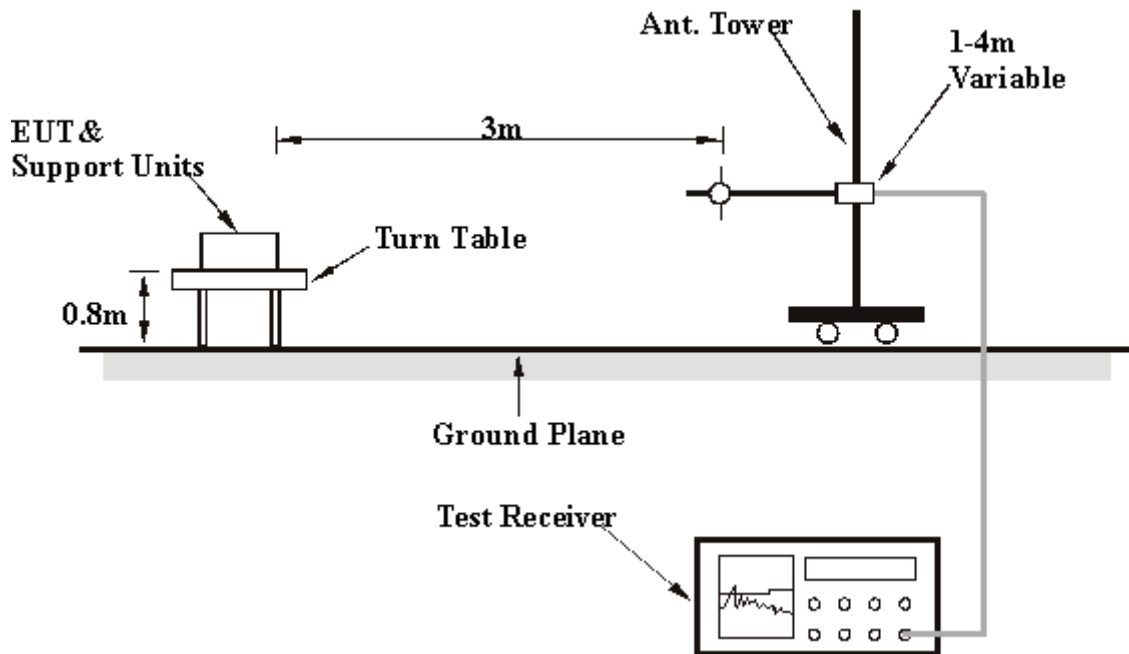

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITION

Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.

4.2.6 TEST RESULTS

Below 1GHz Worst-Case Data

EUT TEST CONDITION		MEASUREMENT DETAIL	
FREQUENCY RANGE	Below 1000MHz	DETECTOR FUNCTION	Quasi-Peak / Peak / Average
INPUT POWER	12Vdc	ENVIRONMENTAL CONDITIONS	28deg. C, 67%RH, 991hPa
TESTED BY	Lori Chiu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*372.45	90.53 PK	98.52	-7.99	2.48 H	102	73.50	17.03
1	*372.45	76.62 AV	78.52	-1.90	2.48 H	102	60.19	17.03
2	744.90	64.58 PK	78.52	-13.94	1.00 H	89	38.97	25.61
3	744.90	50.67 AV	58.52	-7.85	1.00 H	89	25.66	25.61
4	830.88	24.26 QP	46.00	-21.74	1.50 H	118	-2.16	26.42
5	852.26	24.32 QP	46.00	-21.68	1.50 H	190	-2.37	26.69
6	879.48	26.41 QP	46.00	-19.59	1.00 H	271	-0.51	26.91
7	895.03	25.67 QP	46.00	-20.33	1.00 H	310	-1.37	27.04
8	916.41	27.05 QP	46.00	-18.95	1.00 H	241	-0.79	27.85
9	949.46	29.49 QP	46.00	-16.51	1.00 H	250	0.10	29.39

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*372.45	83.03 PK	98.52	-15.49	2.91 V	137	-66.00	17.03
1	*372.45	69.12 AV	78.52	-9.4	2.91 V	137	-52.69	17.03
2	744.90	55.75 PK	78.52	-22.77	1.03 V	115	-30.14	25.61
3	744.90	41.84 AV	58.52	-16.68	1.03 V	115	-16.83	25.61
4	848.38	24.44 QP	46.00	-21.56	1.50 V	346	-2.21	26.65
5	869.76	25.81 QP	46.00	-20.19	2.00 V	151	-1.03	26.84
6	908.64	27.81 QP	46.00	-18.19	1.00 V	232	0.33	27.48
7	933.91	27.11 QP	46.00	-18.89	1.00 V	109	-1.56	28.66
8	957.23	28.18 QP	46.00	-17.82	1.50 V	91	-1.08	29.26
9	976.67	28.27 QP	54.00	-25.73	1.00 V	1	-0.56	28.83

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" = Fundamental frequency
6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{20.16}{100\text{ms}} = -13.91\text{dB}$$

Please see page 17 for plotted duty.

EUT TEST CONDITION		MEASUREMENT DETAIL	
FREQUENCY RANGE	1 ~ 4GHz	DETECTOR FUNCTION	Peak (PK) Average (AV)
INPUT POWER	12Vdc	ENVIRONMENTAL CONDITIONS	28deg. C, 67%RH, 991hPa
TESTED BY	Lori Chiu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1117.00	44.98 PK	74.00	-29.02	1.26 H	255	17.72	27.25
1	1117.00	31.07 AV	54.00	-22.93	1.26 H	255	4.42	27.25
2	1489.00	48.23 PK	74.00	-25.77	1.00 H	234	19.84	28.39
2	1489.00	34.32 AV	54.00	-19.68	1.00 H	234	6.53	28.39
3	1862.00	48.73 PK	74.00	-25.27	1.42 H	222	19.18	29.55
3	1862.00	34.82 AV	54.00	-19.18	1.42 H	222	5.87	29.55
4	2234.00	50.54 PK	74.00	-23.46	1.45 H	230	19.71	30.84
4	2234.00	36.63 AV	54.00	-17.37	1.45 H	230	6.39	30.84
5	2607.00	46.15 PK	74.00	-27.85	1.16 H	287	14.12	32.04
5	2607.00	32.24 AV	54.00	-21.76	1.16 H	287	0.80	32.04
6	2979.00	42.37 PK	74.00	-31.63	1.24 H	121	9.84	32.54
6	2979.00	28.46 AV	54.00	-25.54	1.24 H	121	-3.48	32.54

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*” = Fundamental frequency
 6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{20.16}{100\text{ms}} = -13.91\text{dB}$$

Please see page 17 for plotted duty.



EUT TEST CONDITION		MEASUREMENT DETAIL	
FREQUENCY RANGE	1 ~ 4GHz	DETECTOR FUNCTION	Peak (PK) Average (AV)
INPUT POWER	12Vdc	ENVIRONMENTAL CONDITIONS	28deg. C, 67%RH, 991hPa
TESTED BY	Lori Chiu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1117.00	39.83 PK	74.00	-34.17	1.56 V	22	12.57	27.25
1	1117.00	25.92 AV	54.00	-28.08	1.56 V	22	-0.73	27.25
2	1489.00	42.74 PK	74.00	-31.26	1.45 V	173	14.35	28.39
2	1489.00	28.83 AV	54.00	-25.17	1.45 V	173	1.04	28.39
3	2234.00	44.73 PK	74.00	-29.27	1.56 V	177	13.90	30.84
3	2234.00	30.82 AV	54.00	-23.18	1.56 V	177	0.58	30.84
4	2607.00	42.46 PK	74.00	-31.54	1.62 V	339	10.43	32.04
4	2607.00	28.55 AV	54.00	-25.45	1.62 V	339	-2.89	32.04

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*” = Fundamental frequency
 6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{20.16}{100\text{ms}} = -13.91\text{dB}$$

Please see page 17 for plotted duty.

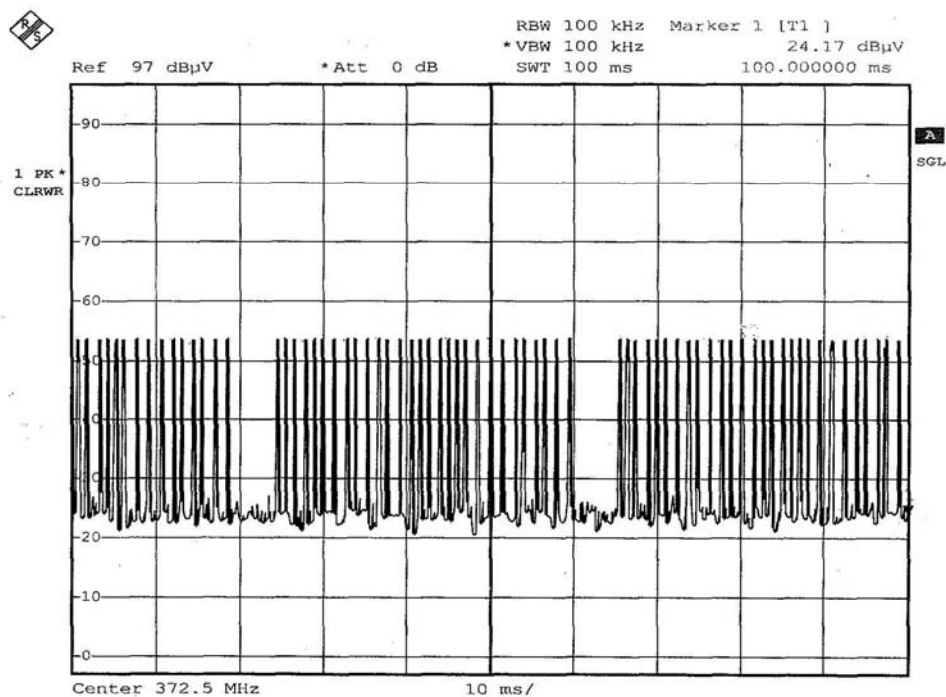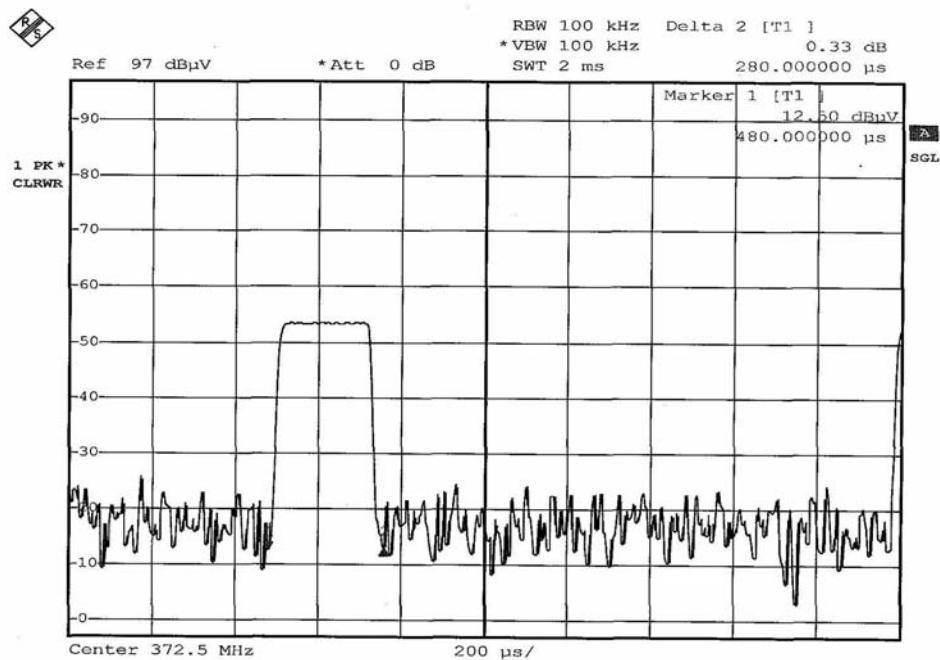

$$0.28\text{ms} * 72 = 20.16\text{ms}$$

$$20\log(\text{Duty cycle}) = 20\log \frac{20.16}{100\text{ms}} = -13.91\text{dB}$$

4.3 EMISSION BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF EMISSION BANDWIDTH MEASUREMENT

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for device operating above 70 MHz and below 900 MHz.

Fundamental Frequency (MHz)	Limit of Emission Bandwidth(kHz)
372.5	931.25

4.3.2 TEST INSTRUMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

- a. The EUT was placed on the turn table.
- b. The signal was coupled to the spectrum analyzer through an antenna.
- c. Set the resolution bandwidth to 10 kHz and video bandwidth to 30 kHz then select Peak function to scan the channel frequency.
- d. The emission bandwidth was measured and recorded.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.


4.3.5 TEST SETUP

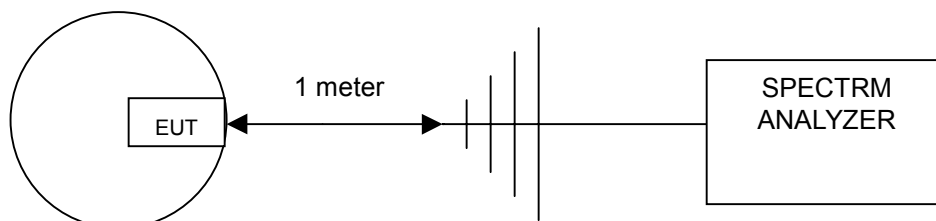

4.3.6 TEST RESULTS

Frequency (MHz)	Emission Bandwidth (kHz)	Maximum Limit (kHz)	PASS/FAIL
372.5	54.00	931.25	PASS

The plot of test result is attached as below.

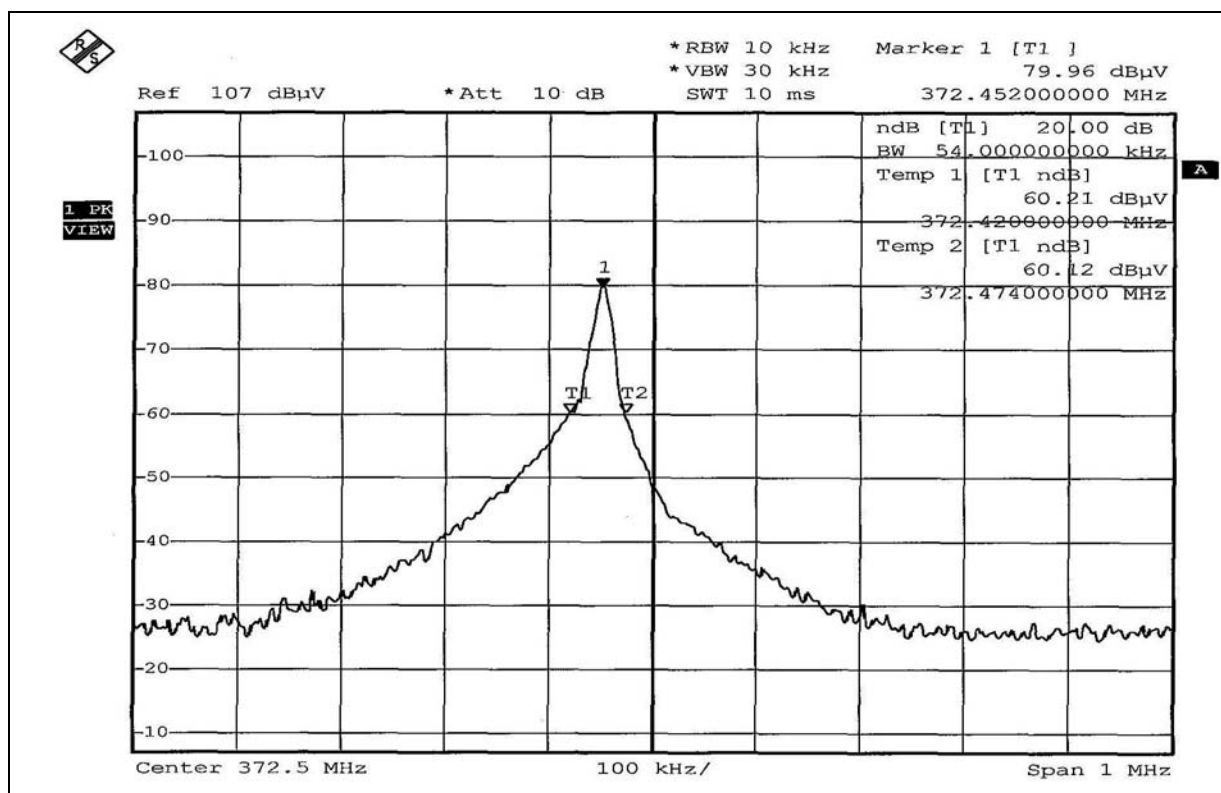

4.4 DEACTIVATION TIME

4.4.1 LIMITS OF DEACTIVATION TIME MEASUREMENT

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

- The EUT was placed on the turning table.
- The signal was coupled to the spectrum analyzer through an antenna.
- Set the resolution bandwidth to 100kHz and video bandwidth to 100kHz. The spectrum analyser was turned to the centre frequency of the transmitter's and the analyser's marker function was used to determine the duration of transmission.
- The transmission duration was measured and recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

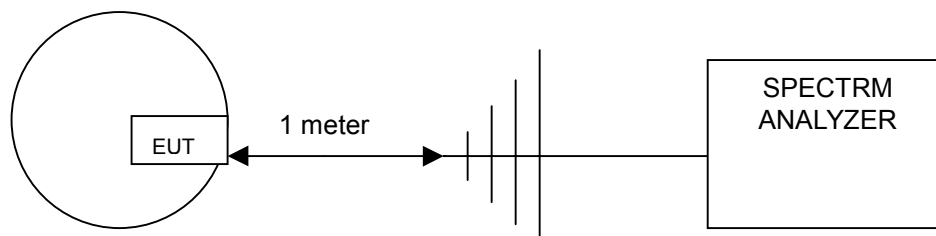


4.4.6 TEST RESULTS

Push button	Frequency (MHz)	Maximum limit (sec)	PASS/FAIL
1	372.50	5	PASS

The plot of test results are attached as below.

Manual Push – Button 1

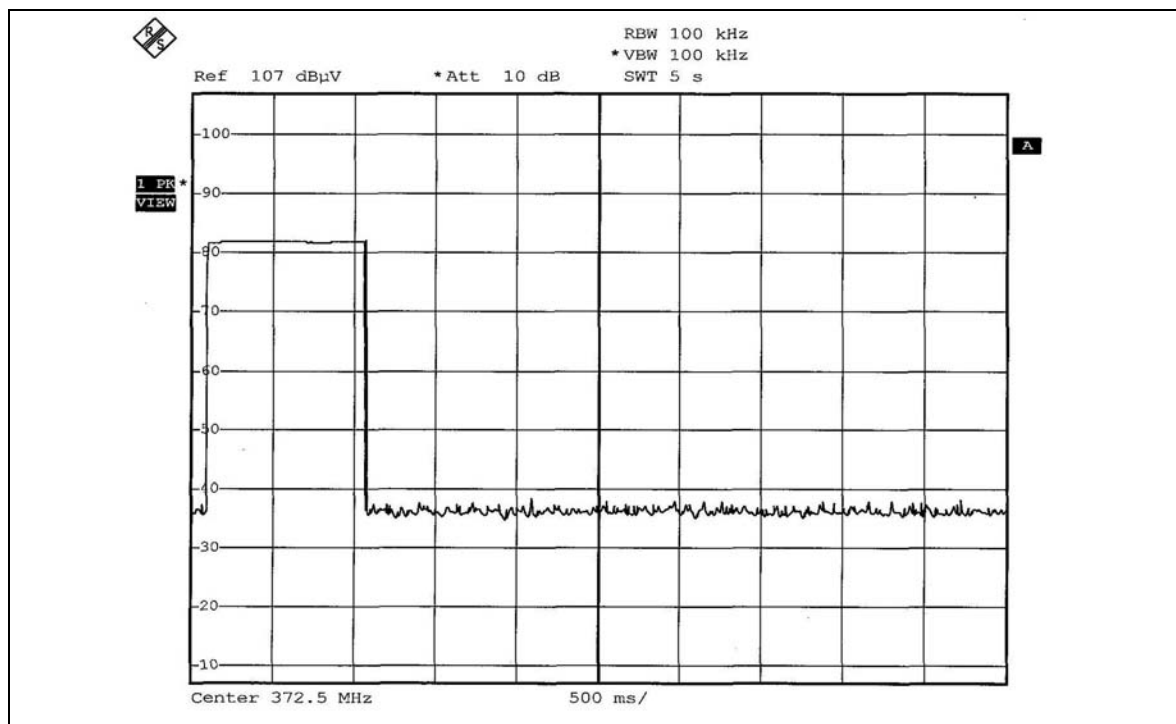

5 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.