



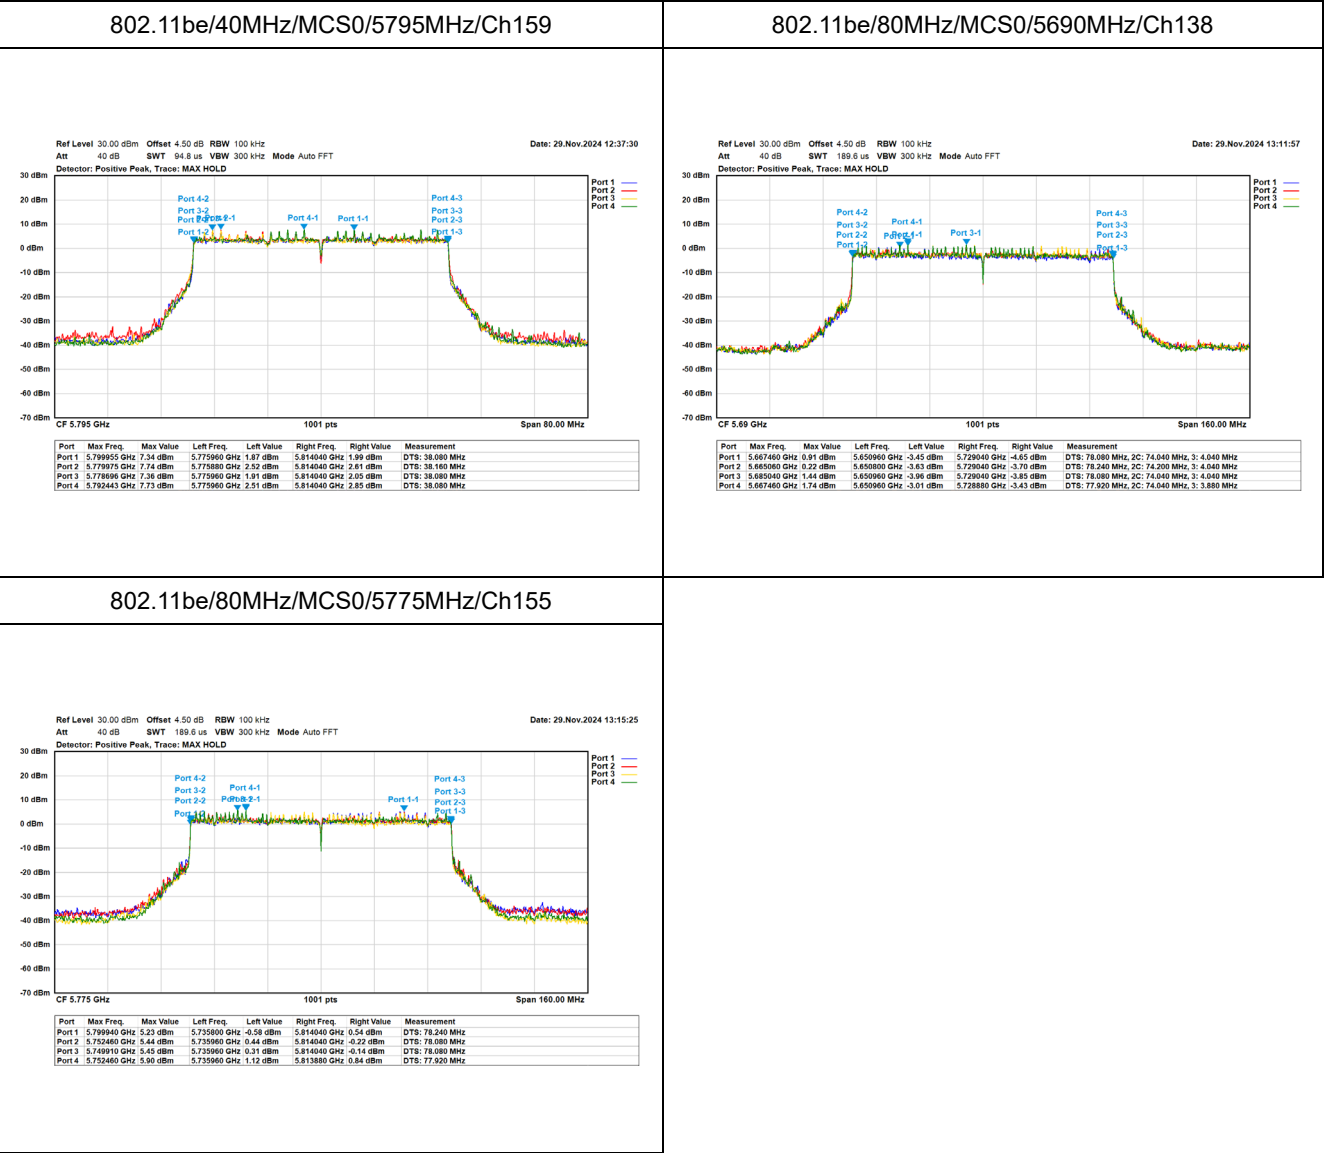


For 26dB Bandwidth:


802.11be/80MHz/MCS0/5210MHz/Ch42

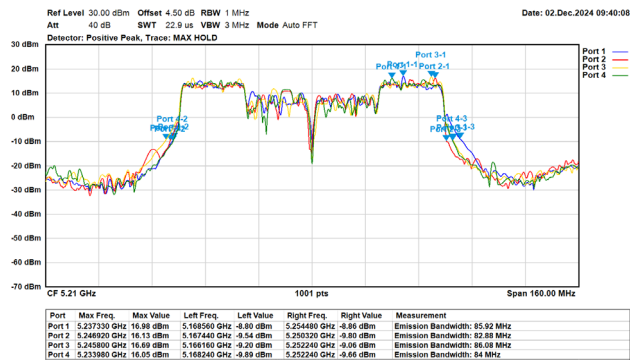


802.11be/80MHz/MCS0/5290MHz/Ch58

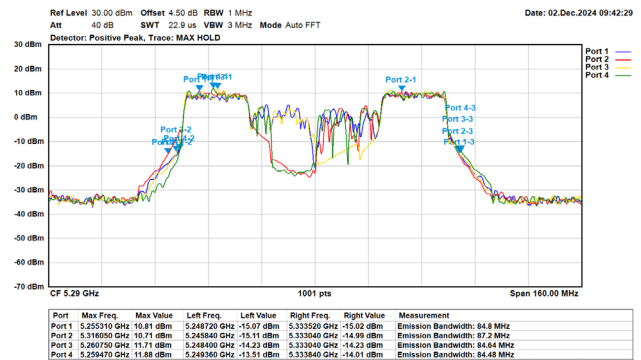


802.11be/80MHz/MCS0/5530MHz/Ch106

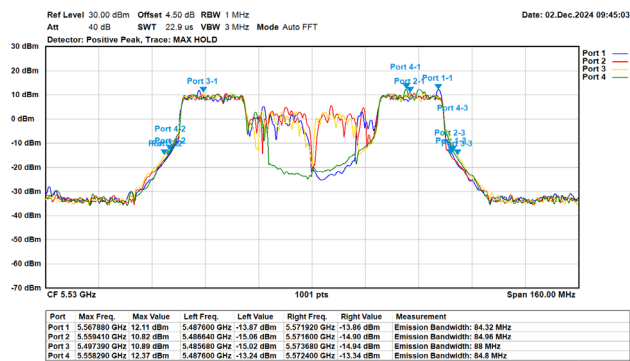


802.11be/80MHz/MCS0/5610MHz/Ch122

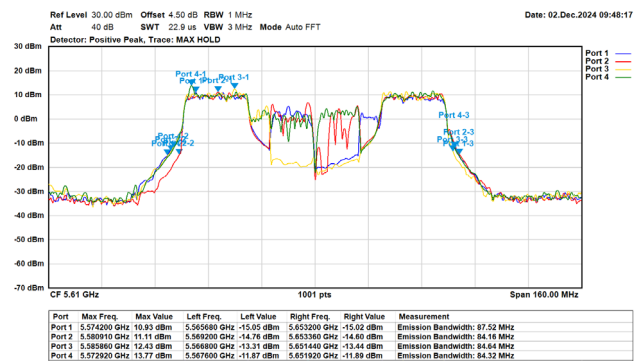


802.11be/80MHz/MCS0/5690MHz/Ch138

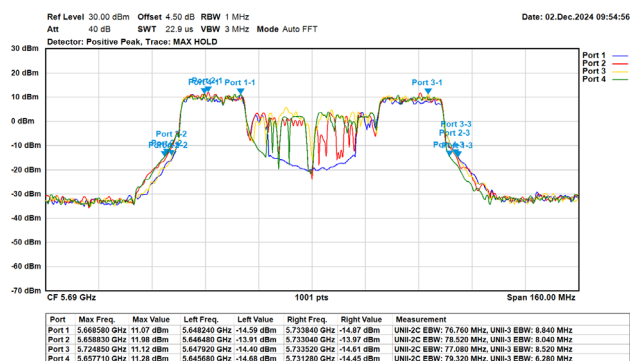


802.11be/160MHz/MCS0/5250MHz/Ch50

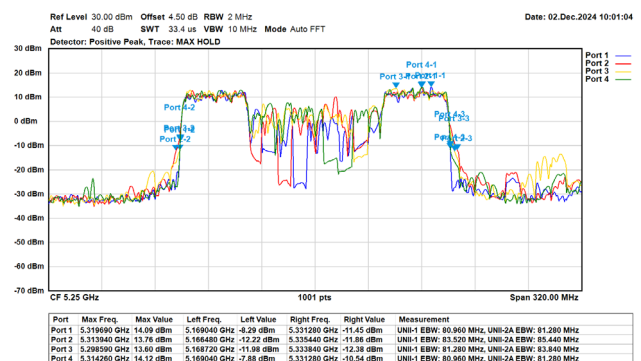

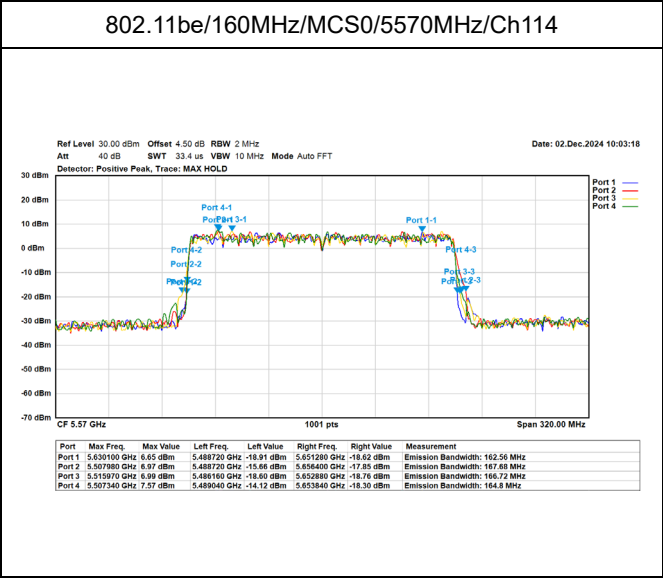

For DTS Bandwidth:

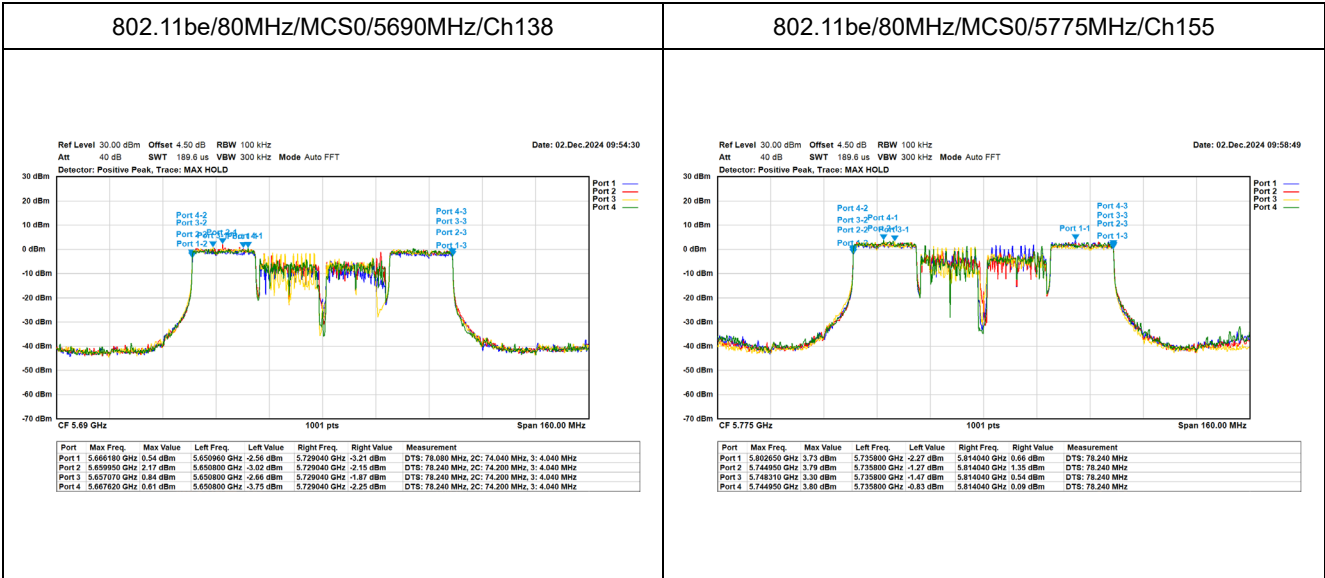

Appendix C. Test Result of Maximum Conducted Output Power

For non-beamforming function:

<4TX, NSS 1, FRU mode>

Modulation	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)						Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total	Limit			
802.11a	5180	22.260	22.440	22.700	22.440	28.483	30.00	4.38	32.863	36.00
	5220	22.280	22.500	22.670	22.230	28.444	30.00	4.38	32.824	36.00
	5240	22.290	22.660	22.640	22.400	28.521	30.00	4.38	32.901	36.00
	5260	16.490	16.730	16.570	16.560	22.609	24.00	4.38	26.989	30.00
	5300	16.700	16.970	16.860	16.750	22.842	24.00	4.38	27.222	30.00
	5320	16.950	17.170	17.080	17.030	23.079	24.00	4.38	27.459	30.00
	5500	16.850	17.140	17.090	17.050	23.054	24.00	4.51	27.564	30.00
	5580	16.550	16.880	16.470	16.720	22.678	24.00	4.51	27.188	30.00
	5700	16.710	17.030	16.780	16.570	22.796	24.00	4.51	27.306	30.00
	5720 (U-NII-2C)	15.350	15.460	15.280	15.350	21.381	23.03	4.51	25.891	29.03
	5720 (U-NII-3)	9.320	9.530	9.230	9.320	15.372	30.00	4.62	19.992	36.00
	5745	23.550	23.600	23.600	23.740	29.644	30.00	4.62	34.264	36.00
	5785	23.660	23.770	23.350	23.680	29.638	30.00	4.62	34.258	36.00
	5825	23.560	23.760	23.690	23.860	29.739	30.00	4.62	34.359	36.00
802.11be (20 MHz)	5180	22.970	23.110	23.390	23.210	29.193	30.00	4.38	33.573	36.00
	5220	23.020	23.310	23.360	22.970	29.189	30.00	4.38	33.569	36.00
	5240	23.030	23.420	23.480	23.090	29.280	30.00	4.38	33.660	36.00
	5260	17.530	17.750	17.700	17.610	23.669	24.00	4.38	28.049	30.00
	5300	17.720	17.910	17.940	17.780	23.859	24.00	4.38	28.239	30.00
	5320	17.760	17.940	17.880	17.910	23.894	24.00	4.38	28.274	30.00
	5500	17.450	17.820	17.700	17.610	23.668	24.00	4.51	28.178	30.00
	5580	17.240	17.510	17.260	17.300	23.349	24.00	4.51	27.859	30.00
	5700	17.340	17.770	17.550	17.240	23.500	24.00	4.51	28.010	30.00
	5720 (U-NII-2C)	15.890	16.270	16.030	16.050	22.083	23.13	4.51	26.593	29.13
	5720 (U-NII-3)	10.920	11.450	11.000	11.010	17.121	30.00	4.62	21.741	36.00
	5745	23.870	23.940	23.740	23.810	29.861	30.00	4.62	34.481	36.00
	5785	23.810	23.960	23.510	23.820	29.799	30.00	4.62	34.419	36.00
	5825	23.480	23.650	23.550	23.660	29.606	30.00	4.62	34.226	36.00

Modulation	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)						Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total	Limit			
802.11be (40 MHz)	5190	22.330	23.190	23.410	23.110	29.049	30.00	4.38	33.429	36.00
	5230	23.320	24.170	24.310	23.990	29.984	30.00	4.38	34.364	36.00
	5270	17.120	18.170	18.110	18.040	23.901	24.00	4.38	28.281	30.00
	5310	17.070	17.860	17.710	17.920	23.673	24.00	4.38	28.053	30.00
	5510	17.210	18.120	17.860	17.970	23.824	24.00	4.51	28.334	30.00
	5550	17.220	18.030	17.690	17.860	23.731	24.00	4.51	28.241	30.00
	5670	17.350	18.370	18.120	17.980	23.992	24.00	4.51	28.502	30.00
	5710 (U-NII-2C)	16.980	18.050	17.880	17.710	23.694	24.00	4.51	28.204	30.00
	5710 (U-NII-3)	7.480	8.560	8.520	8.350	14.269	30.00	4.62	18.889	36.00
	5755	23.290	23.900	23.790	23.850	29.735	30.00	4.62	34.355	36.00
	5795	23.310	23.810	23.450	23.830	29.626	30.00	4.62	34.246	36.00
802.11be (80 MHz)	5210	22.190	22.970	23.140	22.970	28.853	30.00	4.38	33.233	36.00
	5290	17.210	18.060	18.210	18.150	23.946	24.00	4.38	28.326	30.00
	5530	17.240	18.070	17.710	17.920	23.767	24.00	4.51	28.277	30.00
	5610	17.020	17.680	17.930	17.800	23.642	24.00	4.51	28.152	30.00
	5690 (U-NII-2C)	16.800	17.810	17.750	17.500	23.504	24.00	4.51	28.014	30.00
	5690 (U-NII-3)	3.570	4.600	4.800	4.390	10.385	30.00	4.62	15.005	36.00
	5775	21.890	22.430	22.100	22.470	28.250	30.00	4.62	32.870	36.00
802.11be (160 MHz)	5250 (UNII-1)	16.690	17.690	17.810	17.570	23.482	30.00	4.38	27.862	36.00
	5250 (UNII-2A)	17.220	18.190	18.100	18.060	23.930	24.00	4.38	28.310	30.00
	5570	17.330	18.130	17.780	17.920	23.820	24.00	4.51	28.330	30.00

Note: For straddle channels, the total power = conducted output power + duty factor, and the duty factor refer to section 2.3.

<4TX, NSS 4, FRU mode>

Modulation	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)						Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total	Limit			
802.11be (20 MHz)	5180	22.750	22.830	23.030	22.880	28.894	30.00	4.38	33.274	36.00
	5220	22.690	23.020	23.160	22.790	28.940	30.00	4.38	33.320	36.00
	5240	22.730	23.120	23.240	22.820	29.003	30.00	4.38	33.383	36.00
	5260	17.320	17.460	17.310	17.280	23.364	24.00	4.38	27.744	30.00
	5300	17.530	17.690	17.610	17.570	23.621	24.00	4.38	28.001	30.00
	5320	17.480	17.710	17.660	17.470	23.602	24.00	4.38	27.982	30.00
	5500	17.290	17.530	17.280	17.320	23.377	24.00	4.51	27.887	30.00
	5580	17.030	17.250	17.050	17.080	23.124	24.00	4.51	27.634	30.00
	5700	17.010	17.430	17.270	16.990	23.200	24.00	4.51	27.710	30.00
	5720 (U-NII-2C)	15.640	15.910	15.600	15.650	21.722	23.13	4.51	26.232	29.13
	5720 (U-NII-3)	10.620	10.890	10.600	10.630	16.707	30.00	4.62	21.327	36.00
	5745	23.450	23.640	23.530	23.590	29.574	30.00	4.62	34.194	36.00
	5785	23.530	23.600	23.190	23.550	29.491	30.00	4.62	34.111	36.00
	5825	23.180	23.390	23.420	23.350	29.357	30.00	4.62	33.977	36.00
802.11be (40 MHz)	5190	22.460	22.590	22.730	22.530	28.599	30.00	4.38	32.979	36.00
	5230	23.510	23.710	23.700	23.420	29.607	30.00	4.38	33.987	36.00
	5270	17.430	17.780	17.670	17.770	23.685	24.00	4.38	28.065	30.00
	5310	17.270	17.550	17.410	17.530	23.462	24.00	4.38	27.842	30.00
	5510	17.450	17.770	17.740	17.660	23.677	24.00	4.51	28.187	30.00
	5550	17.310	17.770	17.330	17.430	23.485	24.00	4.51	27.995	30.00
	5670	17.660	17.960	17.870	17.720	23.825	24.00	4.51	28.335	30.00
	5710 (U-NII-2C)	17.210	17.760	17.560	17.510	23.535	24.00	4.51	28.045	30.00
	5710 (U-NII-3)	7.820	8.480	8.250	8.130	14.197	30.00	4.62	18.817	36.00
	5755	23.190	23.440	23.230	23.430	29.345	30.00	4.62	33.965	36.00
802.11be (80 MHz)	5210	22.520	22.650	22.700	22.610	28.641	30.00	4.38	33.021	36.00
	5290	17.540	17.780	17.820	17.900	23.783	24.00	4.38	28.163	30.00
	5530	17.450	17.650	17.420	17.640	23.562	24.00	4.51	28.072	30.00
	5610	17.240	17.430	17.620	17.470	23.463	24.00	4.51	27.973	30.00
	5690 (U-NII-2C)	17.090	17.620	17.490	17.260	23.390	24.00	4.51	27.900	30.00
	5690 (U-NII-3)	4.000	4.480	4.590	4.300	10.369	30.00	4.62	14.989	36.00
	5775	22.010	22.070	21.640	22.130	27.987	30.00	4.62	32.607	36.00

Modulation	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)						Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total	Limit			
802.11be (160 MHz)	5250 (UNII-1)	17.000	17.310	17.300	17.120	23.205	30.00	4.38	27.585	36.00
	5250 (UNII-2A)	17.560	17.800	17.600	17.640	23.672	24.00	4.38	28.052	30.00
	5570	17.740	17.940	17.600	17.660	23.758	24.00	4.51	28.268	30.00

Note: For straddle channels, the total power = conducted output power + duty factor, and the duty factor refer to section 2.3.

<4TX, NSS 1, MRU mode>

Modulation	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)						Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total	Limit			
802.11be (20 MHz) (DL_20_Full (RU242)_MCS0)	5180	22.200	22.340	22.890	22.360	28.634	30.00	4.38	33.014	36.00
	5220	22.010	22.660	22.670	22.410	28.624	30.00	4.38	33.004	36.00
	5240	22.130	22.700	22.340	22.490	28.598	30.00	4.38	32.978	36.00
	5260	16.560	17.080	16.720	16.760	22.962	24.00	4.38	27.342	30.00
	5300	16.750	17.190	16.840	16.860	23.091	24.00	4.38	27.471	30.00
	5320	16.800	16.670	16.660	16.880	22.931	24.00	4.38	27.311	30.00
	5500	16.620	17.120	16.970	16.720	23.040	24.00	4.51	27.550	30.00
	5580	16.480	16.550	16.330	16.560	22.659	24.00	4.51	27.169	30.00
	5700	16.320	17.040	16.610	16.240	22.742	24.00	4.51	27.252	30.00
	5720 (U-NII-2C)	15.710	15.980	15.490	15.910	21.955	23.10	4.51	26.465	29.10
	5720 (U-NII-3)	10.540	11.220	10.650	10.820	16.993	30.00	4.62	21.613	36.00
	5745	22.150	22.340	21.970	22.570	28.441	30.00	4.62	33.061	36.00
	5785	22.170	22.470	21.680	22.350	28.356	30.00	4.62	32.976	36.00
	5825	21.710	22.160	21.980	22.450	28.261	30.00	4.62	32.881	36.00
802.11be (40 MHz) (DL_40_Full (RU484)_MCS0)	5190	22.320	22.570	22.770	22.510	28.724	30.00	4.38	33.104	36.00
	5230	22.480	22.580	22.650	22.110	28.638	30.00	4.38	33.018	36.00
	5270	17.230	17.650	17.310	17.500	23.604	24.00	4.38	27.984	30.00
	5310	17.650	18.020	17.520	17.810	23.933	24.00	4.38	28.313	30.00
	5510	17.460	17.480	17.500	17.590	23.686	24.00	4.51	28.196	30.00
	5550	17.620	18.030	17.550	17.770	23.925	24.00	4.51	28.435	30.00
	5670	17.520	18.080	17.850	17.810	23.998	24.00	4.51	28.508	30.00
	5710 (U-NII-2C)	17.390	17.960	17.790	17.810	23.921	24.00	4.51	28.431	30.00
	5710 (U-NII-3)	8.010	8.550	8.500	8.430	14.556	30.00	4.62	19.176	36.00
	5755	22.250	22.530	22.360	22.490	28.587	30.00	4.62	33.207	36.00
802.11be (80 MHz) (DL_80_Full (RU996)_MCS0)	5210	21.800	22.270	22.370	22.310	28.340	30.00	4.38	32.720	36.00
	5290	17.340	17.700	17.840	17.880	23.842	24.00	4.38	28.222	30.00
	5530	17.390	17.820	17.520	17.710	23.760	24.00	4.51	28.270	30.00
	5610	17.120	17.520	17.620	17.480	23.586	24.00	4.51	28.096	30.00
	5690 (U-NII-2C)	17.160	18.030	18.000	17.890	23.931	24.00	4.51	28.441	30.00
	5690 (U-NII-3)	4.290	4.960	5.150	5.150	11.048	30.00	4.62	15.668	36.00
	5775	21.830	22.210	21.770	22.260	28.170	30.00	4.62	32.790	36.00

Modulation	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)						Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total	Limit			
802.11be (160 MHz) (DL_160_Full (RU996x 2)_MCS0)	5250 (UNII-1)	16.190	17.010	16.890	16.460	22.766	30.00	4.38	27.146	36.00
	5250 (UNII-2A)	16.740	17.250	16.810	16.990	23.068	24.00	4.38	27.448	30.00
	5570	16.780	17.350	16.720	16.990	23.083	24.00	4.51	27.593	30.00

Note: For straddle channels, the total power = conducted output power + duty factor, and the duty factor refer to section 2.3.

<4TX, NSS 4, MRU mode>

Modulation	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)						Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total	Limit			
802.11be (20 MHz) (DL_20_Full (RU242)_MCS0)	5180	21.150	21.900	22.020	21.880	27.882	30.00	4.38	32.262	36.00
	5220	21.140	22.070	21.920	21.740	27.863	30.00	4.38	32.243	36.00
	5240	21.270	21.840	21.940	21.850	27.864	30.00	4.38	32.244	36.00
	5260	15.860	16.430	16.190	16.240	22.316	24.00	4.38	26.696	30.00
	5300	16.110	16.500	16.440	16.500	22.522	24.00	4.38	26.902	30.00
	5320	16.460	16.810	16.580	16.920	22.828	24.00	4.38	27.208	30.00
	5500	16.000	16.510	16.290	16.140	22.370	24.00	4.51	26.880	30.00
	5580	15.990	16.190	15.940	15.860	22.128	24.00	4.51	26.638	30.00
	5700	15.850	16.290	16.060	15.830	22.143	24.00	4.51	26.653	30.00
	5720 (U-NII-2C)	15.450	16.060	15.760	15.700	21.879	23.10	4.51	26.389	29.10
	5720 (U-NII-3)	10.260	11.030	10.810	10.570	16.808	30.00	4.62	21.428	36.00
	5745	21.960	22.200	22.250	22.480	28.358	30.00	4.62	32.978	36.00
	5785	22.040	22.270	21.880	22.020	28.186	30.00	4.62	32.806	36.00
	5825	21.750	22.110	21.910	22.450	28.194	30.00	4.62	32.814	36.00
802.11be (40 MHz) (DL_40_Full (RU484)_MCS0)	5190	21.010	21.410	21.120	20.960	27.307	30.00	4.38	31.687	36.00
	5230	20.130	21.350	21.380	21.170	27.214	30.00	4.38	31.594	36.00
	5270	16.610	17.670	17.170	16.760	23.250	24.00	4.38	27.630	30.00
	5310	16.670	17.130	16.680	16.400	22.906	24.00	4.38	27.286	30.00
	5510	16.530	16.950	17.120	16.820	23.038	24.00	4.51	27.548	30.00
	5550	16.510	17.120	16.410	17.100	22.975	24.00	4.51	27.485	30.00
	5670	16.890	17.650	16.910	16.590	23.206	24.00	4.51	27.716	30.00
	5710 (U-NII-2C)	16.740	17.020	17.110	16.600	23.050	24.00	4.51	27.560	30.00
	5710 (U-NII-3)	6.520	8.100	7.250	7.920	13.669	30.00	4.62	18.289	36.00
	5755	20.590	21.040	20.890	20.850	27.023	30.00	4.62	31.643	36.00
802.11be (80 MHz) (DL_80_Full (RU996)_MCS0)	5210	20.070	20.880	20.910	20.940	26.893	30.00	4.38	31.273	36.00
	5290	15.460	16.050	15.790	15.960	21.999	24.00	4.38	26.379	30.00
	5530	15.490	16.270	15.650	16.020	22.047	24.00	4.51	26.557	30.00
	5610	14.920	15.600	15.650	15.800	21.684	24.00	4.51	26.194	30.00
	5690 (U-NII-2C)	15.890	16.430	16.430	15.820	22.331	24.00	4.51	26.841	30.00
	5690 (U-NII-3)	2.450	3.440	3.370	2.740	9.199	30.00	4.62	13.819	36.00
	5775	20.150	20.700	19.820	20.570	26.502	30.00	4.62	31.122	36.00

Modulation	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)						Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total	Limit			
802.11be (160 MHz) (DL_160_Full (RU996x 2)_MCS0)	5250 (UNII-1)	14.260	14.840	14.660	14.440	20.687	30.00	4.38	25.067	36.00
	5250 (UNII-2A)	14.590	15.570	14.990	15.230	21.241	24.00	4.38	25.621	30.00
	5570	14.850	15.860	14.990	15.030	21.333	24.00	4.51	25.843	30.00







Note: For straddle channels, the total power = conducted output power + duty factor, and the duty factor refer to section 2.3.

For beamforming function:**<4TX, NSS 1>**


Modulation	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)						Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total	Limit			
802.11be (20 MHz)	5180	22.090	22.470	21.820	22.220	28.177	30.00	5.58	33.757	36.00
	5220	22.290	23.130	22.400	22.350	28.577	30.00	5.58	34.157	36.00
	5240	21.780	22.570	21.600	21.580	27.923	30.00	5.58	33.503	36.00
	5260	17.540	17.870	17.470	17.580	23.638	24.00	5.58	29.218	30.00
	5300	17.470	17.540	17.350	17.590	23.509	24.00	5.58	29.089	30.00
	5320	18.300	18.080	17.380	17.520	23.857	24.00	5.58	29.437	30.00
	5500	17.140	17.210	16.940	17.040	23.104	24.00	5.43	28.534	30.00
	5580	17.370	17.020	16.790	17.340	23.157	24.00	5.43	28.587	30.00
	5700	17.520	17.220	17.150	17.160	23.286	24.00	5.43	28.716	30.00
	5720 (U-NII-2C)	14.270	15.840	15.200	15.480	21.256	23.13	5.43	26.686	29.13
	5720 (U-NII-3)	12.450	7.700	10.560	10.020	16.522	30.00	5.28	21.802	36.00
	5745	23.180	22.960	23.140	23.260	29.157	30.00	5.28	34.437	36.00
	5785	23.030	22.700	22.880	23.150	28.964	30.00	5.28	34.244	36.00
	5825	22.490	22.470	22.760	23.020	28.711	30.00	5.28	33.991	36.00
802.11be (40 MHz)	5190	22.560	22.990	22.280	22.510	28.613	30.00	5.58	34.193	36.00
	5230	23.330	24.360	23.510	23.440	29.701	30.00	5.58	35.281	36.00
	5270	17.840	18.200	17.570	17.770	23.872	24.00	5.58	29.452	30.00
	5310	17.600	17.780	17.300	17.790	23.643	24.00	5.58	29.223	30.00
	5510	17.340	16.940	16.930	17.250	23.139	24.00	5.43	28.569	30.00
	5550	17.270	16.970	16.490	17.220	23.019	24.00	5.43	28.449	30.00
	5670	17.880	17.470	17.540	17.410	23.599	24.00	5.43	29.029	30.00
	5710 (U-NII-2C)	17.470	17.550	16.660	17.320	23.284	24.00	5.43	28.714	30.00
	5710 (U-NII-3)	9.540	2.480	10.120	5.950	13.976	30.00	5.28	19.256	36.00
	5755	23.300	23.070	22.890	23.310	29.167	30.00	5.28	34.447	36.00
	5795	23.320	22.880	23.190	23.280	29.191	30.00	5.28	34.471	36.00
802.11be (80 MHz)	5210	22.290	22.850	22.190	22.360	28.451	30.00	5.58	34.031	36.00
	5290	17.960	17.940	17.610	18.050	23.914	24.00	5.58	29.494	30.00
	5530	17.210	17.000	16.790	17.150	23.061	24.00	5.43	28.491	30.00
	5610	17.400	17.190	16.870	17.210	23.192	24.00	5.43	28.622	30.00
	5690 (U-NII-2C)	17.680	16.920	17.510	17.270	23.375	24.00	5.43	28.805	30.00
	5690 (U-NII-3)	5.170	6.640	0.220	2.910	10.377	30.00	5.28	15.657	36.00
	5775	22.120	21.820	21.940	22.200	28.043	30.00	5.28	33.323	36.00

Modulation	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)						Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant. 1	Ant. 2	Ant. 3	Ant. 4	Total	Limit			
802.11be (160 MHz)	5250 (UNII-1)	16.290	17.260	15.980	17.360	22.784	30.00	5.58	28.364	36.00
	5250 (UNII-2A)	17.590	18.400	17.380	16.530	23.546	24.00	5.58	29.126	30.00
	5570	17.600	17.180	17.050	17.440	23.343	24.00	5.43	28.773	30.00


Note: For straddle channels, the total power = conducted output power + duty factor, and the duty factor refer to section 2.3.

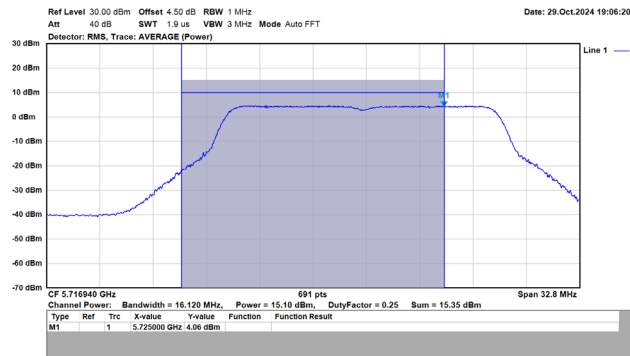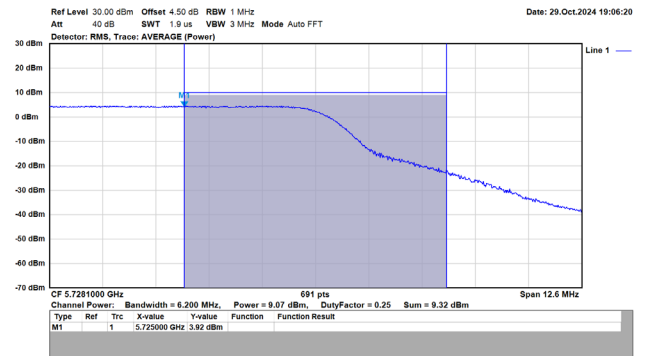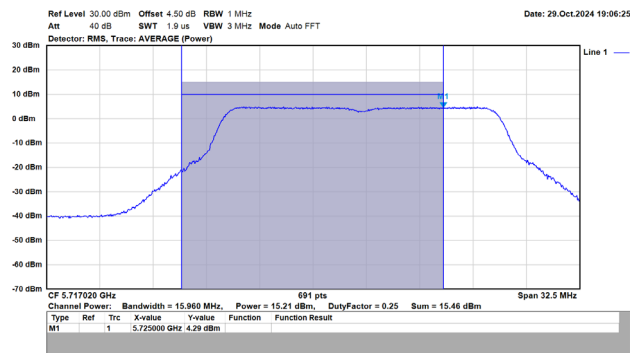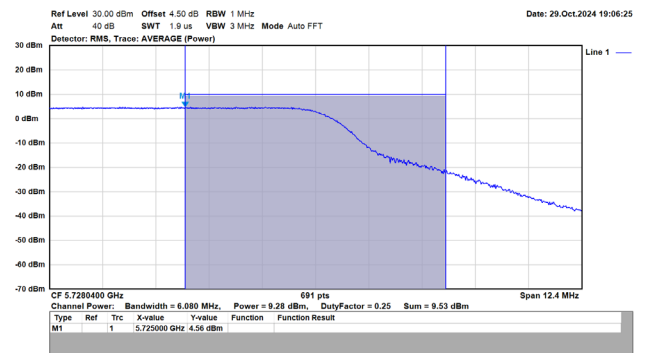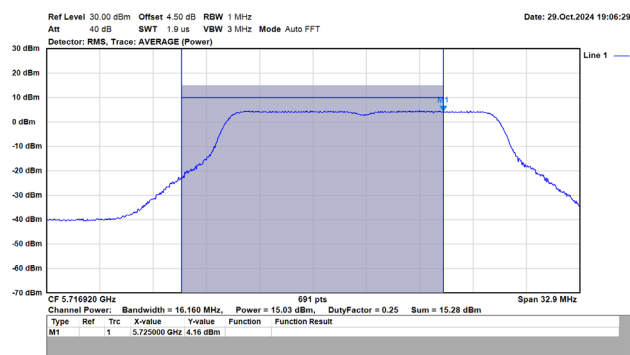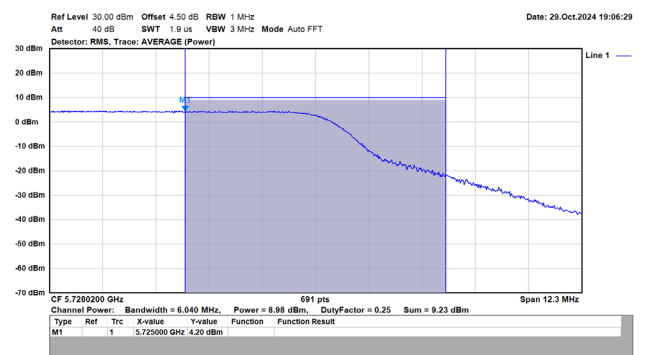For Straddle Channels:**For non-beamforming function:****<4TX, NSS 1, FRU mode>****802.11a/6M/5720MHz/Ch144/Ant.1 (UNII-2C)****802.11a/6M/5720MHz/Ch144/Ant.1 (UNII-3)****802.11a/6M/5720MHz/Ch144/Ant.2 (UNII-2C)****802.11a/6M/5720MHz/Ch144/Ant.2 (UNII-3)****802.11a/6M/5720MHz/Ch144/Ant.3 (UNII-2C)****802.11a/6M/5720MHz/Ch144/Ant.3 (UNII-3)**


802.11a/6M/5720MHz/Ch144/Ant.4 (UNII-2C)

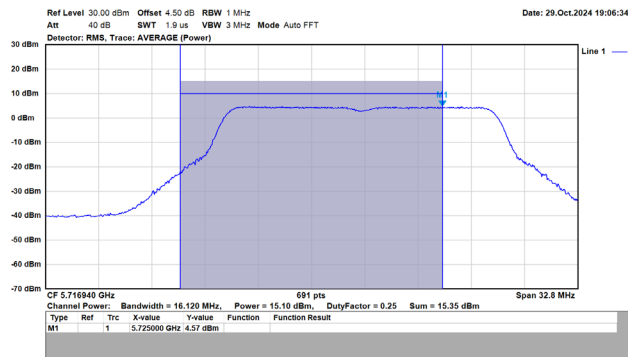


802.11a/6M/5720MHz/Ch144/Ant.4 (UNII-3)

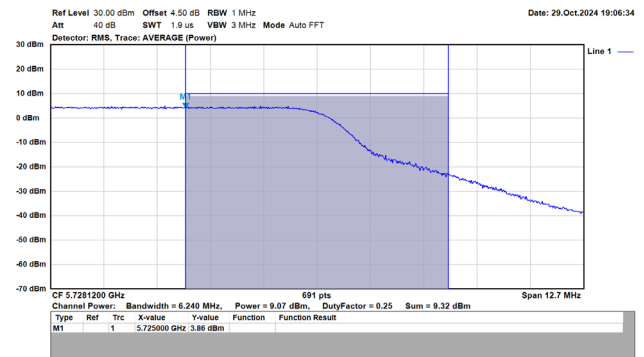


802.11be/20MHz/MCS0/5720MHz/Ch144/Ant.1 (UNII-2C)

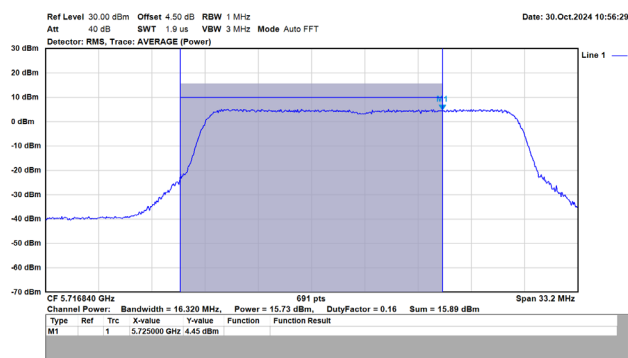

802.11be/20MHz/MCS0/5720MHz/Ch144/Ant.1 (UNII-3)

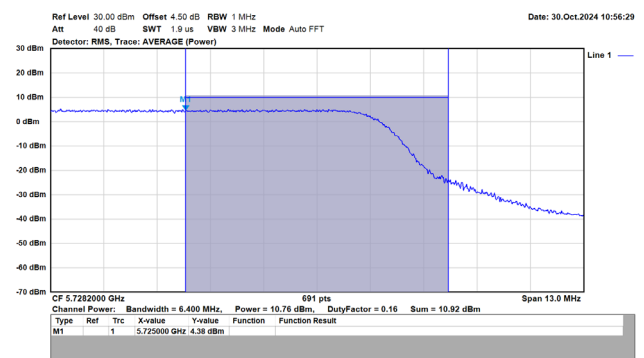

802.11be/20MHz/MCS0/5720MHz/Ch144/Ant.2 (UNII-2C)

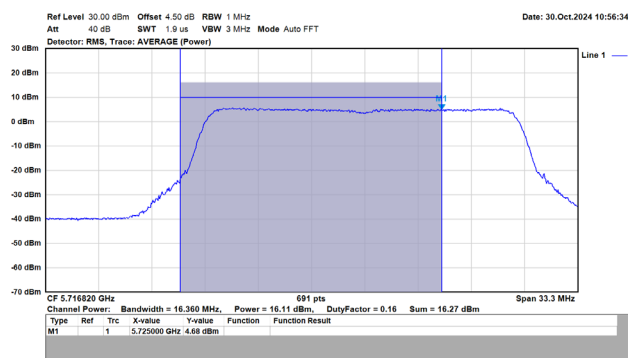

802.11be/20MHz/MCS0/5720MHz/Ch144/Ant.2 (UNII-3)

