Testing Laboratory 3787

RADIO TEST REPORT

FCC ID	:	NKR-SWA20
Equipment	:	Wireless 2.4GHz Audio module
Brand Name	:	Wistron NeWeb Corporation
Model Name	:	SWA20
Applicant	:	Wistron NeWeb Corporation 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308 Taiwan
Manufacturer	:	Wistron NeWeb Corporation 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308 Taiwan
Standard	:	47 CFR FCC Part 15.247

The product was received on Mar. 28, 2023, and testing was started from Apr. 11, 2023 and completed on May 15, 2023. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)

Table of Contents

History of this test report **3**

Summary of Test Result **4**

1 General Description **5**

1.1 Information 5
1.2 Applicable Standards 6
1.3 Testing Location Information 6
1.4 Measurement Uncertainty 7

2 Test Configuration of EUT **8**

2.1 Test Channel Mode 8
2.2 The Worst Case Measurement Configuration 9
2.3 EUT Operation during Test 10
2.4 Accessories 10
2.5 Support Equipment 10
2.6 Test Setup Diagram 11

3 Transmitter Test Result **13**

3.1 AC Power-line Conducted Emissions 13
3.2 DTS Bandwidth 15
3.3 Maximum Conducted Output Power 16
3.4 Power Spectral Density 19
3.5 Emissions in Non-restricted Frequency Bands 21
3.6 Emissions in Restricted Frequency Bands 22

4 Test Equipment and Calibration Data **26**

Appendix A. Test Results of AC Power-line Conducted Emissions

Appendix B. Test Results of DTS Bandwidth

Appendix C. Test Results of Maximum Conducted Output Power

Appendix D. Test Results of Power Spectral Density

Appendix E. Test Results of Emissions in Non-restricted Frequency Bands

Appendix F. Test Results of Emissions in Restricted Frequency Bands

Appendix G. Test Photos

Photographs of EUT v01

History of this test report

Report No.	Version	Description	Issued Date
FR332828	01	Initial issue of report	May 12, 2023
FR332828	02	Revising Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	May 16, 2023

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen
Report Producer: Cathy Chiu

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Data Rate (Mbps)	TX/RX Bandwidth (MHz)	Operating Frequency (MHz)	Channel Spacing (MHz)	Channel Number
2400-2483.5	6	4	2406.35-2476.35	2	1-36 [36]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	pi/4-shifted DQPSK	4	1TX

Note:
- Modulation: pi/4-shifted DQPSK.

1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	WNC	SWA20	PCB Antenna	N/A	3.9
2	2	WNC	SWA20	PCB Antenna	N/A	3.5

Note: The above information was declared by manufacturer.

For 1TX, 1RX:

The EUT supports the antenna with TX and RX diversity functions.
Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.
The Port 1 generated the worst case, so it was selected to test and record in the report.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
pi/4-shifted DQPSK	1	0	n/a (DC>=0.98)	n/a (DC>=0.98)

Note:
- DC is Duty Cycle.
- DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From host system			
Beamforming Function	☐	With beamforming	☒	Without beamforming
Function	☐	Point-to-multipoint	☒	Point-to-point
Test Software Version	MACHUI-localhost:8377			

Note: The above information was declared by manufacturer.

1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15.247
- ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- FCC KDB 558074 D01 v05r02
- FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab.：Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted (Other test items)	TH01-CB	Mason Chan	22.4-23.1 / 56-67	Apr. 13, 2023
RF Conducted (Emissions in Non-restricted Frequency Bands)	TH01-CB	Mason Chan	23.1~24 / 59~63	May 15, 2023
Radiated (Below 1GHz)	03CH04-CB	Alex Kuo	22.3~24 / 58~61	Apr. 27, 2023
Radiated (Above 1GHz)	03CH02-CB	Alex Kuo	22.6~23.2 / 59~63	Apr. 11, 2023~ Apr. 17, 2023
	03CH06-CB	Alex Kuo	22.2~23.3 / 58~62	Apr. 11, 2023~ Apr. 17, 2023
AC Conduction	CO01-CB	Ryan Huang	20~21 / 52~53	Apr. 21, 2023

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	5.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.7 dB	Confidence levels of 95%
Conducted Emission	3.2 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.2 dB	Confidence levels of 95%
Bandwidth Measurement	2.0 %	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
pi/4-shifted DQPSK_1TX	-
2406.35MHz	0x0D
2440.35MHz	0x0D
2476.35MHz	0x0D

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
After evaluating, the worst case was found at Z axis from Emissions in Restricted Frequency Bands above 1GHz, So the measurement will follow this same test configuration.	
1	EUT in Z-axis
Operating Mode > 1GHz	CTX
After evaluating, the worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.	
1	EUT in Z-axis

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

N/A

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	**Equipment**	**Brand Name**	**Model Name**	**FCC ID**
A	Fixture	WNC	48SWA524	N/A
B	NB	DELL	E6430	N/A
C	Device	Wistron NeWeb Corporation	SWA20	N/A
D	Fixture	WNC	48SWA524	N/A
E	Device NB	DELL	E6430	N/A
F	Earphone	SHYARO CHI	MIC-04	N/A
G	Mouse	Logitech	M-U0026	N/A

For Radiated:

Support Equipment				
No.	**Equipment**	**Brand Name**	**Model Name**	**FCC ID**
A	Fixture	WNC	48SWA524	N/A
B	NB	Lenovo	L440	N/A

For RF Conducted:

Support Equipment				
No.	**Equipment**	**Brand Name**	**Model Name**	**FCC ID**
A	NB	DELL	E4300	N/A
B	Fixture	WNC	48SWA524	N/A

2.6 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test

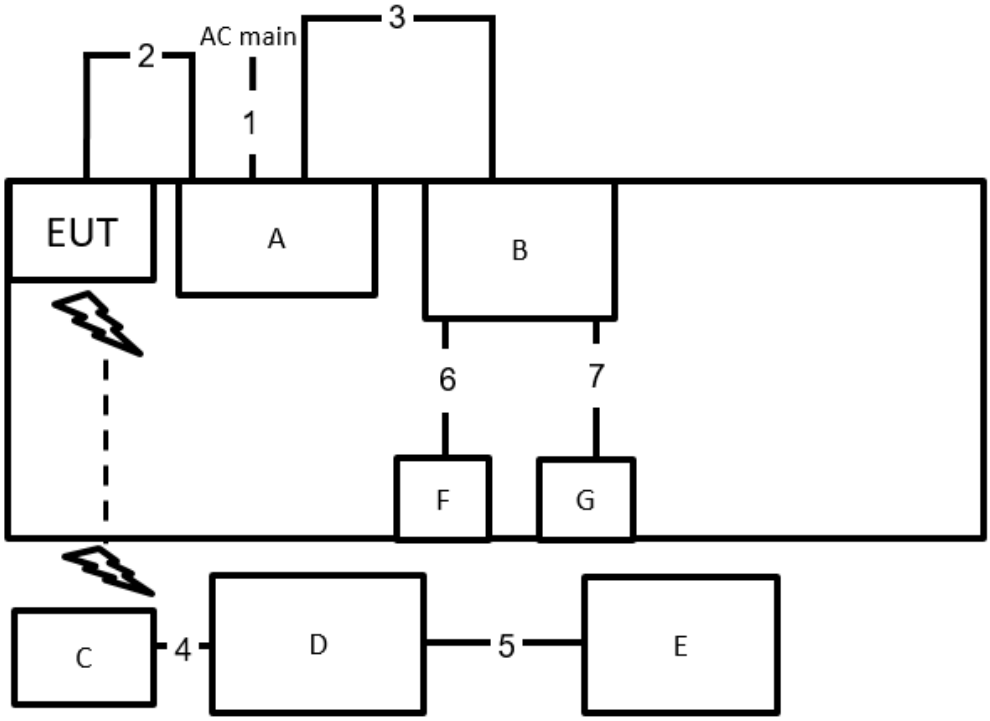

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	Fixture cable	No	0.09m
3	Micro USB cable	Yes	0.75m
4	Fixture cable	No	0.09m
5	Micro USB cable	Yes	0.75m
6	Audio cable	No	1.5m
7	USB cable	Yes	1.5m

Test Setup Diagram - Radiated Test

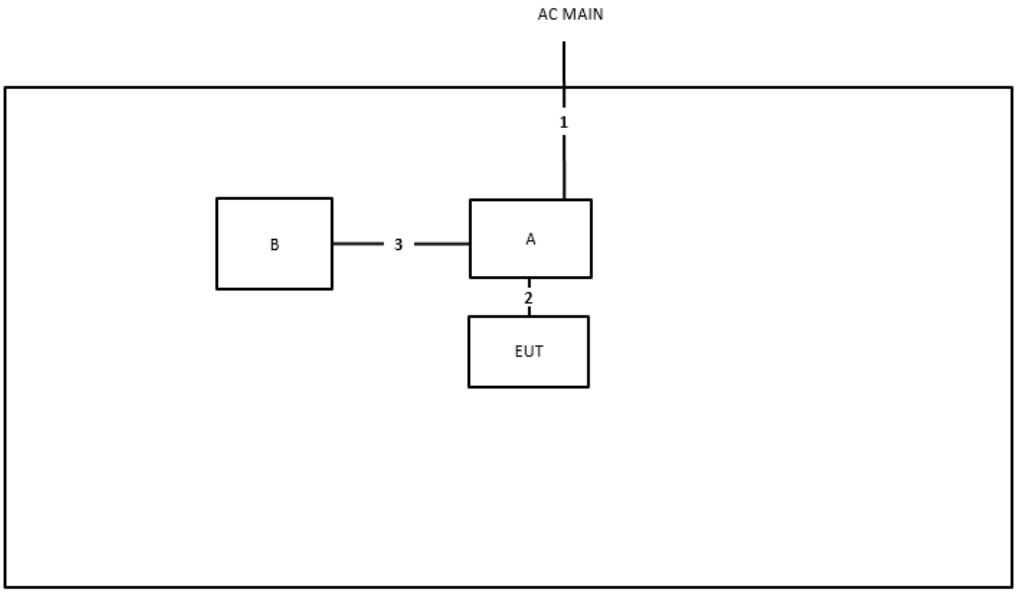

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	Fixture cable	No	0.09m
3	Micro USB cable	Yes	0.75m

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	**Quasi-Peak**	**Average**
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

AC Power-line Conducted Emissions

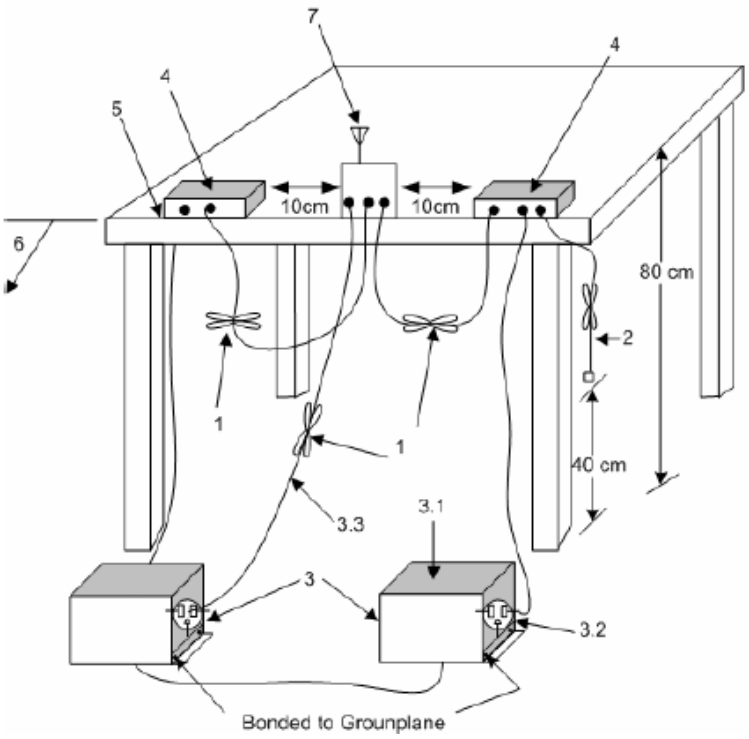

1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.
2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN may be placed on top of, or immediately beneath, reference ground plane.
3.1—All other equipment powered from additional LISN(s).
3.2—A multiple-outlet strip may be used for multiple power cords of non-EUT equipment.
3.3—LISN at least 80 cm from nearest part of EUT chassis.
4—Non-EUT components of EUT system being tested.
5—Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop.
6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.
7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level

b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
▪ 6 dB bandwidth ≥ 500 kHz.

3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
	☒ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
	☐ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
	☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

Emission Bandwidth
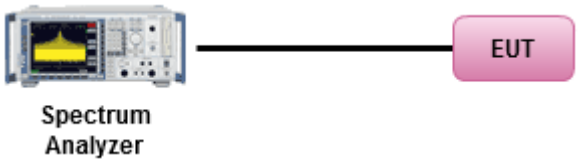

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit		
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)	
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 – (G_{TX} – 6)$ dBm	
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 – (G_{TX} – 6)/3$ dBm	
	▪ Smart antenna system (SAS):	
		- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 – (G_{TX} – 6)/3$ dBm
		- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 – (G_{TX} – 6)/3$ dBm
		- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 – (G_{TX} – 6)/3 + 8$dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, **G_{TX}** = the maximum transmitting antenna directional gain in dBi.		

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
▪ Maximum Peak Conducted Output Power	
	☐ Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
	☐ Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
▪ Maximum Conducted Output Power	
	[duty cycle ≥ 98% or external video / power trigger]
	☐ Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
	☐ Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
	duty cycle < 98% and average over on/off periods with duty factor
	☐ Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
	☐ Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
	☐ Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
	☐ Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
	Measurement using a power meter (PM)
	☐ Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
	☒ Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
▪ For conducted measurement.	
	▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \ldots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

Maximum Conducted Output Power (Spectrum Analyzer)

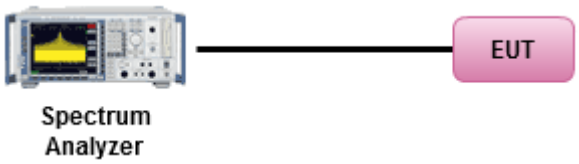

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method		
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).		
	☒ Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.	
▪ For conducted measurement.		
	▪ If The EUT supports multiple transmit chains using options given below:	
		☐ Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
		☐ Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
		☐ Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

Power Spectral Density

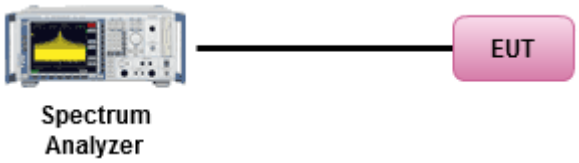

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	**Limit (dBc)**
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
▪ Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

Emissions in Non-restricted Frequency Bands

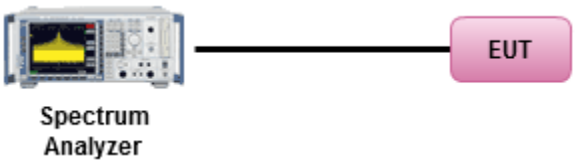

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	**Field Strength (uV/m)**	**Field Strength (dBuV/m)**	**Measure Distance (m)**
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method			
▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].			
▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.			
▪ For the transmitter unwanted emissions shall be measured using following options below:			
	▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.		
		☐	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle ≥98%).
		☐	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
		☒	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW≥1/T).
		☐	Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.
		☐	Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
		☒	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
▪ For the transmitter band-edge emissions shall be measured using following options below:			
	▪ Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.		
	▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.		
	▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).		
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB		
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.		

3.6.4 Test Setup

Radiated - Emissions in Restricted Frequency Bands

9kHz ~30MHz

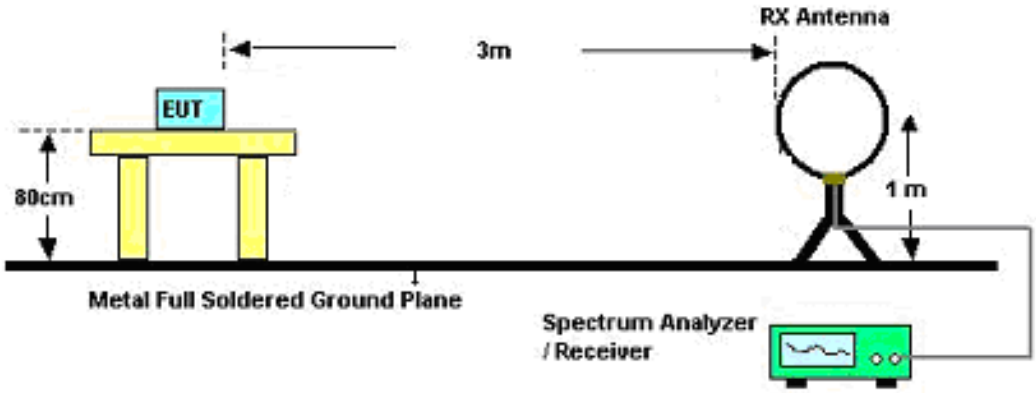

30MHz~1GHz

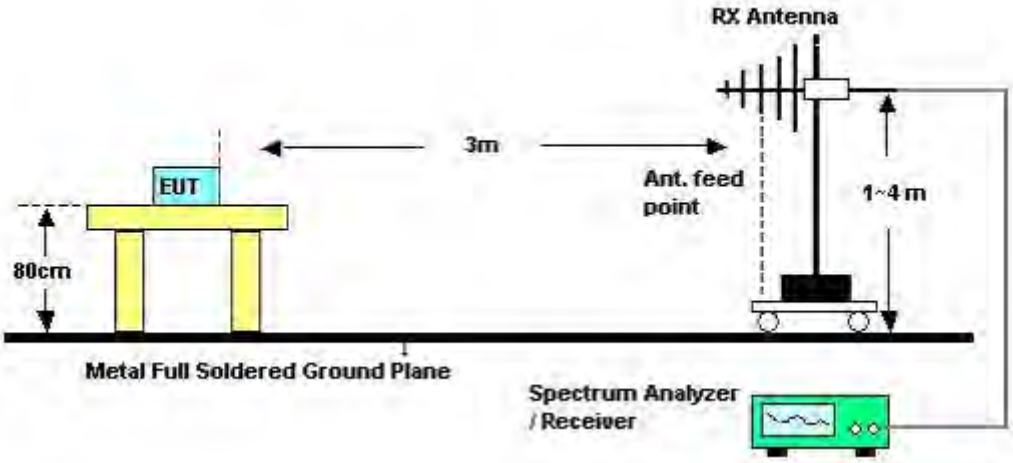

Above 1GHz

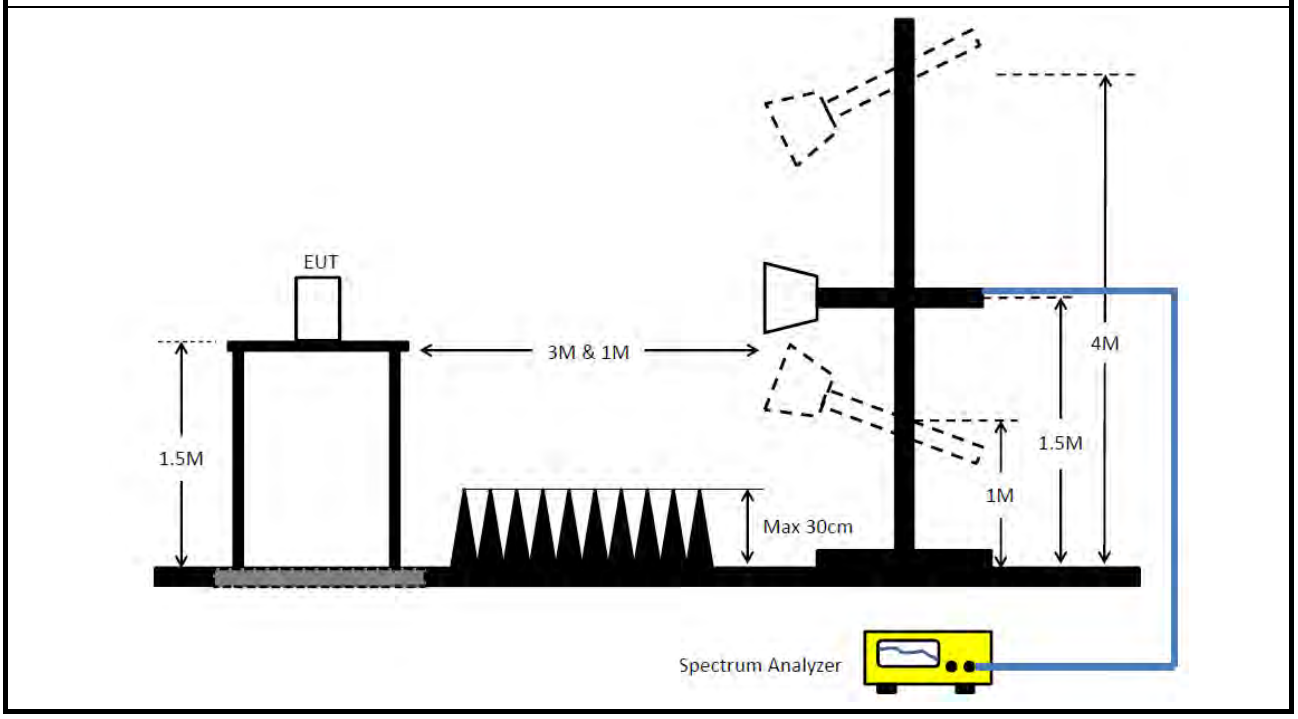

3.6.5 Measurement Results Calculation

The measured Level is calculated using:
Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.
The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F

4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Feb. 20, 2023	Feb. 19, 2024	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 16, 2023	Feb. 15, 2024	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Dec. 20, 2022	Dec. 19, 2023	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Feb. 09, 2023	Feb. 08, 2024	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	Oct. 18, 2022	Oct. 17, 2023	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	May 14, 2022	May 13, 2023	Radiation (03CH04-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH04-CB	30 MHz ~ 1 GHz	Aug. 02, 2022	Aug. 01, 2023	Radiation (03CH04-CB)
BILOG ANTENNA with 6 dB attenuator	Schaffner & EMCI	CBL6112B & N-6-06	22021&AT-N0607	30MHz ~ 1GHz	Oct. 08, 2022	Oct. 07, 2023	Radiation (03CH04-CB)
Pre-Amplifier	EMCI	EMC330N	980391	20MHz ~ 3GHz	May 19, 2022	May 18, 2023	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 21, 2023	Mar. 20, 2024	Radiation (03CH04-CB
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	Jun. 17, 2022	Jun. 16, 2023	Radiation (03CH04-CB)
RF Cable-low	Woken	RG402	Low Cable-03+67	30MHz – 1GHz	Oct. 03, 2022	Oct. 02, 2023	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH04-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 25, 2023	Mar. 24, 2024	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 19, 2022	Apr. 18, 2023	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2022	Aug. 21, 2023	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jul. 01, 2022	Jun. 30, 2023	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSU	100015	9kHz~26GHz	Dec. 05, 2022	Dec. 04, 2023	Radiation (03CH02-CB)

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Oct. 03, 2022	Oct. 02, 2023	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Oct. 03, 2022	Oct. 02, 2023	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#6	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Sep. 30, 2022	Sep. 29, 2023	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120 D	BBHA 9120D-1292	1GHz~18GHz	Aug. 09, 2022	Aug. 08, 2023	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2022	Aug. 21, 2023	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	83017A	MY53270064	0.5GHz ~ 26.5GHz	Aug. 02, 2022	Aug. 01, 2023	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSP40	100080	9kHz~40GHz	Dec. 21, 2022	Dec. 20, 2023	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-68	1GHz~18GHz	Oct. 03, 2022	Oct. 02, 2023	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Dec. 21, 2022	Dec. 20, 2023	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#6	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2022	May 26, 2023	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1 GHz –26.5 GHz	Oct. 04, 2022	Oct. 03, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Feb. 22, 2023	Feb. 21, 2024	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Feb. 22, 2023	Feb. 21, 2024	Conducted (TH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.
NCR means Non-Calibration required.

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	253.5k	38.38	61.64	-23.26	Neutral

Mode 1

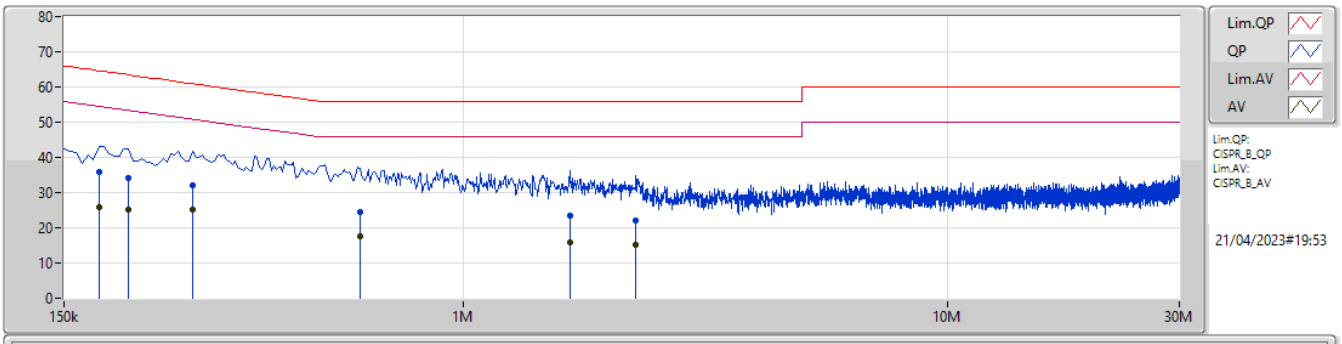

Type	Freq	Level	Limit	Margin	Factor	Condition	Comment	Raw	LISN	CL	AT
	(Hz)	(dBuV)	(dBuV)	(dB)	(dB)			(dBuV)	(dB)	(dB)	(dB)
QP	177k	35.98	64.62	-28.64	9.97	Line	-	26.01	0.06	0.04	9.87
AV	177k	25.97	54.62	-28.65	9.97	Line	-	16.00	0.06	0.04	9.87
QP	204k	34.04	63.44	-29.40	9.96	Line	-	24.08	0.06	0.04	9.86
AV	204k	25.29	53.44	-28.15	9.96	Line	-	15.33	0.06	0.04	9.86
QP	276k	32.09	60.93	-28.84	9.99	Line	-	22.10	0.06	0.05	9.88
AV	276k	25.20	50.93	-25.73	9.99	Line	"Worst"	15.21	0.06	0.05	9.88
QP	613.5k	24.56	56.00	-31.44	10.01	Line	-	14.55	0.06	0.05	9.90
AV	613.5k	17.69	46.00	-28.31	10.01	Line	-	7.68	0.06	0.05	9.90
QP	1.658M	23.60	56.00	-32.40	10.06	Line	-	13.54	0.08	0.08	9.90
AV	1.658M	16.03	46.00	-29.97	10.06	Line	-	5.97	0.08	0.08	9.90
QP	2.27M	22.07	56.00	-33.93	10.09	Line	-	11.98	0.10	0.09	9.90
AV	2.27M	15.04	46.00	-30.96	10.09	Line	-	4.95	0.10	0.09	9.90

Mode 1

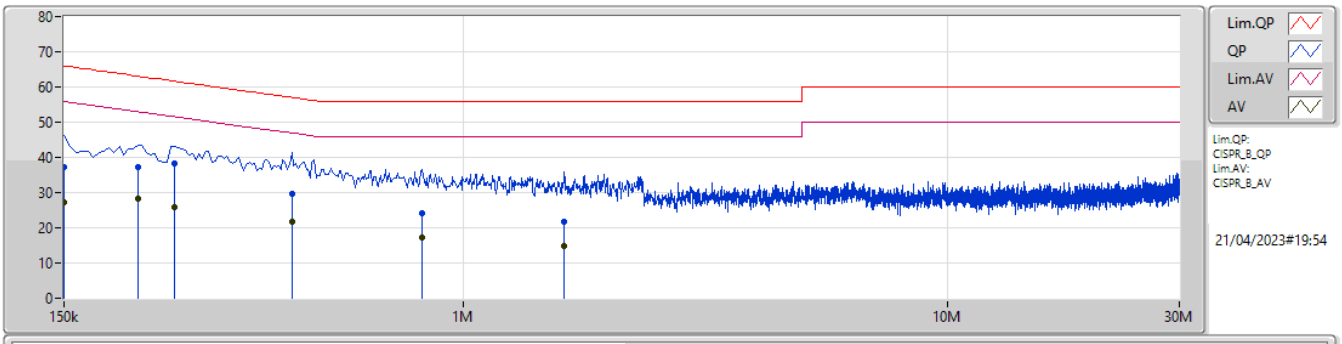

Type	Freq	Level	Limit	Margin	Factor	Condition	Comment	Raw	LISN	CL	AT
	(Hz)	(dBuV)	(dBuV)	(dB)	(dB)			(dBuV)	(dB)	(dB)	(dB)
QP	150k	37.32	66.00	-28.68	9.98	Neutral	-	27.34	0.07	0.04	9.87
AV	150k	27.08	56.00	-28.92	9.98	Neutral	-	17.10	0.07	0.04	9.87
QP	213k	37.27	63.09	-25.82	9.97	Neutral	-	27.30	0.07	0.04	9.86
AV	213k	28.42	53.09	-24.67	9.97	Neutral	-	18.45	0.07	0.04	9.86
QP	253.5k	38.38	61.64	-23.26	9.99	Neutral	"Worst"	28.39	0.07	0.05	9.87
AV	253.5k	25.72	51.64	-25.92	9.99	Neutral	-	15.73	0.07	0.05	9.87
QP	442.5k	29.77	57.01	-27.24	10.03	Neutral	-	19.74	0.07	0.06	9.90
AV	442.5k	21.84	47.01	-25.17	10.03	Neutral	-	11.81	0.07	0.06	9.90
QP	820.5k	24.17	56.00	-31.83	10.02	Neutral	-	14.15	0.08	0.04	9.90
AV	820.5k	17.26	46.00	-28.74	10.02	Neutral	-	7.24	0.08	0.04	9.90
QP	1.617M	21.70	56.00	-34.30	10.06	Neutral	-	11.64	0.09	0.07	9.90
AV	1.617M	14.83	46.00	-31.17	10.06	Neutral	-	4.77	0.09	0.07	9.90

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
pi/4-shifted DQPSK_1TX	3.53M	5.032M	5M03G7D	3.465M	4.919M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
pi/4-shifted DQPSK_1TX	-	-	-	-
2406.35MHz	Pass	500k	3.5M	5.032M
2440.35MHz	Pass	500k	3.465M	5.014M
2476.35MHz	Pass	500k	3.53M	4.919M

Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX **EBW**

2406.35MHz

13/04/2023

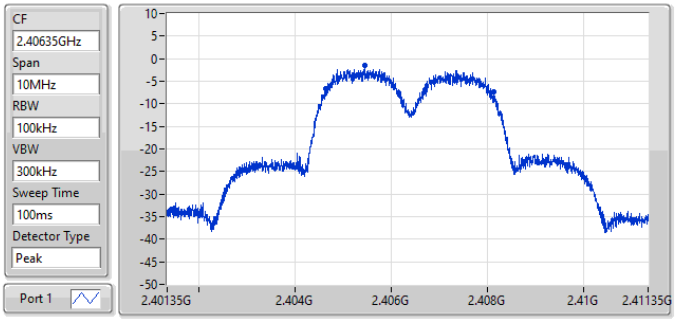

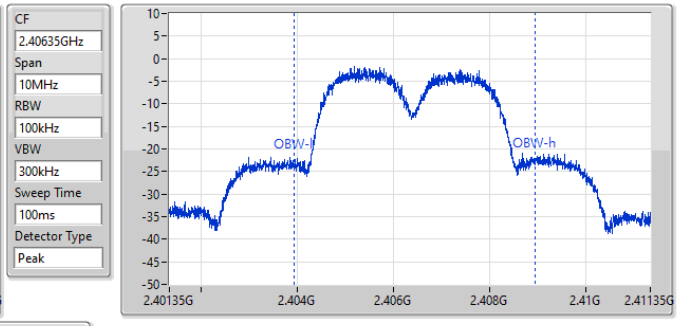

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.5M	2.40464G	2.40814G	5.032M	2.403933G	2.408965G	500k	1

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX **EBW**

2440.35MHz

12/04/2023

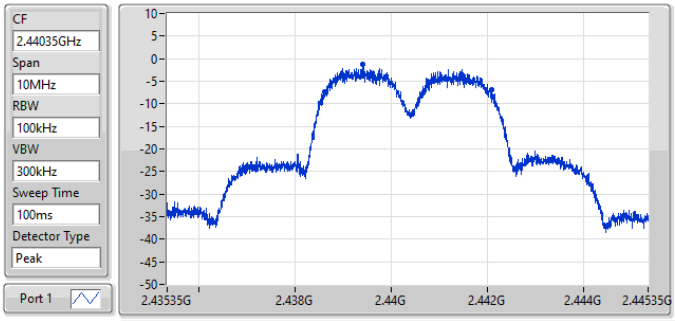

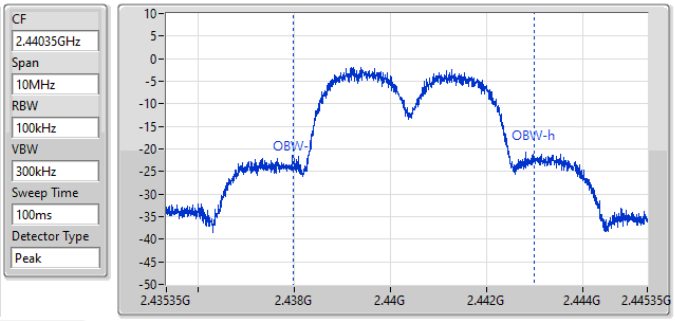

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.465M	2.438625G	2.44209G	5.014M	2.437983G	2.442997G	500k	1

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX **EBW**

2476.35MHz

12/04/2023

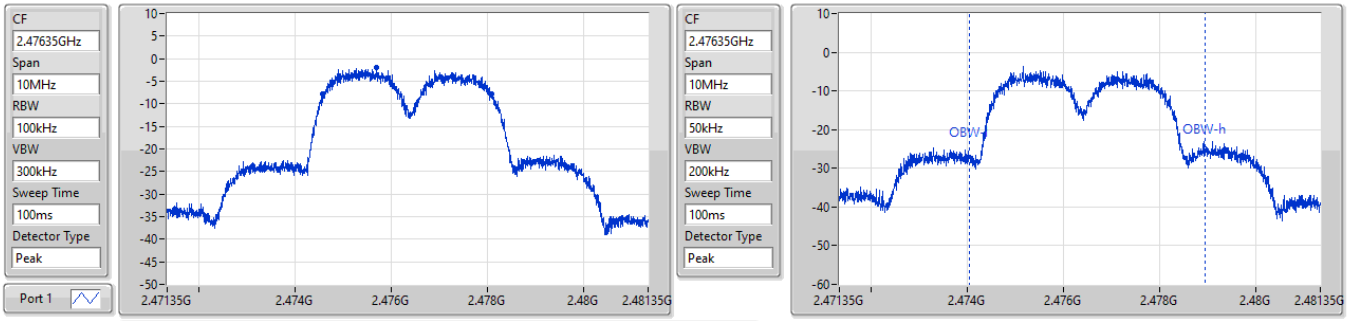

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.53M	2.474575G	2.478105G	4.919M	2.474043G	2.478962G	500k	1

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
pi/4-shifted DQPSK_1TX	3.63	0.00231

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
pi/4-shifted DQPSK_1TX	-	-	-	-	-
2406.35MHz	Pass	3.90	3.36	3.36	30.00
2440.35MHz	Pass	3.90	3.63	3.63	30.00
2476.35MHz	Pass	3.90	3.43	3.43	30.00

DG = Directional Gain; Port X = Port X output power

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
pi/4-shifted DQPSK_1TX	-16.32

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
pi/4-shifted DQPSK_1TX	-	-	-	-	-
2406.35MHz	Pass	3.90	-17.81	-17.81	8.00
2440.35MHz	Pass	3.90	-16.71	-16.71	8.00
2476.35MHz	Pass	3.90	-16.32	-16.32	8.00

DG = Directional Gain; RBW = 3kHz;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX **PSD**

2406.35MHz

13/04/2023

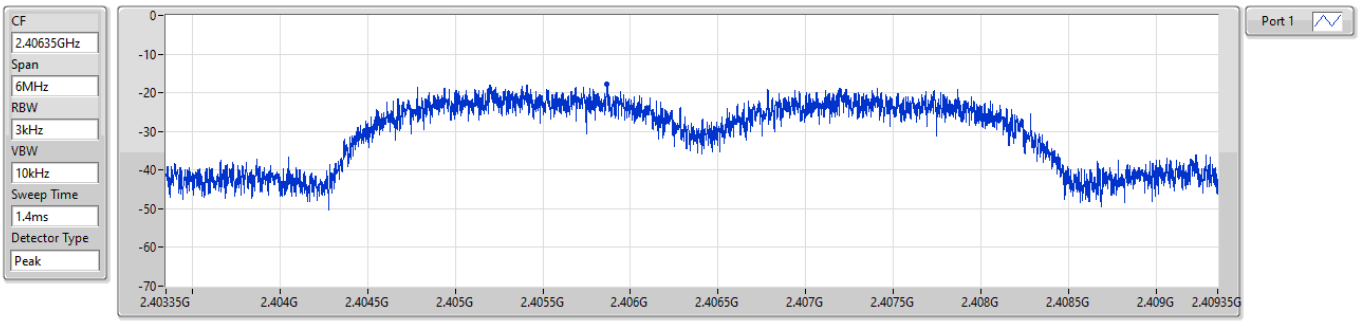

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-17.81	-17.81	-17.81

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX **PSD**

2440.35MHz

12/04/2023

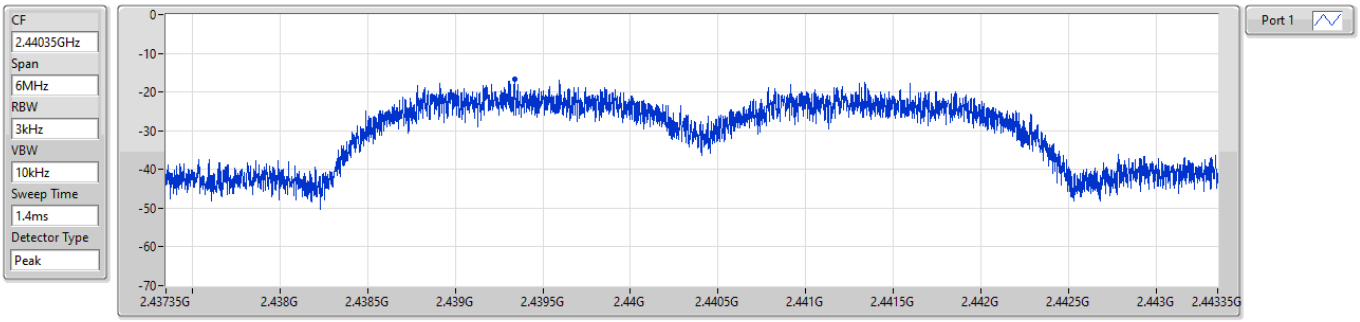

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-16.71	-16.71	-16.71

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX **PSD**

2476.35MHz

12/04/2023

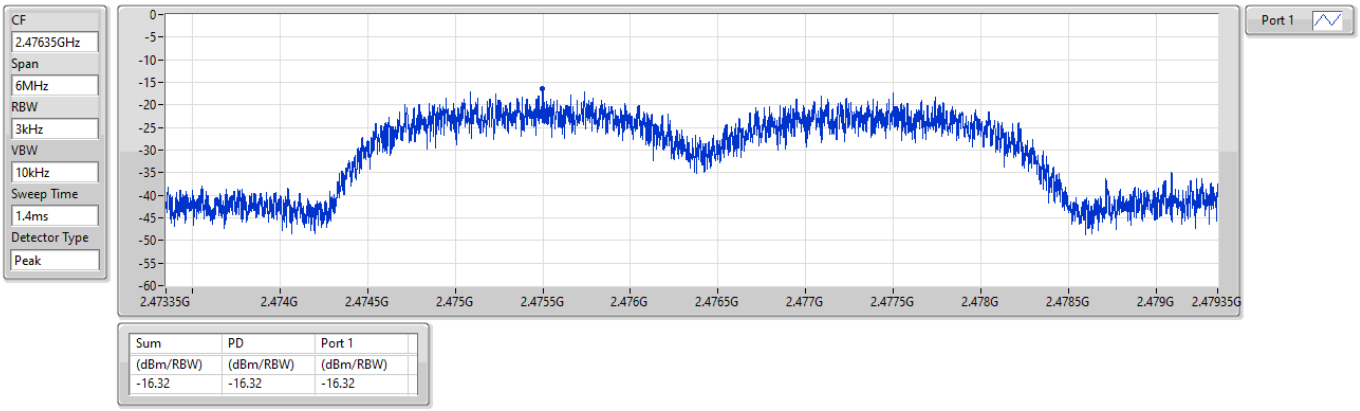

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-16.32	-16.32	-16.32

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
pi/4-shifted DQPSK_1TX	Pass	2.43925G	-1.38	-31.38	48.9M	-42.96	2.39901G	-38.02	2.4G	-39.57	24.90434G	-44.98	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
pi/4-shifted DQPSK_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2406.35MHz	Pass	2.43925G	-1.38	-31.38	48.9M	-42.96	2.39901G	-38.02	2.4G	-39.57	24.90434G	-44.98	1
2440.35MHz	Pass	2.43925G	-1.38	-31.38	48.9M	-45.08	2.3941G	-46.08	2.4G	-48.96	24.28536G	-44.36	1
2476.35MHz	Pass	2.43925G	-1.38	-31.38	41.81M	-45.46	2.39786G	-46.24	2.4G	-48.70	24.46261G	-45.51	1

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX **CSENdB**

2406.35MHz

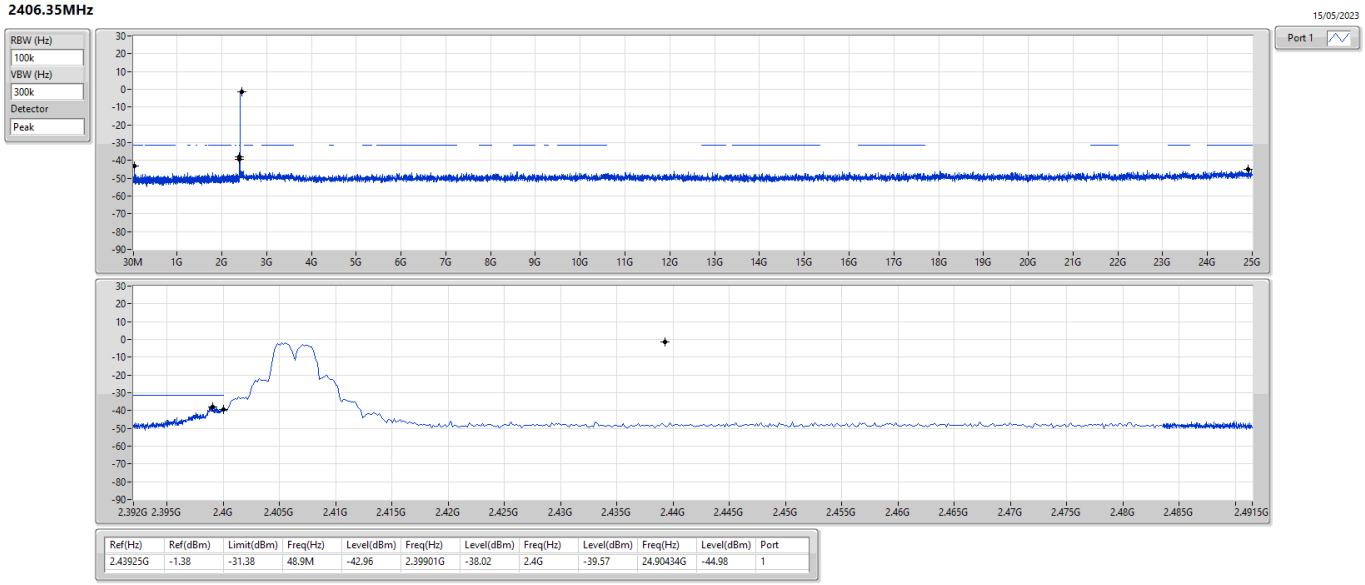

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43925G	-1.38	-31.38	48.9M	-42.96	2.39901G	-38.02	2.4G	-39.57	24.90434G	-44.98	1

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX **CSENdB**

2440.35MHz

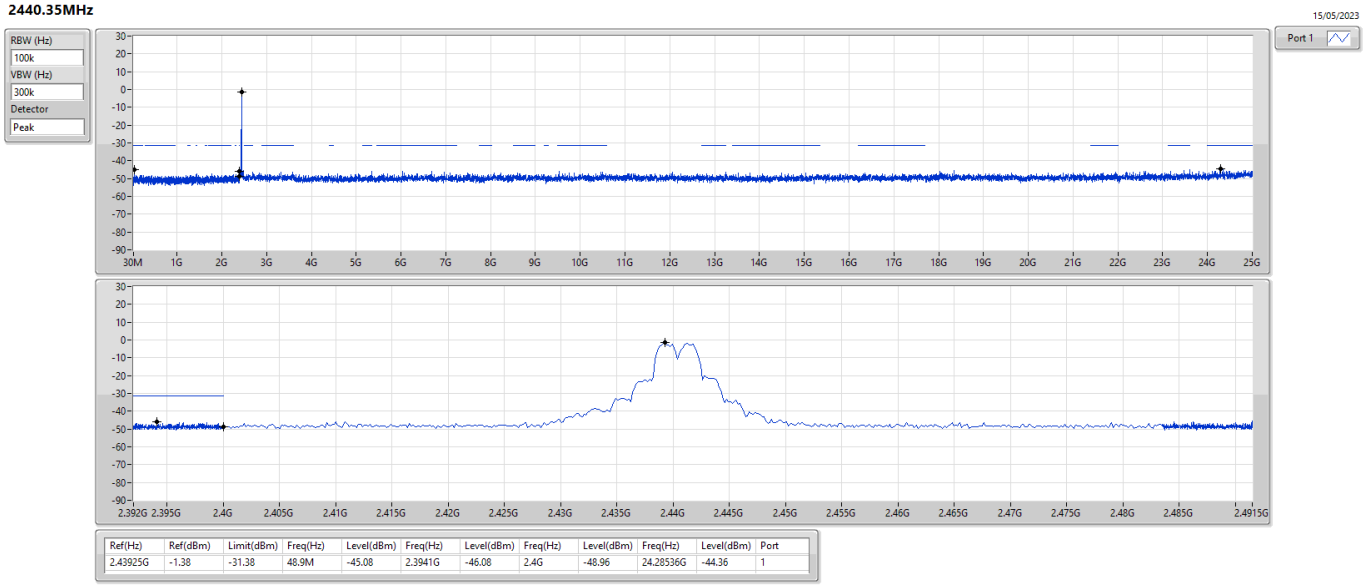

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43925G	-1.38	-31.38	48.9M	-45.08	2.3941G	-46.08	2.4G	-48.96	24.28536G	-44.36	1

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX

CSENdB

2476.35MHz

15/05/2023

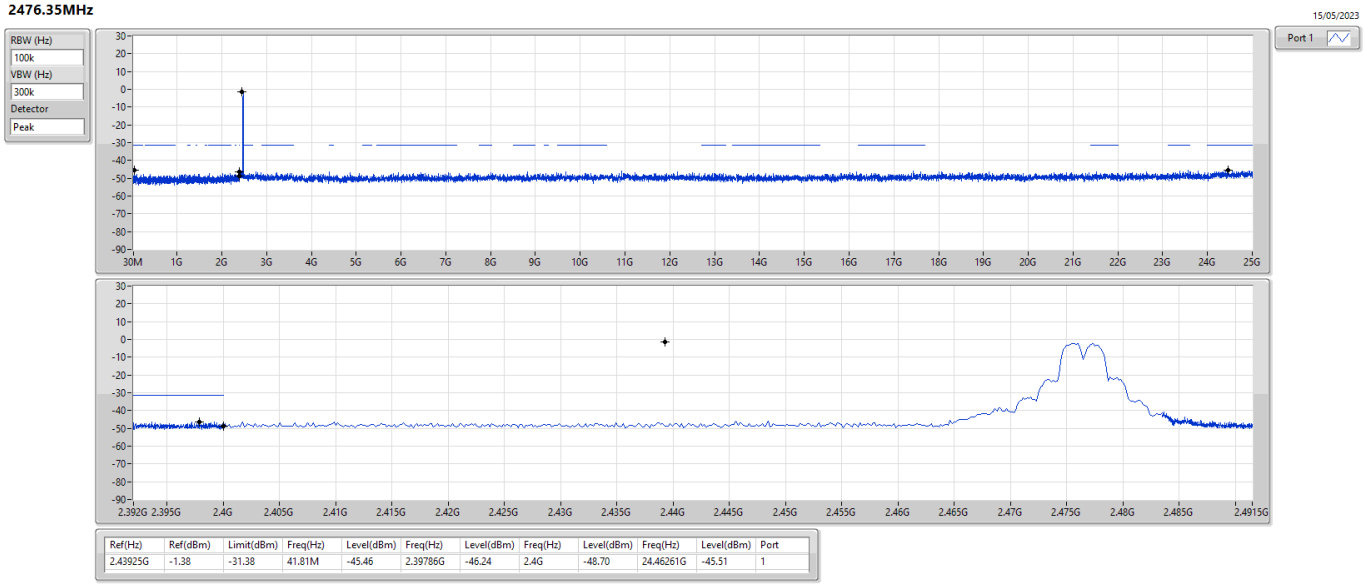

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43925G	-1.38	-31.38	41.81M	-45.46	2.39786G	-46.24	2.4G	-48.70	24.46261G	-45.51	1

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	QP	30M	39.98	40.00	-0.02	Vertical

Mode 1

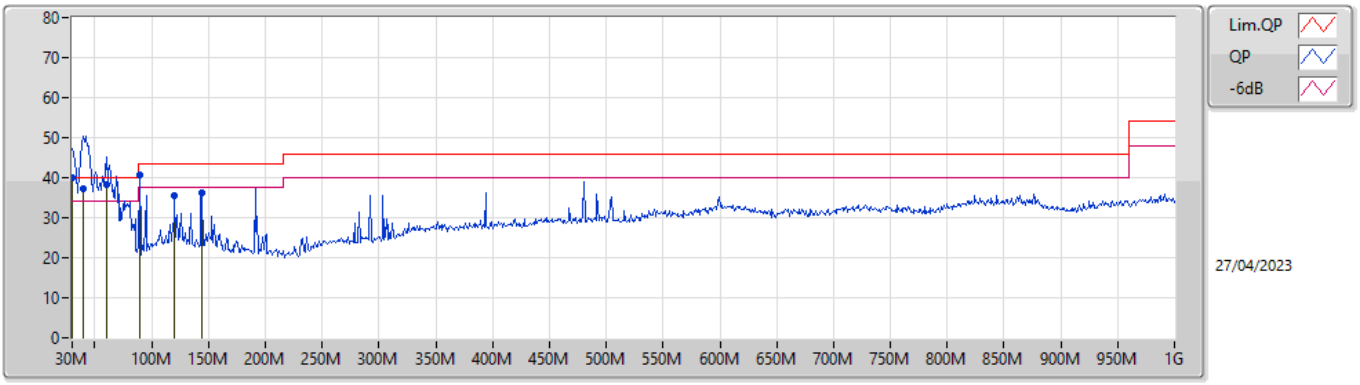

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(m)		(°)	(m)		(dBuV/m)	(dB/m)	(dB)	(dB)
QP	30M	39.98	40.00	-0.02	-19.02	3	Vertical	181	1.00	"Worst"	59.00	24.34	0.63	43.99
QP	39.7M	37.38	40.00	-2.62	-24.32	3	Vertical	81	1.00	-	61.70	19.05	0.71	44.08
QP	60.07M	38.25	40.00	-1.75	-30.25	3	Vertical	324	1.00	-	68.50	12.98	0.87	44.10
PK	89.17M	40.77	43.50	-2.73	-28.95	3	Vertical	121	2.00	-	69.72	14.25	1.04	44.24
PK	120.21M	35.52	43.50	-7.98	-24.71	3	Vertical	120	2.00	-	60.23	18.27	1.20	44.18
PK	144.46M	36.23	43.50	-7.27	-25.89	3	Vertical	111	1.25	-	62.12	16.85	1.31	44.05

Mode 1

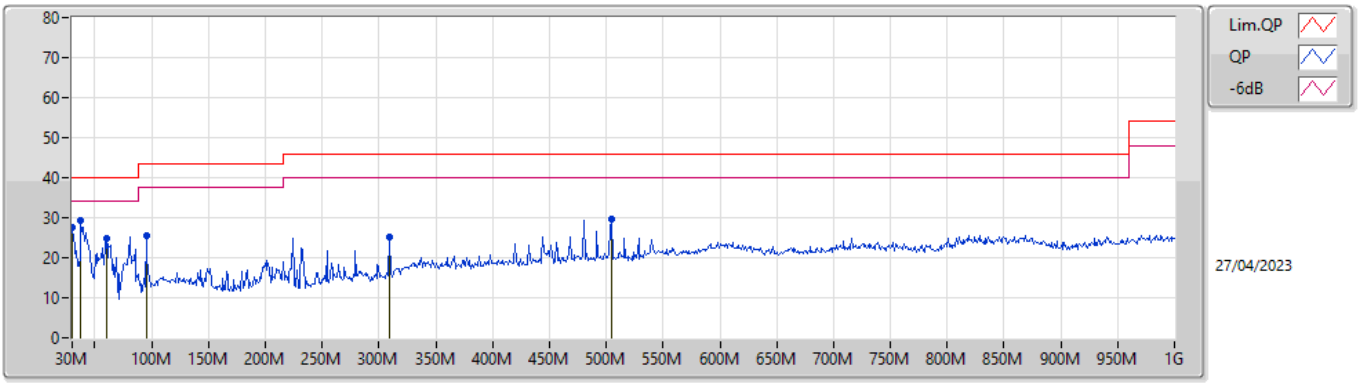

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(m)		(°)	(m)		(dBuV/m)	(dB/m)	(dB)	(dB)
PK	30M	27.67	40.00	-12.33	-19.02	3	Horizontal	263	2.00	-	46.69	24.34	0.63	43.99
PK	37.76M	29.31	40.00	-10.69	-23.14	3	Horizontal	236	1.25	"Worst"	52.45	20.23	0.69	44.06
PK	60.07M	24.86	40.00	-15.14	-30.25	3	Horizontal	283	1.50	-	55.11	12.98	0.87	44.10
PK	94.99M	25.41	43.50	-18.09	-27.47	3	Horizontal	114	2.00	-	52.88	15.70	1.07	44.24
PK	309.36M	25.06	46.00	-20.94	-22.57	3	Horizontal	134	1.25	-	47.63	19.34	1.93	43.84
PK	504.33M	29.66	46.00	-16.34	-17.49	3	Horizontal	44	2.00	-	47.15	23.53	2.40	43.42

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
pi/4-shifted DQPSK_1TX	Pass	AV	2.4835G	53.19	54.00	-0.81	3	Horizontal	118	2.80	-

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX

2406.35MHz_TX

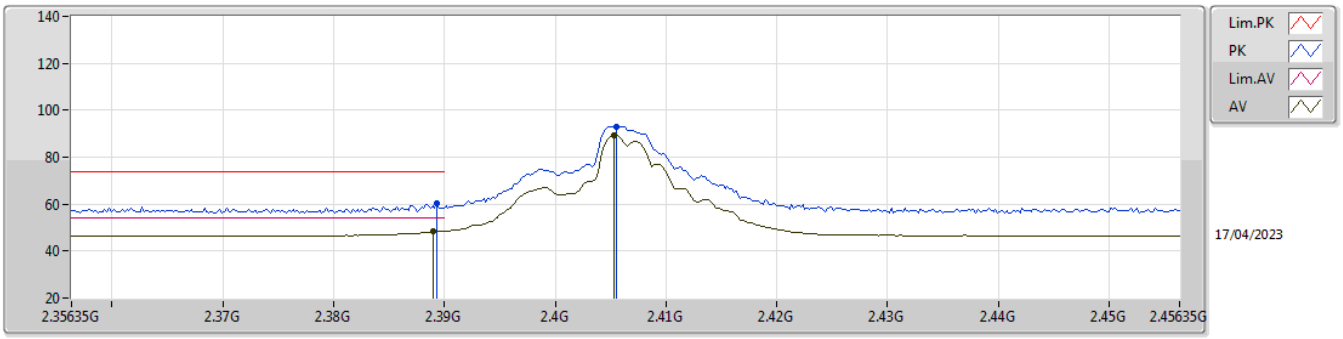

EUT Z_1TX
Setting 0x04
06-H-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	2.38935G	60.43	74.00	-13.57	27.70	3	Vertical	109	2.88	-	27.64	5.09	-
AV	2.38895G	48.20	54.00	-5.80	15.47	3	Vertical	109	2.88	-	27.64	5.09	-
PK	2.40555G	93.09	Inf	-Inf	60.38	3	Vertical	109	2.88	-	27.60	5.11	-
AV	2.40535G	89.31	Inf	-Inf	56.60	3	Vertical	109	2.88	-	27.60	5.11	-

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX

2406.35MHz_TX

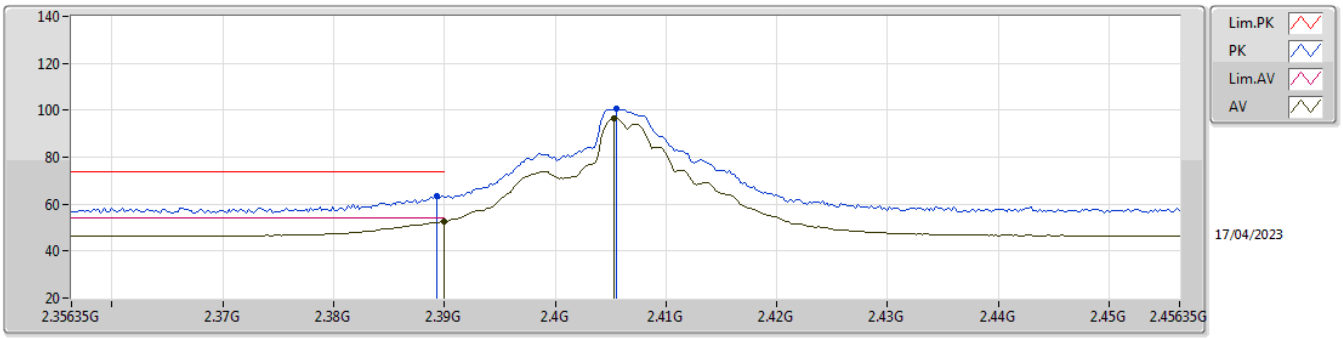

EUT Z_1TX
Setting 0x04
06-H-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	2.38935G	63.43	74.00	-10.57	30.70	3	Horizontal	158	1.55	-	27.64	5.09	-
AV	2.38995G	52.64	54.00	-1.36	19.91	3	Horizontal	158	1.55	-	27.64	5.09	-
PK	2.40555G	100.44	Inf	-Inf	67.73	3	Horizontal	158	1.55	-	27.60	5.11	-
AV	2.40535G	96.58	Inf	-Inf	63.87	3	Horizontal	158	1.55	-	27.60	5.11	-

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX

2406.35MHz_TX

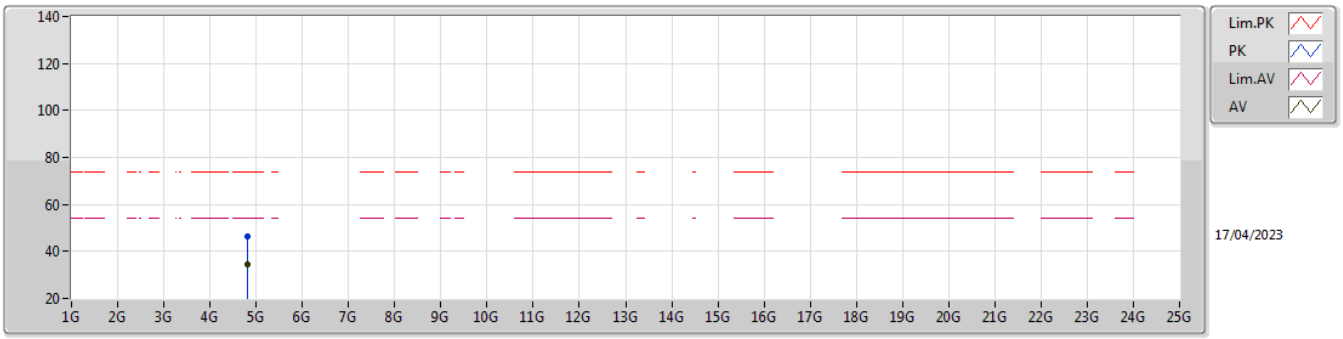

EUT Z_1TX
Setting 0x04
06-H-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	4.8151G	46.34	74.00	-27.66	40.78	3	Vertical	278	1.80	-	31.33	6.76	32.53
AV	4.80802G	34.33	54.00	-19.67	28.79	3	Vertical	278	1.80	-	31.32	6.75	32.53

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX

2406.35MHz_TX

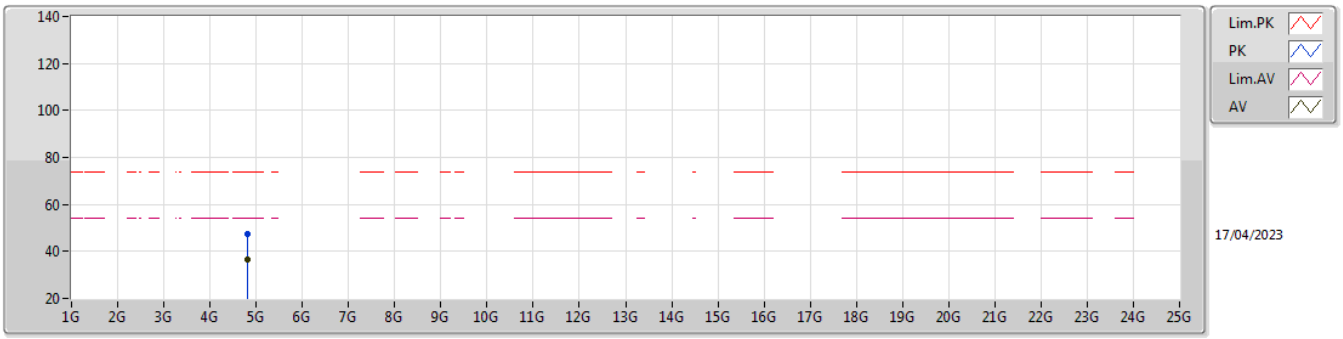

EUT Z_1TX
Setting 0x04
06-H-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	4.81594G	47.29	74.00	-26.71	39.59	3	Horizontal	5	1.00	-	32.90	5.61	30.81
AV	4.80806G	36.70	54.00	-17.30	29.06	3	Horizontal	5	1.00	-	32.85	5.60	30.81

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX

2440.35MHz_TX

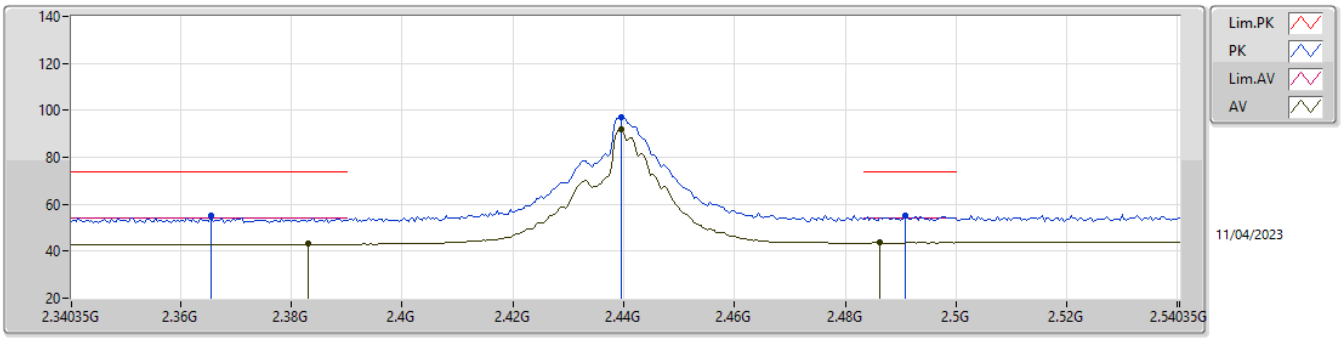

EUT Z_1TX
Setting 0x00
02-F-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	2.36555G	55.15	74.00	-18.85	24.78	3	Vertical	181	2.32	-	27.19	3.18	-
AV	2.38315G	43.53	54.00	-10.47	13.04	3	Vertical	181	2.32	-	27.30	3.19	-
PK	2.43955G	97.20	Inf	-Inf	66.42	3	Vertical	181	2.32	-	27.56	3.22	-
AV	2.43955G	92.08	Inf	-Inf	61.30	3	Vertical	181	2.32	-	27.56	3.22	-
PK	2.49075G	55.14	74.00	-18.86	24.05	3	Vertical	181	2.32	-	27.84	3.25	-
AV	2.48635G	43.84	54.00	-10.16	12.78	3	Vertical	181	2.32	-	27.82	3.24	-

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX

2440.35MHz_TX

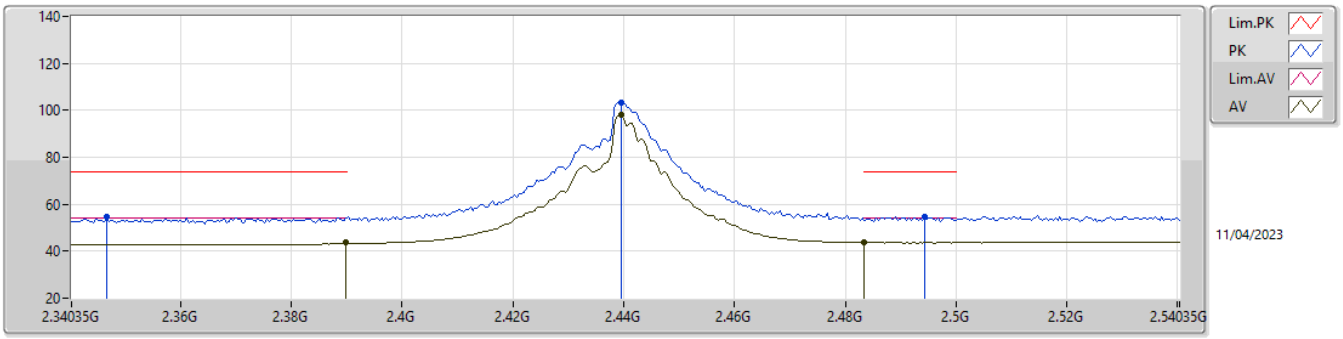

EUT Z_1TX
Setting 0x00
02-F-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	2.34675G	54.65	74.00	-19.35	24.37	3	Horizontal	112	2.91	-	27.11	3.17	-
AV	2.38995G	43.65	54.00	-10.35	13.12	3	Horizontal	112	2.91	-	27.34	3.19	-
PK	2.43955G	103.43	Inf	-Inf	72.65	3	Horizontal	112	2.91	-	27.56	3.22	-
AV	2.43955G	98.34	Inf	-Inf	67.56	3	Horizontal	112	2.91	-	27.56	3.22	-
PK	2.49435G	54.76	74.00	-19.24	23.64	3	Horizontal	112	2.91	-	27.87	3.25	-
AV	2.4835G	43.86	54.00	-10.14	12.82	3	Horizontal	112	2.91	-	27.80	3.24	-

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX

2440.35MHz_TX

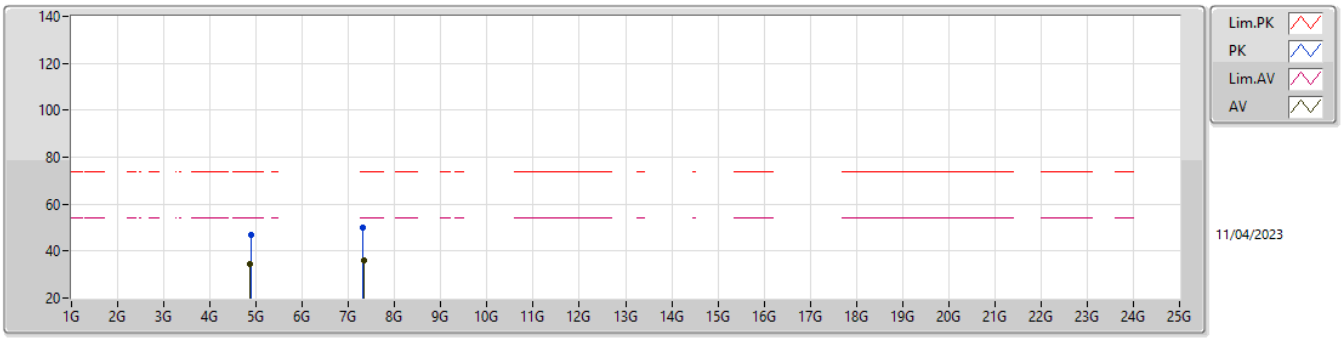

EUT Z_1TX
Setting 0x00
02-F-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	4.8803G	46.67	74.00	-27.33	39.25	3	Vertical	246	1.24	-	32.56	5.64	30.78
AV	4.87604G	34.27	54.00	-19.73	26.86	3	Vertical	246	1.24	-	32.55	5.64	30.78
PK	7.31421G	49.77	74.00	-24.23	38.11	3	Vertical	215	1.56	-	36.74	6.84	31.92
AV	7.32828G	36.26	54.00	-17.74	24.66	3	Vertical	215	1.56	-	36.69	6.84	31.93

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX

2440.35MHz_TX

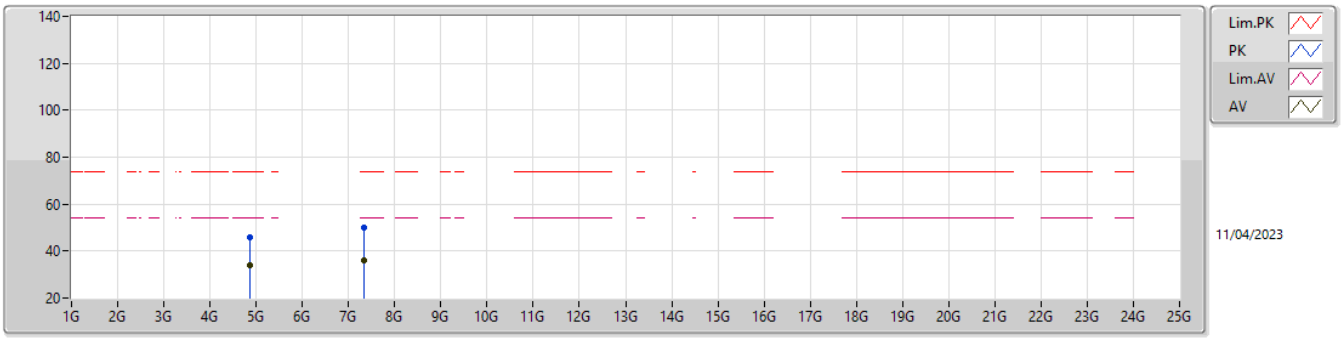

EUT Z_1TX
Setting 0x00
02-F-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	4.87554G	45.99	74.00	-28.01	38.58	3	Horizontal	244	2.48	-	32.55	5.64	30.78
AV	4.87608G	34.19	54.00	-19.81	26.78	3	Horizontal	244	2.48	-	32.55	5.64	30.78
PK	7.32549G	50.21	74.00	-23.79	38.60	3	Horizontal	135	2.71	-	36.70	6.84	31.93
AV	7.32639G	36.11	54.00	-17.89	24.51	3	Horizontal	135	2.71	-	36.69	6.84	31.93

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX

2476.35MHz_TX

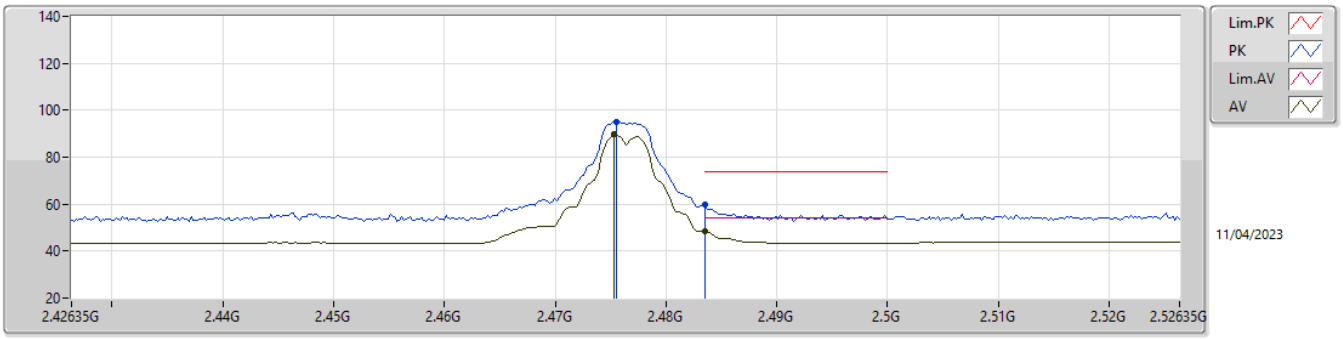

EUT Z_1TX
Setting 0x0D
02-F-W-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	2.47555G	95.07	Inf	-Inf	64.08	3	Vertical	187	2.77	-	27.75	3.24	-
AV	2.47535G	89.74	Inf	-Inf	58.75	3	Vertical	187	2.77	-	27.75	3.24	-
PK	2.4835G	59.65	74.00	-14.35	28.61	3	Vertical	187	2.77	-	27.80	3.24	-
AV	2.4835G	48.48	54.00	-5.52	17.44	3	Vertical	187	2.77	-	27.80	3.24	-

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX

2476.35MHz_TX

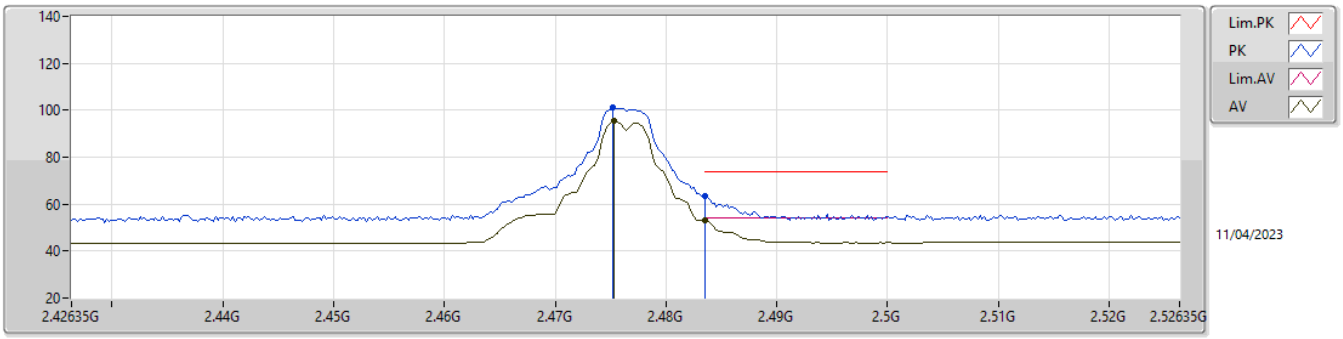

EUT Z_1TX
Setting 0x0D
02-F-W-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	2.47515G	100.98	Inf	-Inf	69.99	3	Horizontal	118	2.80	-	27.75	3.24	-
AV	2.47535G	95.67	Inf	-Inf	64.68	3	Horizontal	118	2.80	-	27.75	3.24	-
PK	2.4835G	63.51	74.00	-10.49	32.47	3	Horizontal	118	2.80	-	27.80	3.24	-
AV	2.4835G	53.19	54.00	-0.81	22.15	3	Horizontal	118	2.80	-	27.80	3.24	-

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX

2476.35MHz_TX

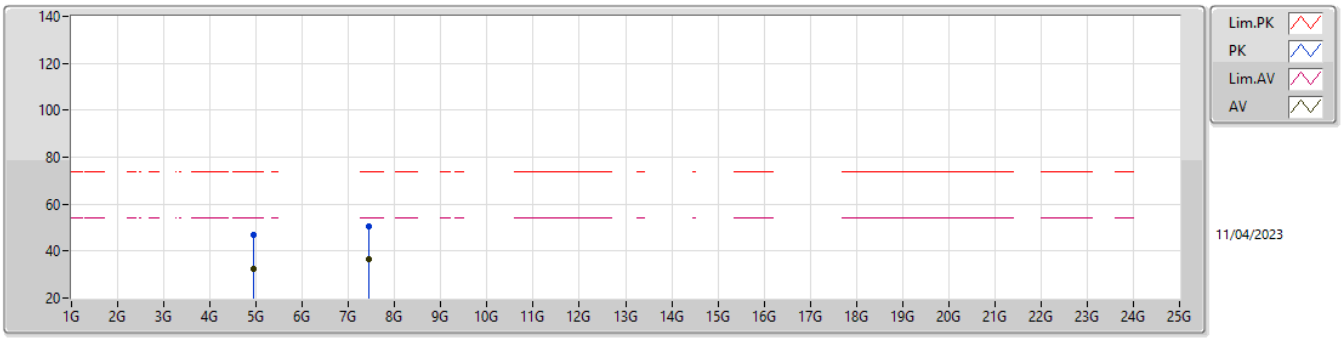

EUT Z_1TX
Setting 0x0D
02-F-W-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	4.94258G	46.77	74.00	-27.23	38.99	3	Vertical	272	2.14	-	32.86	5.67	30.75
AV	4.94418G	32.62	54.00	-21.38	24.83	3	Vertical	272	2.14	-	32.87	5.67	30.75
PK	7.43501G	50.47	74.00	-23.53	39.09	3	Vertical	161	1.87	-	36.53	6.84	31.99
AV	7.43533G	36.41	54.00	-17.59	25.03	3	Vertical	161	1.87	-	36.53	6.84	31.99

2.4-2.4835GHz_pi/4-shifted DQPSK_1TX

2476.35MHz_TX

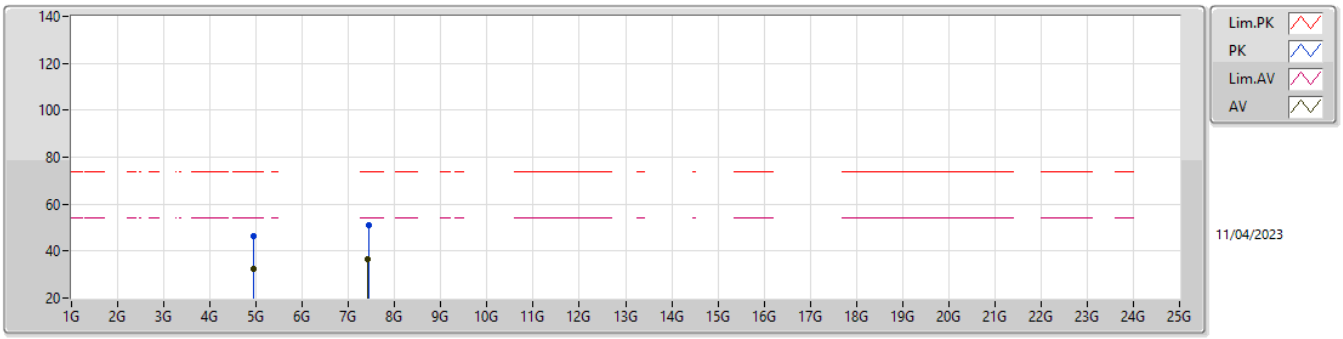

EUT Z_1TX
Setting 0x0D
02-F-W-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	4.94278G	46.54	74.00	-27.46	38.76	3	Horizontal	142	1.21	-	32.86	5.67	30.75
AV	4.9441G	32.63	54.00	-21.37	24.85	3	Horizontal	142	1.21	-	32.86	5.67	30.75
PK	7.43473G	50.93	74.00	-23.07	39.56	3	Horizontal	148	1.48	-	36.53	6.83	31.99
AV	7.42353G	36.47	54.00	-17.53	25.09	3	Horizontal	148	1.48	-	36.55	6.82	31.99