




FR1 n48 / 40MHz / DFT-S OFDM / PI/2 BPSK

Highest Channel


Full RB

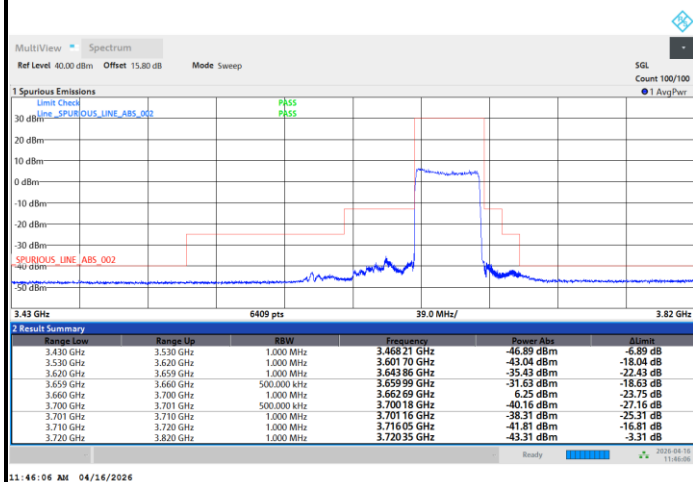

FR1 n48 / 40MHz / DFT-S OFDM / QPSK

Lowest Channel

Full RB

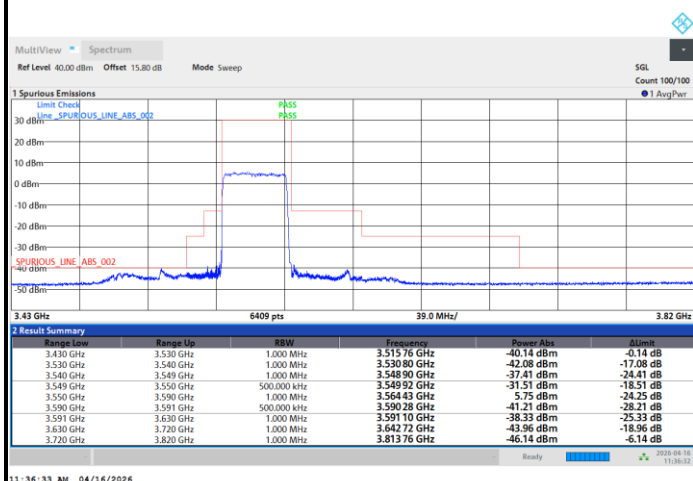




FR1 n48 / 40MHz / DFT-S OFDM / QPSK

Middle Channel

Full RB

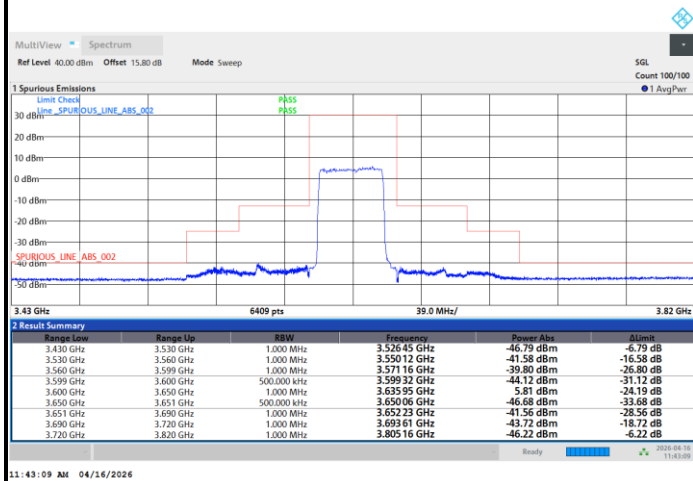


11:43:09 AM 04/16/2026

FR1 n48 / 40MHz / DFT-S OFDM / QPSK

Highest Channel

Full RB

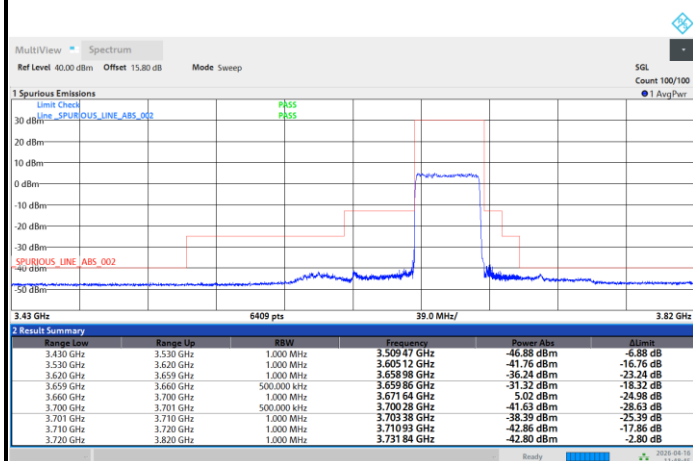

11:48:45 AM 04/16/2026





Adjacent Channel Leakage Ratio (ACLR)

FR1 n48 / 10MHz / DFT-S OFDM / PI/2 BPSK


Lowest Channel

1RB0

1RBmax

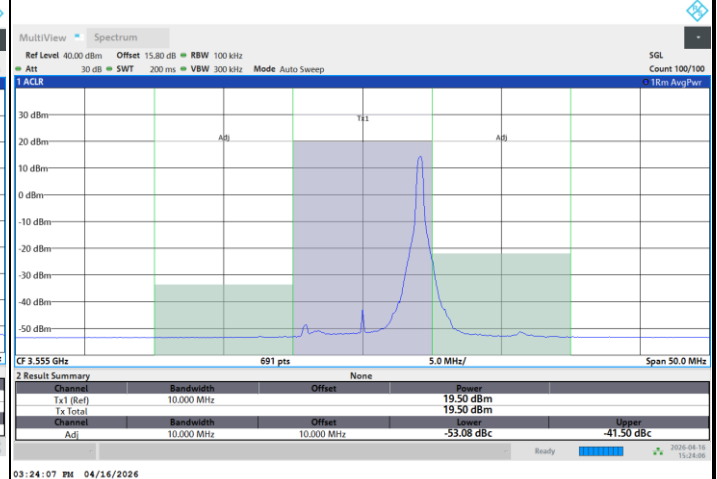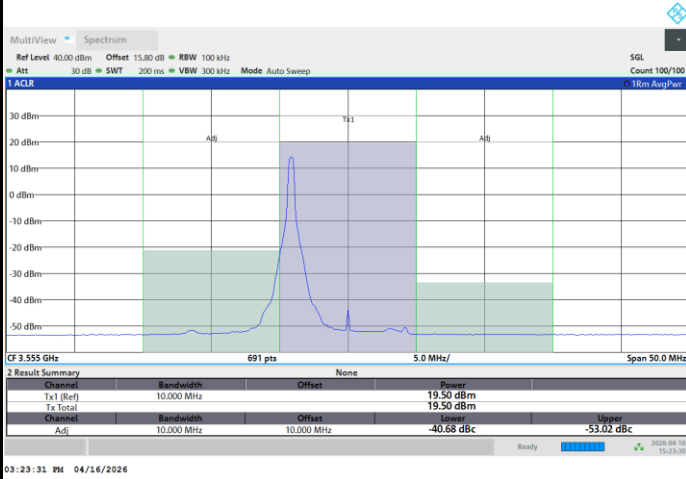

Full RB

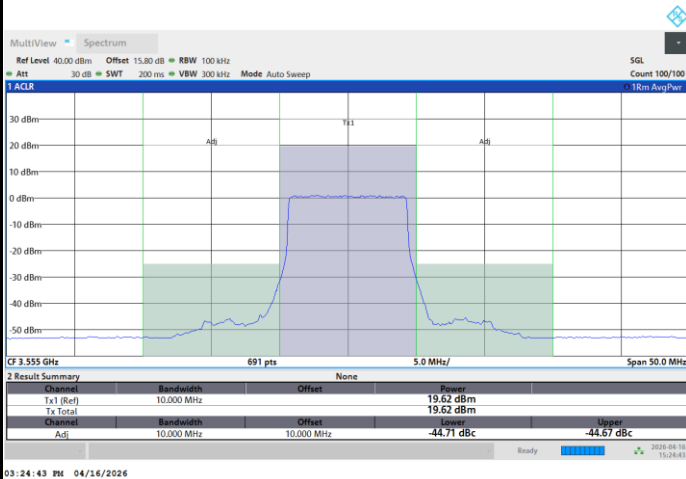





FR1 n48 / 10MHz / DFT-S OFDM / PI/2 BPSK


Middle Channel

1RB0

1RBmax

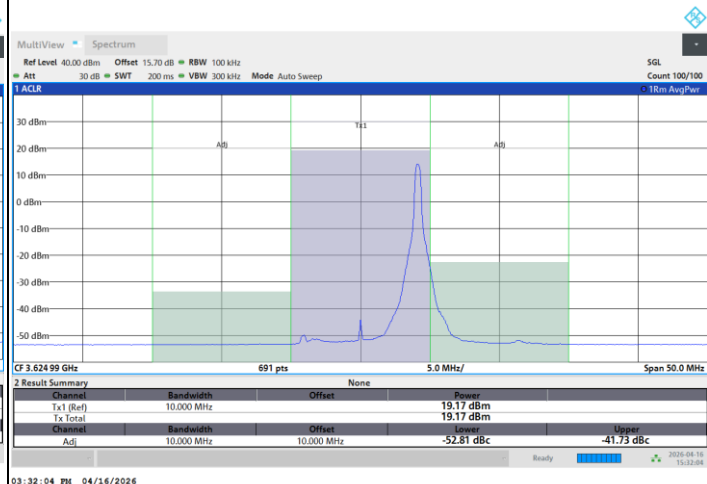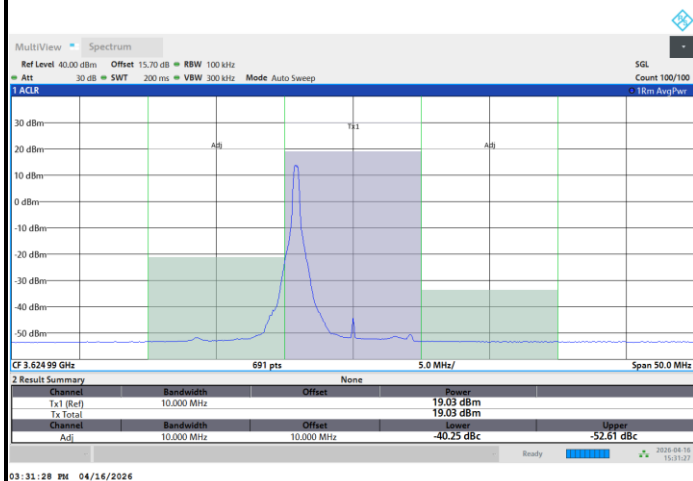

Full RB

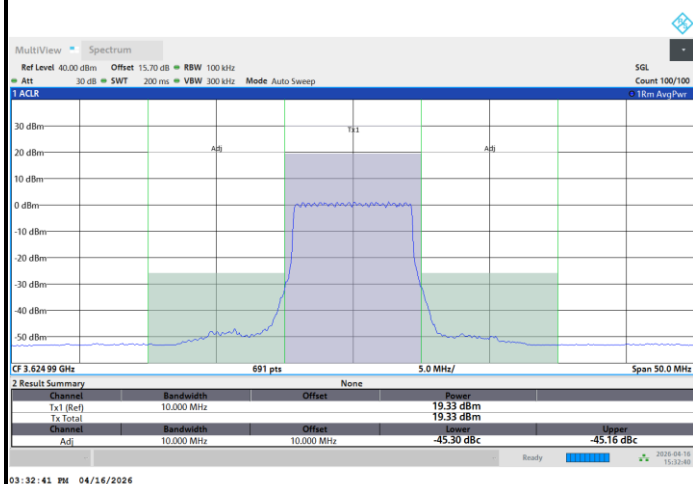





FR1 n48 / 10MHz / DFT-S OFDM / PI/2 BPSK


Highest Channel

1RB0

1RBmax

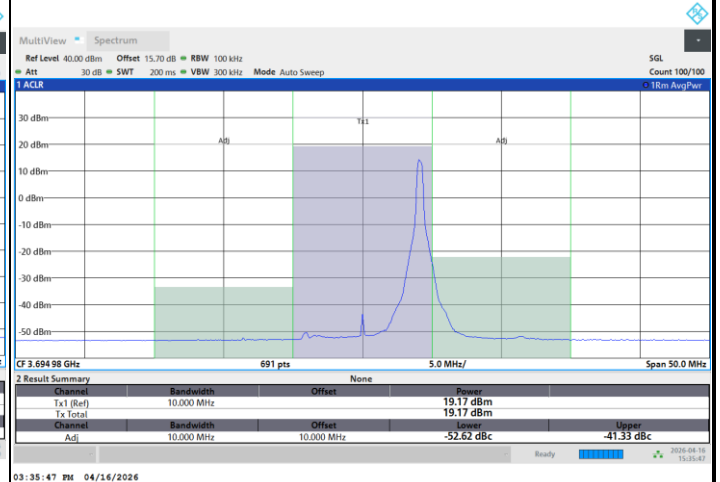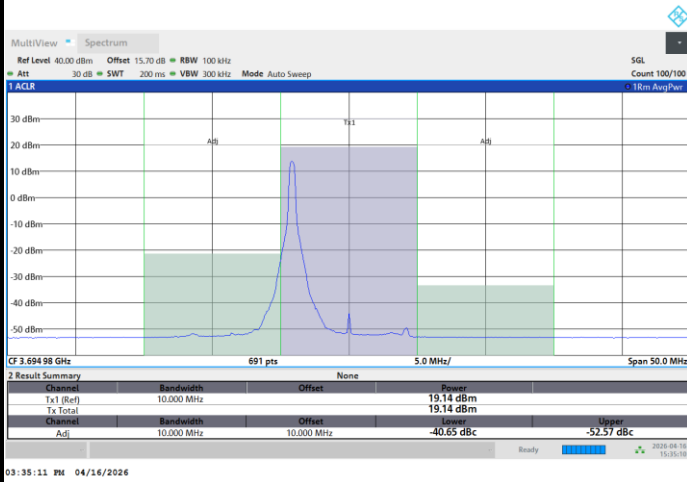

Full RB

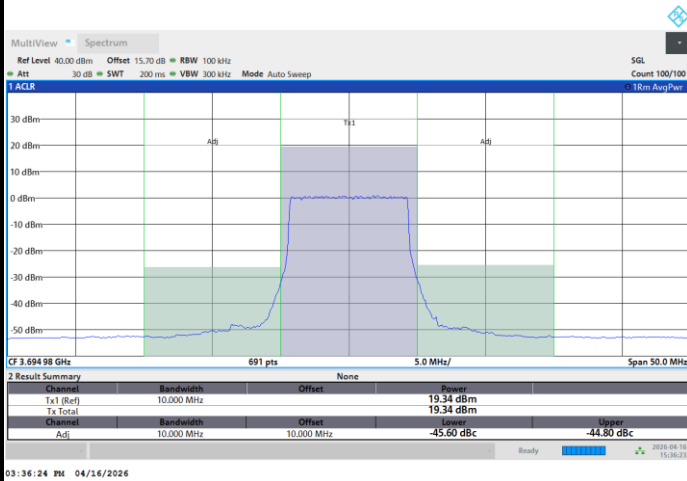





FR1 n48 / 10MHz / DFT-S OFDM / QPSK


Lowest Channel

1RB0

1RBmax

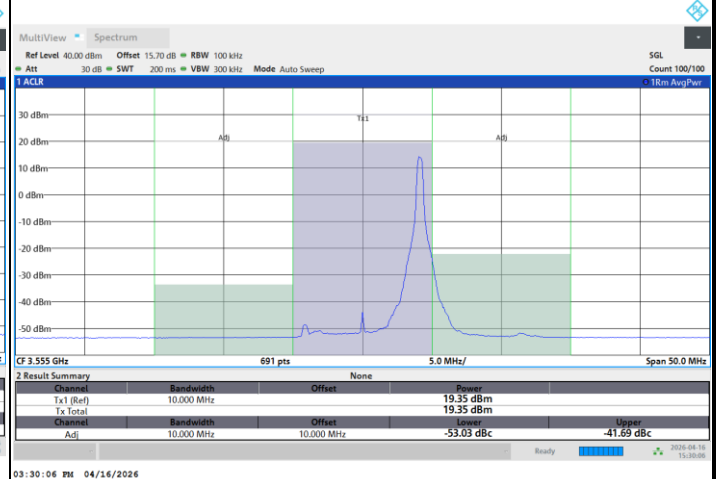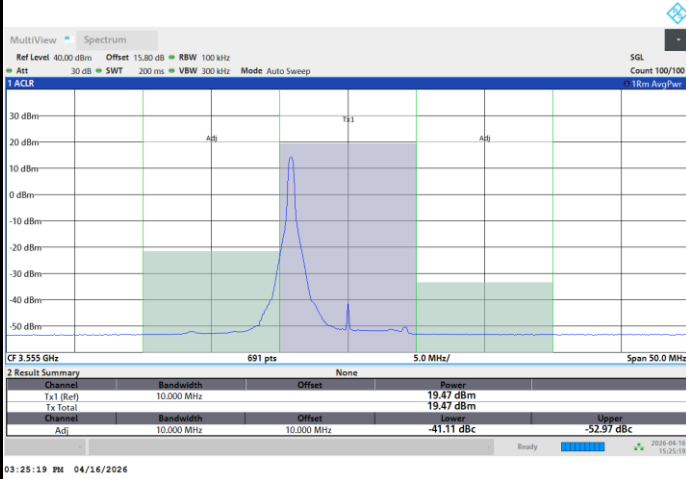

Full RB

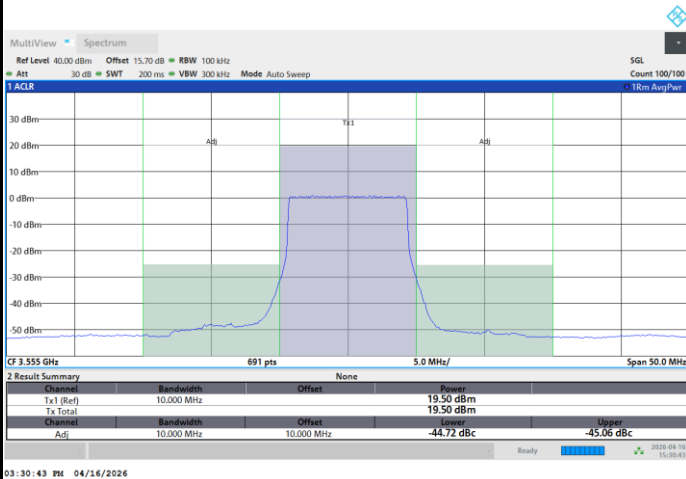





FR1 n48 / 10MHz / DFT-S OFDM / QPSK


Middle Channel

1RB0

1RBmax

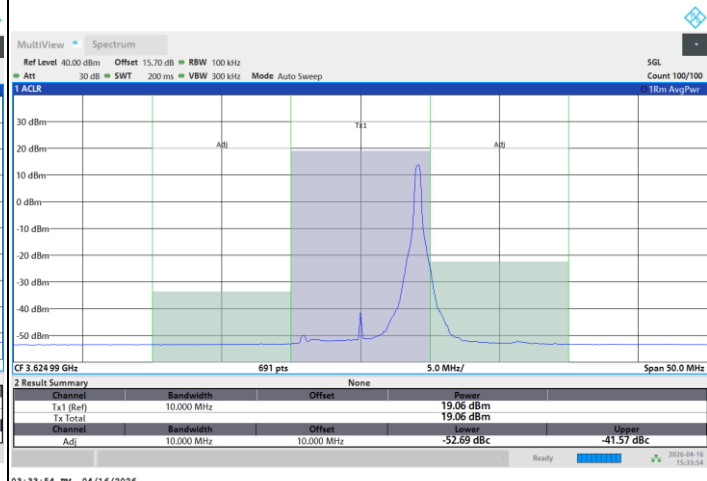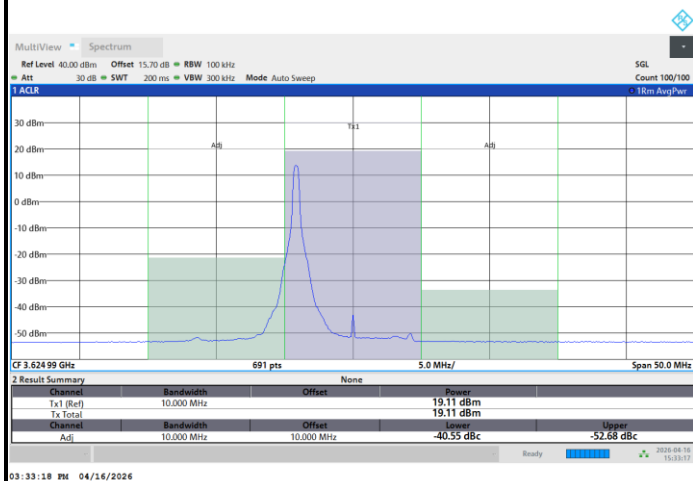

Full RB

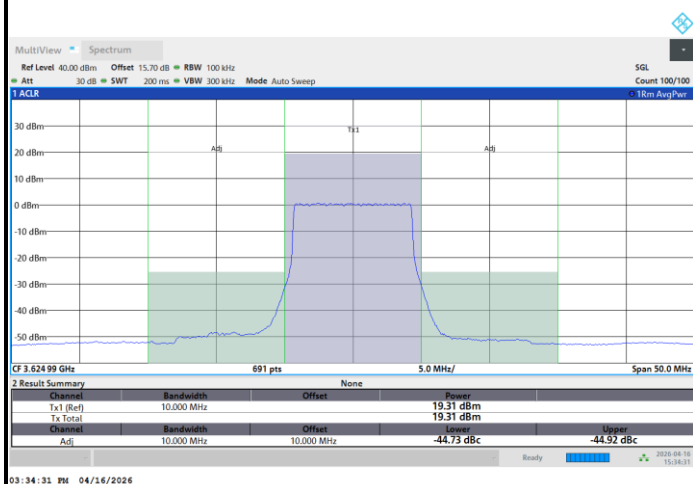





FR1 n48 / 10MHz / DFT-S OFDM / QPSK

Highest Channel


1RB0

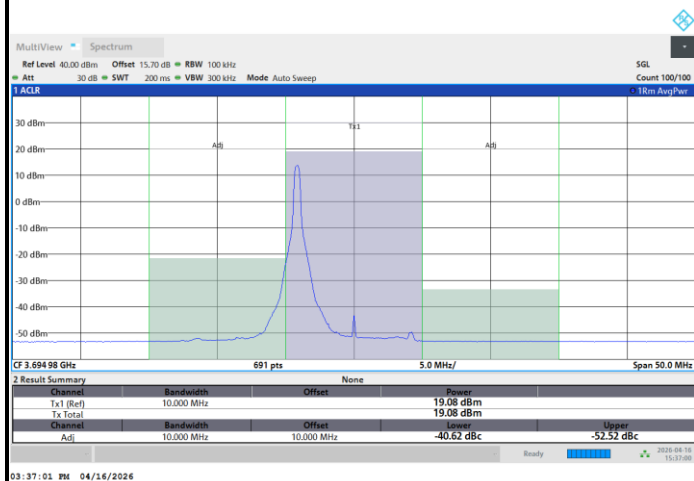

1RBmax

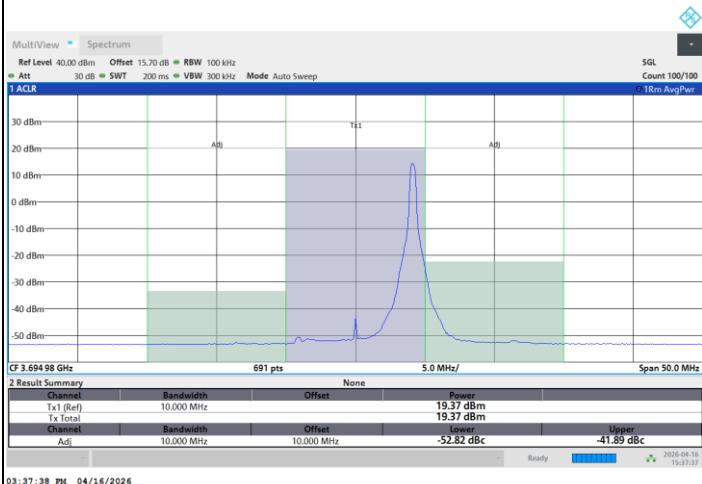

Full RB

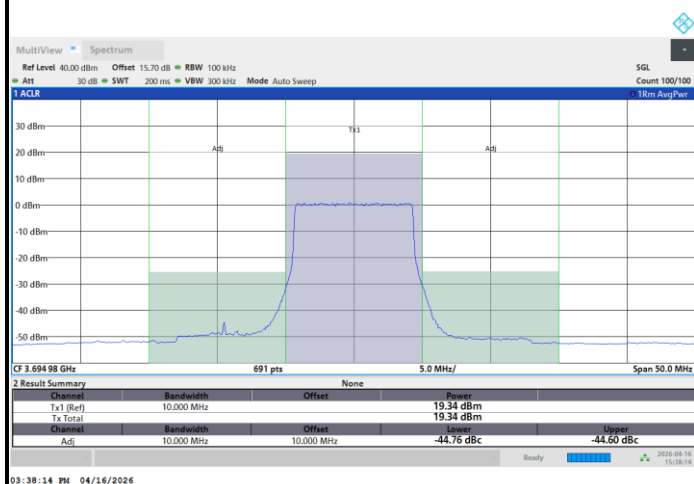



FR1 n48 / 20MHz / DFT-S OFDM / PI/2 BPSK

Lowest Channel


Full RB



FR1 n48 / 20MHz / DFT-S OFDM / PI/2 BPSK

Middle Channel

Full RB

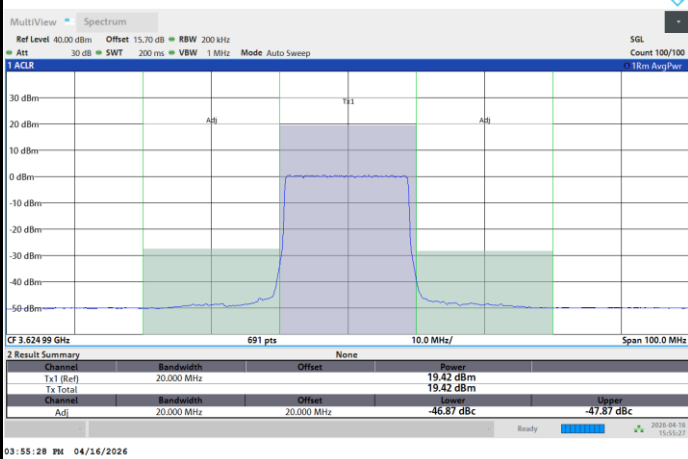




FR1 n48 / 20MHz / DFT-S OFDM / PI/2 BPSK

Highest Channel

Full RB

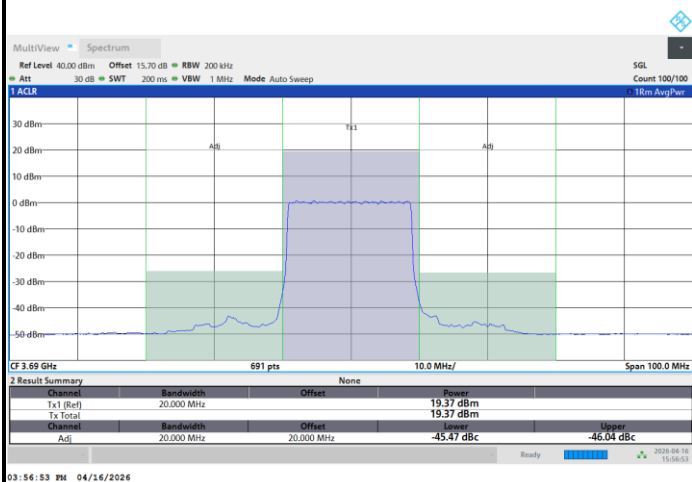

FR1 n48 / 20MHz / DFT-S OFDM / QPSK

Lowest Channel

Full RB






FR1 n48 / 20MHz / DFT-S OFDM / QPSK

Middle Channel


Full RB

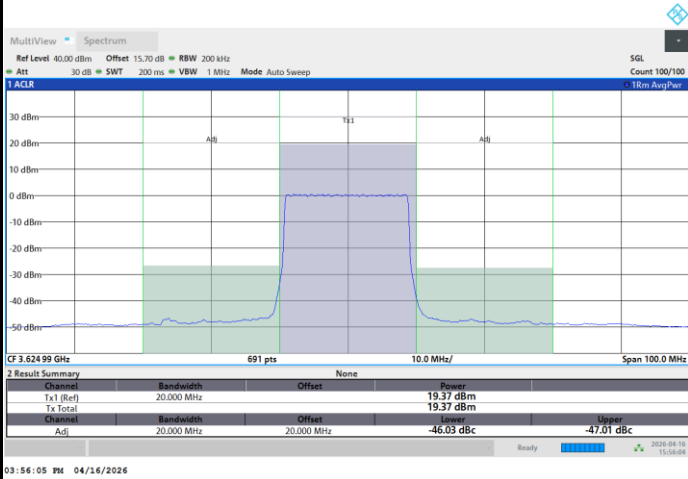

FR1 n48 / 20MHz / DFT-S OFDM / QPSK

Highest Channel

Full RB

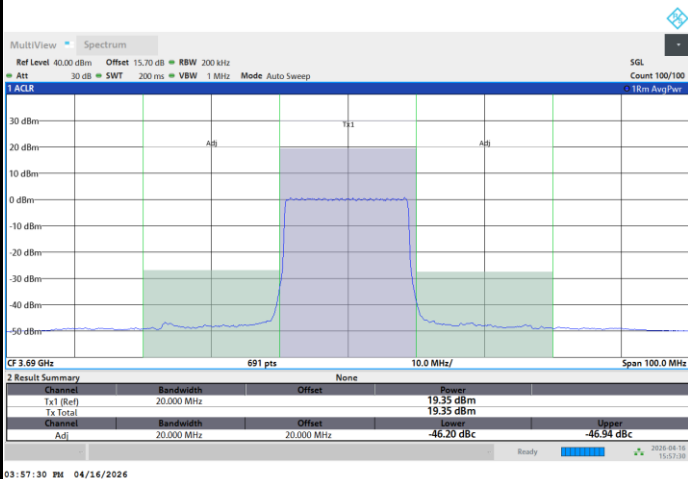




FR1 n48 / 30MHz / DFT-S OFDM / PI/2 BPSK

Lowest Channel


Full RB

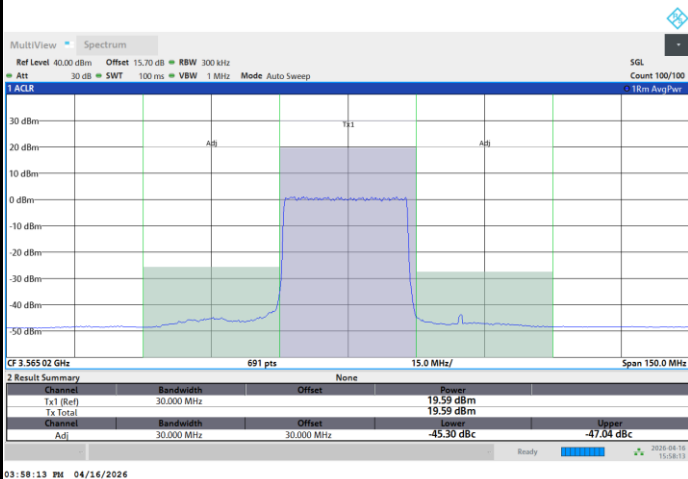

FR1 n48 / 30MHz / DFT-S OFDM / PI/2 BPSK

Middle Channel

Full RB

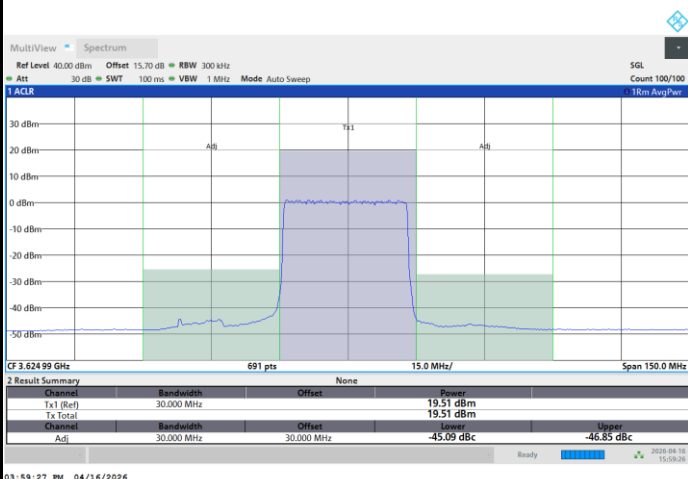




FR1 n48 / 30MHz / DFT-S OFDM / PI/2 BPSK

Highest Channel


Full RB

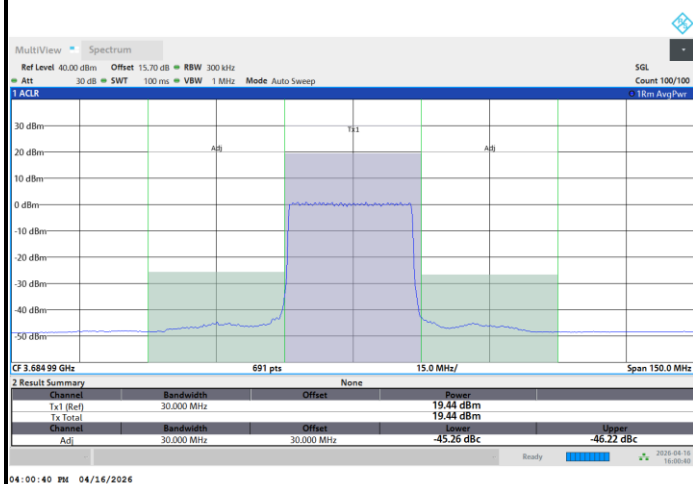

FR1 n48 / 30MHz / DFT-S OFDM / QPSK

Lowest Channel

Full RB

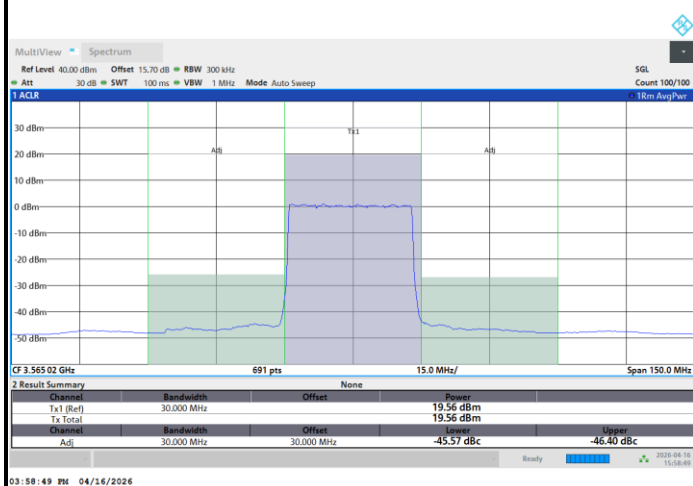




FR1 n48 / 30MHz / DFT-S OFDM / QPSK

Middle Channel


Full RB

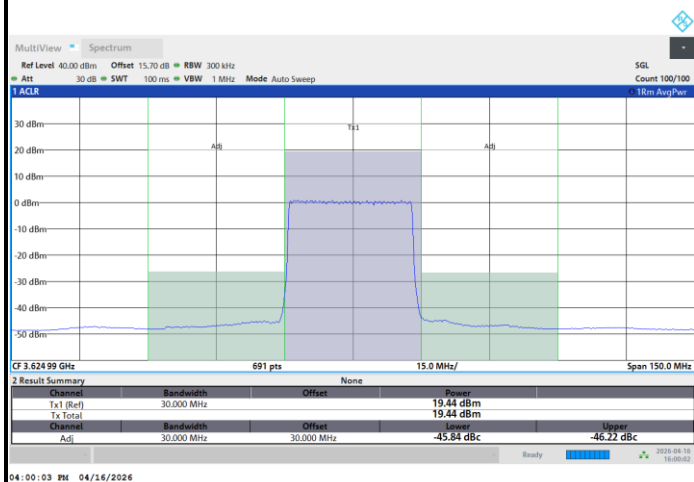

FR1 n48 / 30MHz / DFT-S OFDM / QPSK

Highest Channel

Full RB

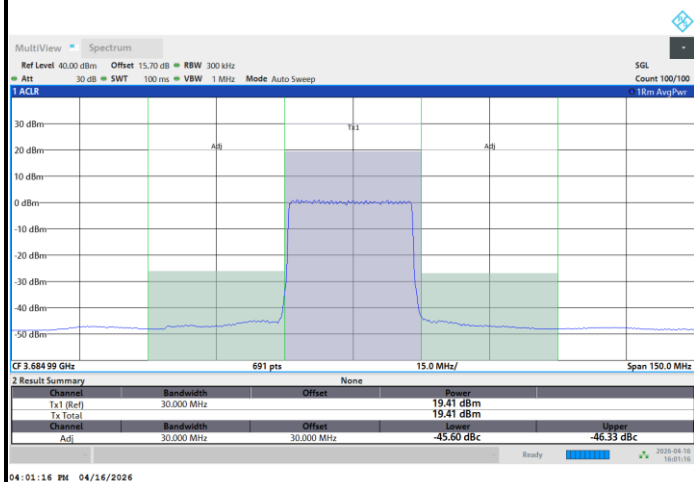




FR1 n48 / 40MHz / DFT-S OFDM / PI/2 BPSK

Lowest Channel


Full RB

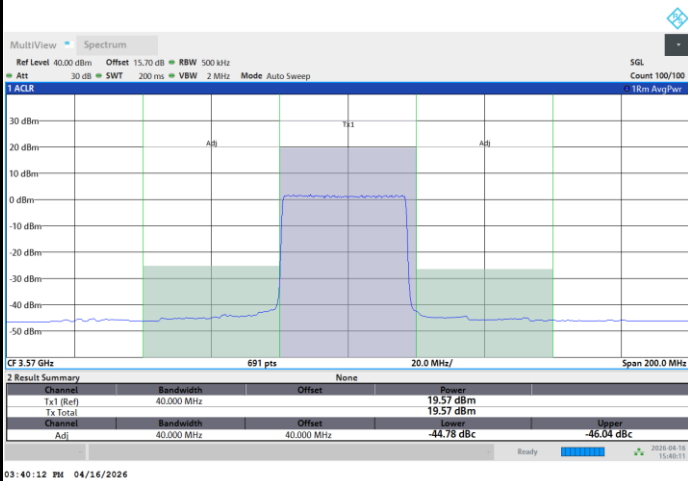

FR1 n48 / 40MHz / DFT-S OFDM / PI/2 BPSK

Middle Channel

Full RB

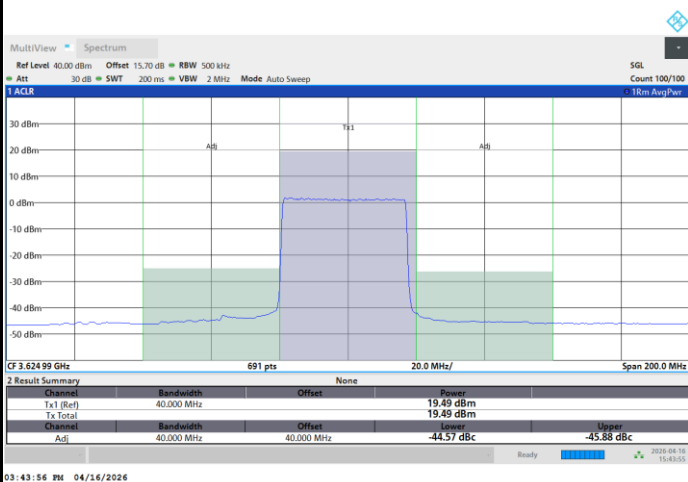




FR1 n48 / 40MHz / DFT-S OFDM / PI/2 BPSK

Highest Channel


Full RB

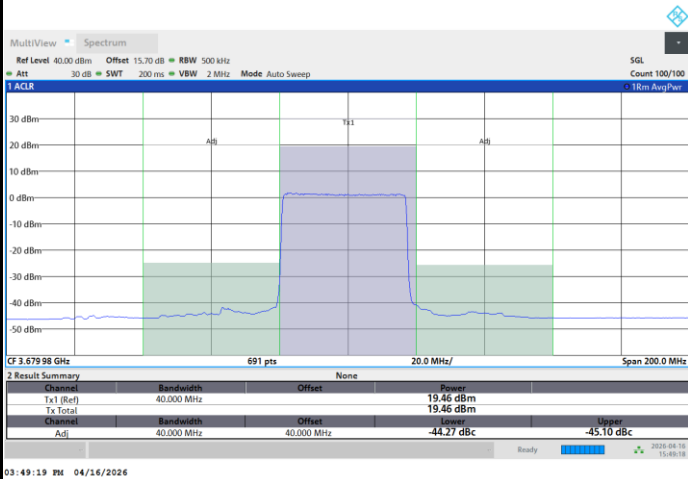

FR1 n48 / 40MHz / DFT-S OFDM / QPSK

Lowest Channel

Full RB

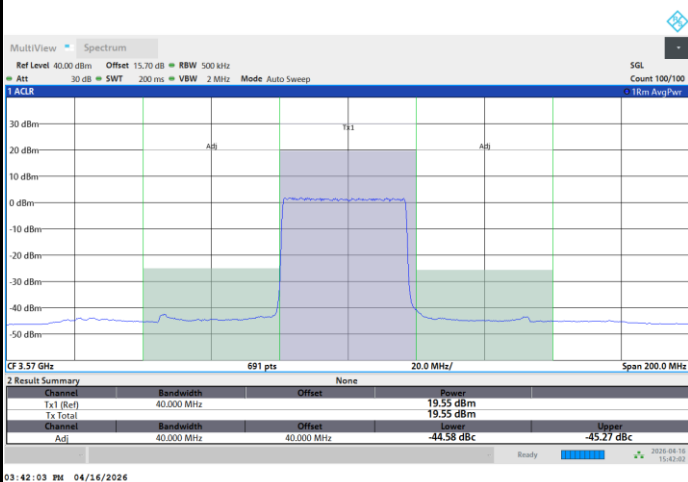




FR1 n48 / 40MHz / DFT-S OFDM / QPSK

Middle Channel


Full RB

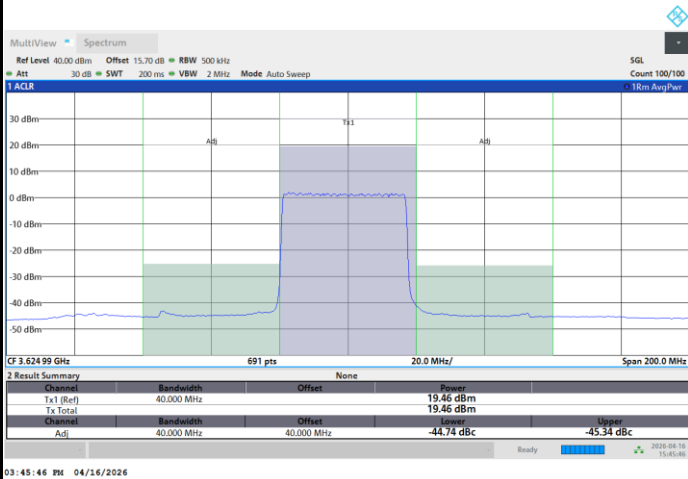

FR1 n48 / 40MHz / DFT-S OFDM / QPSK

Highest Channel

Full RB

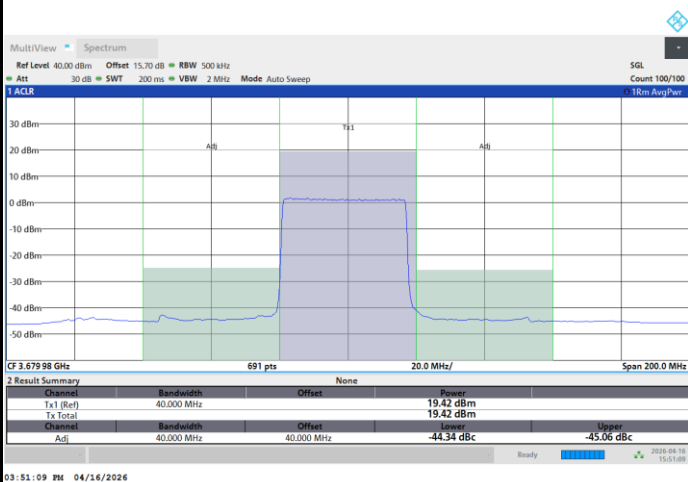




Conducted Spurious Emission

FR1 n48 / 10MHz / DFT-S OFDM / QPSK / 1RB1

Lowest Channel

Middle Channel


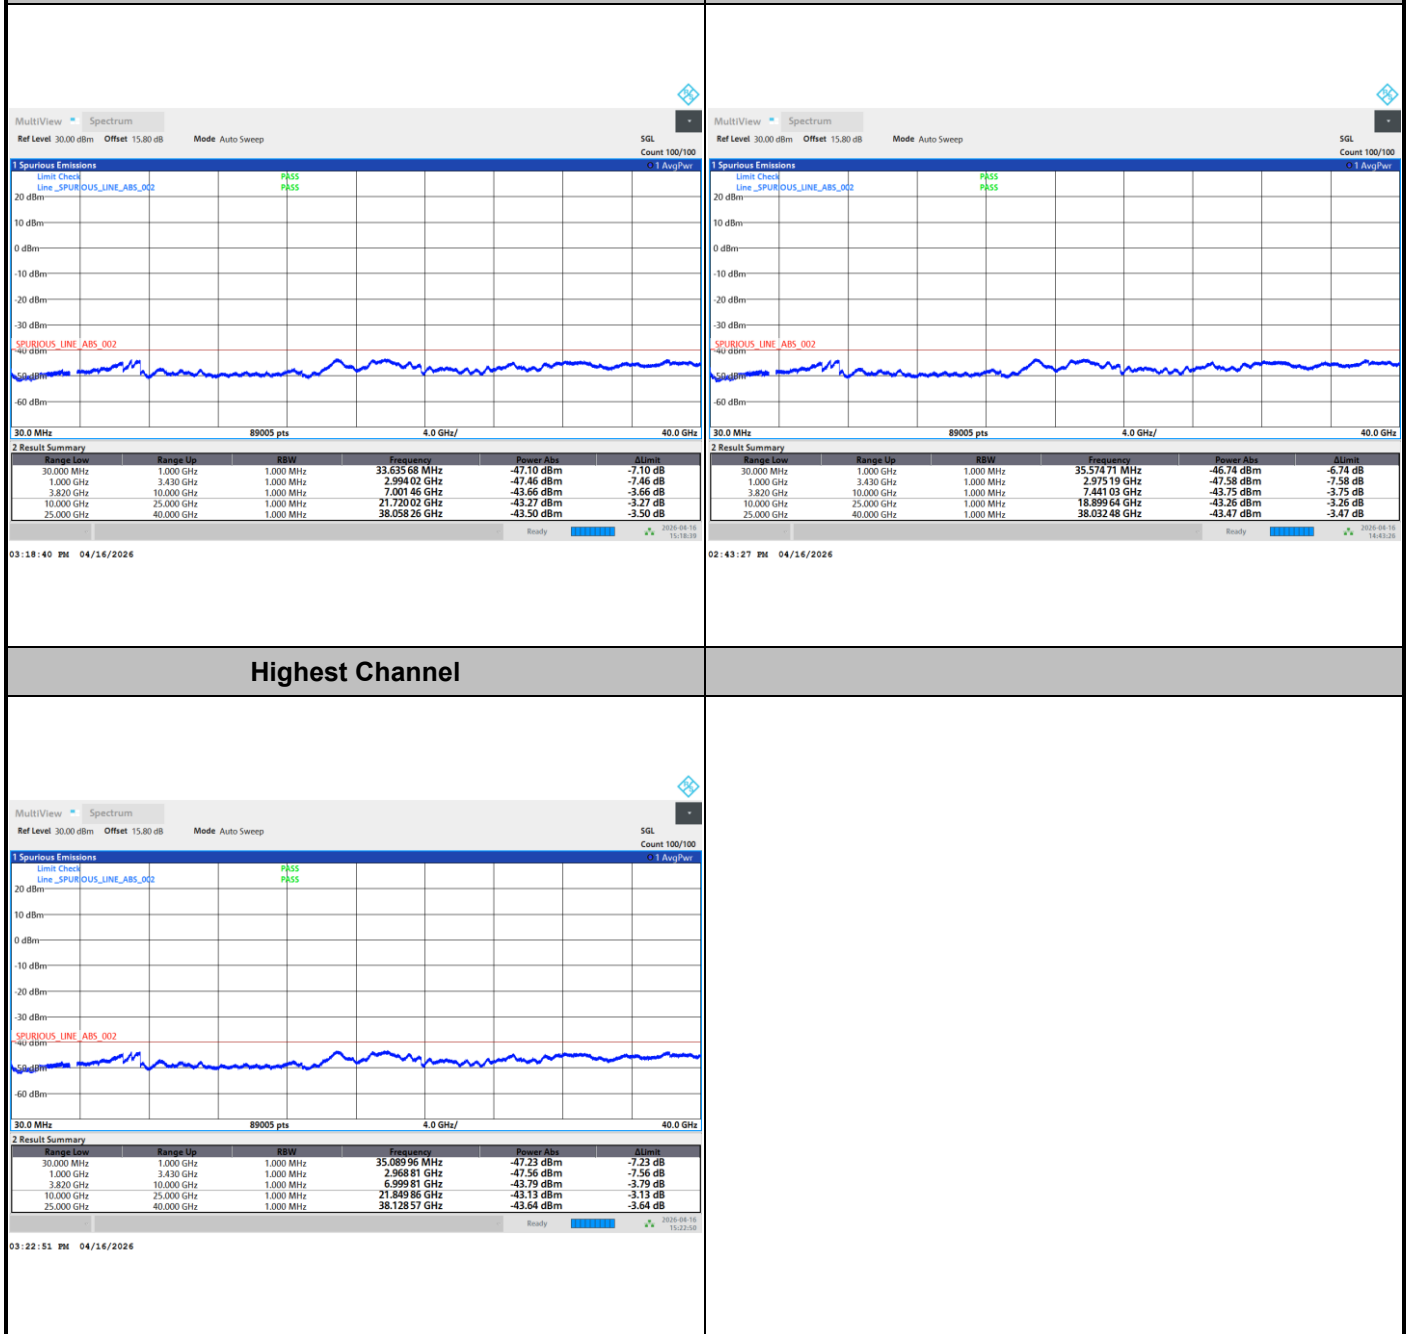





FR1 n48 / 20MHz / DFT-S OFDM / QPSK / 1RB1

Lowest Channel

Middle Channel

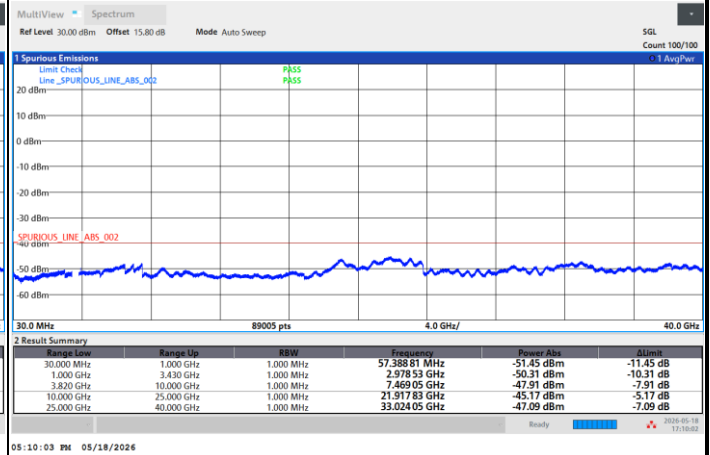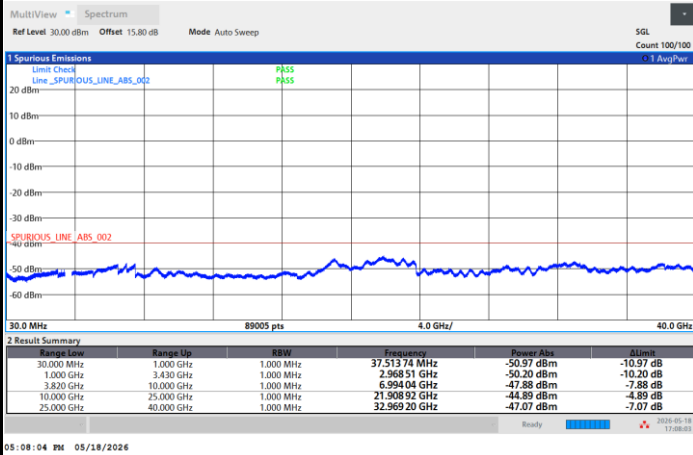

Highest Channel


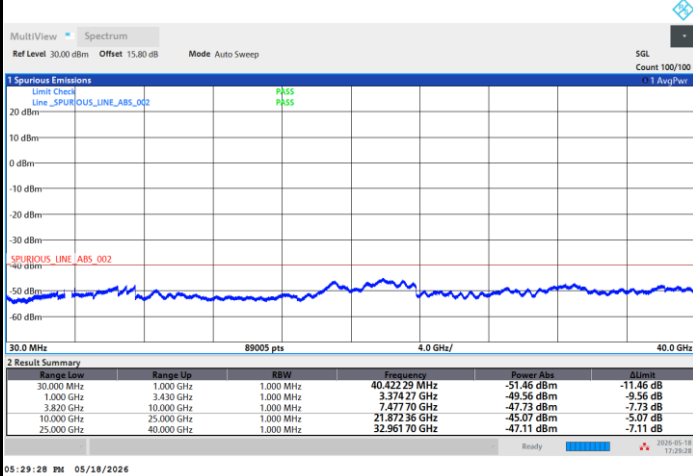





FR1 n48 / 30MHz / DFT-S OFDM / QPSK / 1RB1

Lowest Channel

Middle Channel

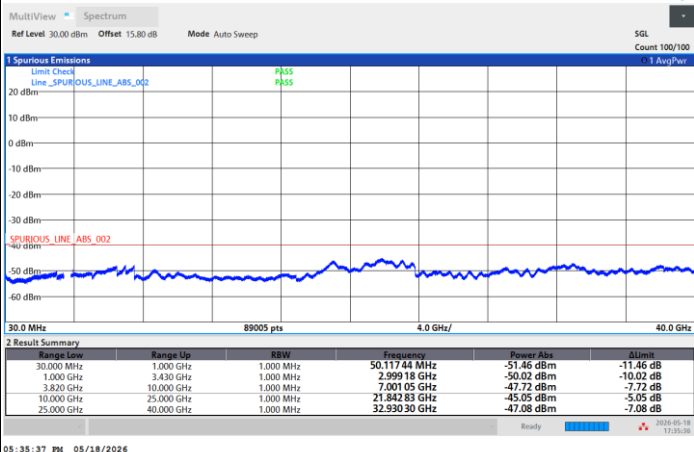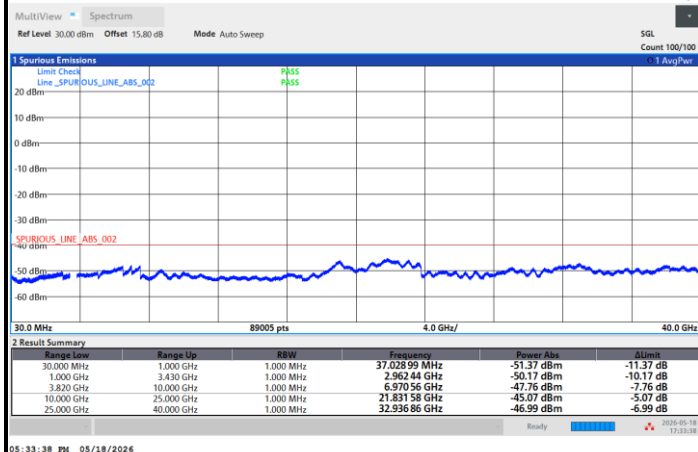

Highest Channel


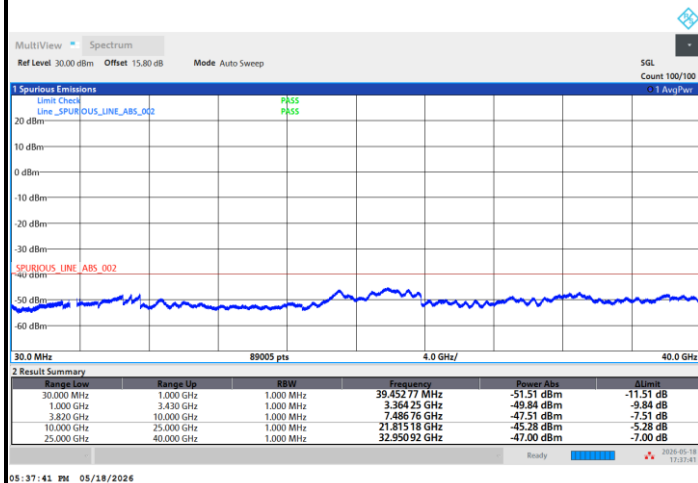





FR1 n48 / 40MHz / DFT-S OFDM / QPSK / 1RB1

Lowest Channel

Middle Channel

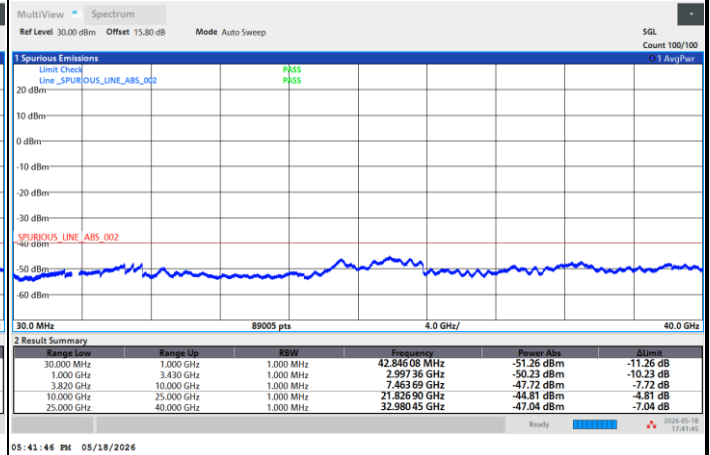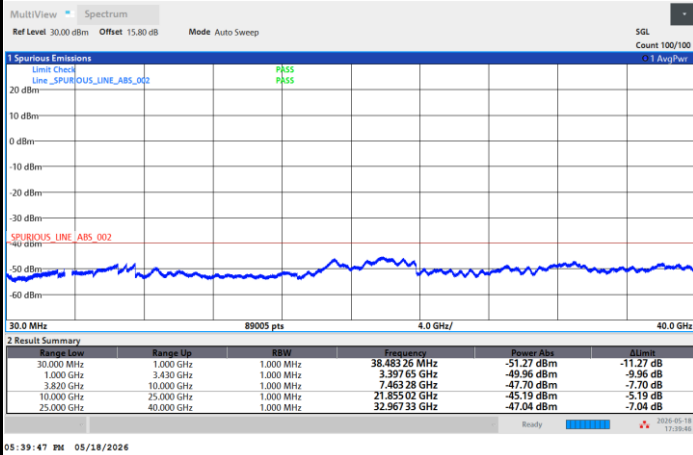

Highest Channel

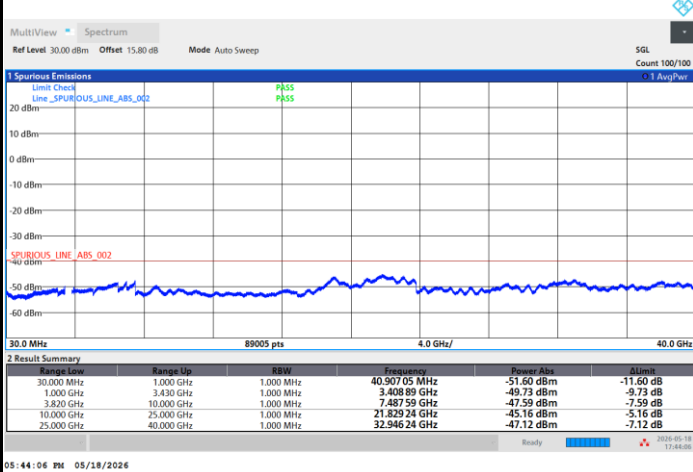

**Frequency Stability**

Test Conditions		FR1 n48 (BPSK) / Middle Channel 10M			
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Frequency Offset (Δf) (Hz)	Within Authorized Frequency Block(Hz)	Result
50	Normal Voltage	0.0007	-2.7	Yes	PASS
40	Normal Voltage	0.0008	2.9	Yes	
30	Normal Voltage	0.0014	-5.1	Yes	
20(Ref.)	Normal Voltage	0.0000	0	Yes	
10	Normal Voltage	0.0012	4.2	Yes	
0	Normal Voltage	0.0004	-1.6	Yes	
-10	Normal Voltage	0.0024	8.7	Yes	
-20	Normal Voltage	0.0020	-7.2	Yes	
-30	Normal Voltage	0.0001	-0.5	Yes	
20	Maximum Voltage	0.0004	-1.6	Yes	
20	Normal Voltage	0.0000	0	Yes	
20	Minimum Voltage	0.0006	2.2	Yes	

Note:

1. Normal Voltage = 4 V. ; Minimum Voltage = 3.8 V. ; Maximum Voltage = 4.2 V.
2. The frequency fundamental emissions stay within the authorized frequency block.
3. The frequency variation is sufficient to ensure that the occupied bandwidth of all operation channels stay within the operating frequency block or frequency block group.



Appendix B. Radiated Spurious Emission Test Data

Test Engineer:	John Chuang, David Dai, and Sam Chou	Relative Humidity:	63.7~71.1 %
		Temperature:	18.3~22.8 °C

B1. Summary of each worse mode

Mode	Band	Part	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	NR SA n48	Part 96	L	14203	-51.05	RMS	40.29	-24.68	0.56	-95.23	28.01	-40.00	-11.05	V	2




Ant. 2

Part 96 Mode 1

NR SA n48 10M Ch637000 1RB1 BPSK

L

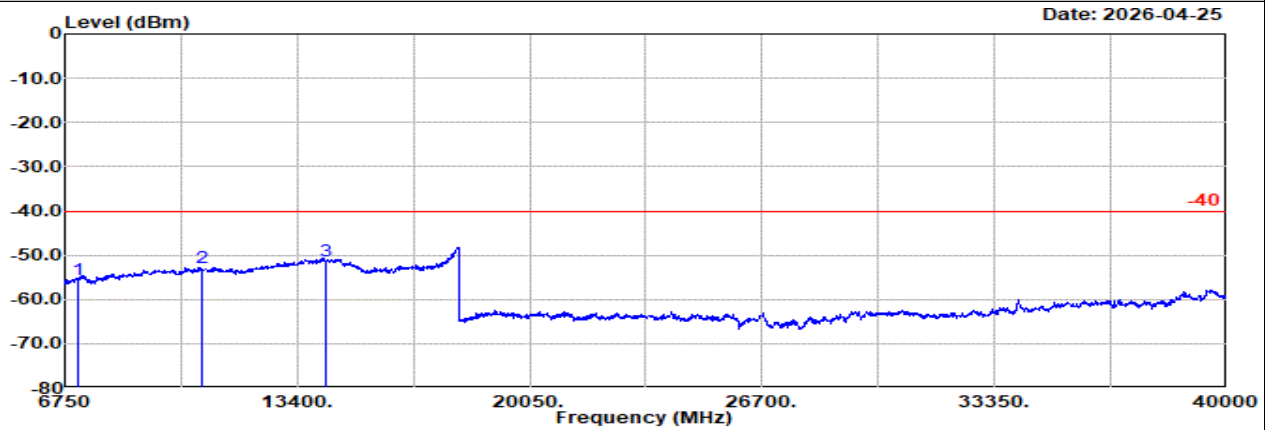


Site : 03CH20-HY

Condition: -40 1m BBHA9170_1223_250702 Horizontal

NR SA n48 10M Ch637000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7102.00	-55.45	RMS	36.41	-24.45	1.10	-95.23	0.00	-40.00	-15.45	Horizontal
2	10652.00	-52.86	RMS	39.20	-24.91	0.45	-95.23	27.63	-40.00	-12.86	Horizontal
3	14203.00	-51.39	RMS	40.29	-24.68	0.56	-95.23	27.67	-40.00	-11.39	Horizontal

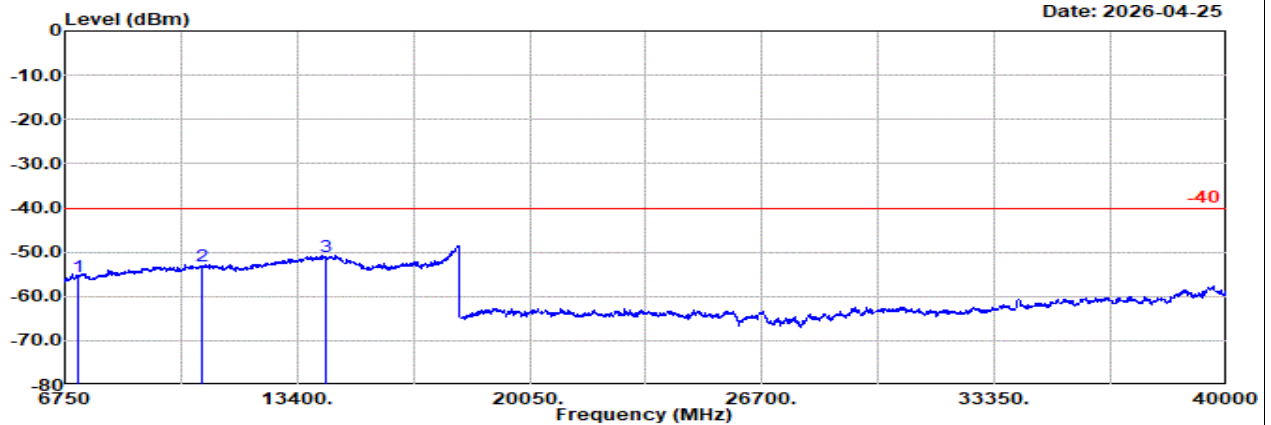

Site : 03CH20-HY

Condition: -40 1m BBHA9170_1223_250702 Vertical

NR SA n48 10M Ch637000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7102.00	-55.44	RMS	36.41	-24.45	1.10	-95.23	26.73	-40.00	-15.44	Vertical
2	10652.00	-53.27	RMS	39.20	-24.91	0.45	-95.23	27.22	-40.00	-13.27	Vertical
3	14203.00	-51.05	RMS	40.29	-24.68	0.56	-95.23	28.01	-40.00	-11.05	Vertical




Ant. 2

Part 96 Mode 1

NR SA n48 10M Ch641666 1RB1 BPSK

M

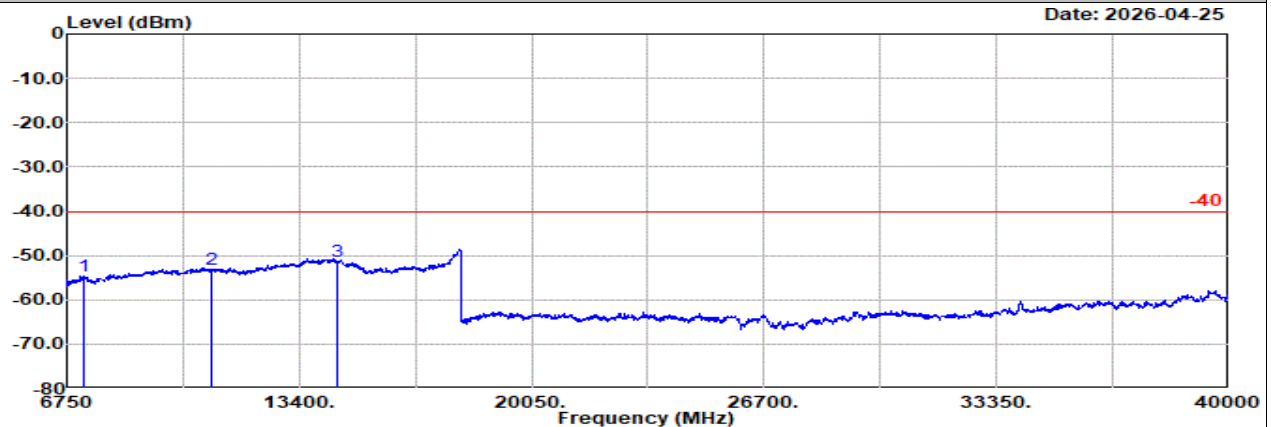


Site : 03CH20-HY

Condition: -40 1m BBHA9170_1223_250702 Horizontal

: NR SA n48 10M Ch641666 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin Pol	
				Factor	1					
1	7242.00	-54.71	RMS	36.97	-24.45	0.98 -95.23	27.02	-40.00	-14.71	Horizontal
2	10862.00	-53.07	RMS	39.02	-24.90	0.44 -95.23	27.60	-40.00	-13.07	Horizontal
3	14483.00	-51.32	RMS	40.03	-24.74	0.51 -95.23	28.11	-40.00	-11.32	Horizontal

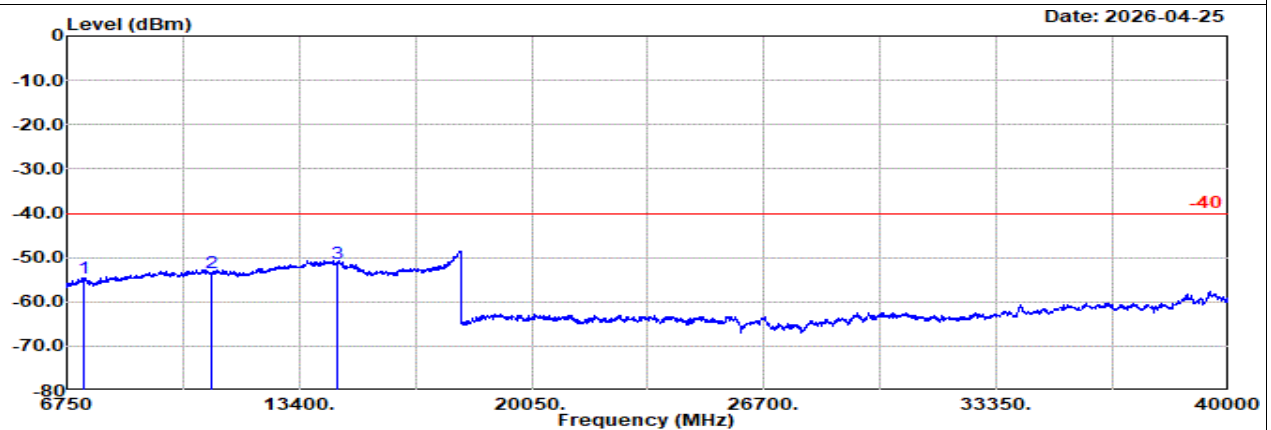

Site : 03CH20-HY

Condition: -40 1m BBHA9170_1223_250702 Vertical

: NR SA n48 10M Ch641666 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin Pol	
				Factor	1					
1	7242.00	-54.66	RMS	36.97	-24.45	0.98 -95.23	27.07	-40.00	-14.66	Vertical
2	10862.00	-53.51	RMS	39.02	-24.90	0.44 -95.23	27.16	-40.00	-13.51	Vertical
3	14483.00	-51.26	RMS	40.03	-24.74	0.51 -95.23	28.17	-40.00	-11.26	Vertical




Ant. 2

Part 96 Mode 1

NR SA n48 10M Ch646332 1RB1 BPSK

H

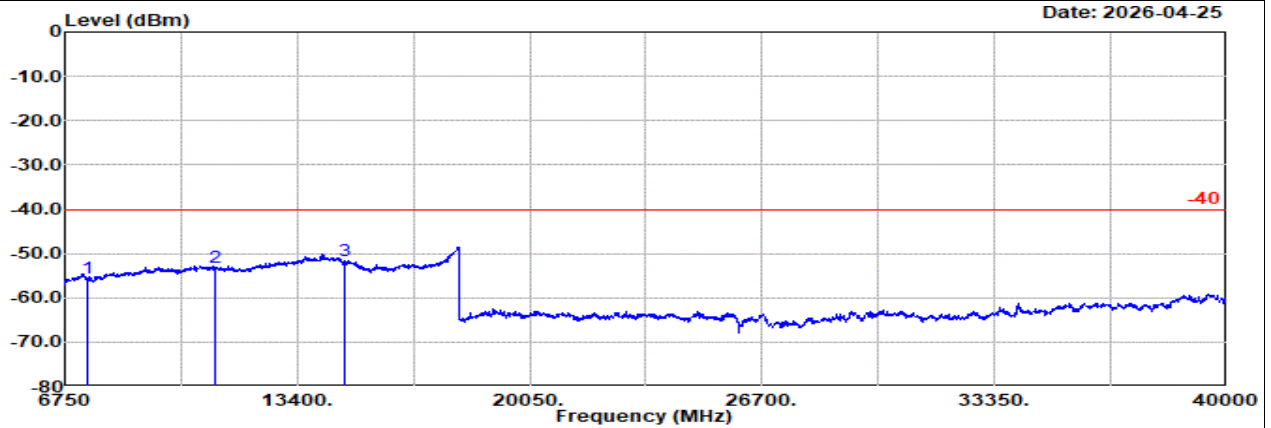


Site : 03CH20-HY

Condition: -40 1m BBHA9170_1223_250702 Horizontal

: NR SA n48 10M Ch646332 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	7382.00	-55.43	RMS	36.47	-24.41	0.79	-95.23	26.95	-40.00	-15.43
2	11072.00	-53.12	RMS	38.90	-24.93	0.43	-95.23	27.71	-40.00	-13.12
3	14763.00	-51.67	RMS	39.90	-24.88	0.46	-95.23	28.08	-40.00	-11.67

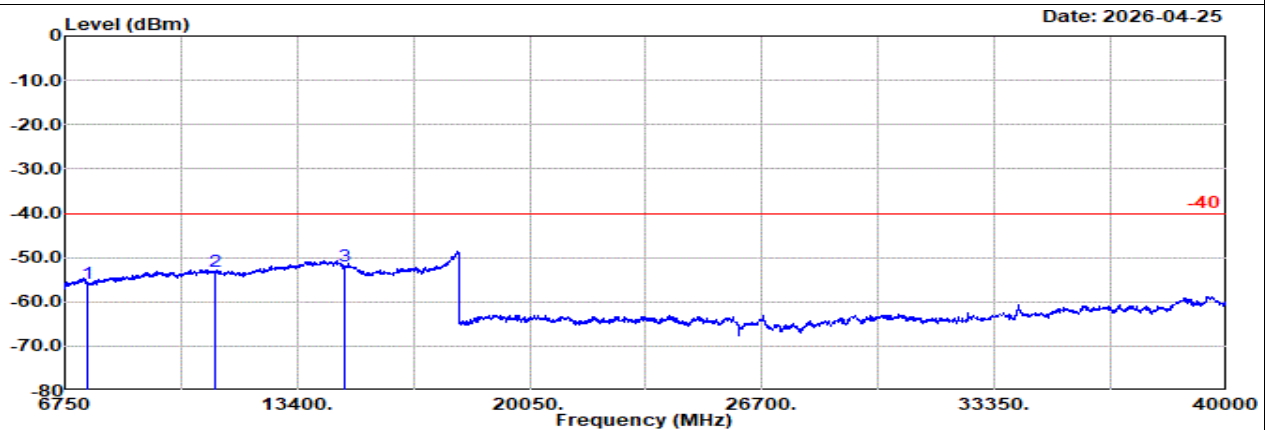

Site : 03CH20-HY

Condition: -40 1m BBHA9170_1223_250702 Vertical

: NR SA n48 10M Ch646332 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	7382.00	-55.79	RMS	36.47	-24.41	0.79	-95.23	26.59	-40.00	-15.79
2	11072.00	-53.22	RMS	38.90	-24.93	0.43	-95.23	27.61	-40.00	-13.22
3	14763.00	-52.00	RMS	39.90	-24.88	0.46	-95.23	27.75	-40.00	-12.00




Ant. 2

Part 96 Mode 1


NR SA n48 10M Ch637000 1RB1 BPSK

L

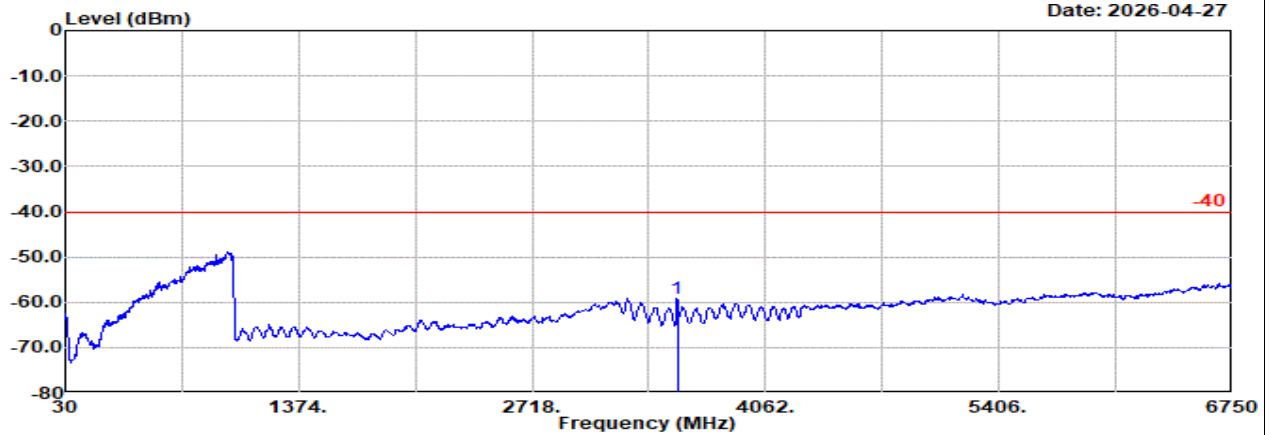

Site : 03CH20-HY
Condition: -40 3m HF_9120D_02360_251105 Horizontal
: NR SA n48 10M Ch637000 1RB1 BPSK
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	3553.00	-59.24	RMS	29.51	-26.06	0.00	-95.23	32.54	-40.00	-19.24	Horizontal

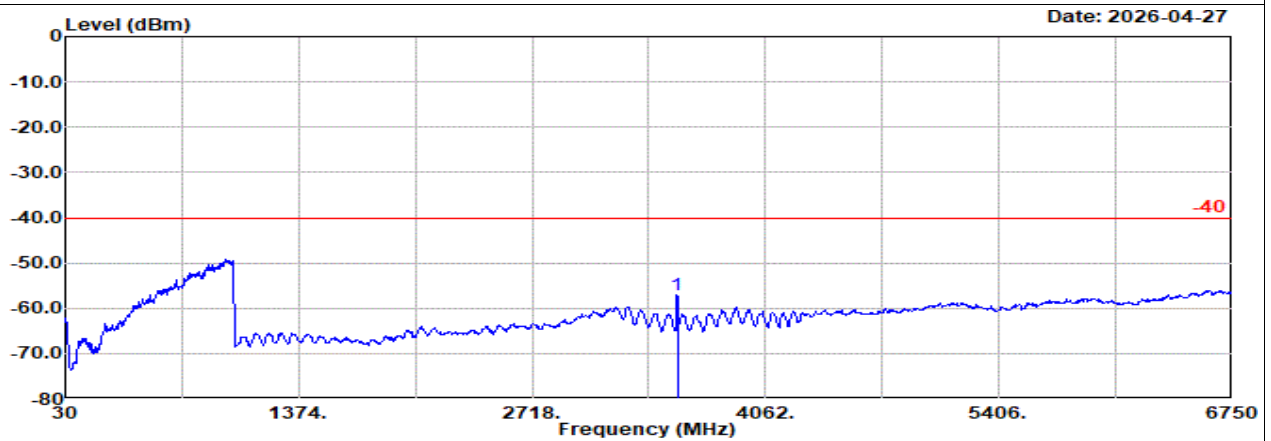

Site : 03CH20-HY
Condition: -40 3m HF_9120D_02360_251105 Vertical
: NR SA n48 10M Ch637000 1RB1 BPSK
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	3553.00	-57.20	RMS	29.51	-26.06	0.00	-95.23	34.58	-40.00	-17.20	Vertical