

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
47 CFR FCC Part 15, Subpart E (Section 15.407)
47 CFR FCC Part 22
47 CFR FCC Part 24
47 CFR FCC Part 27
47 CFR FCC Part 90
47 CFR FCC Part 2

Report No.: RFBCKS-WTW-P22080716B-3
FCC ID: NKR-WNXL11BWL
Product: AP
Brand: WNC, Comcast, Cox, Charter
Model No.: WNXL11BWL
Received Date: 2024/8/12
Test Date: 2024/8/15 ~ 2024/8/21
Issued Date: 2024/8/29

Applicant: Wistron NeWeb Corp.
Address: 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C.
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

FCC Registration / 723255 / TW2022

Designation Number:

Approved by:  , **Date:** 2024/8/29
May Chen / Manager

This test report consists of 31 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by: Vito Lung / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Supplementary Information	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Antenna Description of EUT	7
3.3 Test Mode Applicability and Tested Channel Detail.....	8
3.4 Test Program Used and Operation Descriptions	9
3.5 Connection Diagram of EUT and Peripheral Devices	9
3.6 Configuration of Peripheral Devices and Cable Connections	9
4 Test Instruments	10
4.1 Unwanted Emissions below 1 GHz	10
4.2 Radiated Spurious Emissions below 1GHz.....	11
4.3 Unwanted Emissions above 1 GHz.....	11
4.4 Radiated Spurious Emissions above 1GHz	12
5 Limits of Test Items.....	13
5.1 Unwanted Emissions below 1 GHz	13
5.2 Radiated Spurious Emissions below 1GHz.....	13
5.3 Unwanted Emissions above 1 GHz.....	14
5.4 Radiated Spurious Emissions above 1GHz	15
6 Test Arrangements.....	16
6.1 Unwanted Emissions below 1 GHz	16
6.1.1 Test Setup	16
6.1.2 Test Procedure.....	17
6.2 Radiated Spurious Emissions below 1GHz.....	18
6.2.1 Test Setup	18
6.2.2 Test Procedure.....	19
6.3 Unwanted Emissions above 1 GHz.....	20
6.3.1 Test Setup	20
6.3.2 Test Procedure.....	20
6.4 Radiated Spurious Emissions above 1GHz	21
6.4.1 Test Setup	21
6.4.2 Test Procedure.....	21
7 Test Results of Test Item	22
7.1 Unwanted Emissions below 1 GHz	22
7.2 Radiated Spurious Emissions below 1GHz.....	24
7.3 Unwanted Emissions above 1 GHz.....	26
7.4 Radiated Spurious Emissions above 1GHz	28
8 Pictures of Test Arrangements	30
9 Information of the Testing Laboratories	31

Release Control Record

Issue No.	Description	Date Issued
RFBCKS-WTW-P22080716B-3	Original release.	2024/8/29

1 Certificate

Product: AP

Brand: WNC, Comcast, Cox, Charter

Test Model: WNXL11BWL

Sample Status: Engineering sample

Applicant: Wistron NeWeb Corp.

Test Date: 2024/8/15 ~ 2024/8/21

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
47 CFR FCC Part 15, Subpart E (Section 15.407)
47 CFR FCC Part 22
47 CFR FCC Part 24
47 CFR FCC Part 27
47 CFR FCC Part 90
47 CFR FCC Part 2

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

Standard / Clause	Test Item	Result	Remark
15.205 /15.209 /15.247(d) 15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Meet the requirement of limit.
Part 27.53(g)	Radiated Spurious Emissions below 1GHz	Pass	Meet the requirement of limit.
15.205 /15.209 /15.247(d) 15.407(b) (1/2/3/4(i)/10)	Unwanted Emissions above 1 GHz	Pass	Meet the requirement of limit.
Part 27.53(g)	Radiated Spurious Emissions above 1GHz	Pass	Meet the requirement of limit.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
Radiated Spurious Emissions below 1GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.1 dB
Radiated Spurious Emissions above 1GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.1 dB
	1 GHz ~ 18 GHz	5.0 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AP
Brand	WNC, Comcast, Cox, Charter
Test Model	WNXL11BWL
Modulation Technology	DSSS, OFDM, OFDMA
Operating Frequency	WLAN 2412 ~ 2462 MHz 5180 ~ 5240 MHz 5260 ~ 5320 MHz 5500 ~ 5720 MHz 5745 ~ 5825 MHz BT-LE 2402 ~ 2480 MHz

Note:

1. This report is prepared for FCC Class II permissive change. The difference compared with the design is as the following information:
 - ◆ Changed LTE module from QUECTEL EM06-A to Telit Cinterion LN920A6-NA (WWAN module FCC ID: RI7LN920NA).
2. According to above condition, there are Unwanted Emissions and Radiated Spurious Emissions test items needs to be performed. All data for meeting the requirement is verified.
3. The EUT contains certified WWAN module which FCC ID: RI7LN920NA (Brand: Telit Cinterion; Model: LN920A6-NA)
4. The EUT uses following accessories.

Item	Brand	Model	Specification
AC Adapter 1	EPS3	ML36-7120300-A1	AC Input: 100-120V, 50/60Hz, 1A DC Output: 12V, 3.0A DC Output Cable: 1.8m Plug: US
AC Adapter 2	EPS3	NBC36G120300VU	AC Input: 100-120V, 50/60Hz, 1A DC Output: 12V, 3.0A DC Output Cable: 1.8m Plug: US

5. The EUT has below radios as following table:

Radio 1	Radio 2	Radio 3
WLAN 2.4GHz + BT-LE	WLAN 5GHz (Low Band)	WLAN 5GHz (High Band)

6. Simultaneously transmission combination.

Combination	Technology				
1	WLAN 2.4GHz	WLAN 5GHz (Low Band)	WLAN 5GHz (High Band)	BT-LE	LTE

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

7. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna NO.	RF Chain NO.	Brand	Model	Antenna Net Gain(dBi)	Frequency range (GHz)	Antenna Type	Connector Type
2G ANT	Chain 0	WNC	XLE	4.00	2.4~2.4835	Dipole	ipex(MHF)
	Chain 1	WNC	XLE	3.20	2.4~2.4835	Dipole	ipex(MHF)
5GL ANT	Chain 0	WNC	XLE	4.60	5.15~5.35	Dipole	ipex(MHF)
	Chain 1	WNC	XLE	4.70	5.15~5.35	Dipole	ipex(MHF)
5GH ANT	Chain 0	WNC	XLE	4.90	5.47~5850	Dipole	ipex(MHF)
	Chain 1	WNC	XLE	4.50	5.47~5850	Dipole	ipex(MHF)
	Chain 2	WNC	XLE	5.00	5.47~5850	Dipole	ipex(MHF)
	Chain 3	WNC	XLE	4.80	5.47~5850	Dipole	ipex(MHF)
BLE ANT	Chain 0	WNC	XLE	4.10	2.4~2.4835	PCB	ipex(MHF)
Antenna NO.	Antenna Net Gain(dBi)		Frequency range		Antenna Type		Connector Type
WWAN	2.00		1.850~1.915 GHz		Dipole		ipex(MHF)
	2.00		1.710~1.780 GHz		Dipole		ipex(MHF)
	3.00		814~849 MHz		Dipole		ipex(MHF)
	2.00		2.496~2.690 GHz		Dipole		ipex(MHF)
	3.00		699-716 MHz		Dipole		ipex(MHF)
	3.00		777-787 MHz		Dipole		ipex(MHF)
	0.00		2.305~2.315 GHz		Dipole		ipex(MHF)

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

The directional antenna gain, please refer to the following table:

Frequency Range (GHz)	Directional Antenna Gain (dBi)	Antenna Type	Antenna Connector
2.4~2.4835	3.63	Dipole	i-pex(MHF)
5.15~5.25	5.68		
5.25~5.35	5.59		
5.47~5.725	4.19		
5.725~5.85	4.89		

Note: Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. The AC Adapter has the following models: EPS3 ML36-7120300-A1/ EPS3 NBC36G120300VU. Pre-scan these models of AC Adapters and find the worst case as a representative test condition.
Worst Case:	1. AC Adapter Worst Condition: EPS3 ML36-7120300-A1


Following channel(s) was (were) selected for the final test as listed below:

Test Item	Combination	Test Standard	Mode	Tested Channel
Unwanted Emissions below 1 GHz	1	FCC 15.247 FCC 15.407	802.11b	6
			802.11a	48
			802.11ax (HE40)	159
			BT-LE 1M	0
			LTE B12	23130(711 MHz)
Radiated Spurious Emissions below 1GHz	1	FCC Part 27	802.11b	6
			802.11a	48
			802.11ax (HE40)	159
			BT-LE 1M	0
			LTE B12	23130(711 MHz)
Unwanted Emissions above 1 GHz	1	FCC 15.247 FCC 15.407	802.11b	6
			802.11a	48
			802.11ax (HE40)	159
			BT-LE 1M	0
			LTE B12	23130(711 MHz)
Radiated Spurious Emissions above 1GHz	1	FCC Part 27	802.11b	6
			802.11a	48
			802.11ax (HE40)	159
			BT-LE 1M	0
			LTE B12	23130(711 MHz)

3.4 Test Program Used and Operation Descriptions

Controlling software (WiFi: accessMTool_REL_3_2_1_5; BT: Telnet paste BT cmd.txt; WWAN: EUT link up with simulator) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.5 Connection Diagram of EUT and Peripheral Devices

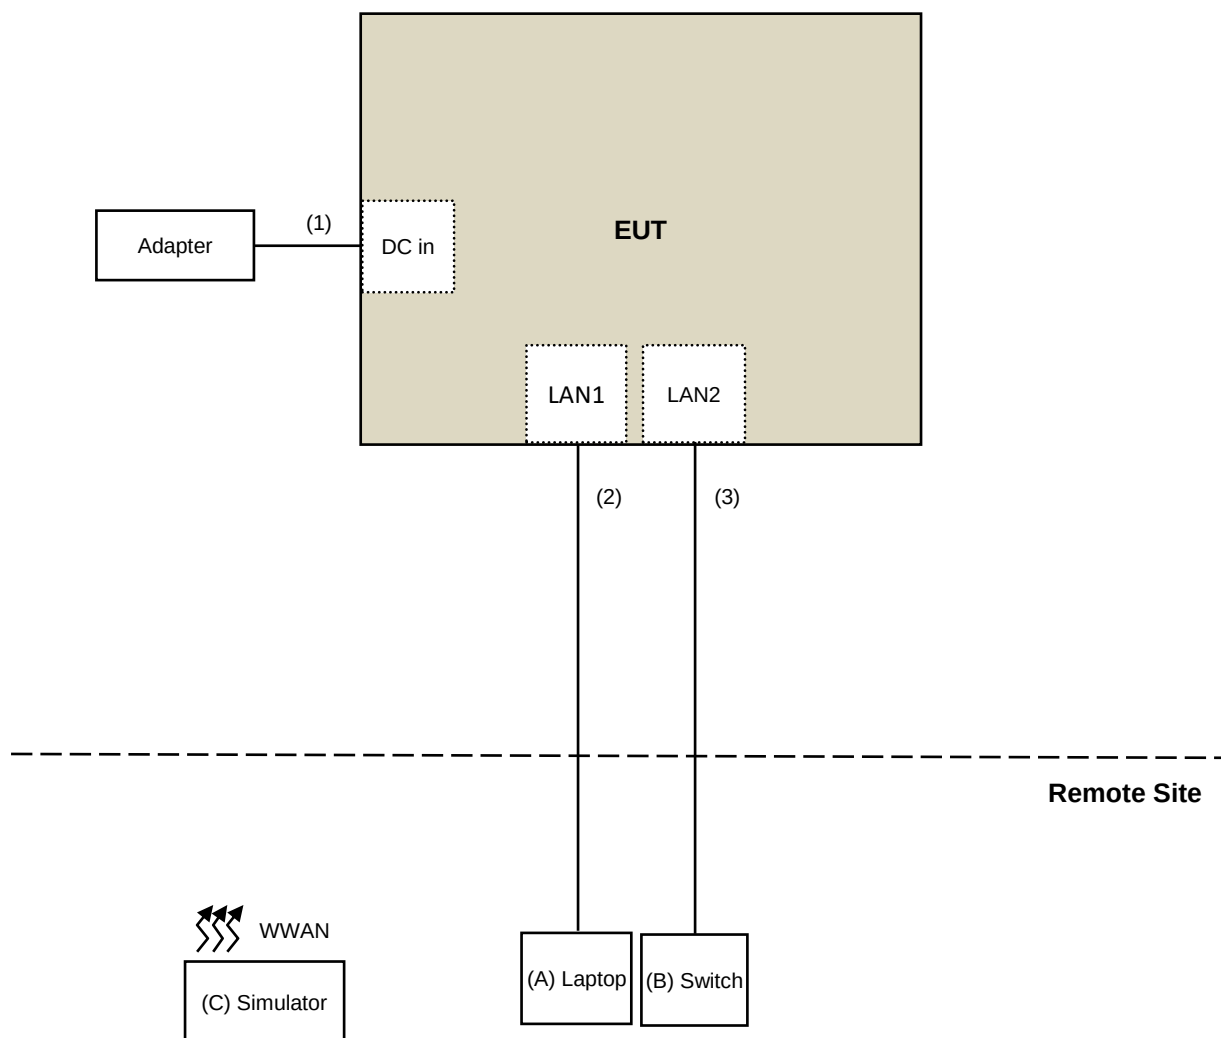

3.6 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Dell	P92G	BM6Q4P2	N/A	Provided by Lab
B	Switch	D-Link	DGS-1005D	DR8WC92000523	N/A	Provided by Lab
C	Simulator	Keysight	E7515A	MY55340229	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.8	No	0	Supplied by applicant
2	RJ-45 Cable	1	10	No	0	Provided by Lab
3	RJ-45 Cable	1	10	No	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-0942	2023/10/12	2024/10/11
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-01	2024/5/16	2025/5/15
Loop Antenna Electro-Metrics	EM-6879	264	2024/2/23	2025/2/22
MXA Signal Analyzer Keysight	N9020B	MY60112410	2024/3/13	2025/3/12
MXE EMI Receiver Keysight	N9038A	MY59050100	2024/6/19	2025/6/18
Preamplifier EMCI	EMC330N	980852	2024/2/17	2025/2/16
	EMC001340	980142	2024/2/19	2025/2/18
RF Coaxial Cable JYEBAO	5D-FB	LOOPCAB-001	2024/2/19	2025/2/18
		LOOPCAB-002	2024/2/19	2025/2/18
RF Coaxial Cable PEWC	8D	966-6-1	2024/5/16	2025/5/15
		966-6-2	2024/5/16	2025/5/15
		966-6-3	2024/5/16	2025/5/15
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 6.
2. Tested Date: 2024/8/15

4.2 Radiated Spurious Emissions below 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-0942	2023/10/12	2024/10/11
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-01	2024/5/16	2025/5/15
Loop Antenna Electro-Metrics	EM-6879	264	2024/2/23	2025/2/22
MXA Signal Analyzer Keysight	N9020B	MY60112410	2024/3/13	2025/3/12
MXE EMI Receiver Keysight	N9038A	MY59050100	2024/6/19	2025/6/18
Preamplifier EMCI	EMC330N	980852	2024/2/17	2025/2/16
	EMC001340	980142	2024/2/19	2025/2/18
RF Coaxial Cable JYBAO	5D-FB	LOOPCAB-001	2024/2/19	2025/2/18
		LOOPCAB-002	2024/2/19	2025/2/18
RF Coaxial Cable PEWC	8D	966-6-1	2024/5/16	2025/5/15
		966-6-2	2024/5/16	2025/5/15
		966-6-3	2024/5/16	2025/5/15
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 6.
2. Tested Date: 2024/8/21

4.3 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-2035	2023/11/12	2024/11/11
	BBHA 9170	BBHA9170519	2023/11/12	2024/11/11
MXA Signal Analyzer Keysight	N9020B	MY60112410	2024/3/13	2025/3/12
MXE EMI Receiver Keysight	N9038A	MY59050100	2024/6/19	2025/6/18
Preamplifier EMCI	EMC12630SE	980385	2024/6/1	2025/5/31
	EMC184045SE	980387	2024/8/8	2025/8/7
RF Coaxial Cable EMCI	EMC104-SM-SM-1300	210205	2024/6/1	2025/5/31
	EMC104-SM-SM-2000	210203	2024/6/1	2025/5/31
	EMC104-SM-SM-8000	221015	2024/6/1	2025/5/31
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 6.
2. Tested Date: 2024/8/21

4.4 Radiated Spurious Emissions above 1GHz

Refer to section 4.3 to get the tested date and information of the instruments.

5 Limits of Test Items

5.1 Unwanted Emissions below 1 GHz

For FCC 15.247:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

For FCC 15.407:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.2 Radiated Spurious Emissions below 1GHz

According to FCC 47 CFR part 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. The limit of emissions is equal to -13 dBm.

5.3 Unwanted Emissions above 1 GHz

For FCC 15.247:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

For FCC 15.407 transmitters operating in the 5.150-5.850 GHz band:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To	Limit	
789033 D02 General UNII Test Procedure New Rules v02r01	Field Strength at 3 m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m) *
15.407(b)(2)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m) *
15.407(b)(3)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m) *
15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2 (dBμV/m) ^{*1} PK: 105.2 (dBμV/m) ^{*2} PK: 110.8 (dBμV/m) ^{*3} PK: 122.2 (dBμV/m) ^{*4}

^{*1} beyond 75 MHz or more above of the band edge.

^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

5.4 Radiated Spurious Emissions above 1GHz


According to FCC 47 CFR part 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. The limit of emissions is equal to -13 dBm.

6 Test Arrangements


6.1 Unwanted Emissions below 1 GHz

6.1.1 Test Setup

For Radiated emission below 30 MHz

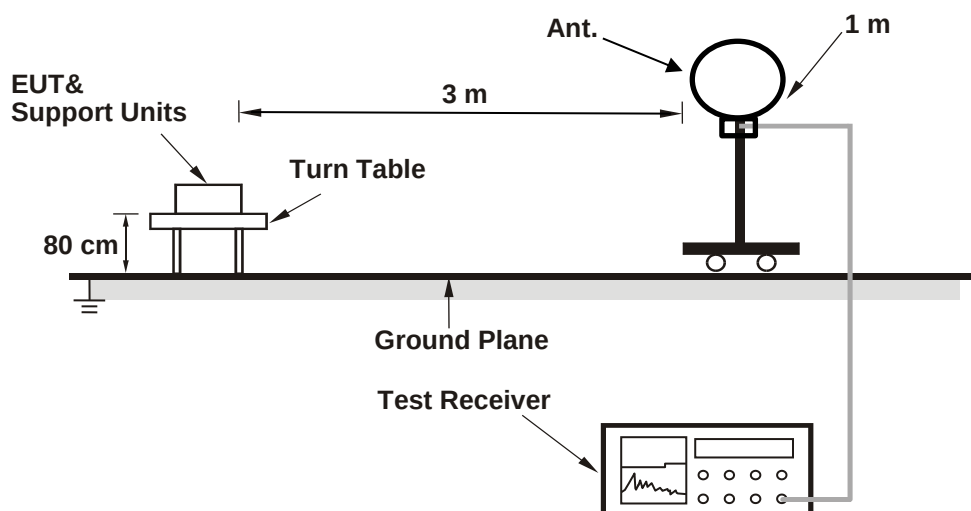

For Radiated emission above 30 MHz

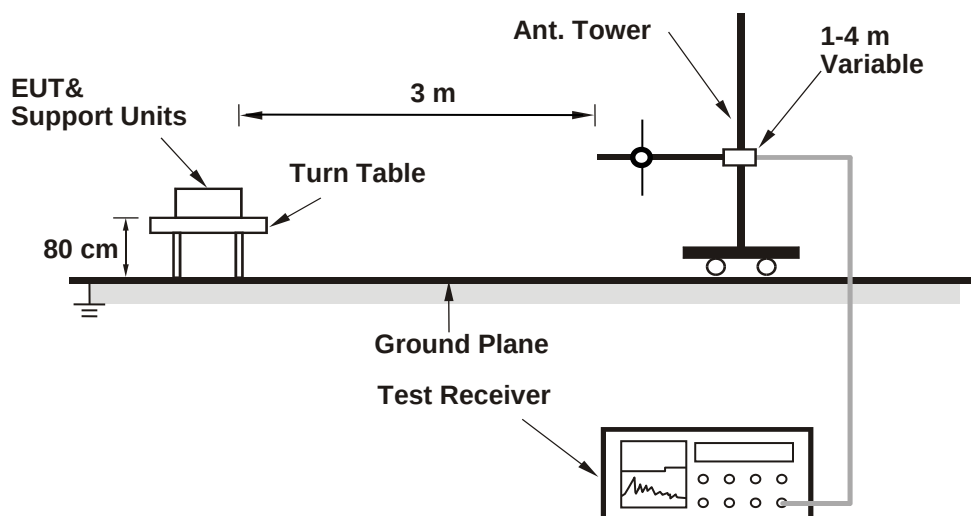

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.1.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.


Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.


6.2 Radiated Spurious Emissions below 1GHz

6.2.1 Test Setup

For Radiated emission below 30 MHz

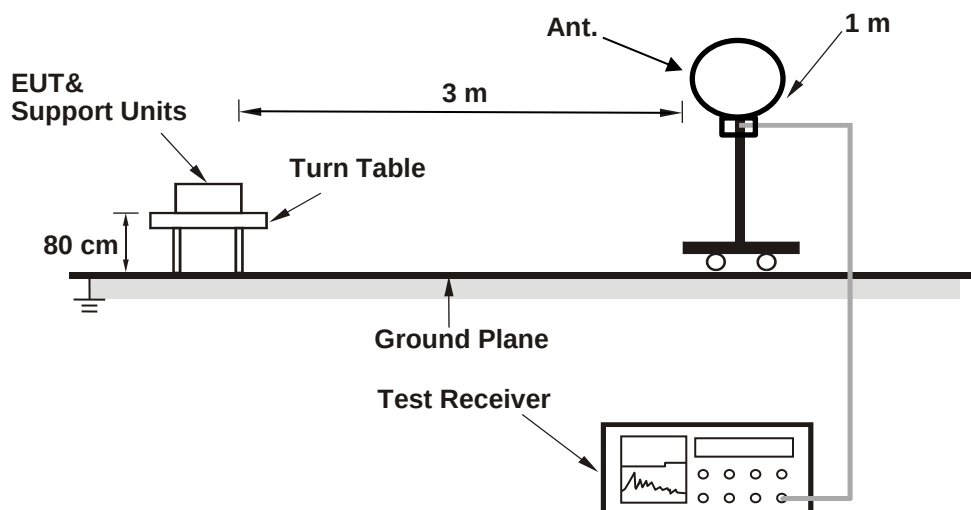

For Radiated emission above 30 MHz

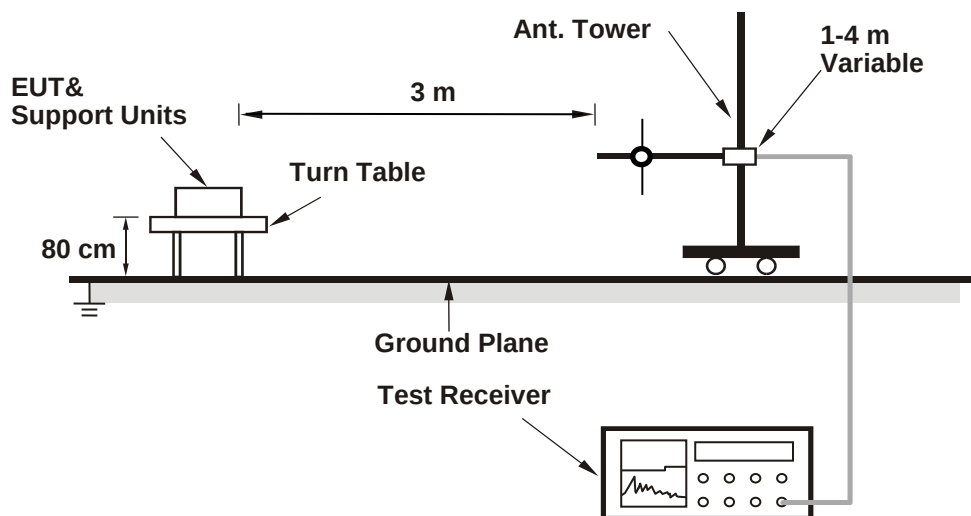

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.2.2 Test Procedure

The EUT is configured by test software or key-in commands to set data modulation and maximum power using WWAN technology.


- a. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following ANSI C63.26 section 5.5 and 5.2.7
- e. $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- f. $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.
2. The amplitude of spurious emissions in the range 9 kHz to 30 MHz which are attenuated more than 20 dB below the permissible value need not be reported.

6.3 Unwanted Emissions above 1 GHz

6.3.1 Test Setup

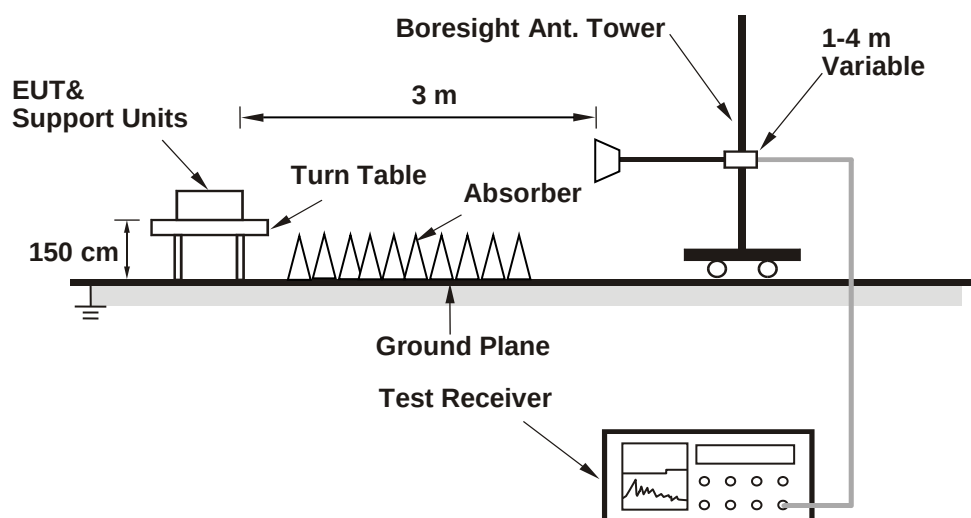

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.3.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.4 Radiated Spurious Emissions above 1GHz

6.4.1 Test Setup

For radiated emission above 1 GHz

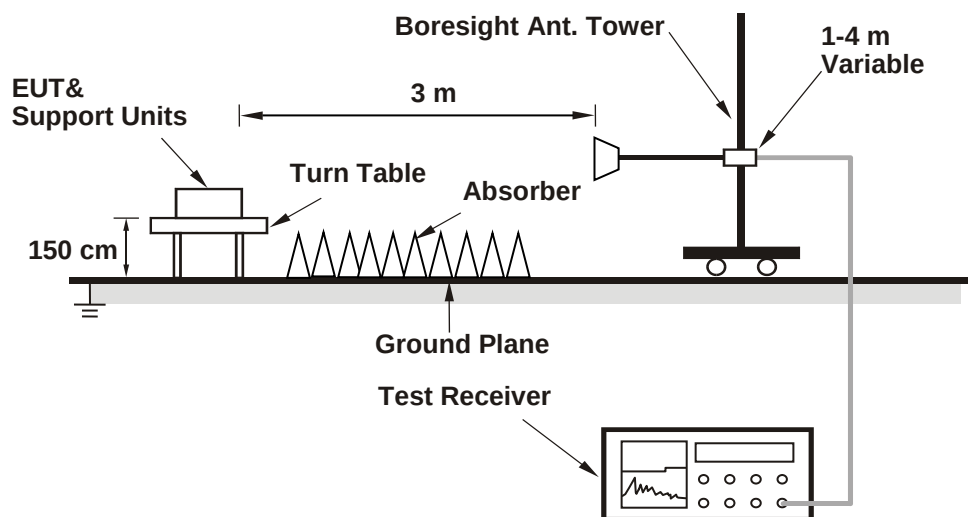

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.4.2 Test Procedure

The EUT is configured by test software or key-in commands to set data modulation and maximum power using WWAN technology.

- In the semi-anechoic chamber, EUT placed on the 1.5 m height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following ANSI C63.26 section 5.5 and 5.2.7
- $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.

7 Test Results of Test Item

7.1 Unwanted Emissions below 1 GHz

FCC 15.247


FCC 15.407

Combination	1		
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.71	24.2 QP	40.0	-15.8	2.00 H	351	37.7	-13.5
2	157.96	30.1 QP	43.5	-13.4	2.50 H	210	42.7	-12.6
3	300.06	33.9 QP	46.0	-12.1	1.00 H	97	46.2	-12.3
4	399.86	31.7 QP	46.0	-14.3	3.50 H	198	41.5	-9.8
5	500.17	26.9 QP	46.0	-19.1	1.50 H	251	34.4	-7.5
6	600.26	35.9 QP	46.0	-10.1	1.06 H	25	41.0	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

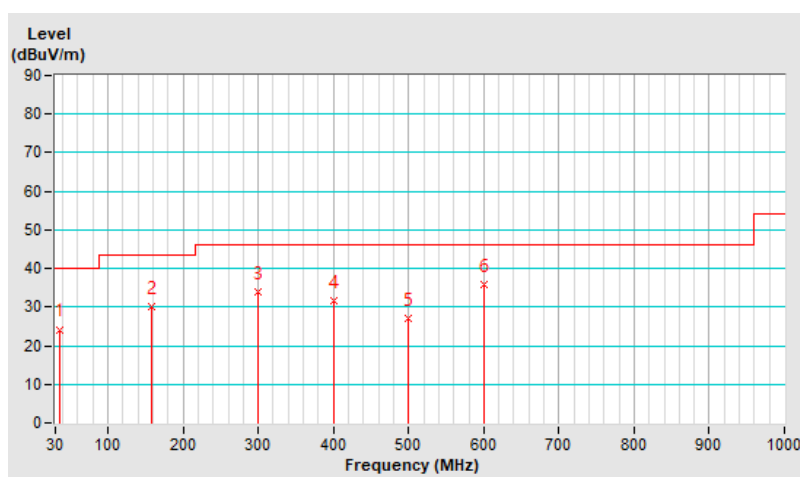


Combination	1		
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.39	35.6 QP	40.0	-4.4	4.00 V	342	49.1	-13.5
2	64.49	27.9 QP	40.0	-12.1	2.00 V	236	41.8	-13.9
3	300.17	33.6 QP	46.0	-12.4	3.50 V	91	45.9	-12.3
4	400.35	29.8 QP	46.0	-16.2	2.00 V	199	39.6	-9.8
5	500.04	26.5 QP	46.0	-19.5	1.50 V	260	34.0	-7.5
6	599.96	35.3 QP	46.0	-10.7	2.00 V	106	40.4	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

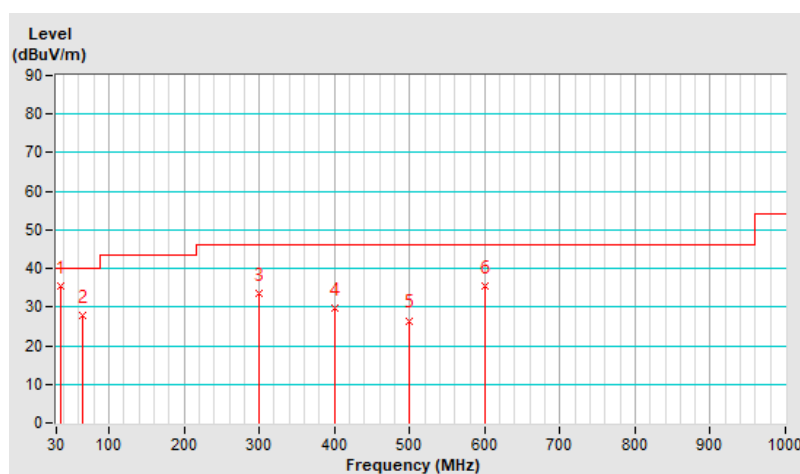

7.2 Radiated Spurious Emissions below 1GHz


FCC Part 27

Combination	1		
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.89	-75.99	-13.00	-62.99	1.00 H	256	25.30	-101.29
2	157.84	-70.39	-13.00	-57.39	1.50 H	306	30.90	-101.29
3	300.21	-67.49	-13.00	-54.49	1.50 H	231	33.80	-101.29
4	399.97	-69.89	-13.00	-56.89	2.00 H	300	31.40	-101.29
5	500	-73.79	-13.00	-60.79	1.50 H	300	27.50	-101.29
6	600.35	-65.09	-13.00	-52.09	1.00 H	164	36.20	-101.29

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

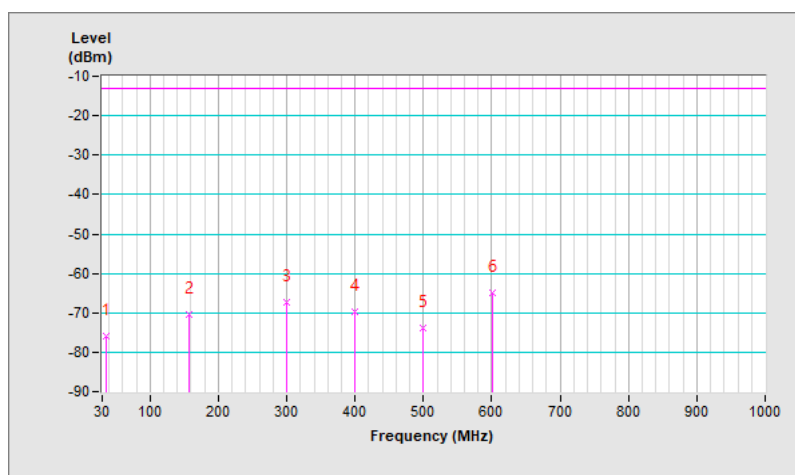


Combination	1		
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.45	-65.19	-13.00	-52.19	1.50 V	200	36.10	-101.29
2	63.2	-73.79	-13.00	-60.79	1.50 V	230	27.50	-101.29
3	299.9	-66.49	-13.00	-53.49	1.00 V	270	34.80	-101.29
4	399.5	-71.19	-13.00	-58.19	2.00 V	300	30.10	-101.29
5	500.1	-72.79	-13.00	-59.79	1.00 V	156	28.50	-101.29
6	600	-63.79	-13.00	-50.79	3.00 V	147	37.50	-101.29

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

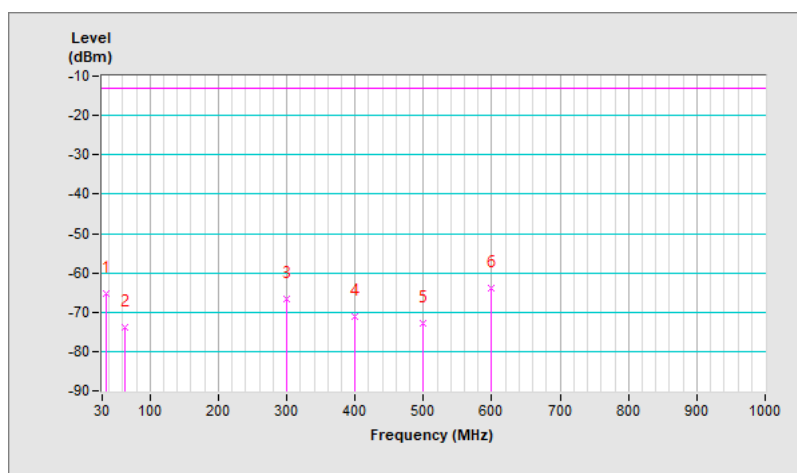

7.3 Unwanted Emissions above 1 GHz

FCC 15.247


FCC 15.407

Combination	1		
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4804	44.5 PK	74.0	-29.5	1.50 H	50	41.3	3.2
2	4804	34.5 AV	54.0	-19.5	1.50 H	50	31.3	3.2
3	4874	44.0 PK	74.0	-30.0	1.20 H	20	40.6	3.4
4	4874	39.7 AV	54.0	-14.3	1.20 H	20	36.3	3.4
5	7311	48.1 PK	74.0	-25.9	1.10 H	25	38.0	10.1
6	7311	42.1 AV	54.0	-11.9	1.10 H	25	32.0	10.1
7	#10480	47.5 PK	68.2	-20.7	1.81 H	161	32.9	14.6
8	11590	54.3 PK	74.0	-19.7	2.10 H	155	38.8	15.5
9	11590	41.9 AV	54.0	-12.1	2.10 H	159	26.4	15.5
10	15720	56.8 PK	74.0	-17.2	1.53 H	126	40.9	15.9
11	15720	42.5 AV	54.0	-11.5	1.56 H	128	26.6	15.9
12	#17385	60.1 PK	68.2	-8.1	3.19 H	330	39.6	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

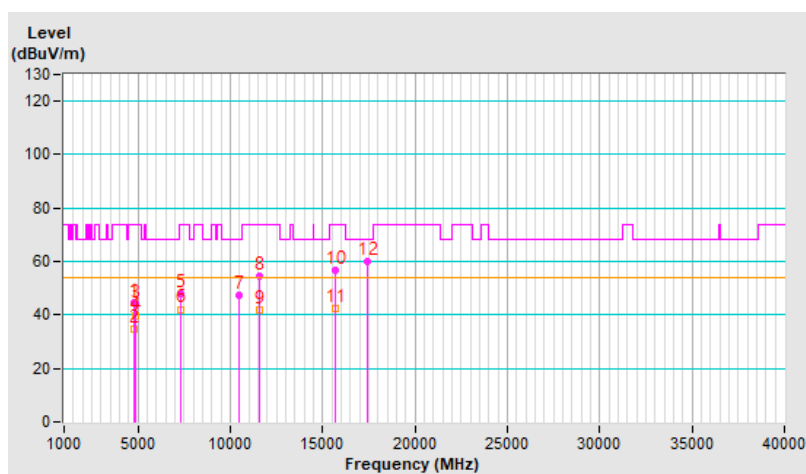


Combination	1		
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4804	43.5 PK	74.0	-30.5	2.00 V	10	40.3	3.2
2	4804	36.5 AV	54.0	-17.5	2.00 V	10	33.3	3.2
3	4874	42.5 PK	74.0	-31.5	1.80 V	220	39.1	3.4
4	4874	39.1 AV	54.0	-14.9	1.80 V	220	35.7	3.4
5	7311	48.1 PK	74.0	-25.9	1.50 V	213	38.0	10.1
6	7311	42.1 AV	54.0	-11.9	1.50 V	213	32.0	10.1
7	#10480	47.6 PK	68.2	-20.6	1.59 V	248	33.0	14.6
8	11590	54.6 PK	74.0	-19.4	1.81 V	213	39.1	15.5
9	11590	44.3 AV	54.0	-9.7	1.81 V	213	28.8	15.5
10	15720	54.0 PK	74.0	-20.0	1.76 V	30	38.1	15.9
11	15720	40.5 AV	54.0	-13.5	1.76 V	30	24.6	15.9
12	#17385	58.1 PK	68.2	-10.1	3.30 V	49	37.6	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

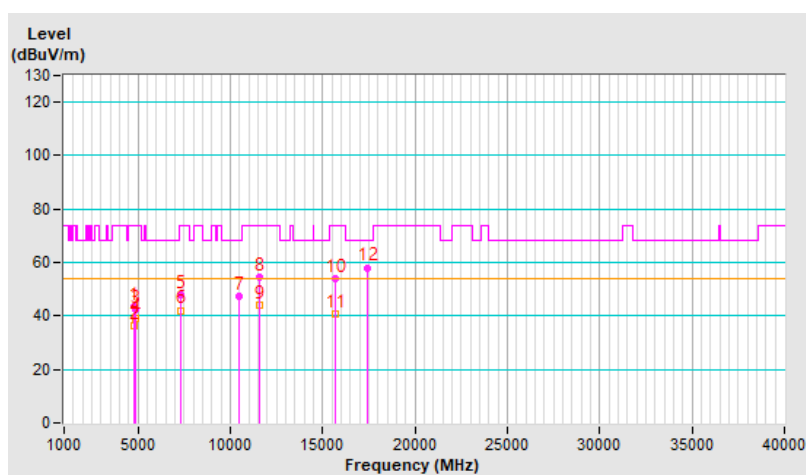

7.4 Radiated Spurious Emissions above 1GHz


FCC Part 27

Combination	1		
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422	-61.40	-13.00	-48.40	1.21 H	206	38.34	-99.74
2	2133	-59.50	-13.00	-46.50	2.20 H	136	38.35	-97.85
3	2844	-58.98	-13.00	-45.98	1.81 H	250	37.93	-96.91
4	3555	-57.89	-13.00	-44.89	2.51 H	45	38.13	-96.02

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

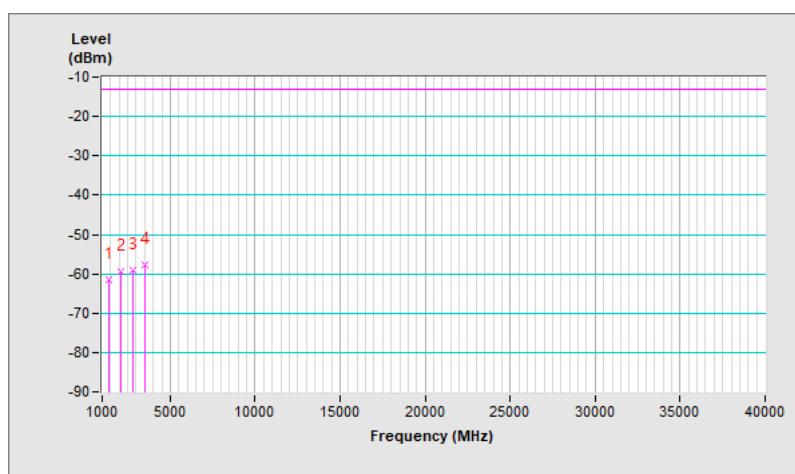


Combination	1		
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422	-61.62	-13.00	-48.62	1.57 V	320	38.12	-99.74
2	2133	-59.31	-13.00	-46.31	1.50 V	264	38.54	-97.85
3	2844	-58.80	-13.00	-45.80	2.10 V	150	38.11	-96.91
4	3555	-57.61	-13.00	-44.61	3.20 V	150	38.41	-96.02

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

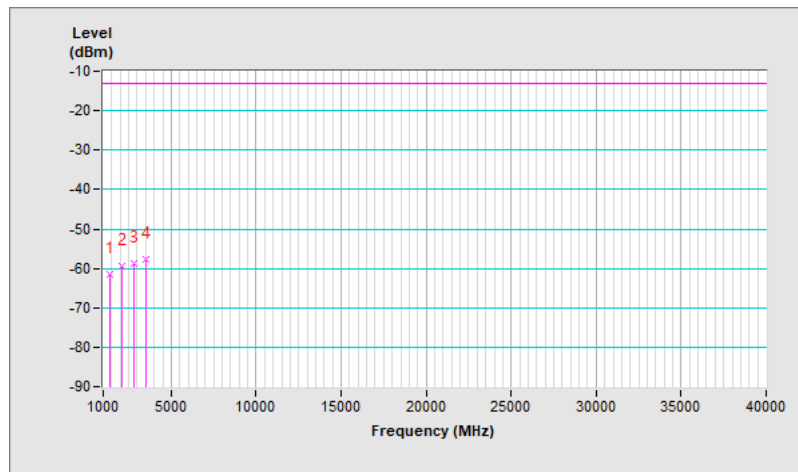

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---