




Spectrum Plot

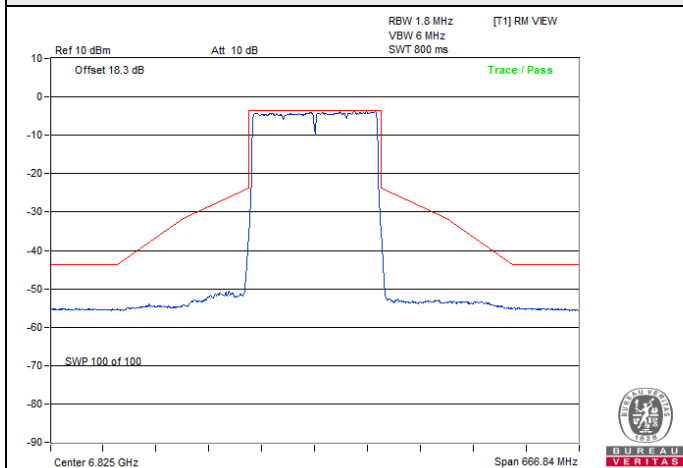


802.11be (EHT160) / Chain 1 : CH 175

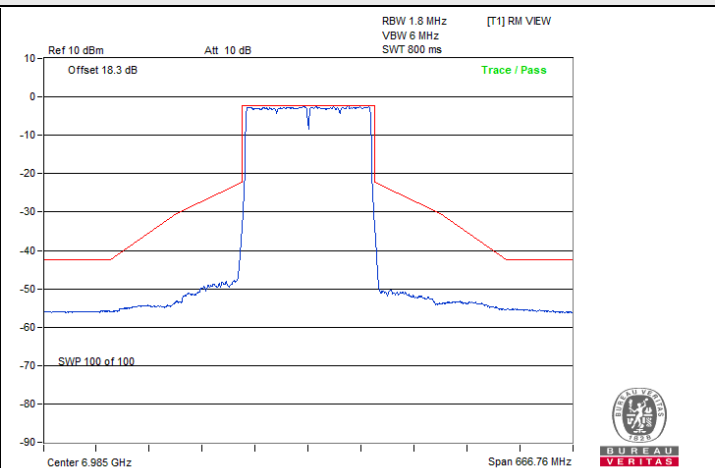


802.11be (EHT160) / Chain 1 : CH 207

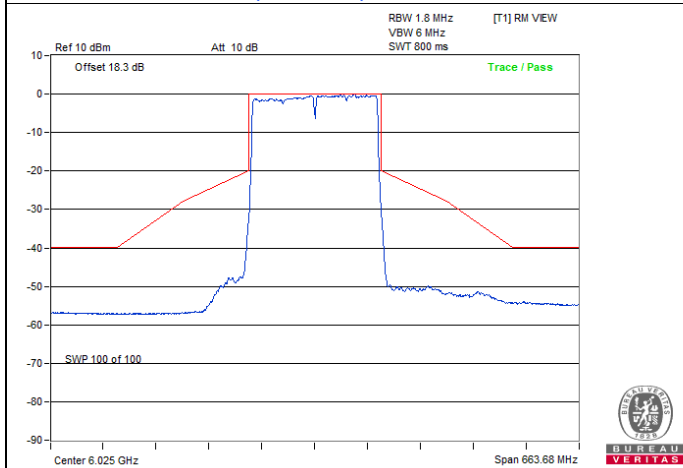


802.11be (EHT160) / Chain 2 : CH 15

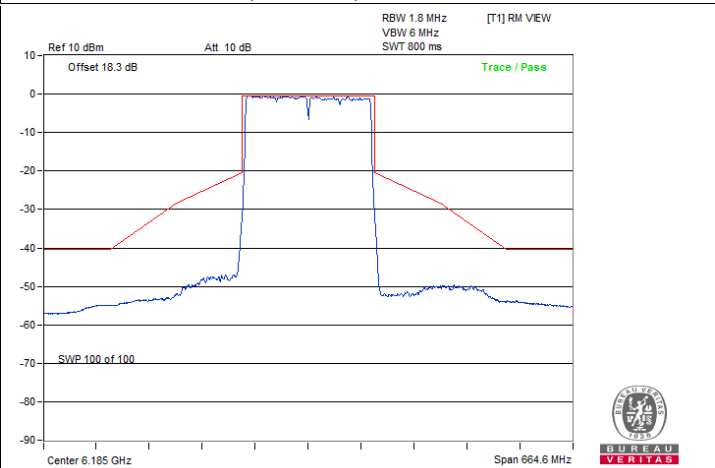

802.11be (EHT160) / Chain 2 : CH 47

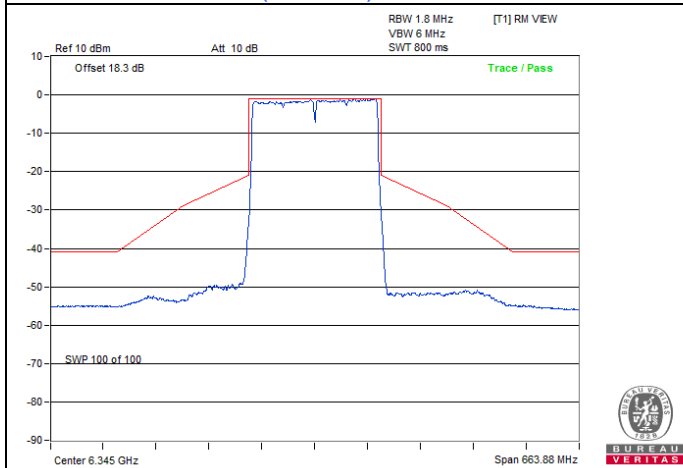


802.11be (EHT160) / Chain 2 : CH 79

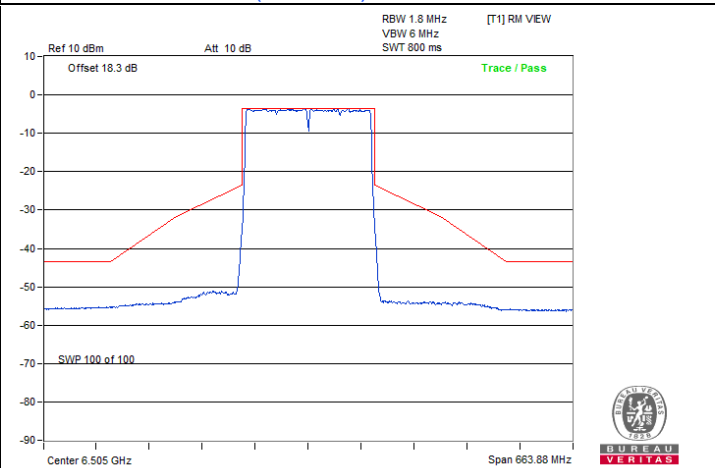


802.11be (EHT160) / Chain 2 : CH 111


Spectrum Plot

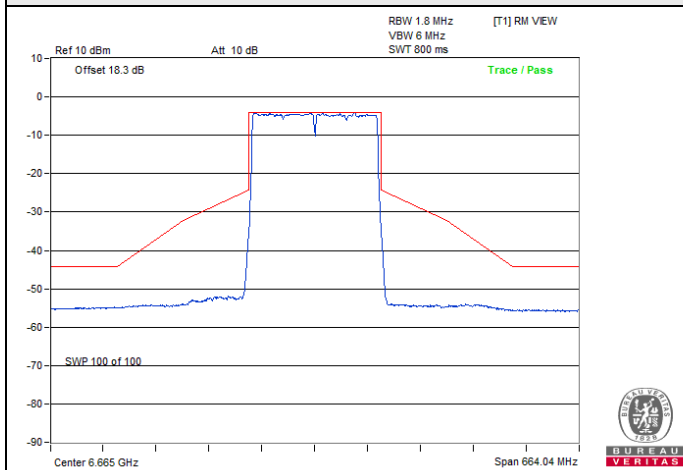


802.11be (EHT160) / Chain 2 : CH 143

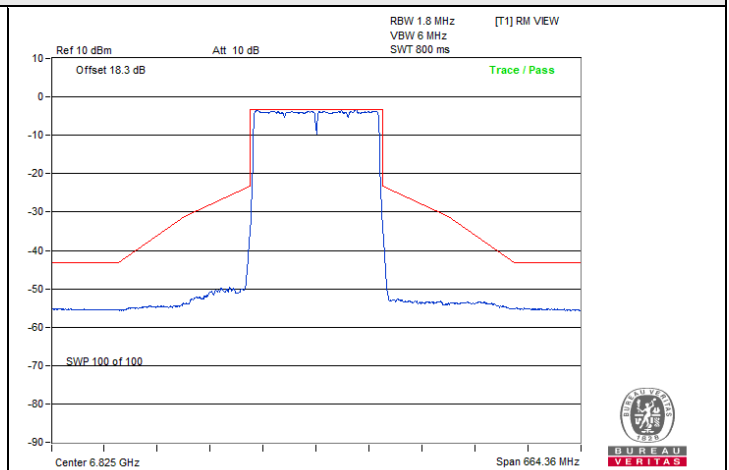


802.11be (EHT160) / Chain 2 : CH 175

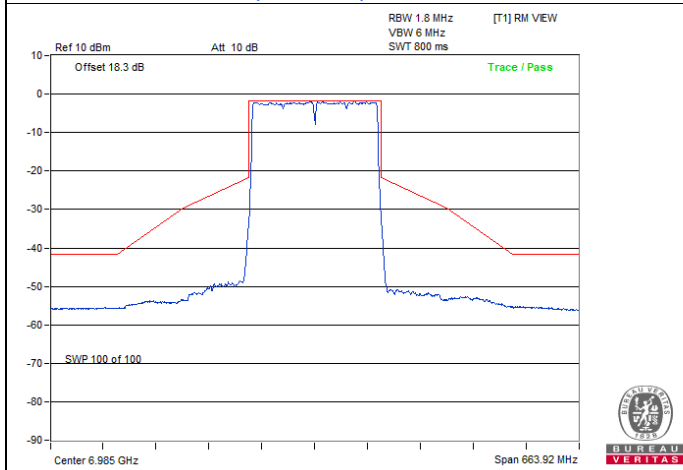


802.11be (EHT160) / Chain 2 : CH 207

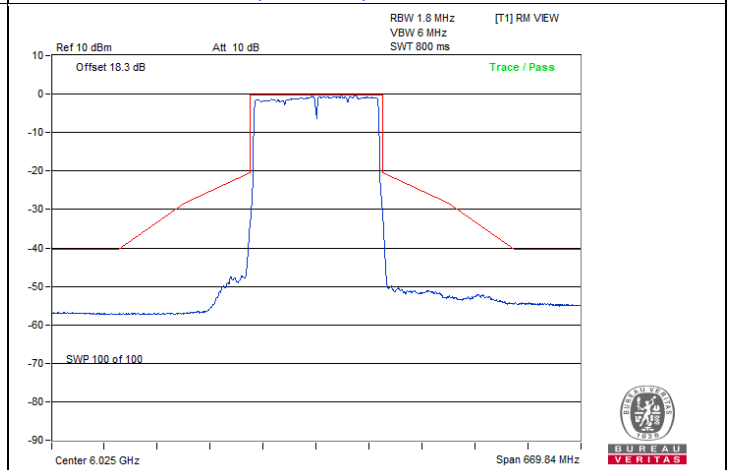

802.11be (EHT160) / Chain 3 : CH 15

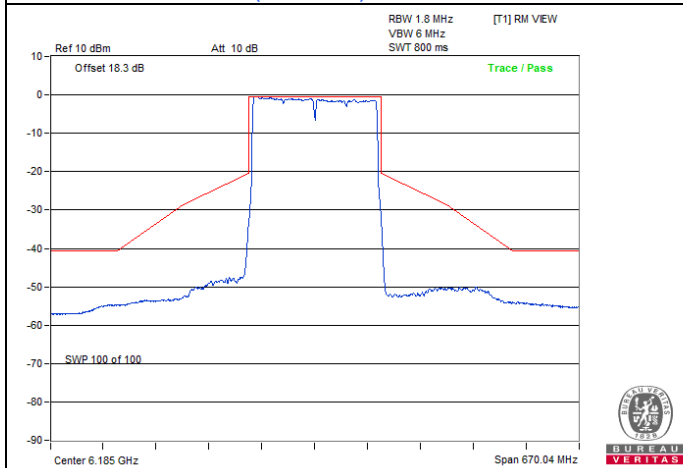


802.11be (EHT160) / Chain 3 : CH 47

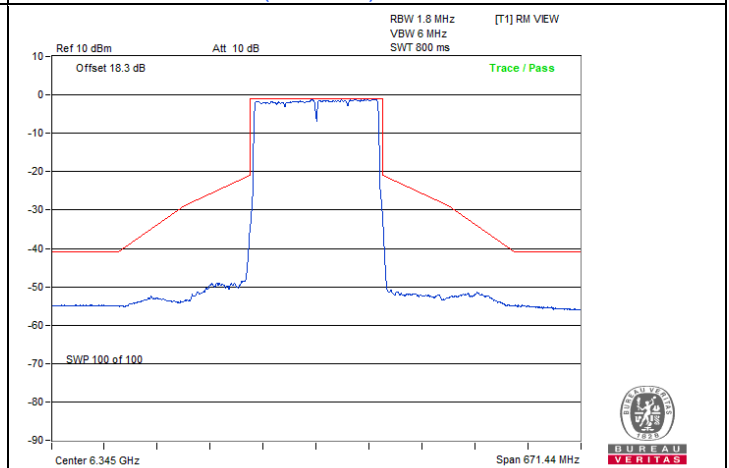


802.11be (EHT160) / Chain 3 : CH 79


Spectrum Plot

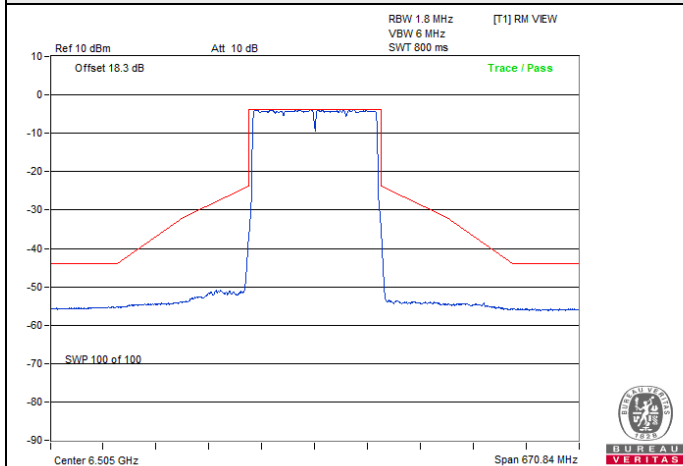


802.11be (EHT160) / Chain 3 : CH 111

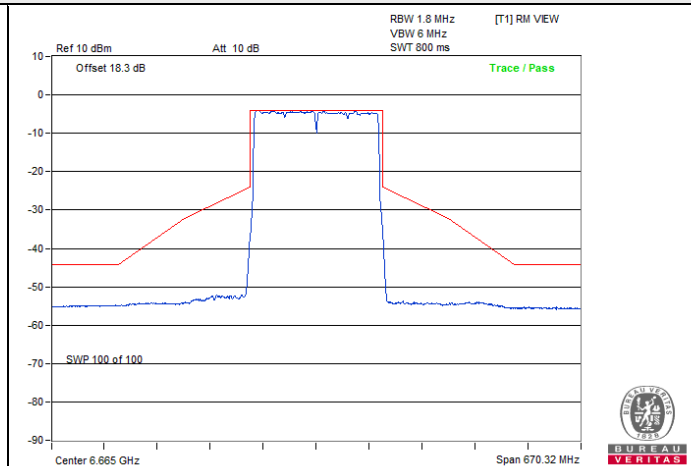

802.11be (EHT160) / Chain 3 : CH 143

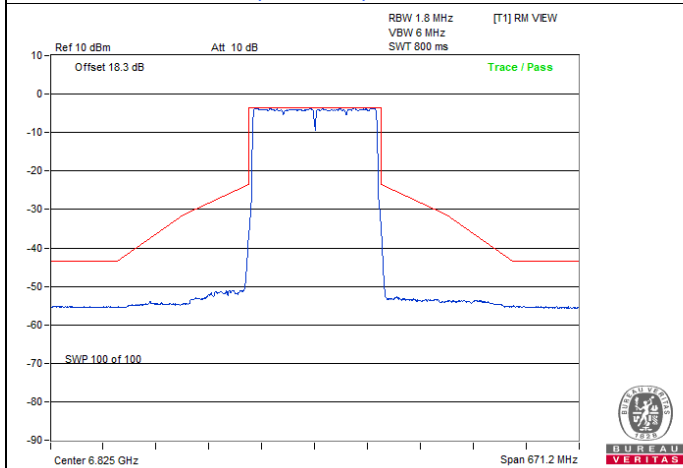


802.11be (EHT160) / Chain 3 : CH 175

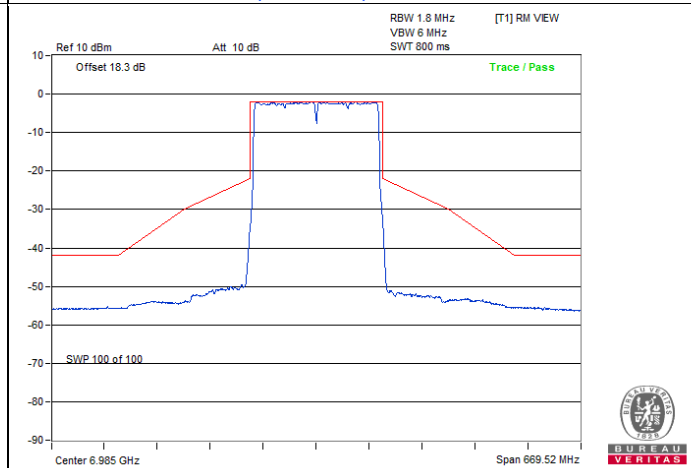


802.11be (EHT160) / Chain 3 : CH 207

802.11be (EHT320)


Spectrum Plot

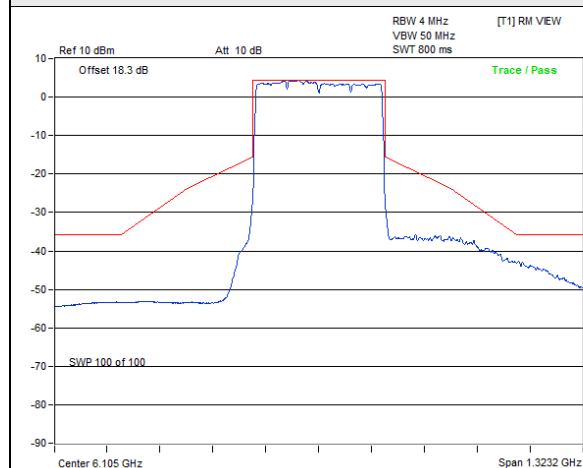


802.11be (EHT320) / Chain 0 : CH 31

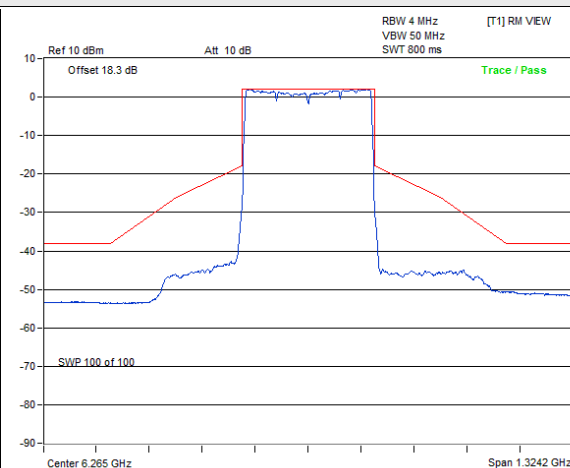


802.11be (EHT320) / Chain 0 : CH 63

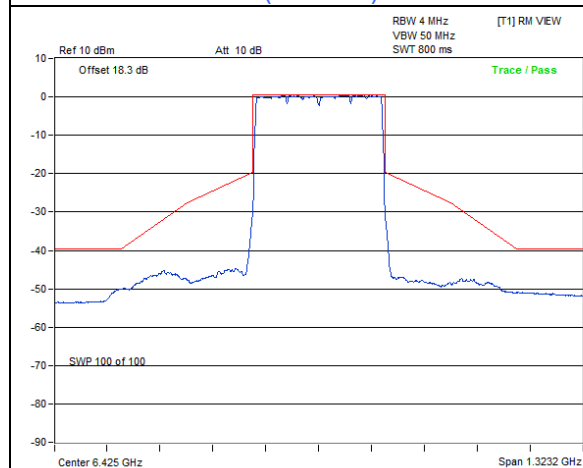


802.11be (EHT320) / Chain 0 : CH 95

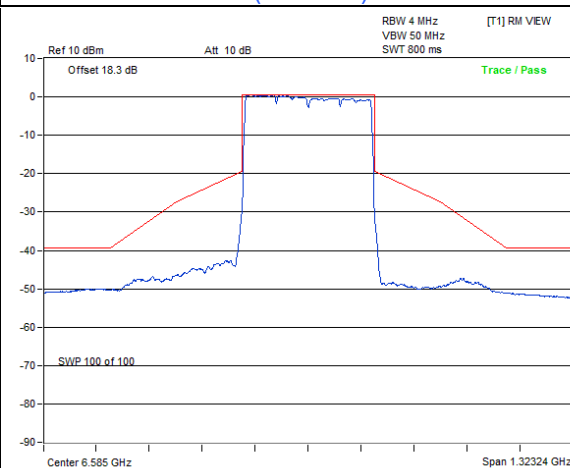

802.11be (EHT320) / Chain 0 : CH 127

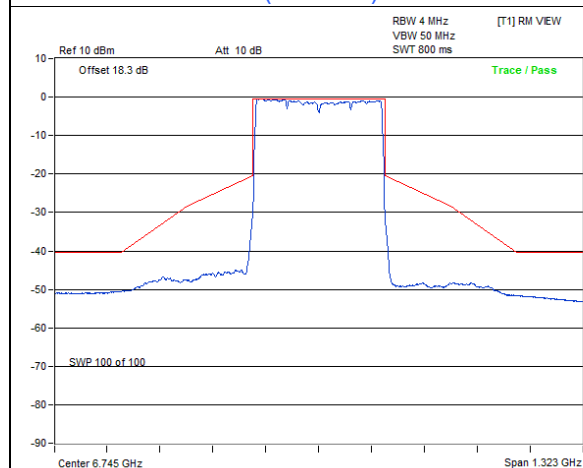


802.11be (EHT320) / Chain 0 : CH 159

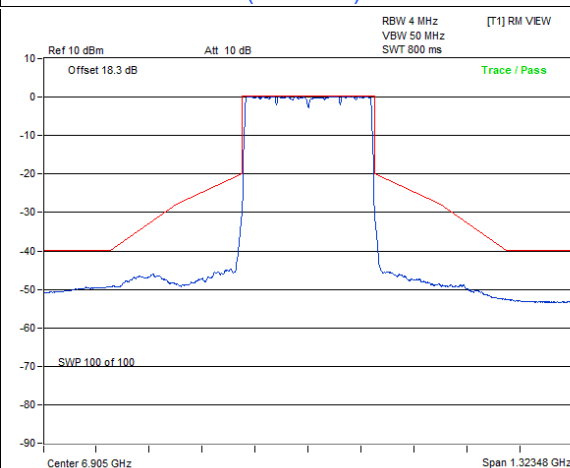


802.11be (EHT320) / Chain 0 : CH 191


Spectrum Plot

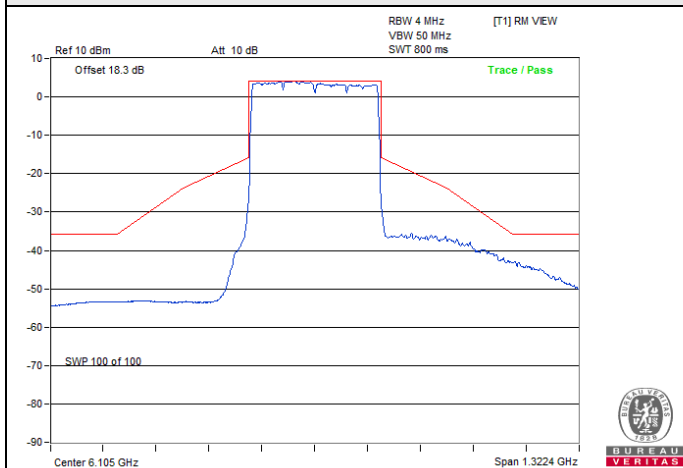


802.11be (EHT320) / Chain 1 : CH 31

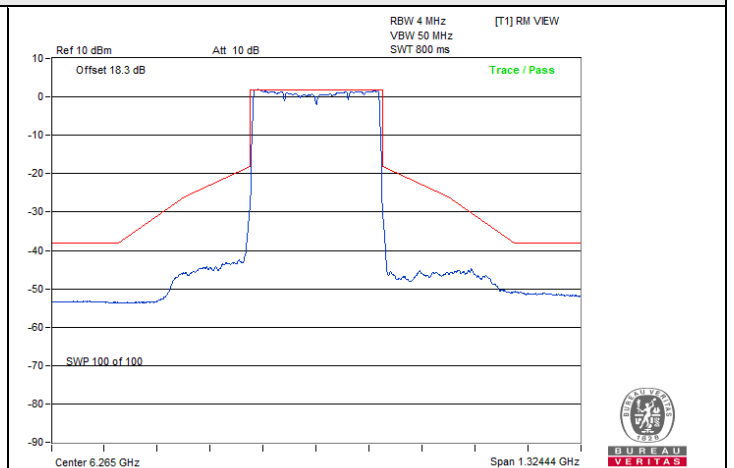


802.11be (EHT320) / Chain 1 : CH 63

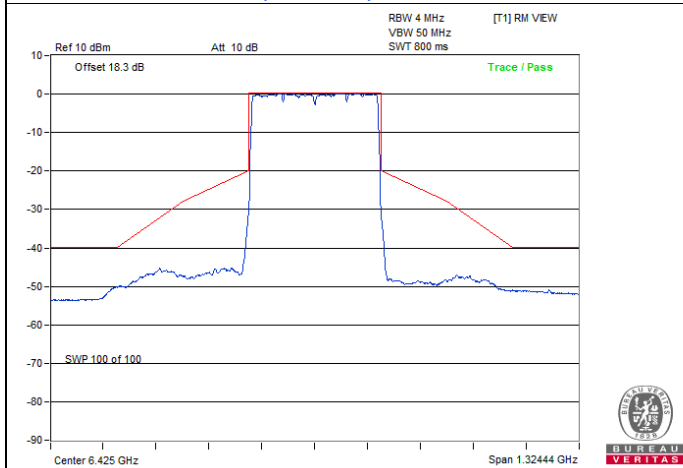


802.11be (EHT320) / Chain 1 : CH 95

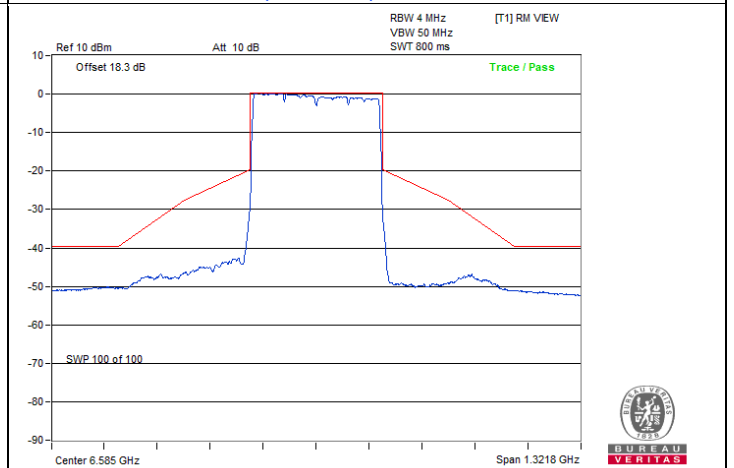

802.11be (EHT320) / Chain 1 : CH 127

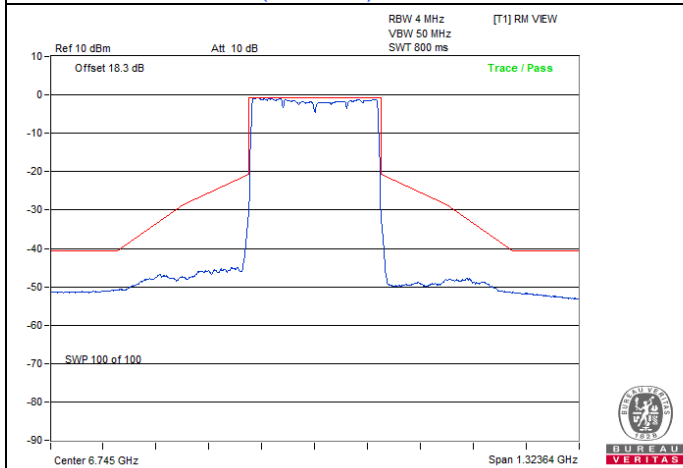


802.11be (EHT320) / Chain 1 : CH 159

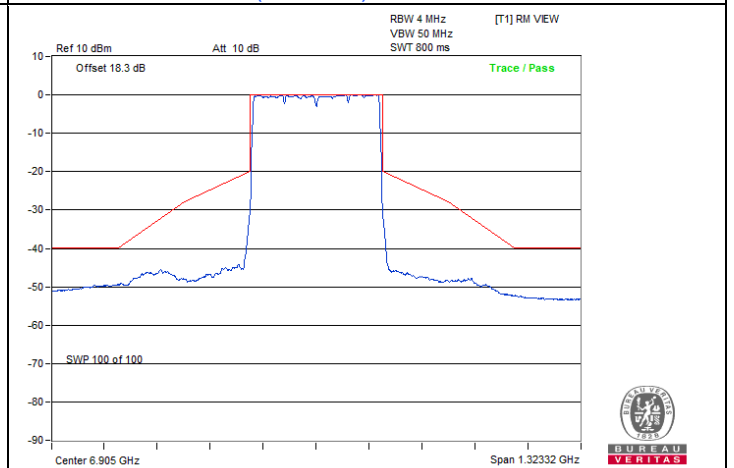


802.11be (EHT320) / Chain 1 : CH 191


Spectrum Plot

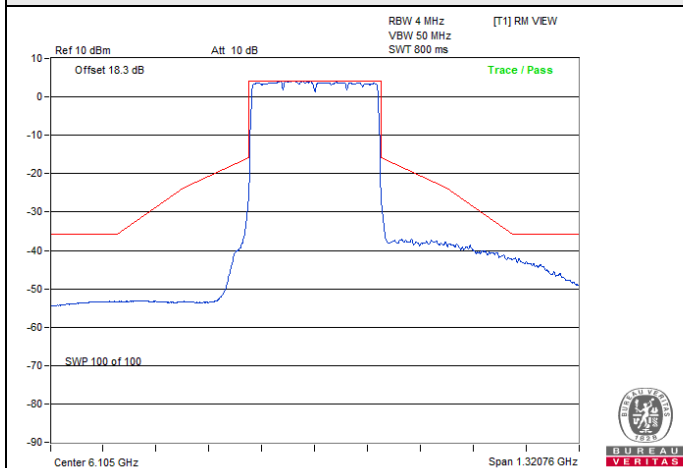


802.11be (EHT320) / Chain 2 : CH 31

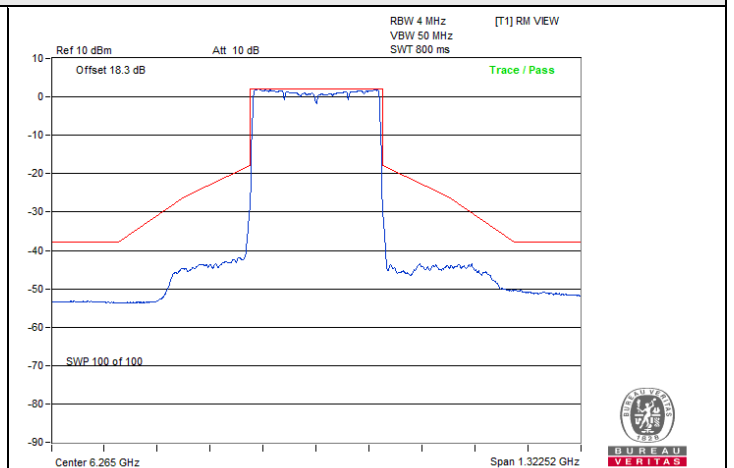


802.11be (EHT320) / Chain 2 : CH 63

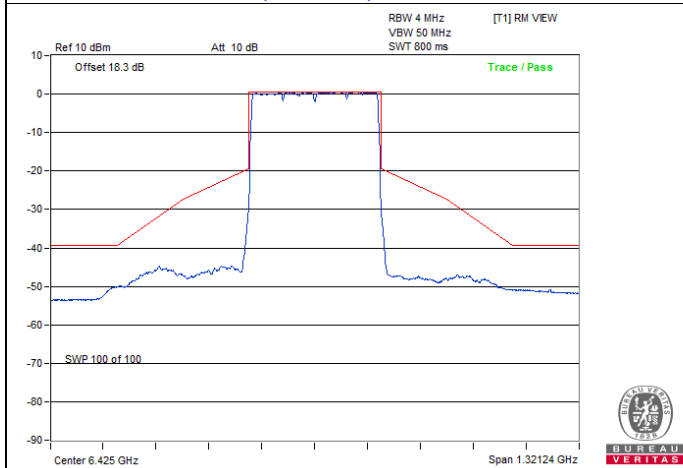


802.11be (EHT320) / Chain 2 : CH 95

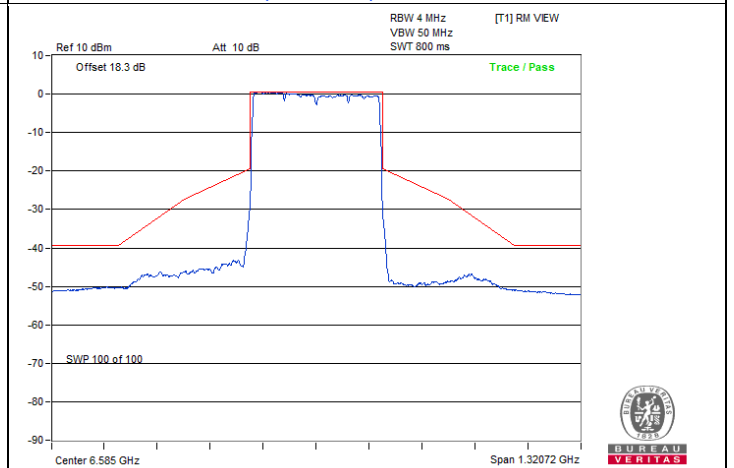

802.11be (EHT320) / Chain 2 : CH 127

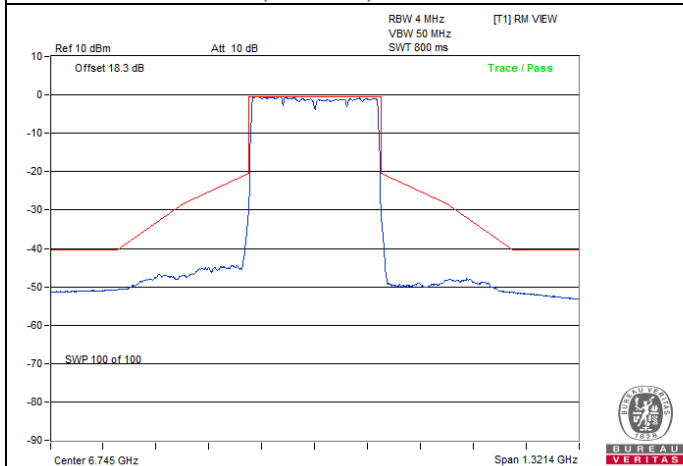


802.11be (EHT320) / Chain 2 : CH 159

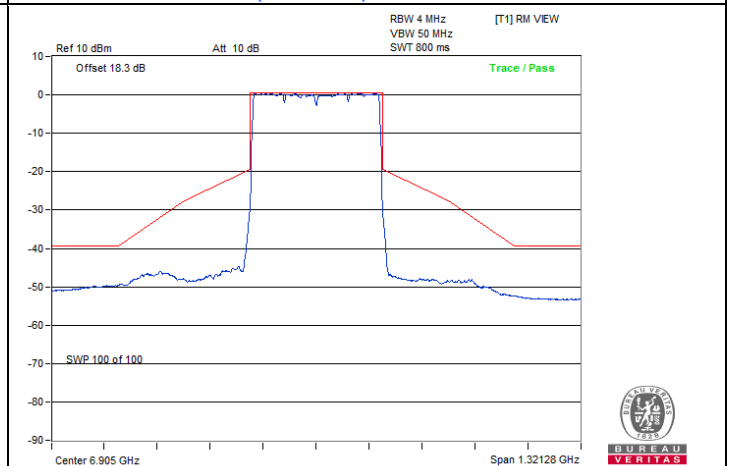


802.11be (EHT320) / Chain 2 : CH 191


Spectrum Plot

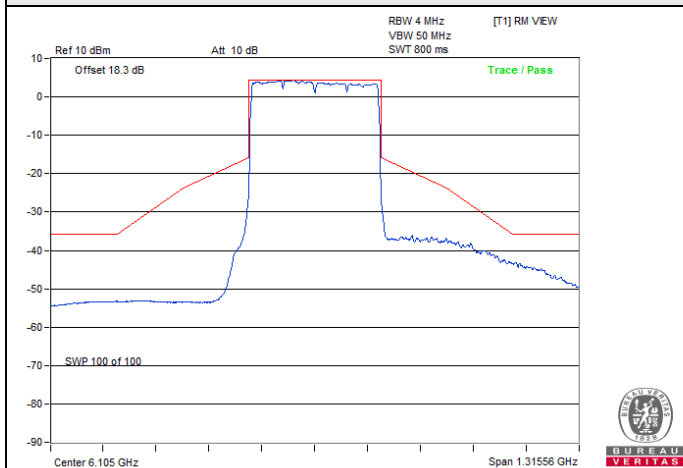


802.11be (EHT320) / Chain 3 : CH 31

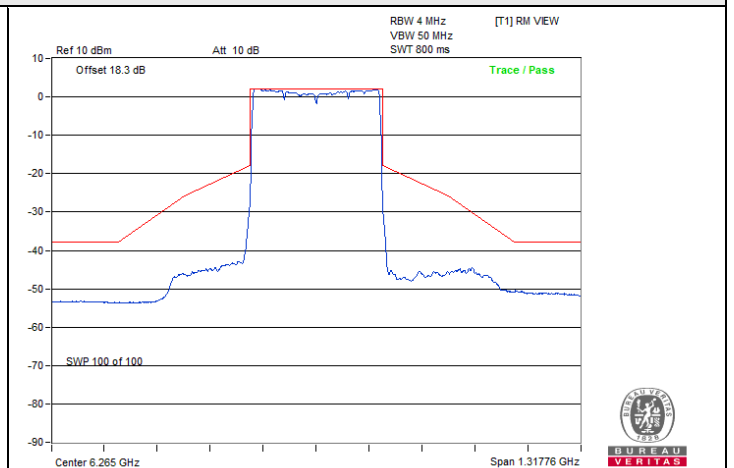


802.11be (EHT320) / Chain 3 : CH 63

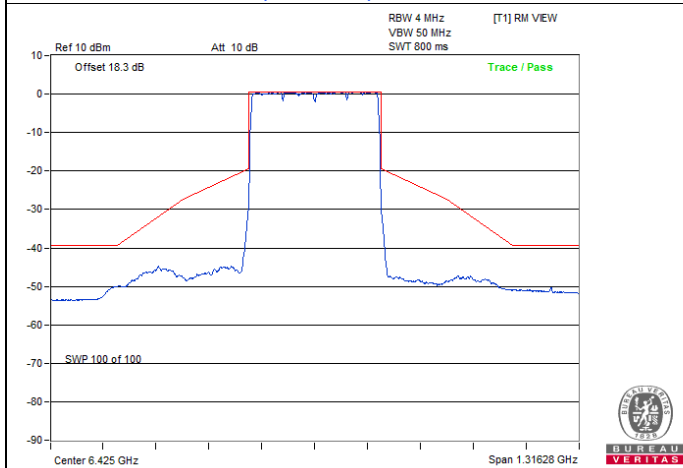


802.11be (EHT320) / Chain 3 : CH 95

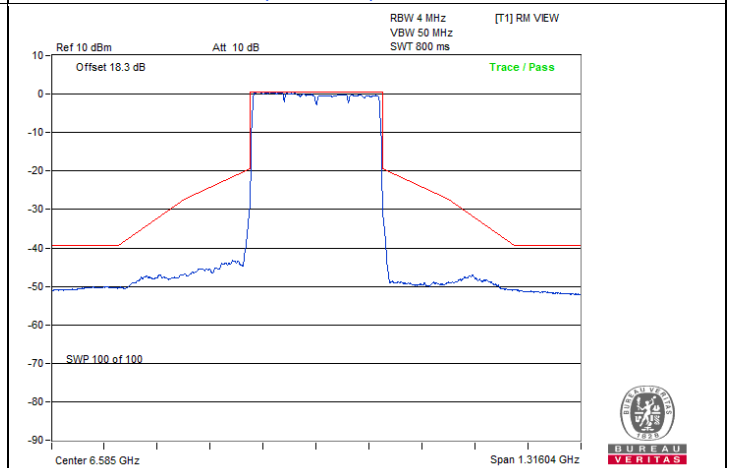

802.11be (EHT320) / Chain 3 : CH 127

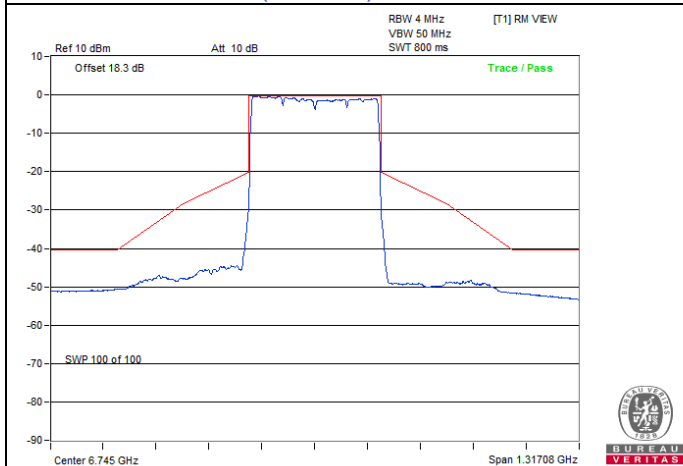

802.11be (EHT320) / Chain 3 : CH 159

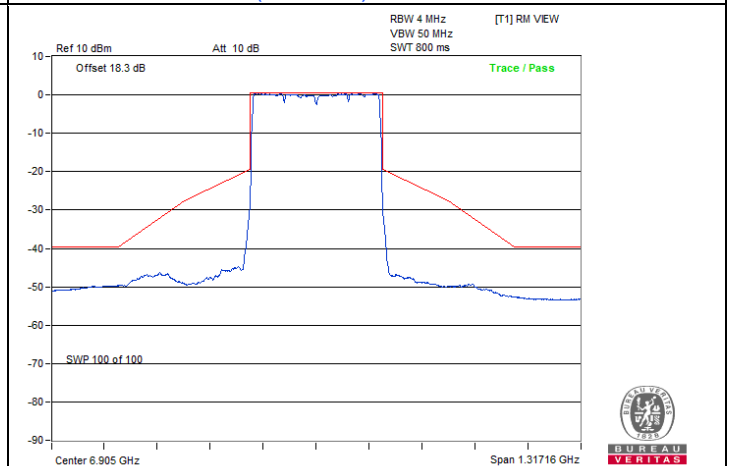

802.11be (EHT320) / Chain 3 : CH 191

7.5 Occupied Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	----------------	---------------------------	--------------	------------	-----------

802.11be (EHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
1	5955	19.14	19.08	19.14	19.08
45	6175	19.14	19.08	19.14	19.20
93	6415	19.08	19.08	19.14	19.14
97	6435	19.14	19.08	19.14	19.14
105	6475	19.14	19.08	19.08	19.20
113	6515	19.14	19.08	19.14	19.14
117	6535	19.08	19.08	19.08	19.02
149	6695	19.14	19.08	19.14	19.20
181	6855	19.08	19.14	19.14	19.20
185	6875	19.20	19.08	19.20	19.14
209	6995	19.14	19.14	19.14	19.14
233	7115	19.08	19.08	19.20	19.20

802.11be (EHT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
3	5965	38.16	38.16	38.16	38.04
43	6165	38.16	37.92	38.16	38.04
91	6405	38.16	38.04	38.16	37.92
99	6445	38.16	38.04	38.16	38.16
107	6485	38.16	38.28	38.04	38.04
115	6525	38.04	38.16	38.04	38.16
123	6565	38.04	38.16	38.04	38.16
155	6725	38.16	38.16	38.16	38.04
179	6845	38.28	37.92	38.04	38.16
187	6885	38.16	38.16	38.04	38.16
211	7005	38.16	38.04	38.04	38.16
227	7085	38.04	38.16	37.92	38.16

802.11be (EHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
7	5985	77.52	77.76	77.76	77.76
39	6145	77.52	78.00	77.76	77.76
87	6385	77.52	77.76	77.76	77.76
103	6465	78.00	78.00	78.00	77.76
119	6545	77.76	77.76	77.76	77.76
151	6705	77.76	77.76	77.76	77.76
183	6865	77.76	77.76	77.76	77.76
199	6945	77.76	77.76	78.00	77.76
215	7025	77.76	77.76	78.00	77.76


802.11be (EHT160)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
15	6025	156.48	157.44	156.96	156.48
47	6185	157.44	157.44	157.92	157.44
79	6345	157.44	157.44	156.96	156.96
111	6505	156.48	157.92	157.92	157.44
143	6665	157.44	157.44	156.96	157.44
175	6825	156.96	157.44	157.44	157.44
207	6985	157.92	157.44	157.44	157.92


802.11be (EHT320)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
31	6105	314.88	314.88	315.84	314.88
63	6265	315.84	315.84	315.84	316.80
95	6425	315.84	315.84	314.88	315.84
127	6585	315.84	316.80	315.84	314.88
159	6745	316.80	315.84	315.84	315.84
191	6905	315.84	315.84	314.88	314.88


Spectrum Plot of Maximum Value

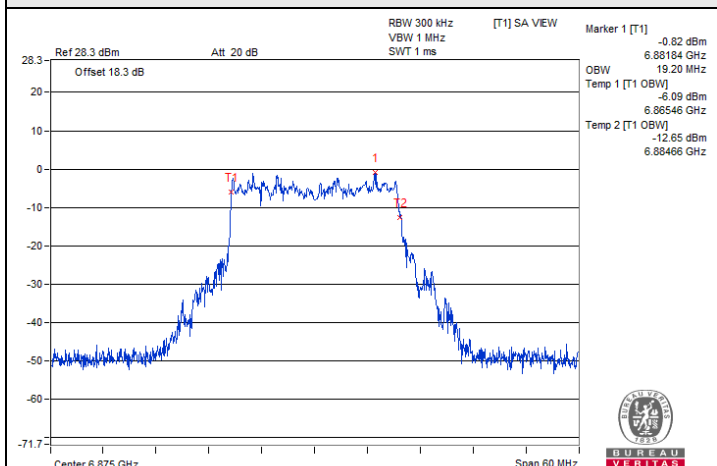


802.11be (EHT20) / Chain 0 : CH 185

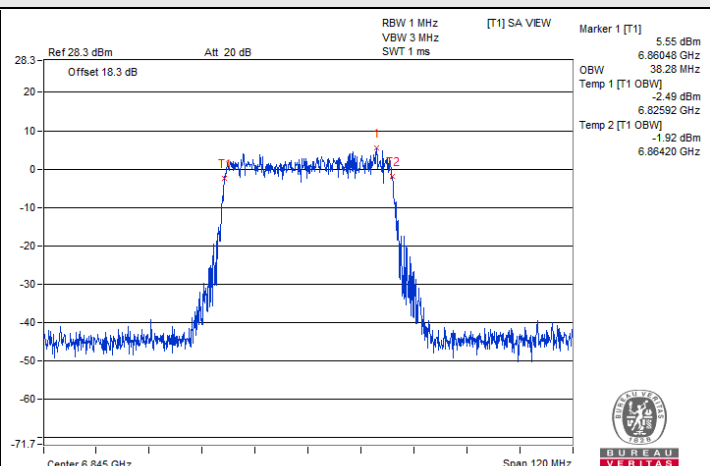


802.11be (EHT40) / Chain 0 : CH 179

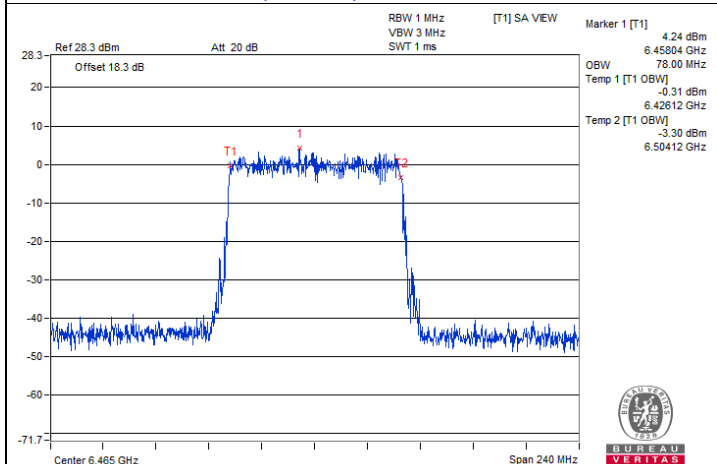

802.11be (EHT80) / Chain 0 : CH 103

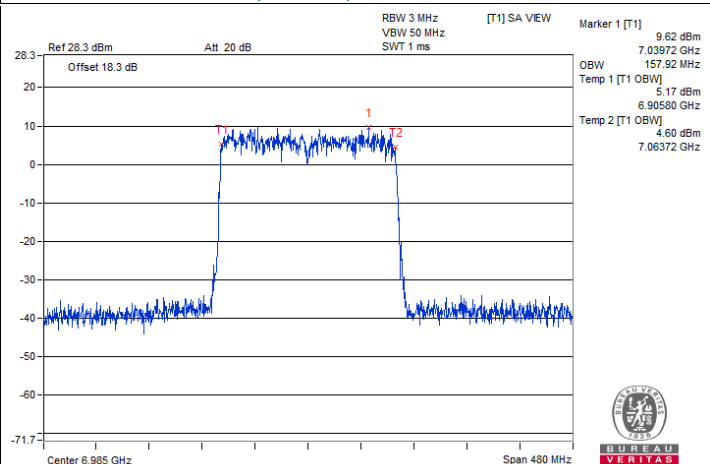

802.11be (EHT160) / Chain 0 : CH 207

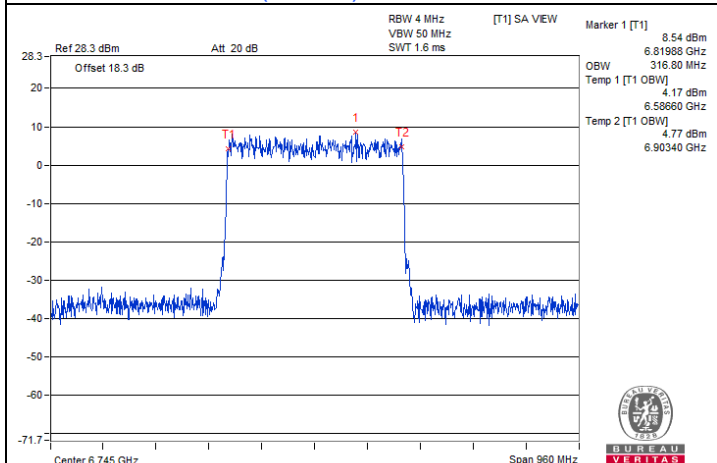

802.11be (EHT320) / Chain 0 : CH 159

7.6 Contention-based Protocol

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Cheng
--------------	----------------	---------------------------	--------------	------------	------------

For U-NII-5


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	37	6135	6135	-66.94	-0.8	0	-66.14	-62	OFF
					-67.44	-0.8	0	-66.64	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON
	320	31	6105	5950	-64.75	-0.8	0	-63.95	-62	OFF
					-65.25	-0.8	0	-64.45	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON
				6105	-62.98	-0.8	0	-62.18	-62	OFF
					-63.48	-0.8	0	-62.68	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON
				6260	-67.49	-0.8	0	-66.69	-62	OFF
					-67.99	-0.8	0	-67.19	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss), the one representative port (Chain 3) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6135	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	5950	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6105	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6260	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

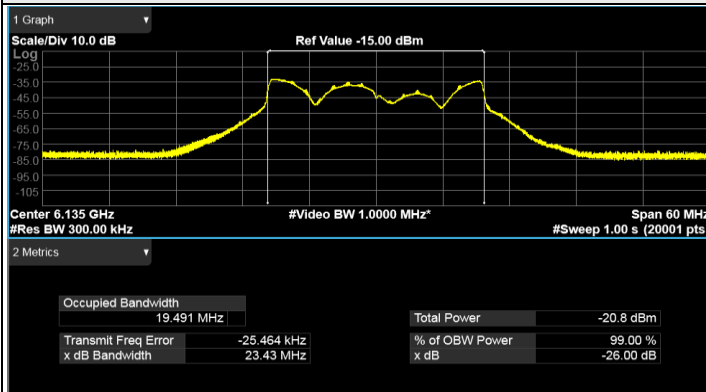


802.11be (EHT20) / CH37

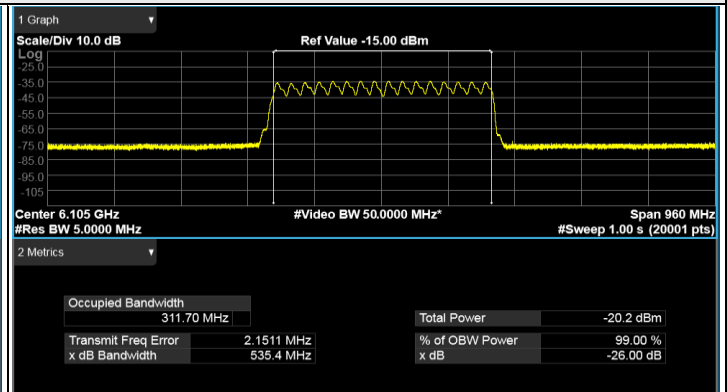


802.11be (EHT320) / CH31


Plots of Injected signal (AWGN) level

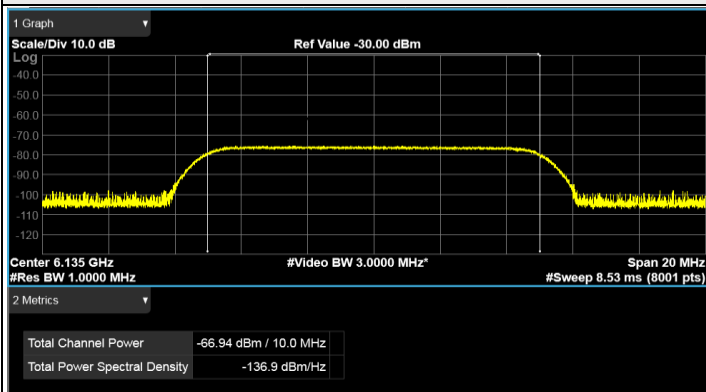


802.11be (EHT20) / CH37

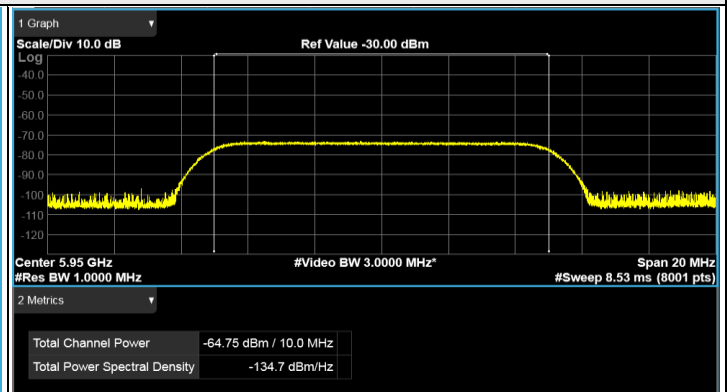

802.11be (EHT320) / CH31(Low Edge)

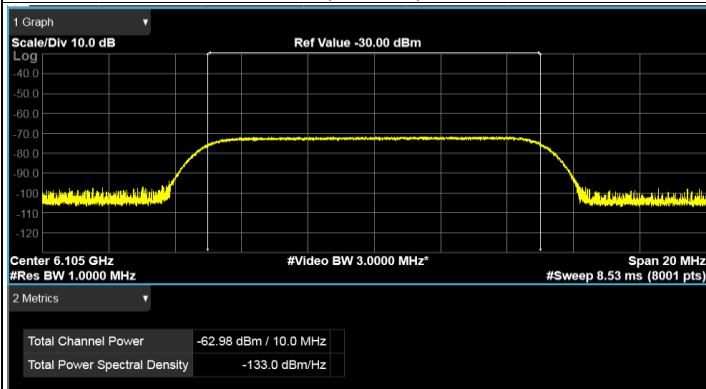


802.11be (EHT320) / CH31(Middle)

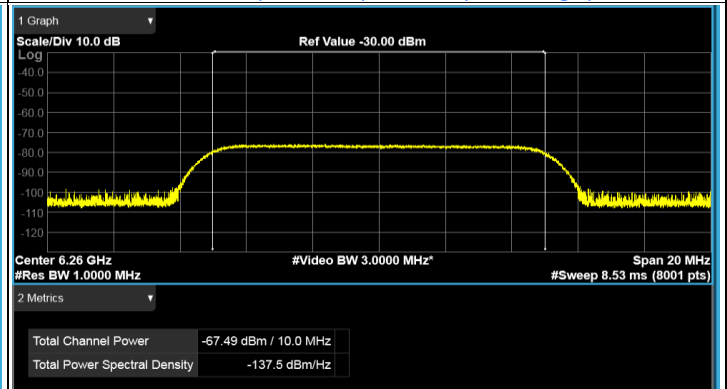

802.11be (EHT320) / CH31(High Edge)


Plots of EUT ceased transmission in the time domain

6G_UNII5_BW20_CH37_6135_TRS

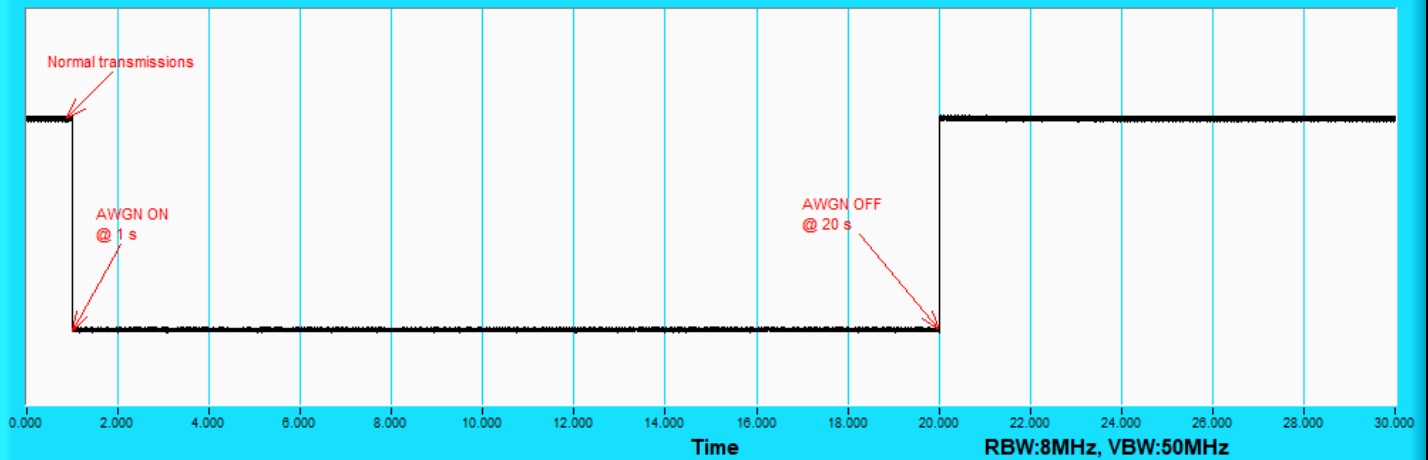


802.11be (EHT20) / CH37

6G_UNII5_BW320_CH31_5950_TRS

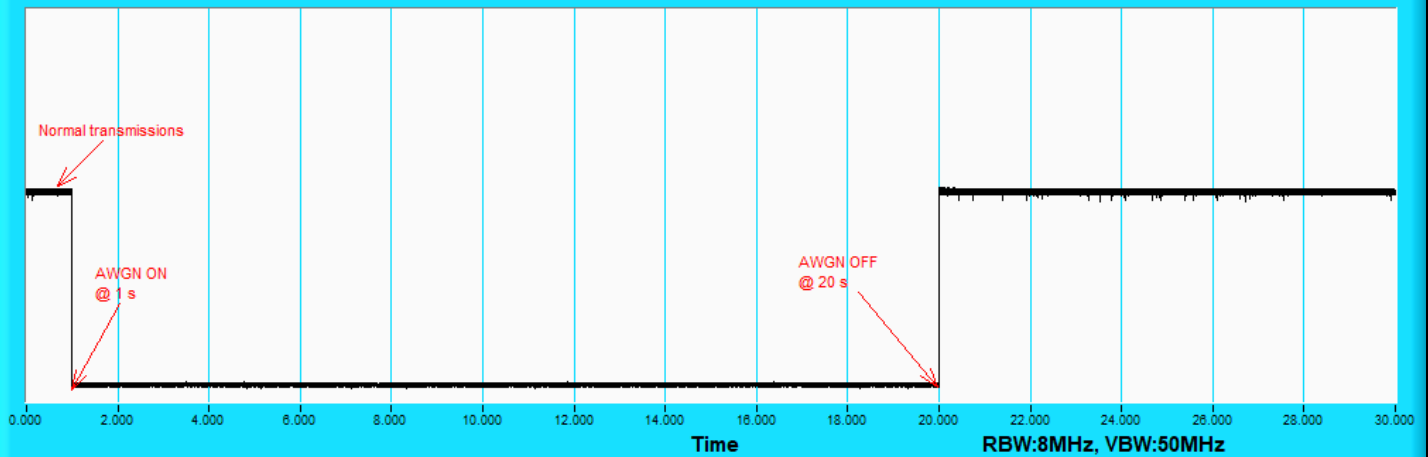


802.11be (EHT320) / CH31(Low Edge)

6G_UNII5_BW320_CH31_6105_TRS

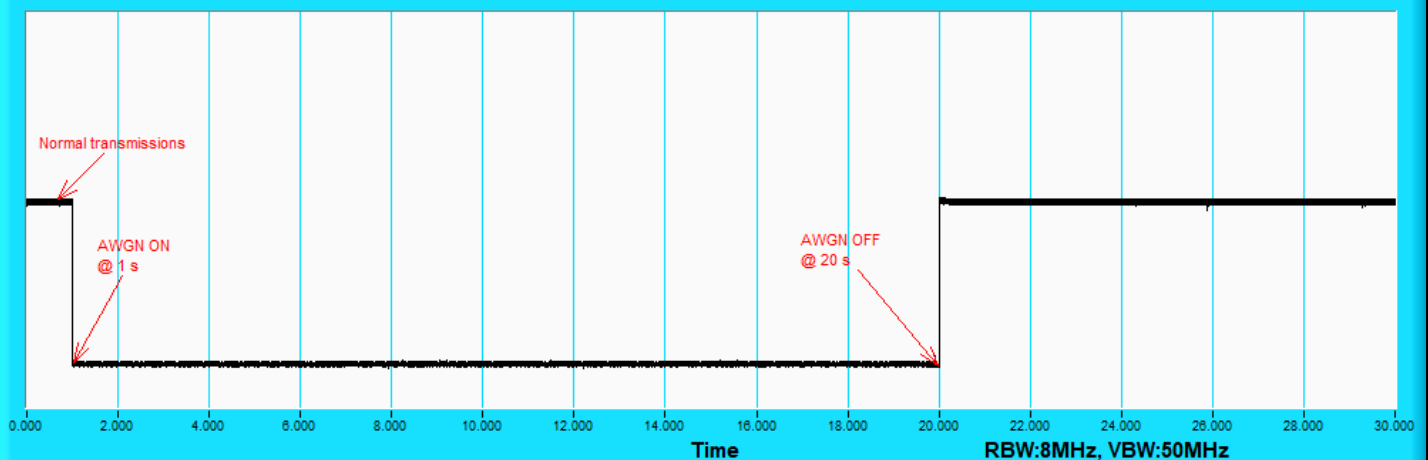

802.11be (EHT320) / CH31(Middle)

Plots of EUT ceased transmission in the time domain

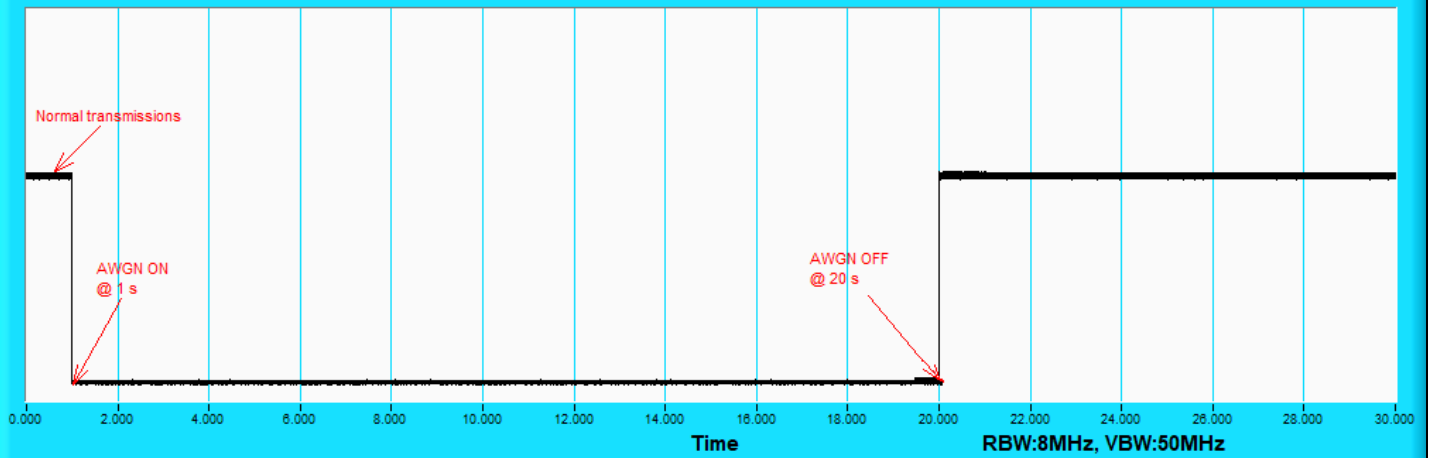6G_UNII5_BW320_CH31_6260_TRS


802.11be (EHT320) / CH31(High Edge)

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	101	6455	6455	-68.46	-0.8	0	-67.66	-62	OFF
					-68.96	-0.8	0	-68.16	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON
	320	95	6425	6270	-66.5	-0.8	0	-65.7	-62	OFF
					-67	-0.8	0	-66.2	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON
		95	6425	6425	-63.25	-0.8	0	-62.45	-62	OFF
					-63.75	-0.8	0	-62.95	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON
		95	6425	6580	-66.38	-0.8	0	-65.58	-62	OFF
					-66.88	-0.8	0	-66.08	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss), the one representative port (Chain 3) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6455	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6270	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6425	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6580	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

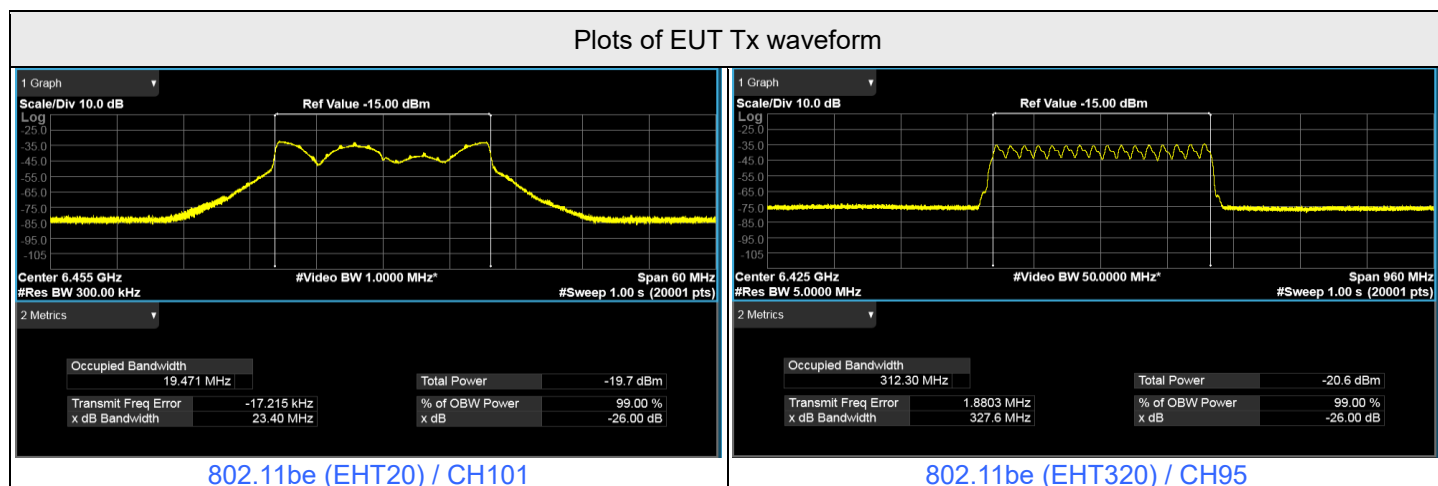


Plots of Injected signal (AWGN) level

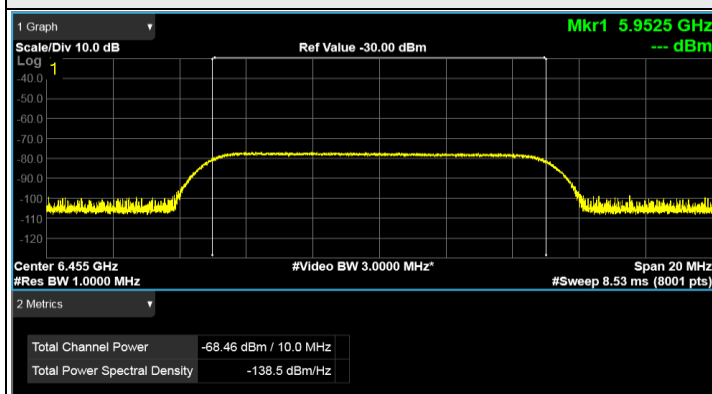


802.11be (EHT20) / CH101

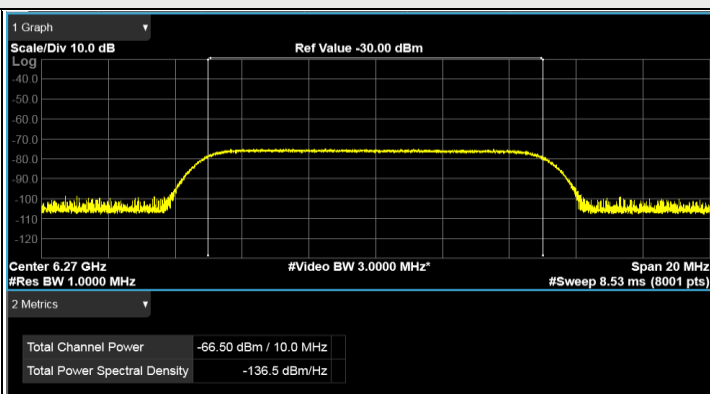

802.11be (EHT320) / CH95(Low Edge)

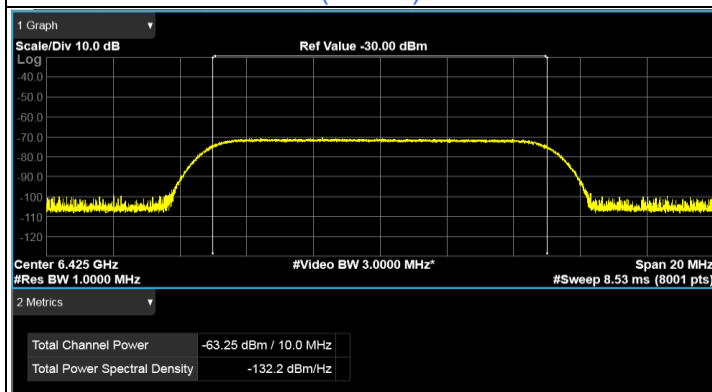


802.11be (EHT320) / CH95(Middle)

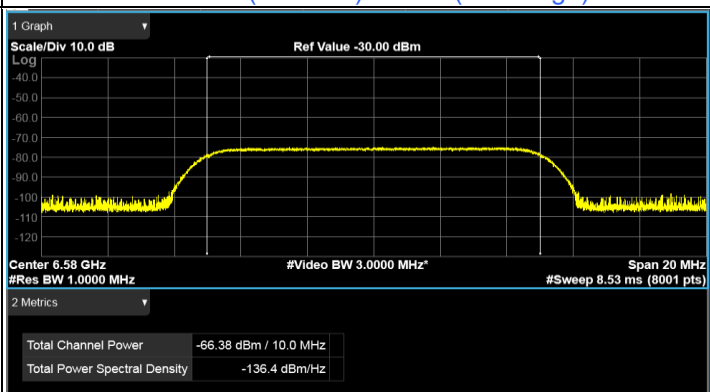

802.11be (EHT320) / CH95(High Edge)

Plots of EUT ceased transmission in the time domain


6G_UNII6_BW20_CH101_6455_TRS

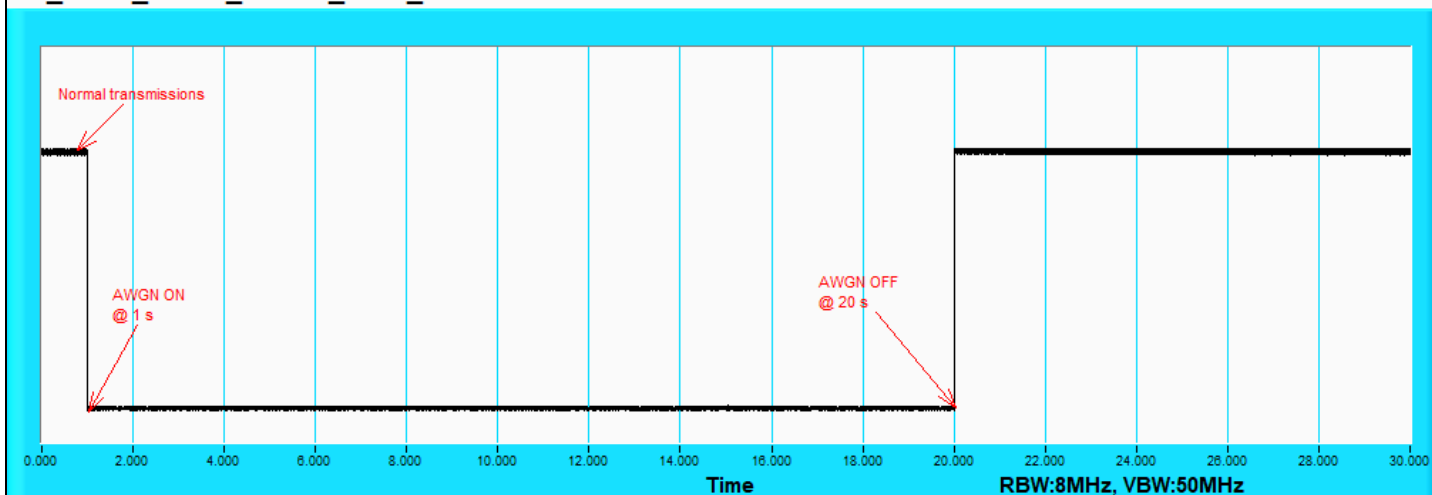

802.11be (EHT20) / CH101


Plots of EUT ceased transmission in the time domain

6G_UNII6_BW320_CH95_6270_TRS

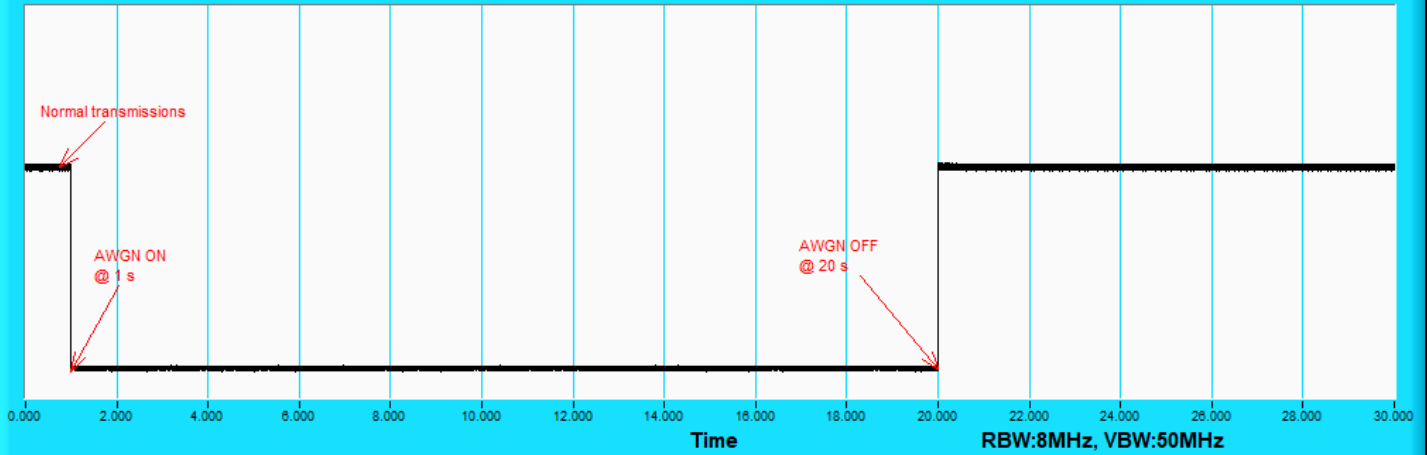


802.11be (EHT320) / CH95(Low Edge)

6G_UNII6_BW320_CH95_6425_TRS

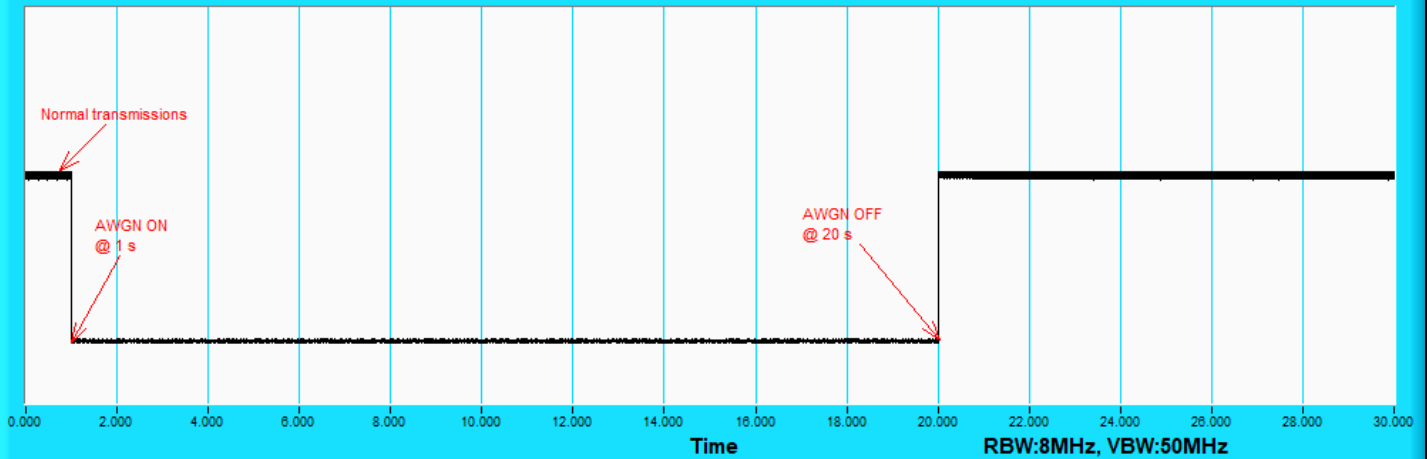

802.11be (EHT320) / CH95(Middle)

6G_UNII6_BW320_CH95_6580_TRS

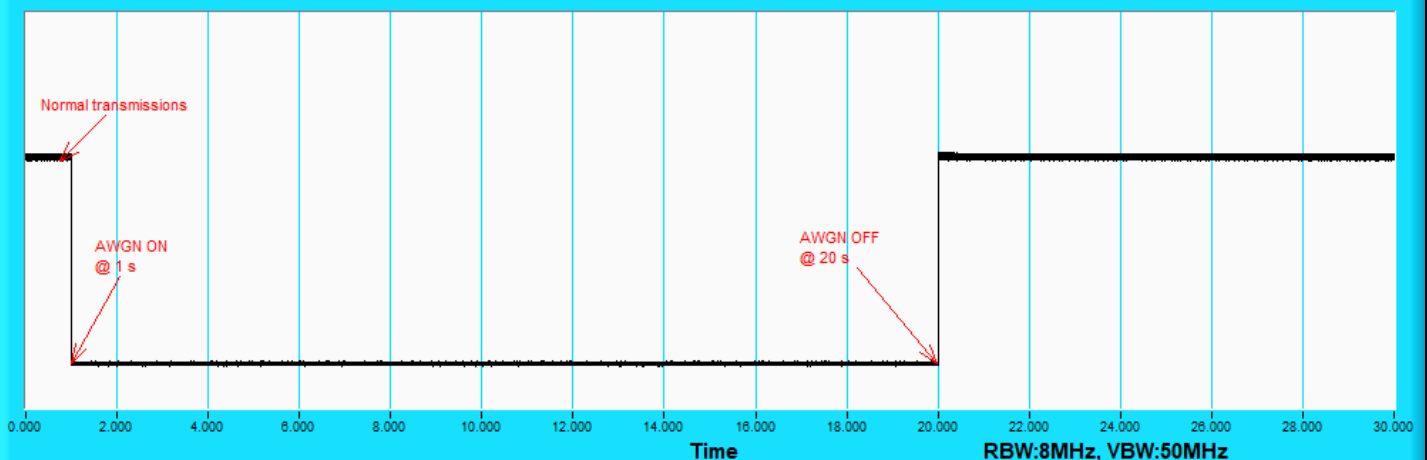

802.11be (EHT320) / CH95(High Edge)


For U-NII-7

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	133	6615	6615	-67.05	-0.8	0	-66.25	-62	OFF
					-67.55	-0.8	0	-66.75	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON
	320	159	6745	6590	-66.21	-0.8	0	-65.41	-62	OFF
					-66.71	-0.8	0	-65.91	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON
				6745	-64.28	-0.8	0	-63.48	-62	OFF
					-64.78	-0.8	0	-63.98	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON
				6900	-63.79	-0.8	0	-62.99	-62	OFF
					-64.29	-0.8	0	-63.49	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss), the one representative port (Chain 3) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6615	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6590	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6745	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6900	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

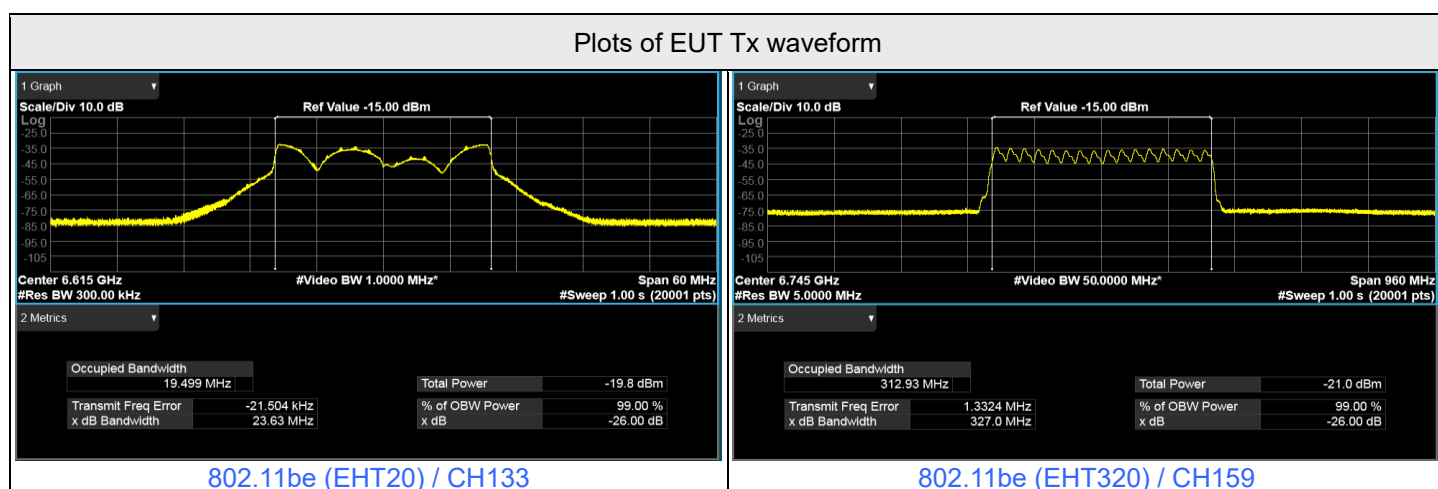


Plots of Injected signal (AWGN) level

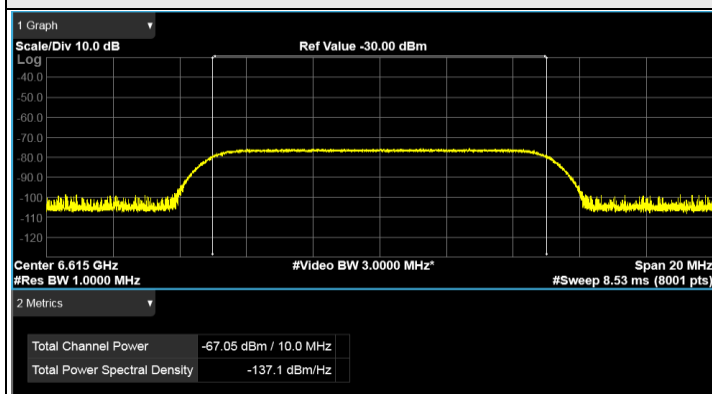


802.11be (EHT20) / CH133

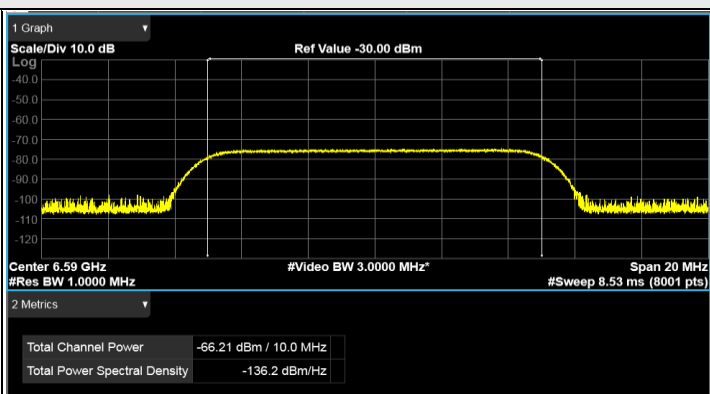

802.11be (EHT320) / CH159(Low Edge)

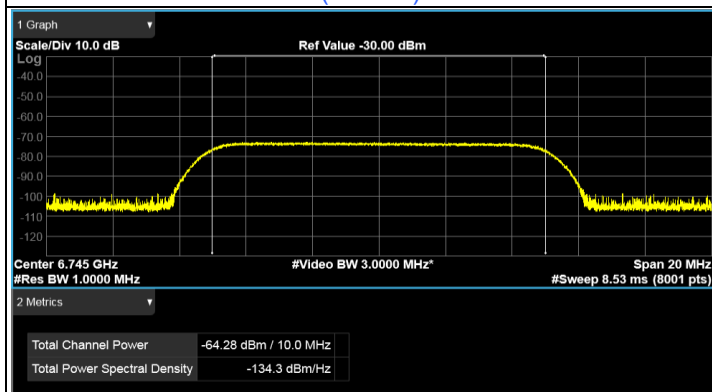


802.11be (EHT320) / CH159(Middle)

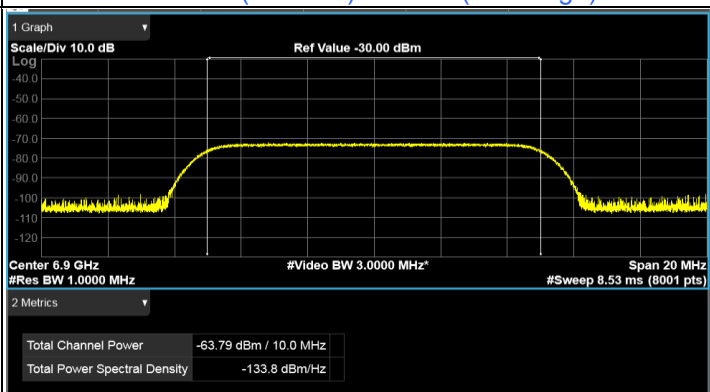

802.11be (EHT320) / CH159(High Edge)

Plots of EUT ceased transmission in the time domain


6G_UNII7_BW20_CH133_6615_TRS

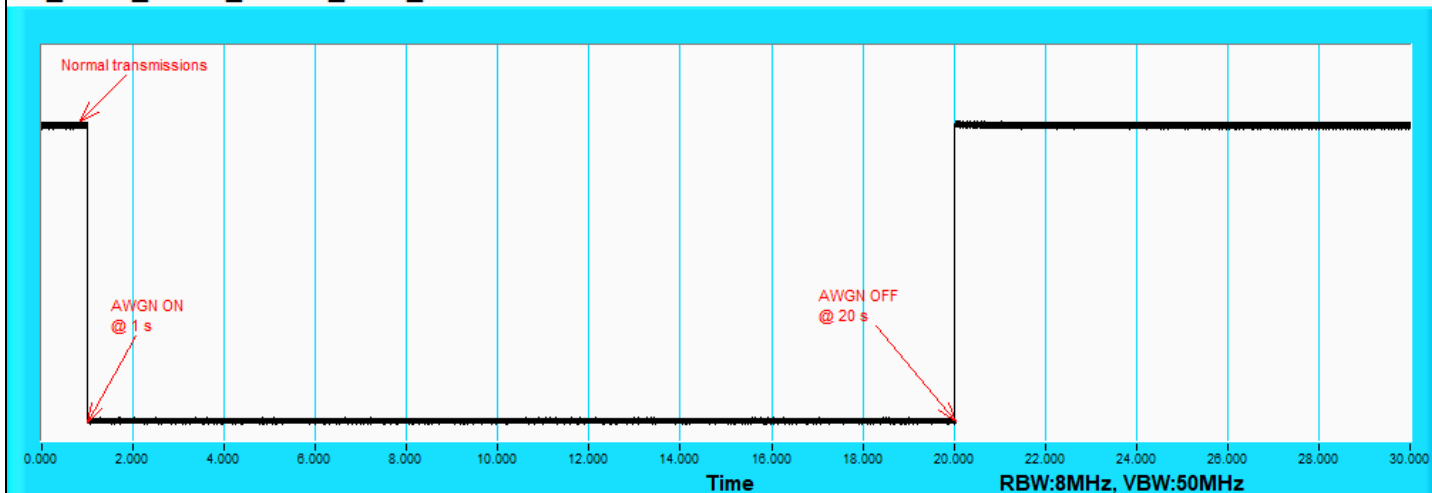

802.11be (EHT20) / CH133


Plots of EUT ceased transmission in the time domain

6G_UNII7_BW320_CH159_6590_TRS

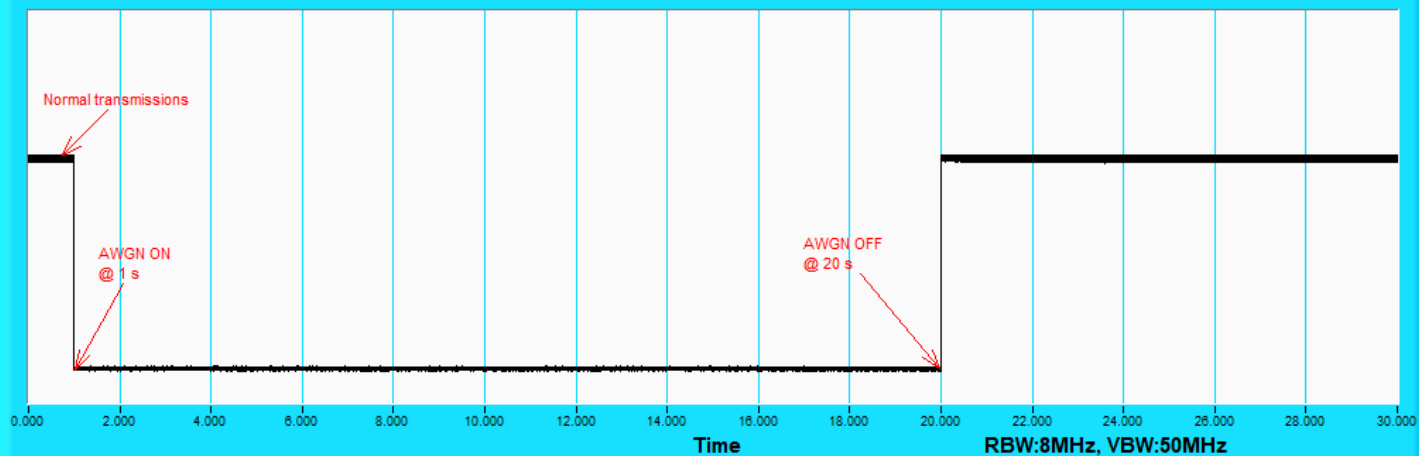


802.11be (EHT320) / CH159(Low Edge)

6G_UNII7_BW320_CH159_6745_TRS

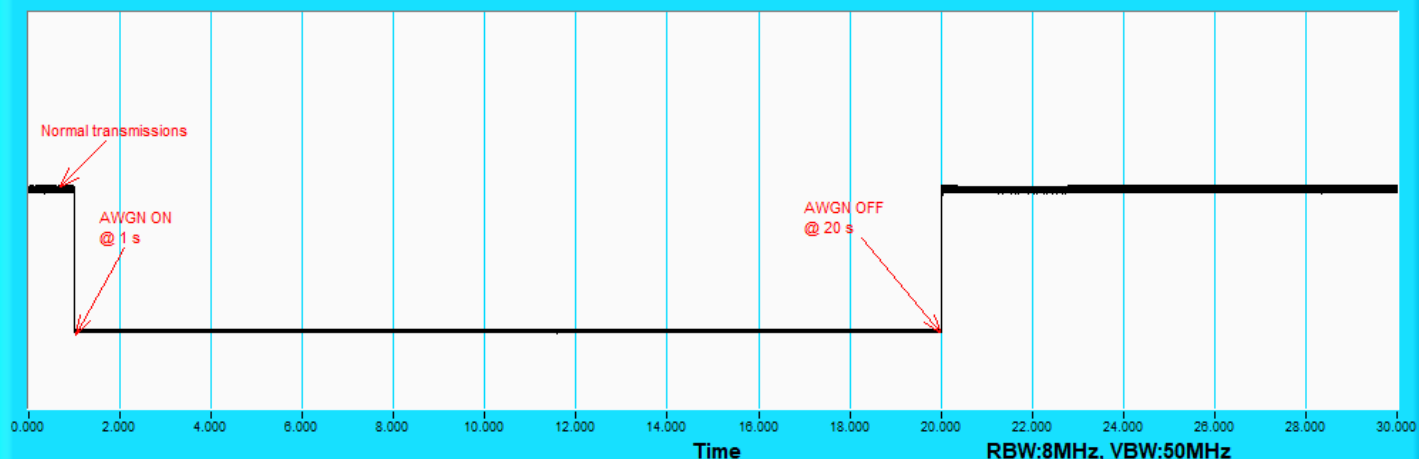

802.11be (EHT320) / CH159(Middle)

6G_UNII7_BW320_CH159_6900_TRS

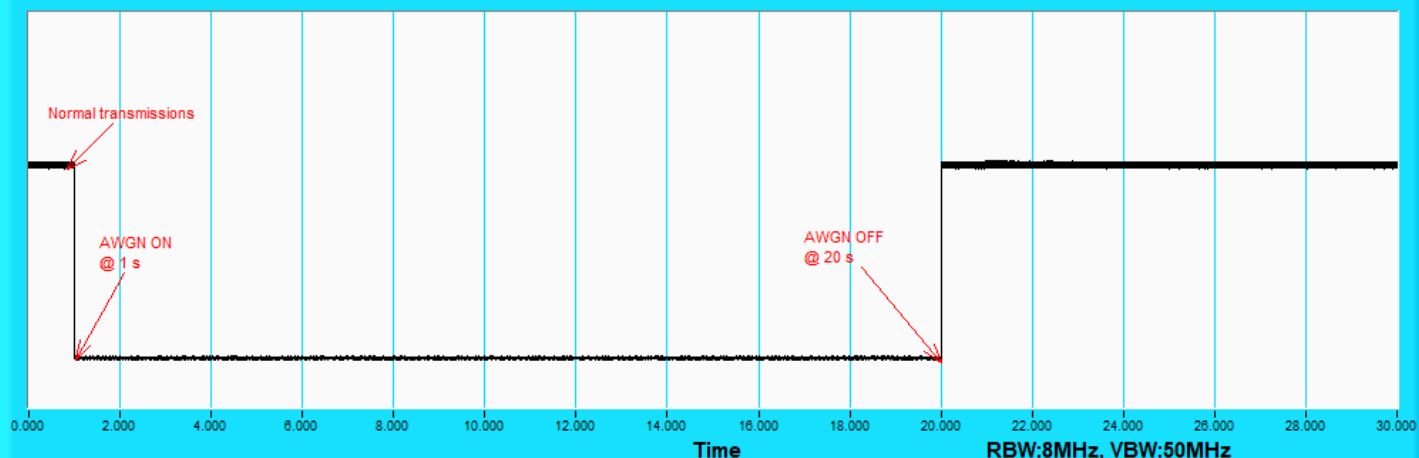

802.11be (EHT320) / CH159(High Edge)


For U-NII-8

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	229	7095	7095	-68.96	-0.8	0	-68.16	-62	OFF
					-69.46	-0.8	0	-68.66	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON
	320	191	6750	6750	-67.45	-0.8	0	-66.65	-62	OFF
					-67.95	-0.8	0	-67.15	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON
			6905	6905	-62.99	-0.8	0	-62.19	-62	OFF
					-63.49	-0.8	0	-62.69	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON
			7060	7060	-66.56	-0.8	0	-65.76	-62	OFF
					-67.06	-0.8	0	-66.26	-62	Minimal
					-82.8	-0.8	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss), the one representative port (Chain 3) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	7095	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

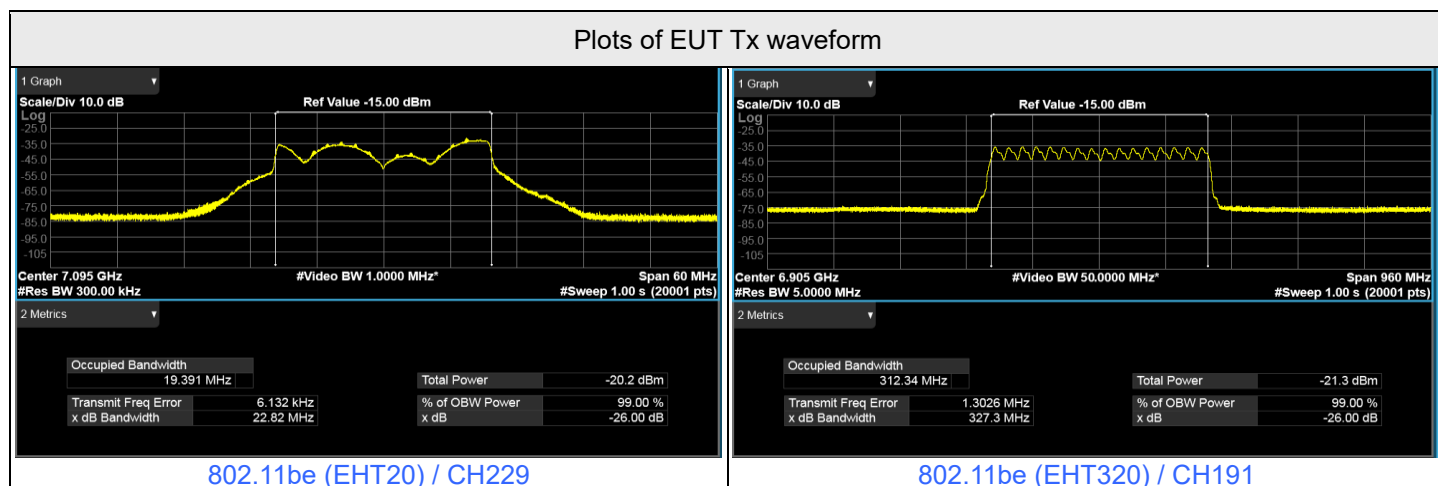


Plots of Injected signal (AWGN) level

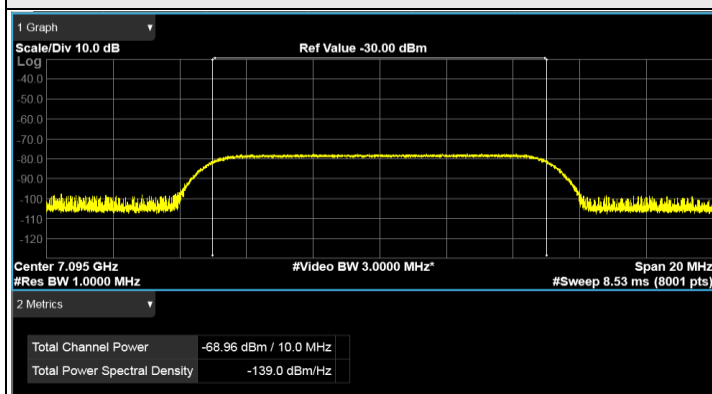


802.11be (EHT20) / CH229

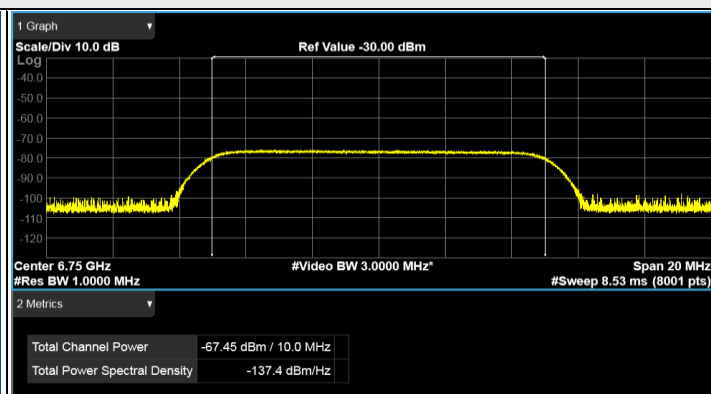

802.11be (EHT320) / CH191(Low Edge)

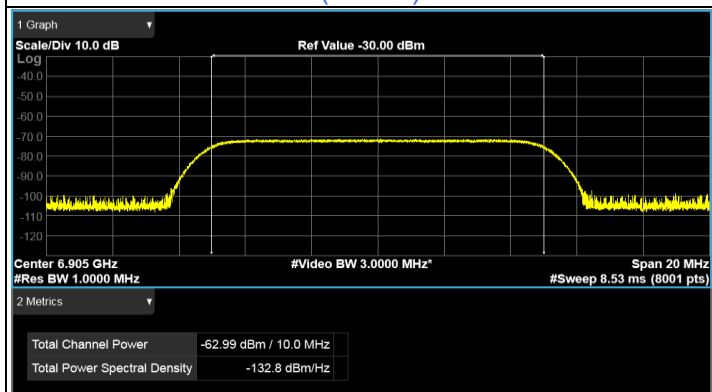


802.11be (EHT320) / CH191(Middle)

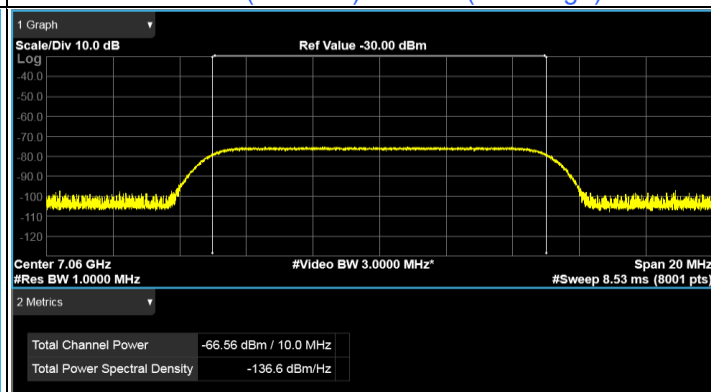

802.11be (EHT320) / CH191(High Edge)

Plots of EUT ceased transmission in the time domain


6G_UNII8_BW20_CH229_7095_TRS

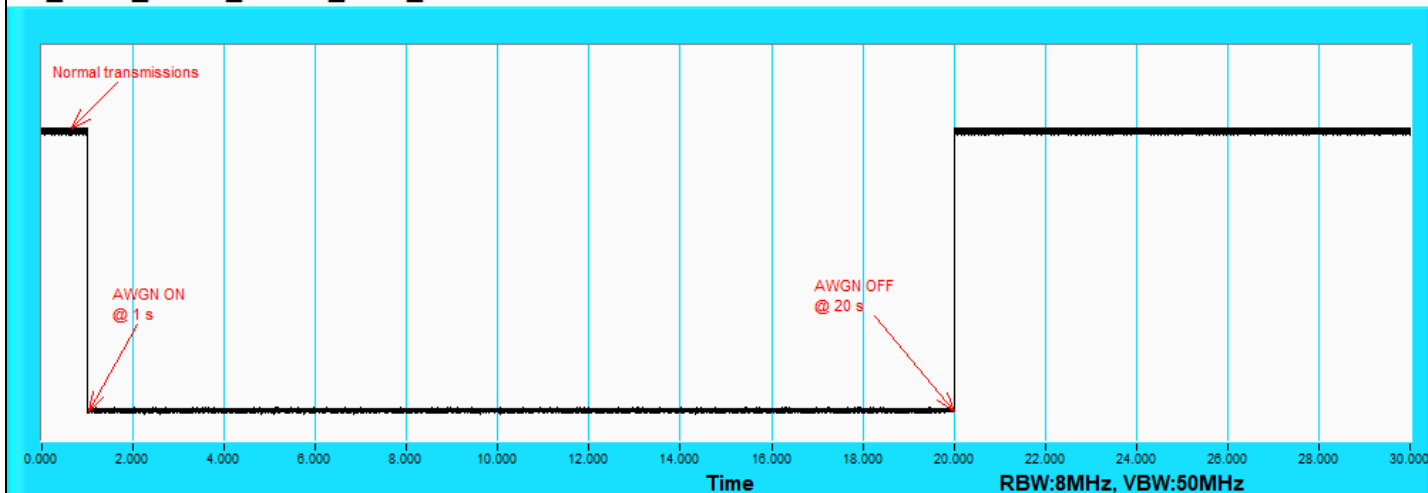


802.11be (EHT20) / CH229

Plots of EUT ceased transmission in the time domain


6G_UNII8_BW320_CH191_6750_TRS

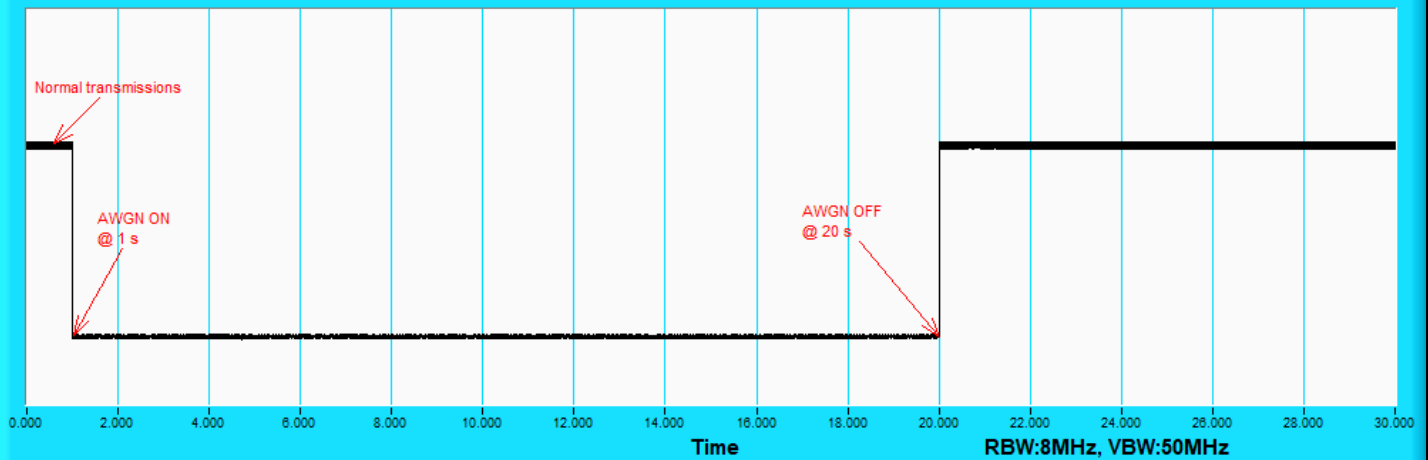

6G_UNII8_BW320_CH191_6905_TRS

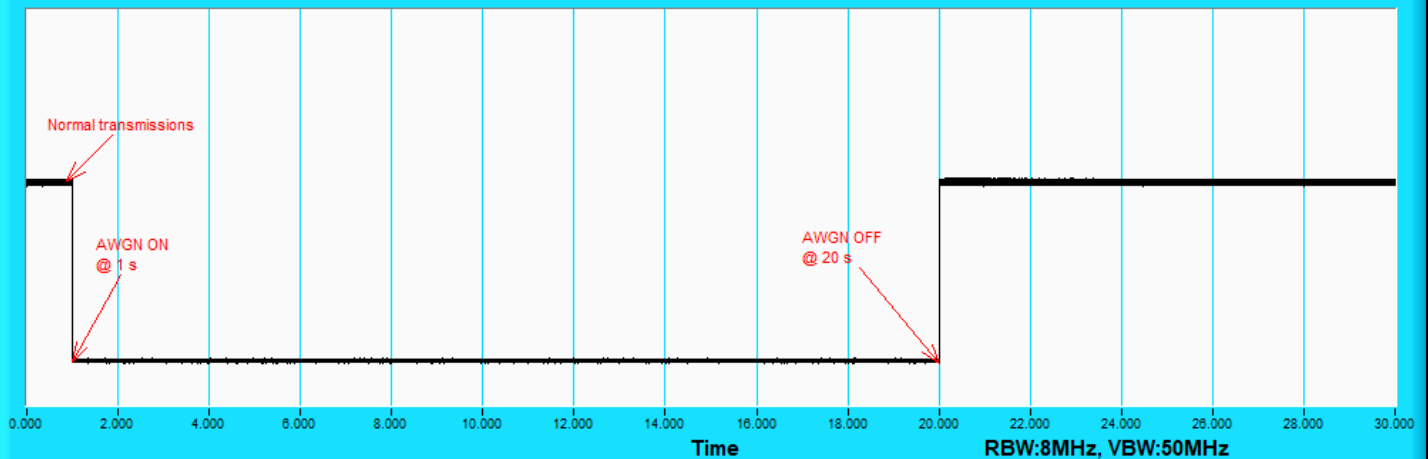

6G_UNII8_BW320_CH191_7060_TRS

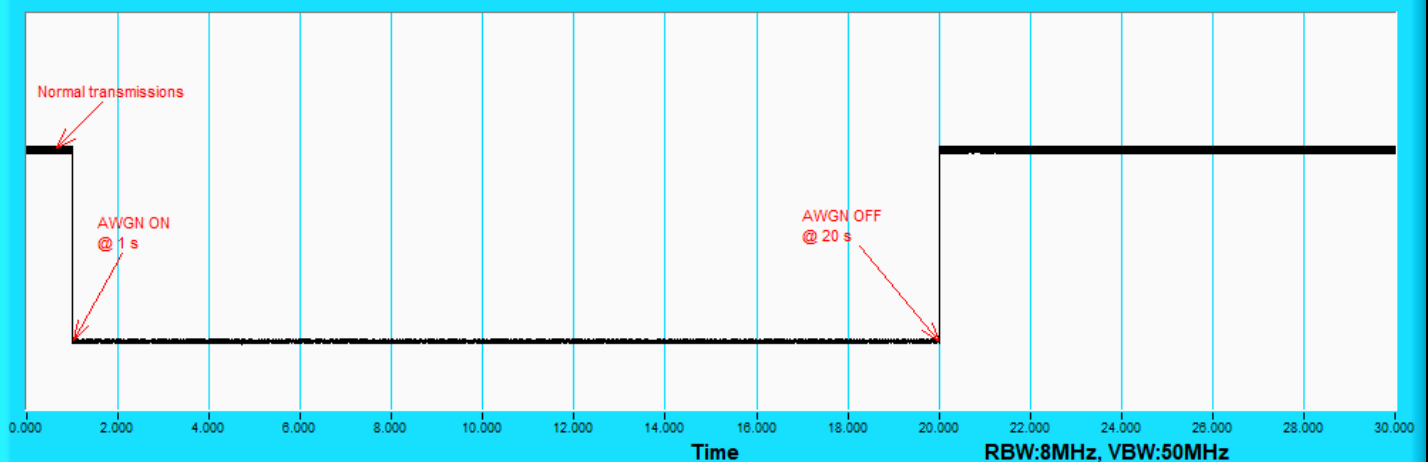


7.7 AC Power Conducted Emissions

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.96	38.40	25.99	48.36	35.95	65.58	55.58	-17.22	-19.63
2	0.32188	9.98	24.00	17.18	33.98	27.16	59.66	49.66	-25.68	-22.50
3	0.40391	9.99	30.26	24.29	40.25	34.28	57.77	47.77	-17.52	-13.49
4	4.98438	10.30	26.53	20.71	36.83	31.01	56.00	46.00	-19.17	-14.99
5	8.60547	10.54	28.17	22.58	38.71	33.12	60.00	50.00	-21.29	-16.88
6	15.83203	11.01	27.65	22.81	38.66	33.82	60.00	50.00	-21.34	-16.18

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

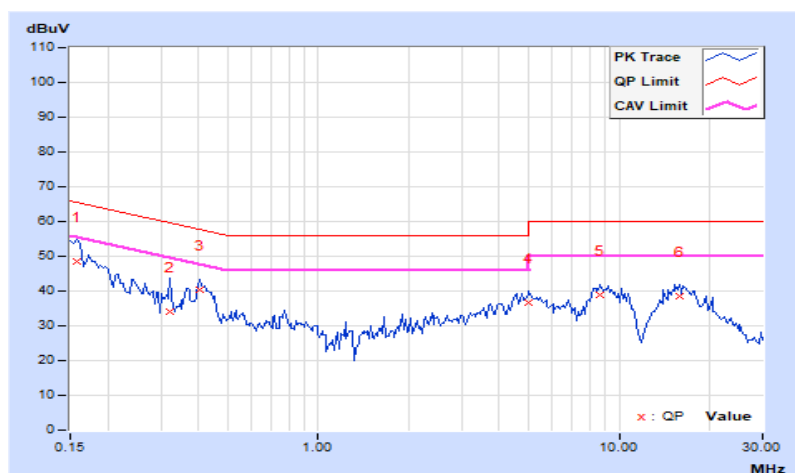


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.98	38.31	26.22	48.29	36.20	66.00	56.00	-17.71	-19.80
2	0.22031	9.97	28.57	13.95	38.54	23.92	62.81	52.81	-24.27	-28.89
3	0.40781	9.93	29.79	24.64	39.72	34.57	57.69	47.69	-17.97	-13.12
4	5.07813	10.20	26.17	20.77	36.37	30.97	60.00	50.00	-23.63	-19.03
5	8.49609	10.37	28.67	23.28	39.04	33.65	60.00	50.00	-20.96	-16.35
6	16.23828	10.78	26.62	21.65	37.40	32.43	60.00	50.00	-22.60	-17.57

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

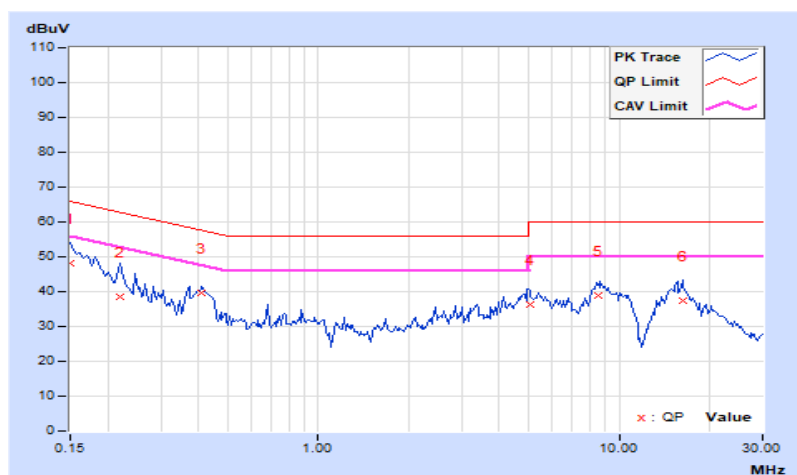


7.8 Unwanted Emissions below 1 GHz

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.97	32.8 PK	40.0	-7.2	1.01 H	244	46.8	-14.0
2	137.67	30.3 PK	43.5	-13.2	1.01 H	157	43.5	-13.2
3	190.05	32.9 PK	43.5	-10.6	1.01 H	171	48.3	-15.4
4	646.92	26.3 PK	46.0	-19.7	1.01 H	212	30.4	-4.1
5	740.04	28.7 PK	46.0	-17.3	2.00 H	232	31.2	-2.5
6	868.08	29.4 PK	46.0	-16.6	2.00 H	148	30.4	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

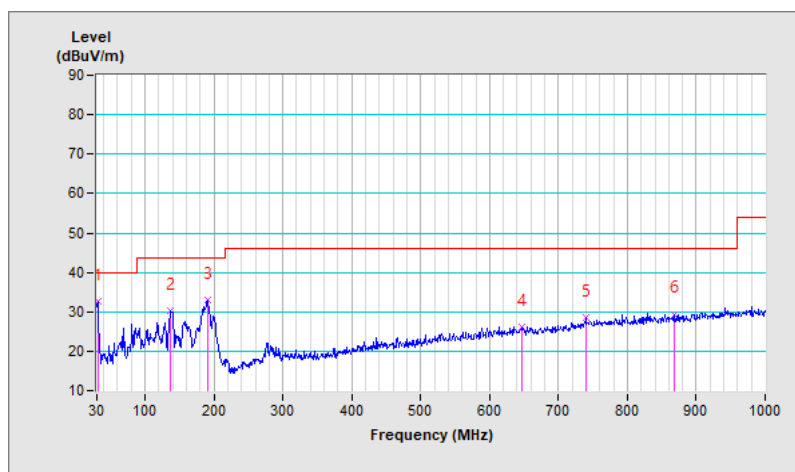


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 65% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	35.2 PK	40.0	-4.8	1.00 V	3	48.9	-13.7
2	52.31	31.7 PK	40.0	-8.3	1.00 V	233	44.5	-12.8
3	80.44	28.8 PK	40.0	-11.2	1.99 V	153	46.5	-17.7
4	191.02	31.0 PK	43.5	-12.5	1.99 V	8	46.5	-15.5
5	525.67	25.0 PK	46.0	-21.0	1.00 V	268	31.8	-6.8
6	785.63	29.0 PK	46.0	-17.0	1.99 V	176	30.8	-1.8

Remarks:



1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

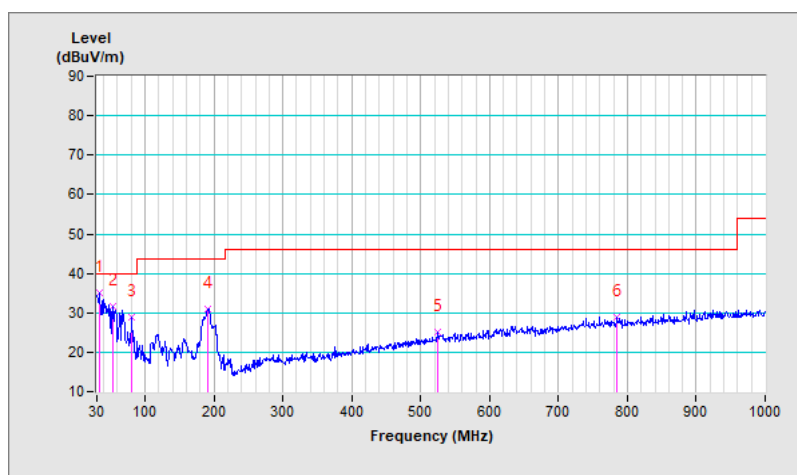


7.9 Unwanted Emissions above 1 GHz

CDD Mode

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9

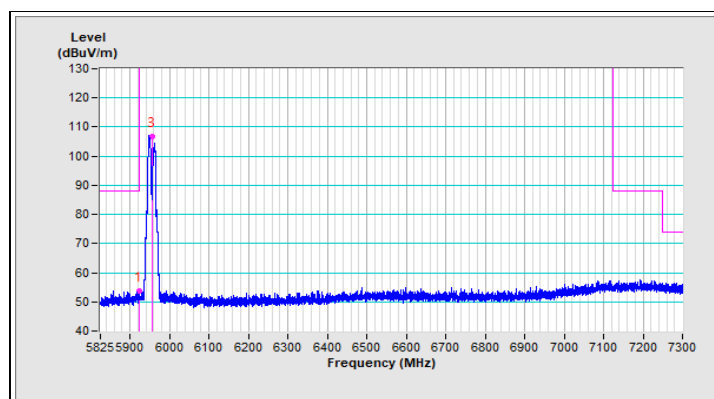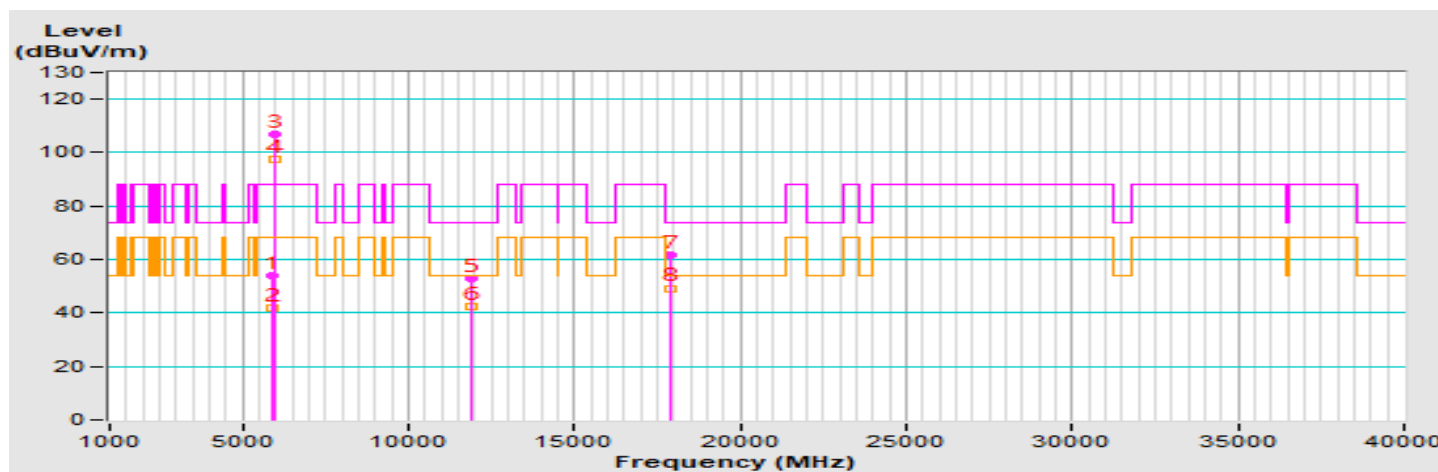

Horizontal (Peak)

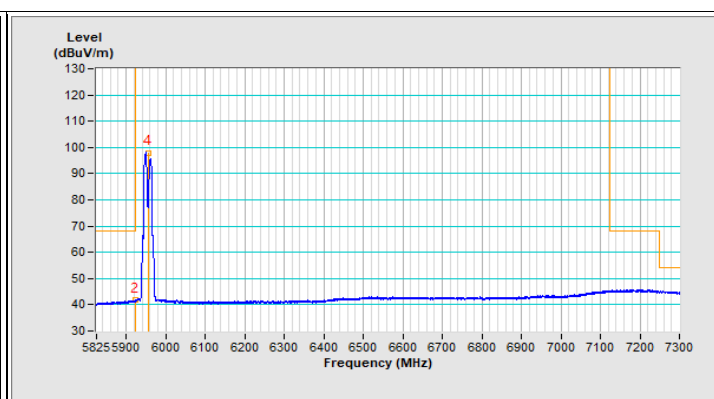



Horizontal (Average)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.8 PK	88.2	-34.4	2.43 H	226	47.5	6.3
2	#5925.00	41.7 AV	68.2	-26.5	2.43 H	226	35.4	6.3
3	*5955.00	106.6 PK			2.43 H	226	100.4	6.2
4	*5955.00	97.7 AV			2.43 H	226	91.5	6.2
5	11910.00	52.9 PK	74.0	-21.1	2.93 H	203	37.5	15.4
6	11910.00	42.6 AV	54.0	-11.4	2.93 H	203	27.2	15.4
7	17865.00	61.8 PK	74.0	-12.2	2.62 H	227	34.0	27.8
8	17865.00	49.3 AV	54.0	-4.7	2.62 H	227	21.5	27.8


Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
- " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9

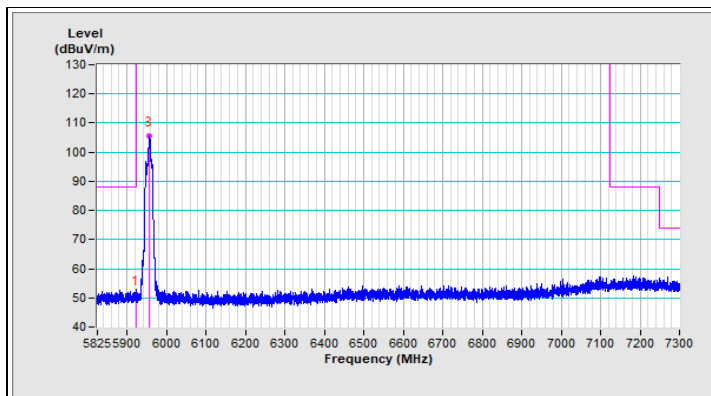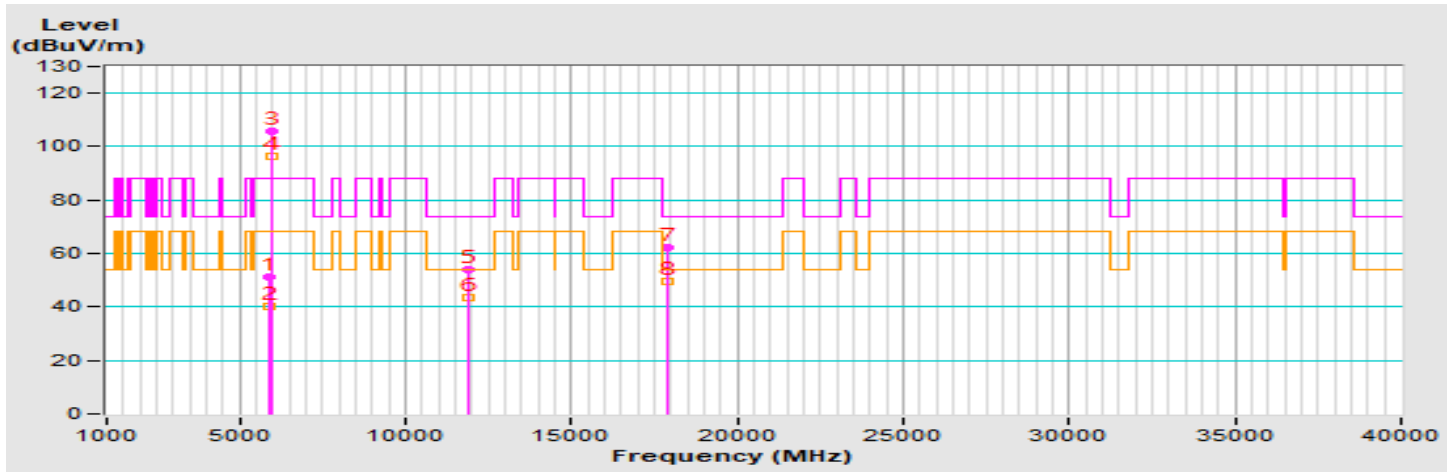

Vertical (Peak)

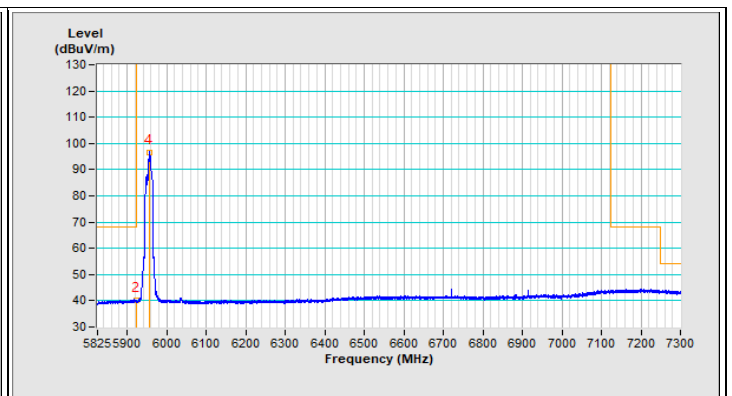


Vertical (Average)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.2 PK	88.2	-37.0	2.52 V	106	44.9	6.3
2	#5925.00	40.2 AV	68.2	-28.0	2.52 V	106	33.9	6.3
3	*5955.00	105.5 PK			2.52 V	106	99.3	6.2
4	*5955.00	96.5 AV			2.52 V	106	90.3	6.2
5	11910.00	53.8 PK	74.0	-20.2	3.08 V	82	38.4	15.4
6	11910.00	43.4 AV	54.0	-10.6	3.08 V	82	28.0	15.4
7	17865.00	62.1 PK	74.0	-11.9	2.98 V	102	34.3	27.8
8	17865.00	49.6 AV	54.0	-4.4	2.98 V	102	21.8	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9.5

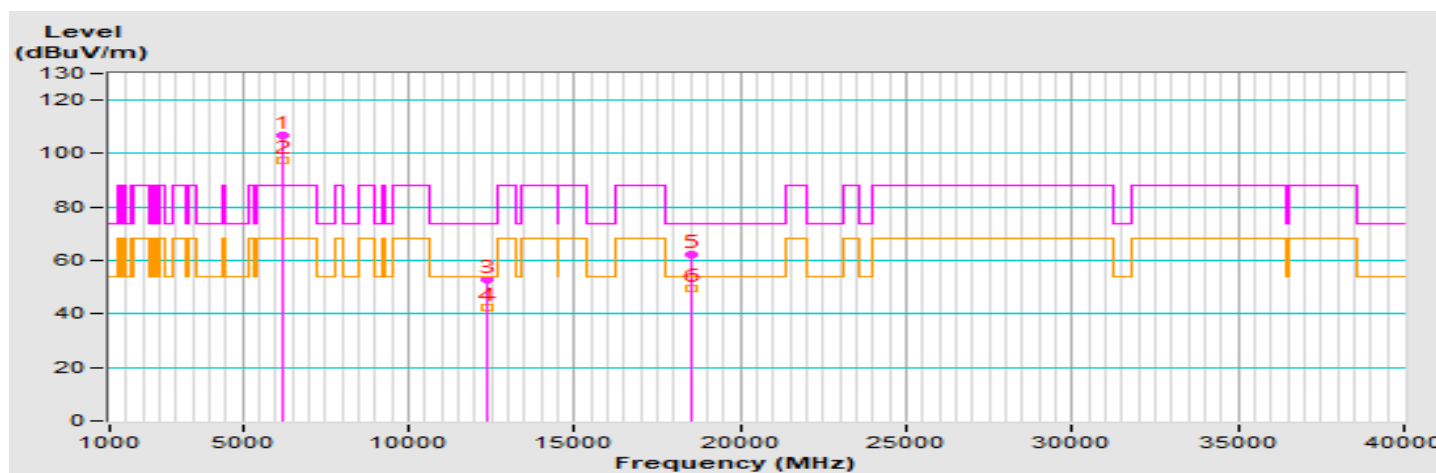


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	106.6 PK			2.53 H	224	100.0	6.6
2	*6175.00	97.5 AV			2.53 H	224	90.9	6.6
3	12350.00	53.1 PK	74.0	-20.9	2.89 H	196	38.0	15.1
4	12350.00	42.5 AV	54.0	-11.5	2.89 H	196	27.4	15.1
5	18525.00	62.2 PK	74.0	-11.8	2.57 H	234	67.1	-4.9
6	18525.00	49.6 AV	54.0	-4.4	2.57 H	234	54.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9.5

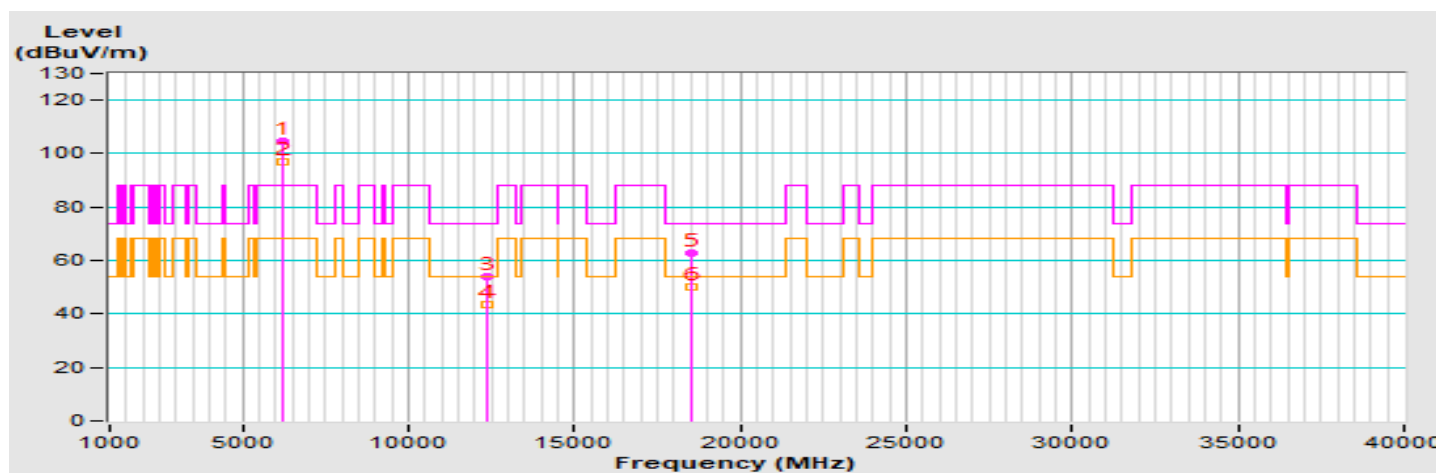


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	104.8 PK			3.98 V	62	98.2	6.6
2	*6175.00	96.8 AV			3.98 V	62	90.2	6.6
3	12350.00	54.1 PK	74.0	-19.9	3.13 V	83	39.0	15.1
4	12350.00	43.6 AV	54.0	-10.4	3.13 V	83	28.5	15.1
5	18525.00	62.6 PK	74.0	-11.4	3.03 V	104	67.5	-4.9
6	18525.00	49.9 AV	54.0	-4.1	3.03 V	104	54.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	7

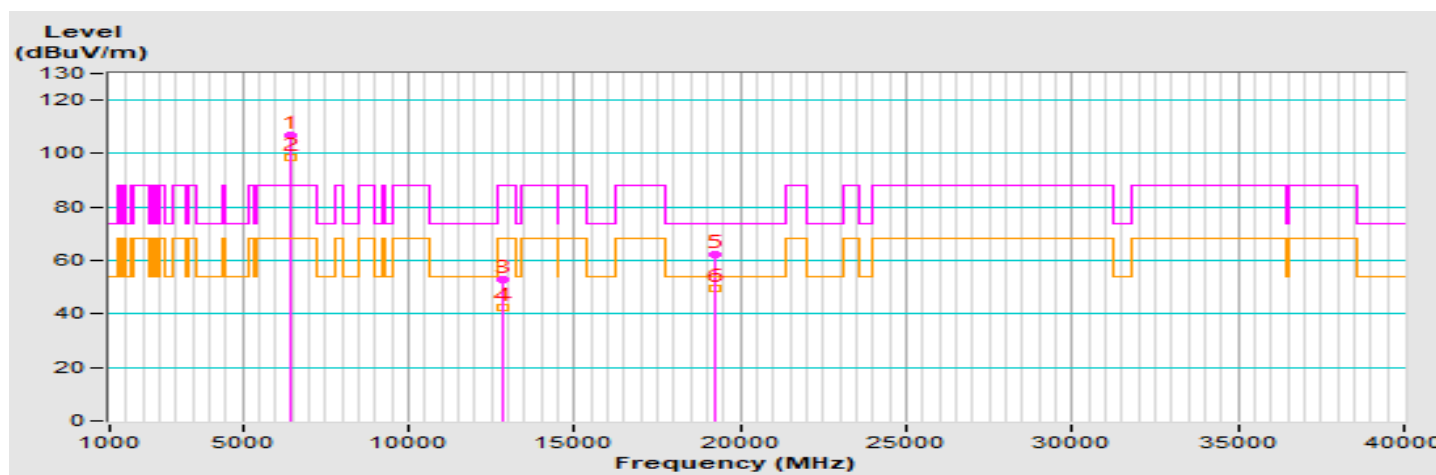


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	106.9 PK			1.66 H	298	99.3	7.6
2	*6415.00	98.5 AV			1.66 H	298	90.9	7.6
3	#12830.00	52.8 PK	88.2	-35.4	2.90 H	189	37.2	15.6
4	#12830.00	42.4 AV	68.2	-25.8	2.90 H	189	26.8	15.6
5	19245.00	62.2 PK	74.0	-11.8	2.58 H	236	66.5	-4.3
6	19245.00	49.5 AV	54.0	-4.5	2.58 H	236	53.8	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	7

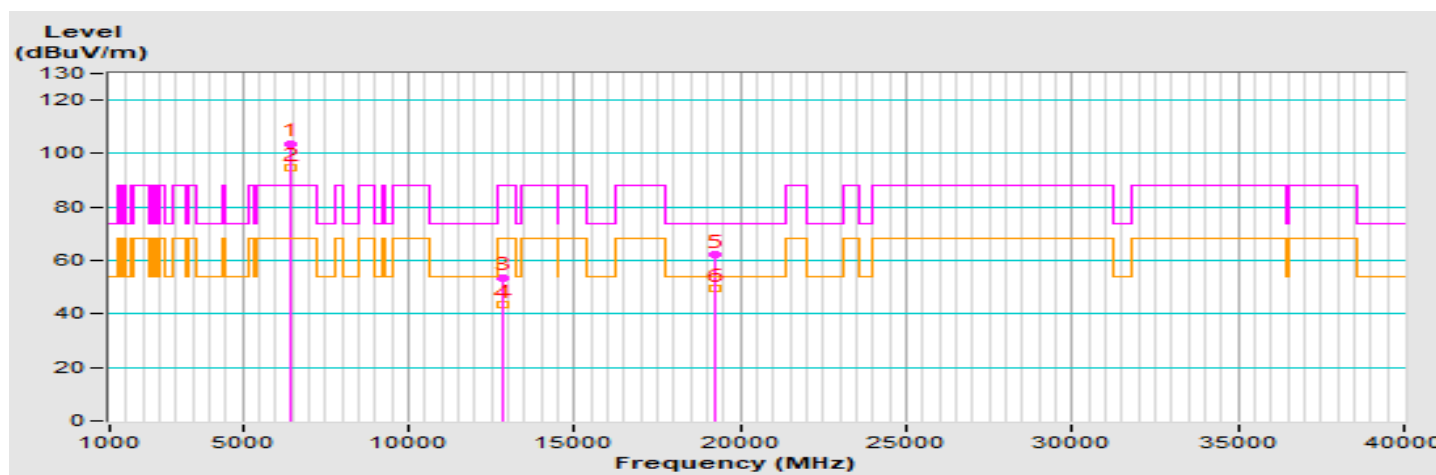


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	103.8 PK			2.32 V	76	96.2	7.6
2	*6415.00	94.7 AV			2.32 V	76	87.1	7.6
3	#12830.00	53.7 PK	88.2	-34.5	3.08 V	71	38.1	15.6
4	#12830.00	43.3 AV	68.2	-24.9	3.08 V	71	27.7	15.6
5	19245.00	62.3 PK	74.0	-11.7	3.01 V	94	66.6	-4.3
6	19245.00	49.7 AV	54.0	-4.3	3.01 V	94	54.0	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	7.5

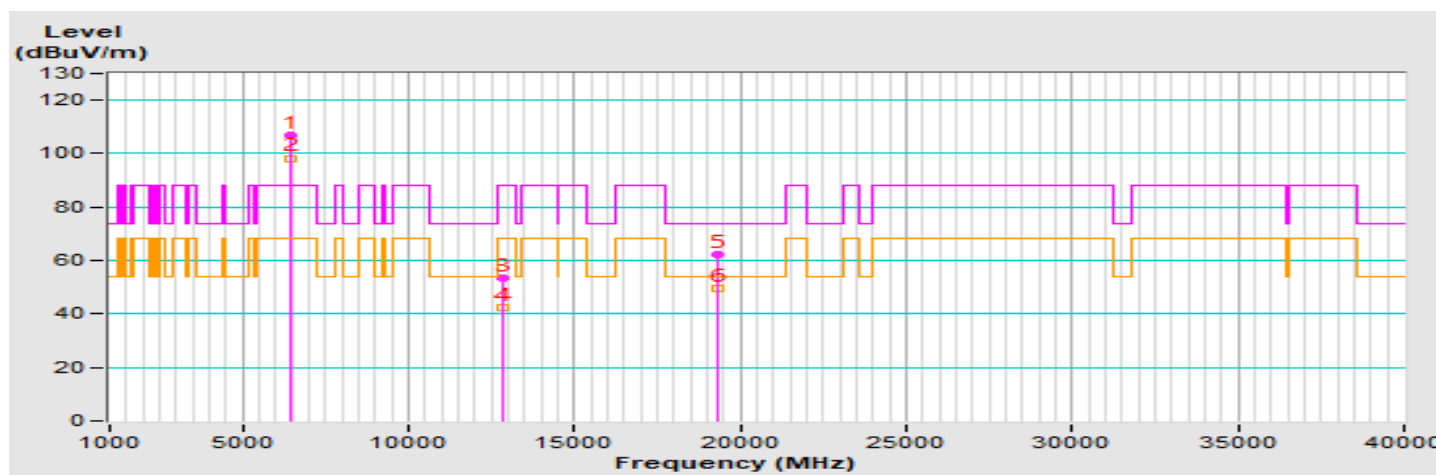


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	106.9 PK			2.52 H	293	99.1	7.8
2	*6435.00	98.3 AV			2.52 H	293	90.5	7.8
3	#12870.00	53.2 PK	88.2	-35.0	2.84 H	181	37.5	15.7
4	#12870.00	42.4 AV	68.2	-25.8	2.84 H	181	26.7	15.7
5	19305.00	62.4 PK	74.0	-11.6	2.61 H	233	66.4	-4.0
6	19305.00	49.7 AV	54.0	-4.3	2.61 H	233	53.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	7.5

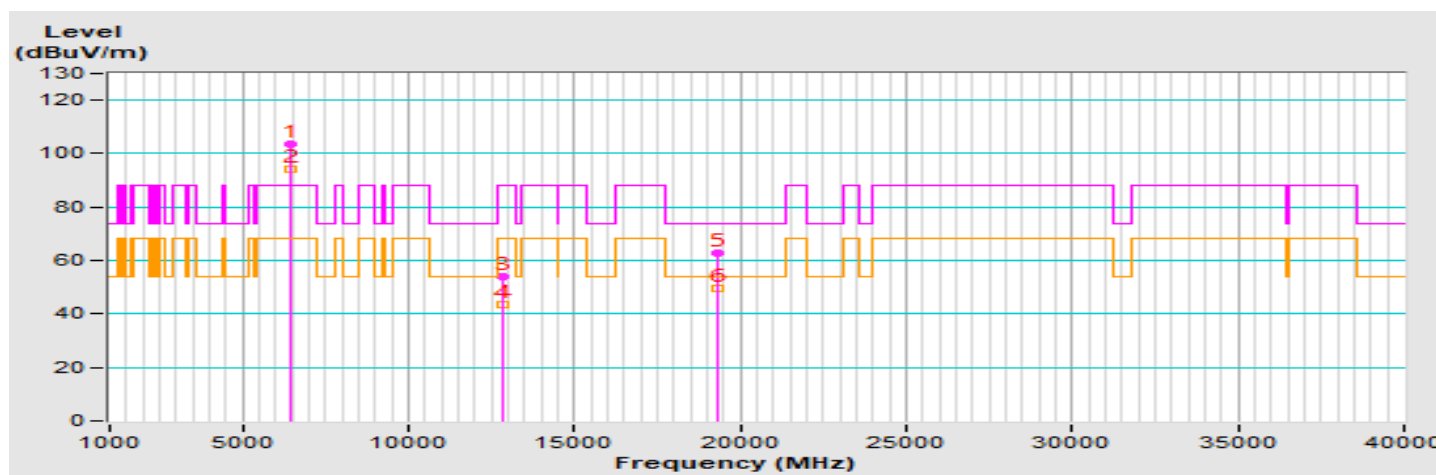


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	103.7 PK			2.30 V	77	95.9	7.8
2	*6435.00	94.2 AV			2.30 V	77	86.4	7.8
3	#12870.00	54.1 PK	88.2	-34.1	3.11 V	57	38.4	15.7
4	#12870.00	43.7 AV	68.2	-24.5	3.11 V	57	28.0	15.7
5	19305.00	62.6 PK	74.0	-11.4	3.03 V	90	66.6	-4.0
6	19305.00	49.8 AV	54.0	-4.2	3.03 V	90	53.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	6.5

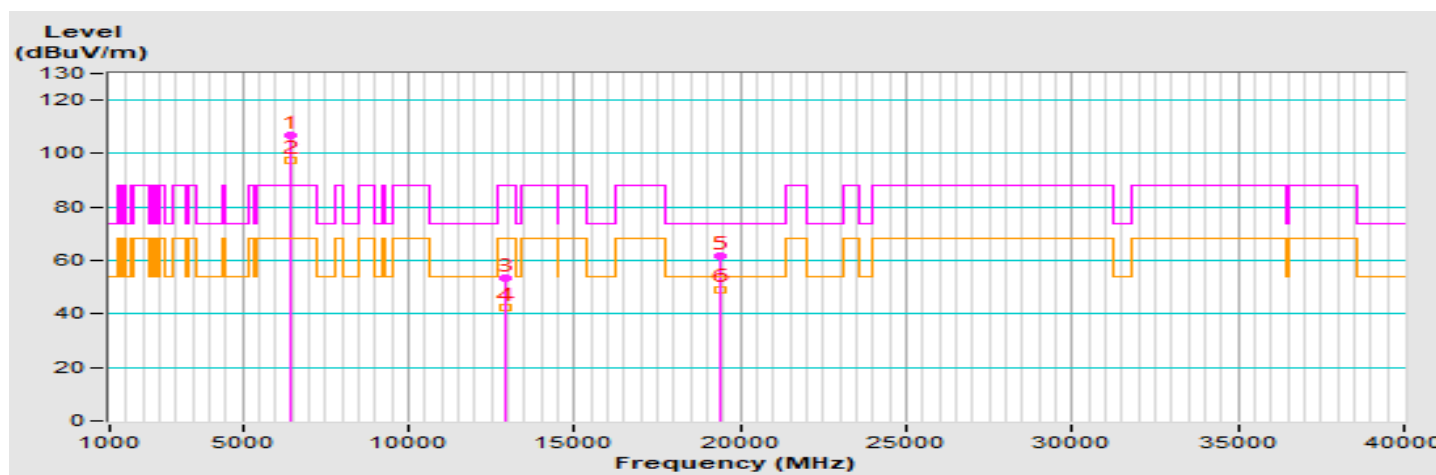


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	106.6 PK			1.77 H	292	98.5	8.1
2	*6475.00	97.6 AV			1.77 H	292	89.5	8.1
3	#12950.00	53.3 PK	88.2	-34.9	2.85 H	181	37.8	15.5
4	#12950.00	42.2 AV	68.2	-26.0	2.85 H	181	26.7	15.5
5	19425.00	61.9 PK	74.0	-12.1	2.65 H	244	65.4	-3.5
6	19425.00	49.3 AV	54.0	-4.7	2.65 H	244	52.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	6.5

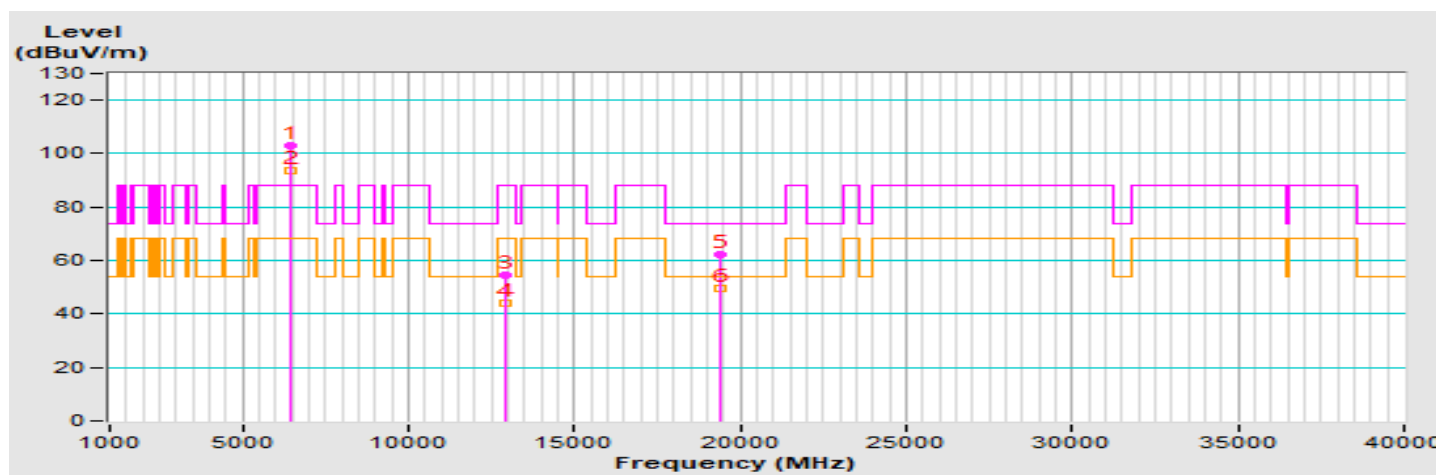


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.9 PK			2.31 V	82	94.8	8.1
2	*6475.00	93.4 AV			2.31 V	82	85.3	8.1
3	#12950.00	54.4 PK	88.2	-33.8	3.06 V	54	38.9	15.5
4	#12950.00	43.9 AV	68.2	-24.3	3.06 V	54	28.4	15.5
5	19425.00	62.4 PK	74.0	-11.6	3.05 V	96	65.9	-3.5
6	19425.00	49.7 AV	54.0	-4.3	3.05 V	96	53.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	8.5

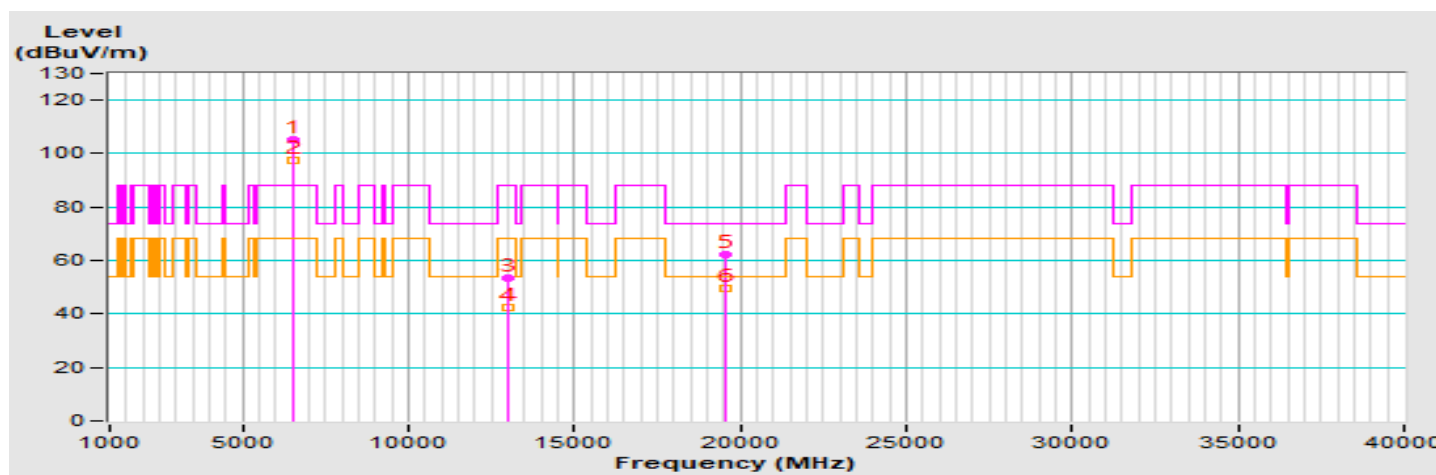


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	105.2 PK			2.67 H	278	96.8	8.4
2	*6515.00	97.7 AV			2.67 H	278	89.3	8.4
3	#13030.00	53.4 PK	88.2	-34.8	2.90 H	170	37.8	15.6
4	#13030.00	42.5 AV	68.2	-25.7	2.90 H	170	26.9	15.6
5	19545.00	62.4 PK	74.0	-11.6	2.61 H	219	65.8	-3.4
6	19545.00	49.6 AV	54.0	-4.4	2.61 H	219	53.0	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	8.5

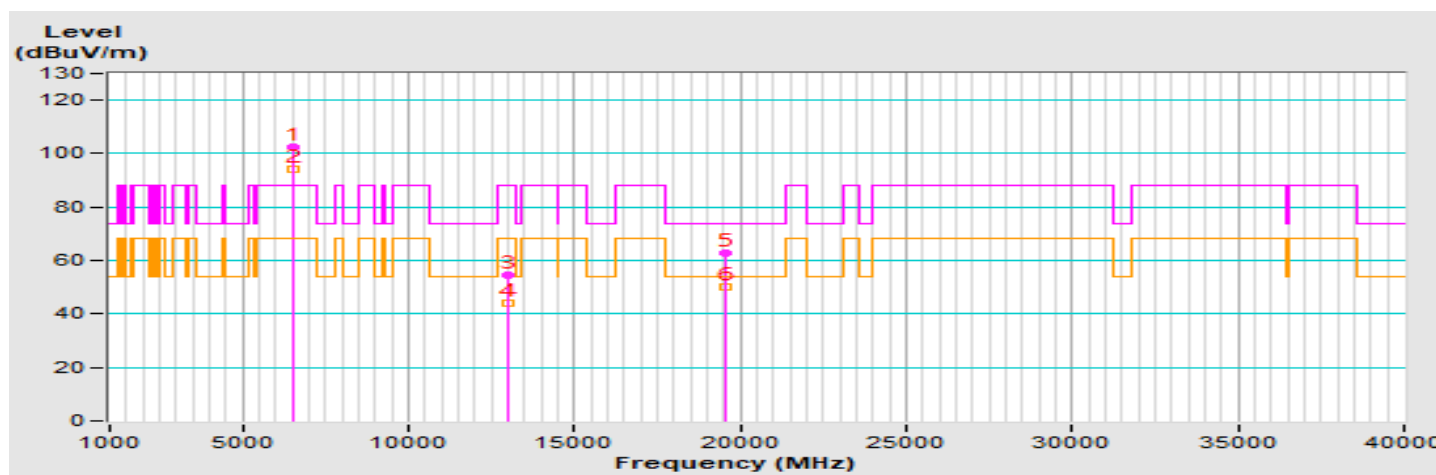


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.4 PK			3.57 V	74	94.0	8.4
2	*6515.00	94.0 AV			3.57 V	74	85.6	8.4
3	#13030.00	54.5 PK	88.2	-33.7	3.10 V	61	38.9	15.6
4	#13030.00	44.1 AV	68.2	-24.1	3.10 V	61	28.5	15.6
5	19545.00	62.7 PK	74.0	-11.3	3.10 V	93	66.1	-3.4
6	19545.00	49.9 AV	54.0	-4.1	3.10 V	93	53.3	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	6

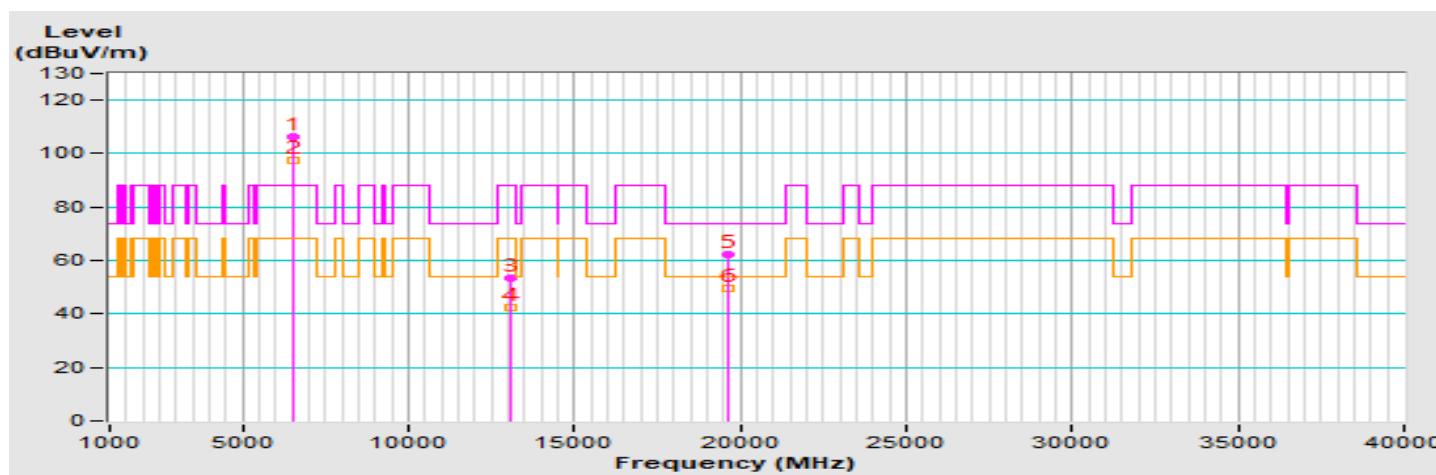


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	106.3 PK			2.18 H	292	97.8	8.5
2	*6535.00	97.6 AV			2.18 H	292	89.1	8.5
3	#13070.00	53.2 PK	88.2	-35.0	2.94 H	166	37.5	15.7
4	#13070.00	42.5 AV	68.2	-25.7	2.94 H	166	26.8	15.7
5	19605.00	62.3 PK	74.0	-11.7	2.58 H	208	66.0	-3.7
6	19605.00	49.4 AV	54.0	-4.6	2.58 H	208	53.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	6

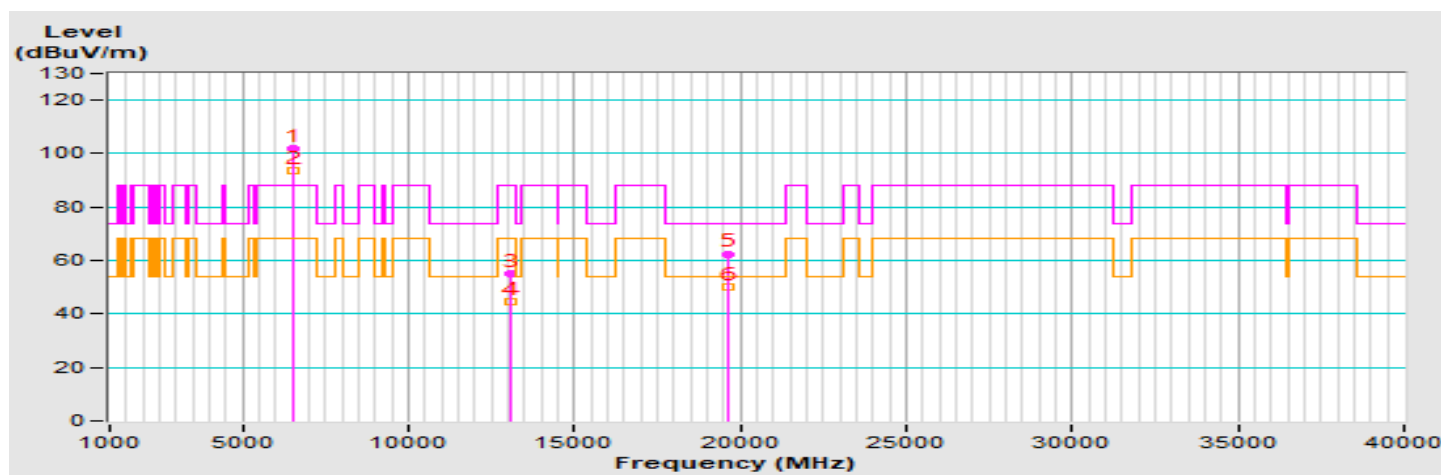


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	102.1 PK			3.55 V	74	93.6	8.5
2	*6535.00	93.4 AV			3.55 V	74	84.9	8.5
3	#13070.00	55.1 PK	88.2	-33.1	3.14 V	55	39.4	15.7
4	#13070.00	44.6 AV	68.2	-23.6	3.14 V	55	28.9	15.7
5	19605.00	62.5 PK	74.0	-11.5	3.04 V	78	66.2	-3.7
6	19605.00	49.9 AV	54.0	-4.1	3.04 V	78	53.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	8

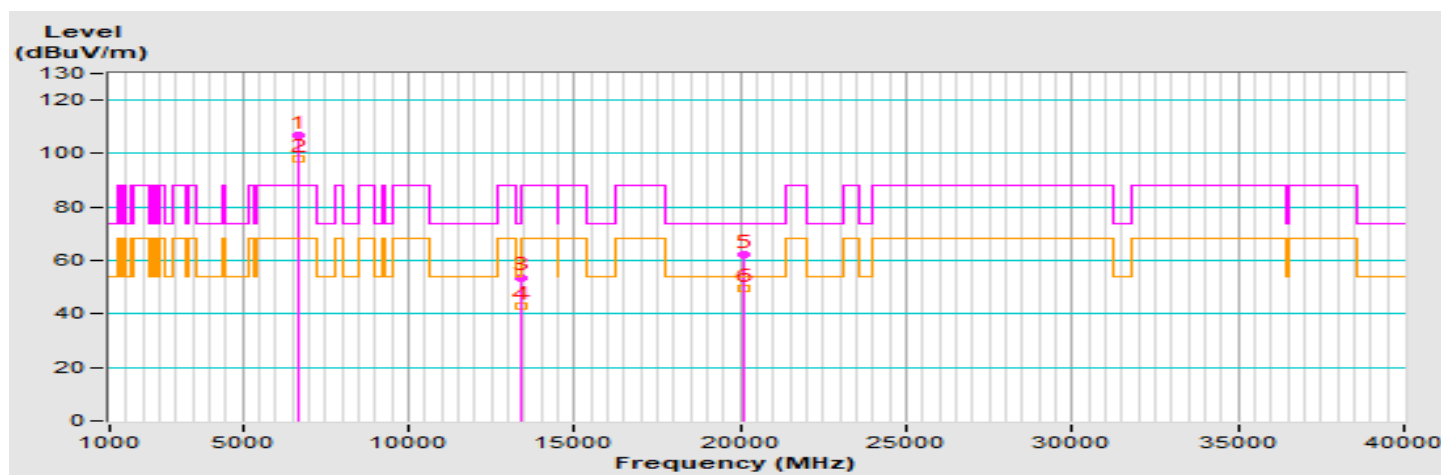


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.8 PK			3.06 H	291	98.0	8.8
2	*6695.00	98.2 AV			3.06 H	291	89.4	8.8
3	13390.00	53.7 PK	74.0	-20.3	2.98 H	178	36.0	17.7
4	13390.00	42.9 AV	54.0	-11.1	2.98 H	178	25.2	17.7
5	20085.00	62.3 PK	74.0	-11.7	2.62 H	202	66.1	-3.8
6	20085.00	49.6 AV	54.0	-4.4	2.62 H	202	53.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	8

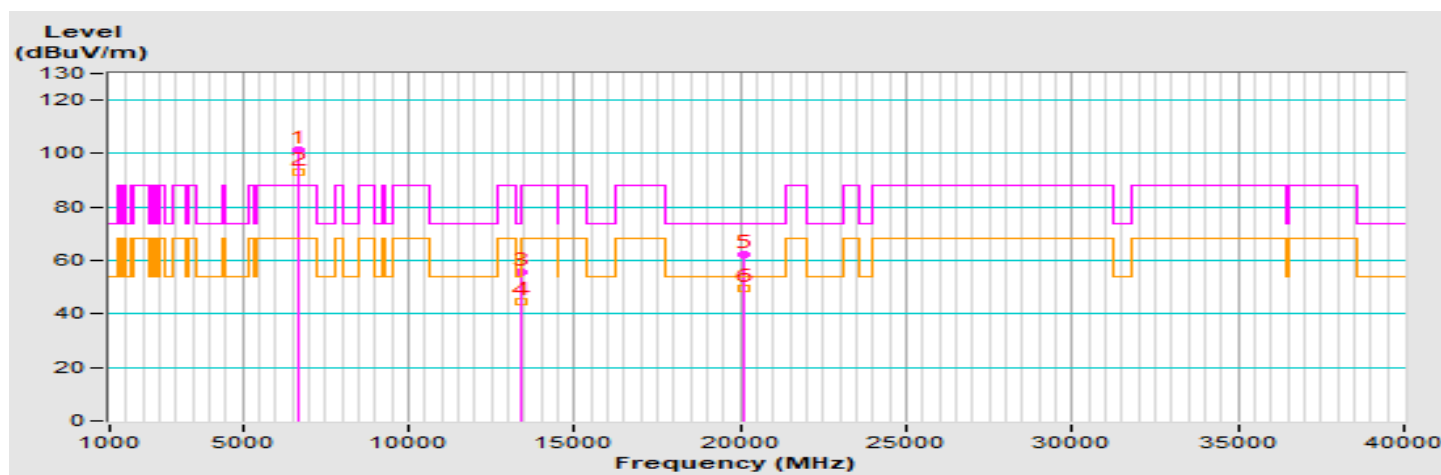


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	101.1 PK			3.32 V	127	92.3	8.8
2	*6695.00	93.1 AV			3.32 V	127	84.3	8.8
3	13390.00	55.6 PK	74.0	-18.4	3.08 V	48	37.9	17.7
4	13390.00	44.8 AV	54.0	-9.2	3.08 V	48	27.1	17.7
5	20085.00	62.1 PK	74.0	-11.9	3.02 V	82	65.9	-3.8
6	20085.00	49.5 AV	54.0	-4.5	3.02 V	82	53.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	8

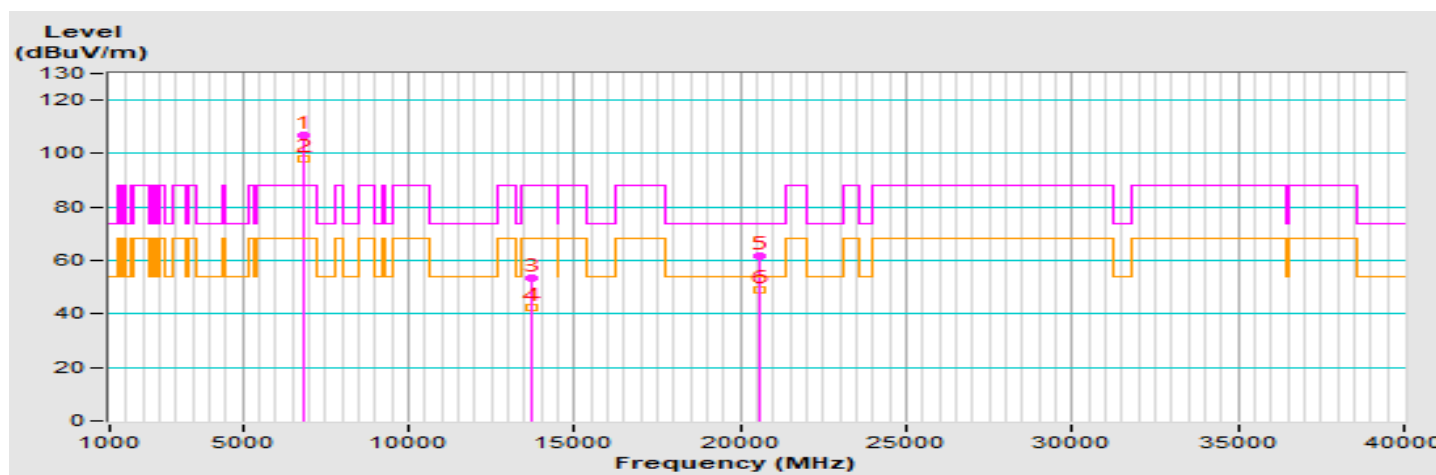


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	106.7 PK			2.15 H	286	97.4	9.3
2	*6855.00	98.1 AV			2.15 H	286	88.8	9.3
3	#13710.00	53.5 PK	88.2	-34.7	2.99 H	172	35.0	18.5
4	#13710.00	42.6 AV	68.2	-25.6	2.99 H	172	24.1	18.5
5	20565.00	61.7 PK	74.0	-12.3	2.59 H	206	64.9	-3.2
6	20565.00	49.2 AV	54.0	-4.8	2.59 H	206	52.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	8

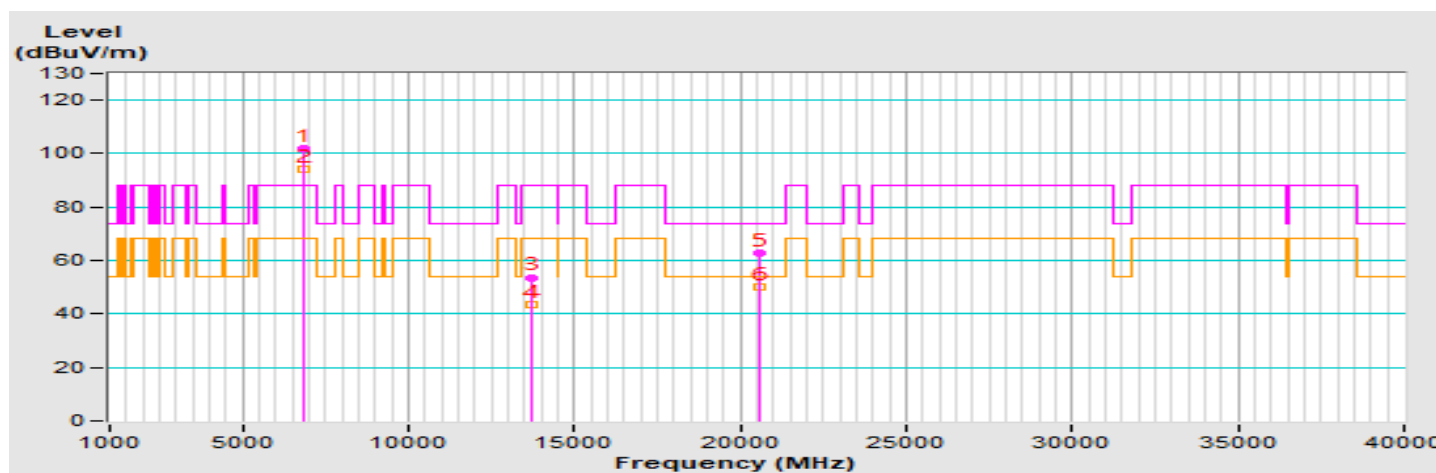


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	101.8 PK			3.82 V	242	92.5	9.3
2	*6855.00	94.4 AV			3.82 V	242	85.1	9.3
3	#13710.00	53.7 PK	88.2	-34.5	3.15 V	81	35.2	18.5
4	#13710.00	43.5 AV	68.2	-24.7	3.15 V	81	25.0	18.5
5	20565.00	62.6 PK	74.0	-11.4	3.04 V	120	65.8	-3.2
6	20565.00	50.2 AV	54.0	-3.8	3.04 V	120	53.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	7

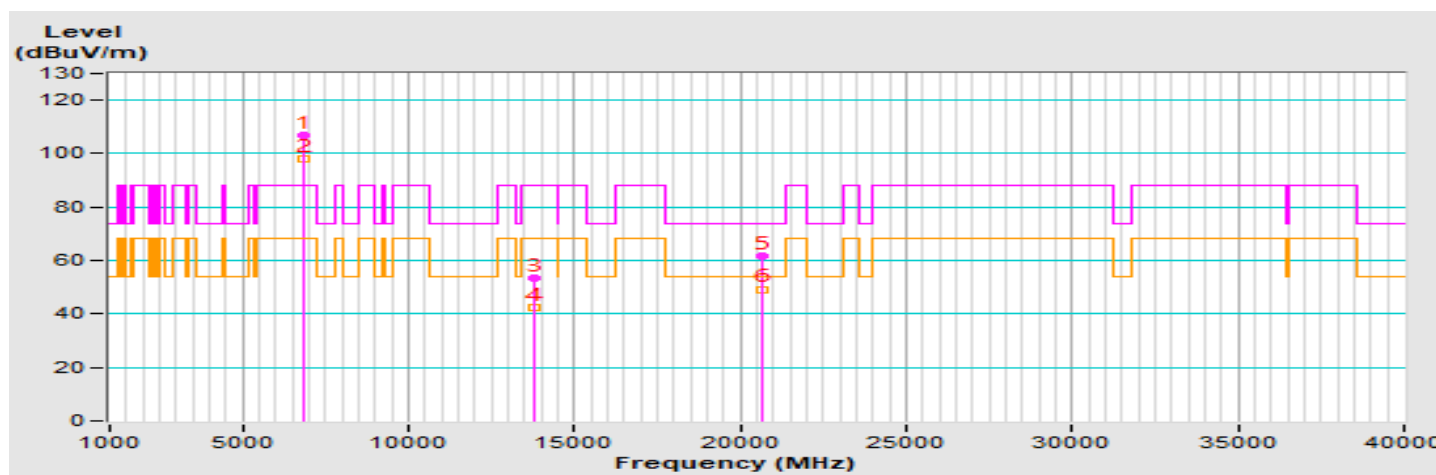


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6875.00	106.7 PK			2.15 H	286	97.6	9.1
2	*6875.00	98.1 AV			2.15 H	286	89.0	9.1
3	#13750.00	53.2 PK	88.2	-35.0	2.96 H	159	34.8	18.4
4	#13750.00	42.3 AV	68.2	-25.9	2.96 H	159	23.9	18.4
5	20625.00	61.6 PK	74.0	-12.4	2.64 H	206	64.8	-3.2
6	20625.00	49.3 AV	54.0	-4.7	2.64 H	206	52.5	-3.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	7

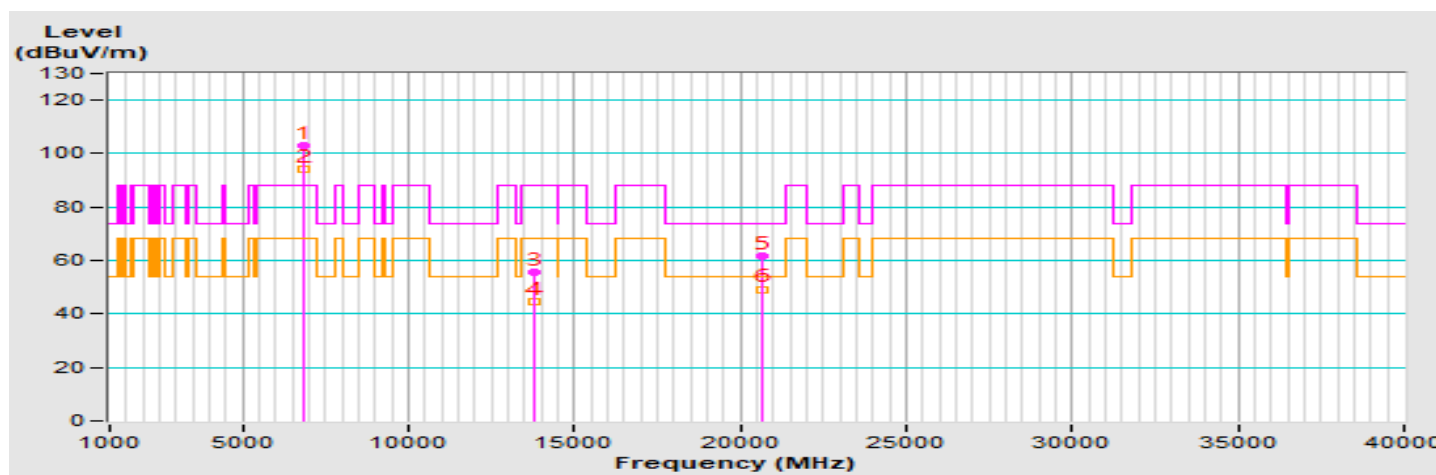


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	103.1 PK			3.27 V	115	94.0	9.1
2	*6875.00	94.1 AV			3.27 V	115	85.0	9.1
3	#13750.00	55.8 PK	88.2	-32.4	3.09 V	43	37.4	18.4
4	#13750.00	44.8 AV	68.2	-23.4	3.09 V	43	26.4	18.4
5	20625.00	61.7 PK	74.0	-12.3	2.96 V	68	64.9	-3.2
6	20625.00	49.3 AV	54.0	-4.7	2.96 V	68	52.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	8.5

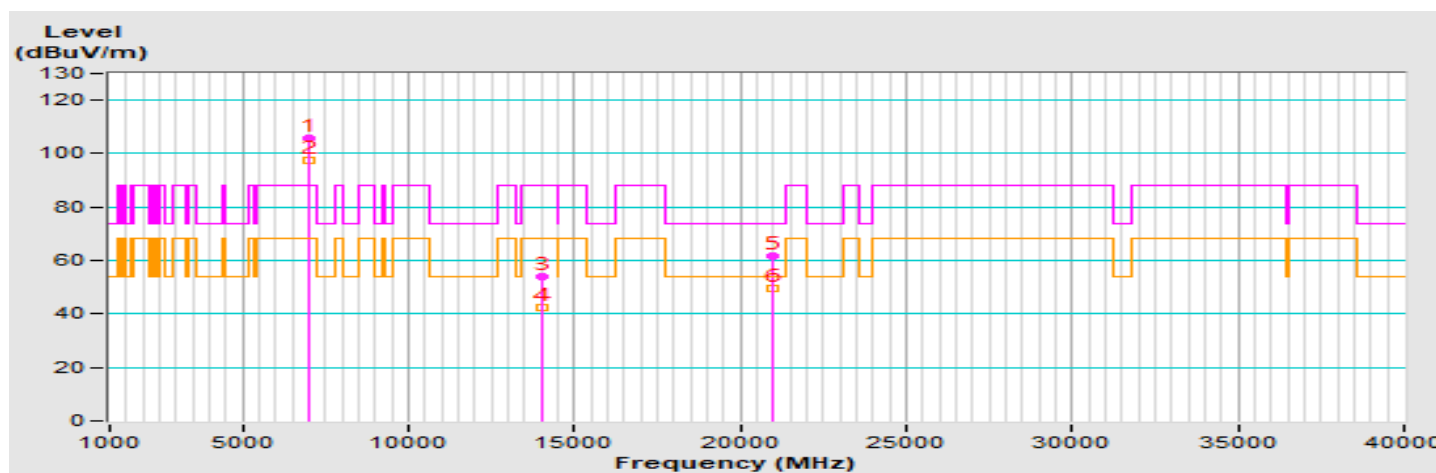


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6995.00	105.9 PK			1.88 H	172	96.0	9.9
2	*6995.00	97.5 AV			1.88 H	172	87.6	9.9
3	#13990.00	53.8 PK	88.2	-34.4	3.02 H	182	34.7	19.1
4	#13990.00	42.6 AV	68.2	-25.6	3.02 H	182	23.5	19.1
5	20985.00	61.9 PK	74.0	-12.1	2.59 H	211	64.8	-2.9
6	20985.00	49.6 AV	54.0	-4.4	2.59 H	211	52.5	-2.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	8.5


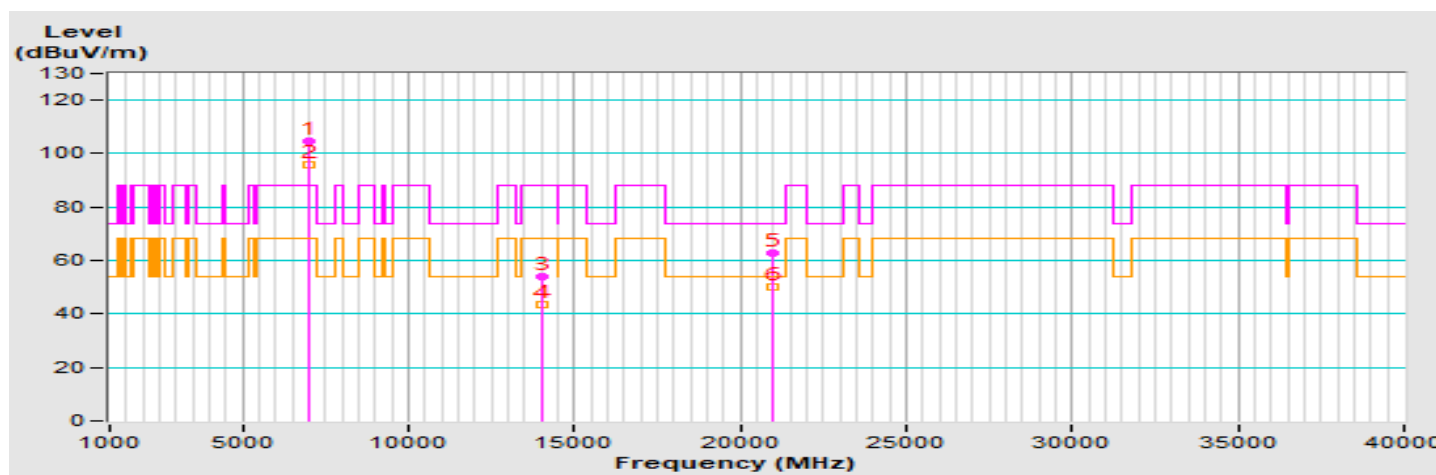


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	104.4 PK			3.28 V	114	94.5	9.9
2	*6995.00	95.9 AV			3.28 V	114	86.0	9.9
3	#13990.00	54.2 PK	88.2	-34.0	3.18 V	85	35.1	19.1
4	#13990.00	43.7 AV	68.2	-24.5	3.18 V	85	24.6	19.1
5	20985.00	62.7 PK	74.0	-11.3	3.08 V	134	65.6	-2.9
6	20985.00	50.1 AV	54.0	-3.9	3.08 V	134	53.0	-2.9


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	2.5

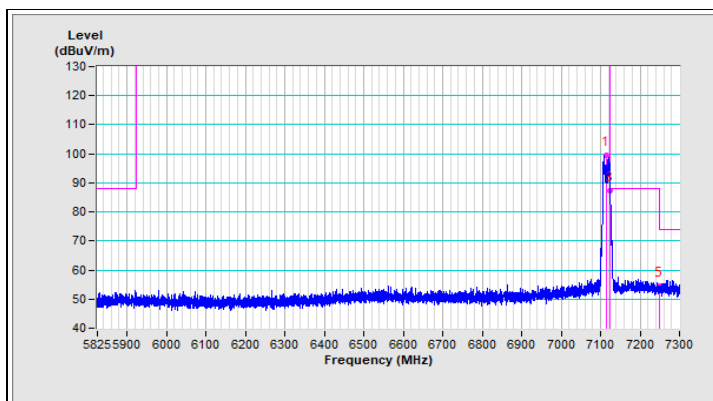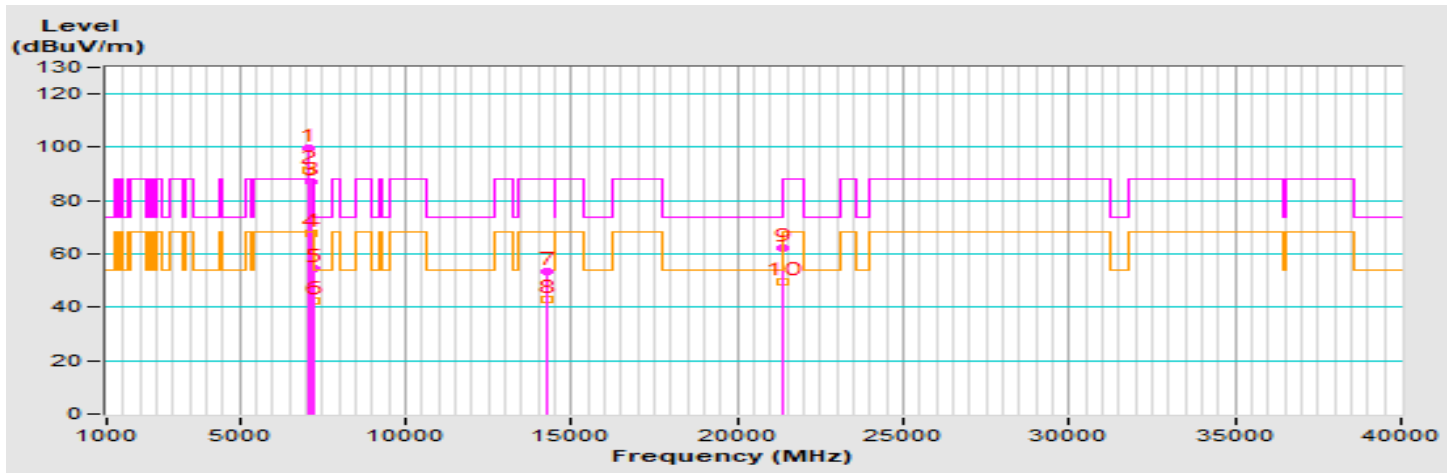

Horizontal (Peak)

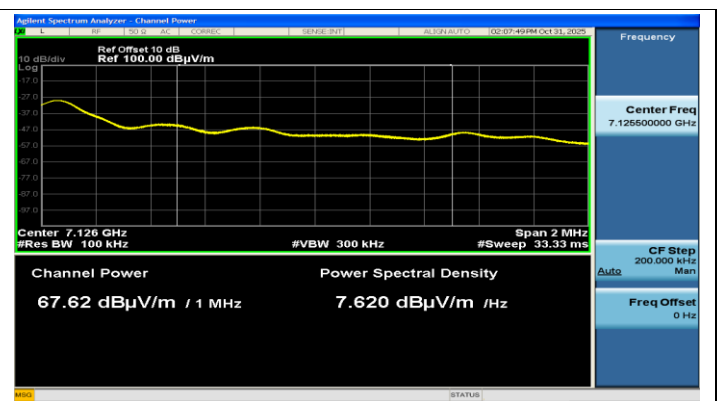



For Integration method: Horizontal (Average)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.6 PK			2.07 H	283	88.8	10.8
2	*7115.00	91.4 AV			2.07 H	283	80.6	10.8
3	#7125.00	87.1 PK	88.2	-1.1	2.07 H	283	76.2	10.9
4	#7125.00	67.6 AV	68.2	-0.6	2.07 H	283	56.7	10.9
5	7250.00	54.5 PK	74.0	-19.5	2.07 H	283	43.7	10.8
6	7250.00	42.5 AV	54.0	-11.5	2.07 H	283	31.7	10.8
7	#14230.00	53.6 PK	88.2	-34.6	3.04 H	178	33.8	19.8
8	#14230.00	42.7 AV	68.2	-25.5	3.04 H	178	22.9	19.8
9	21345.00	62.1 PK	74.0	-11.9	2.53 H	210	64.6	-2.5
10	21345.00	49.5 AV	54.0	-4.5	2.53 H	210	52.0	-2.5


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	2.5

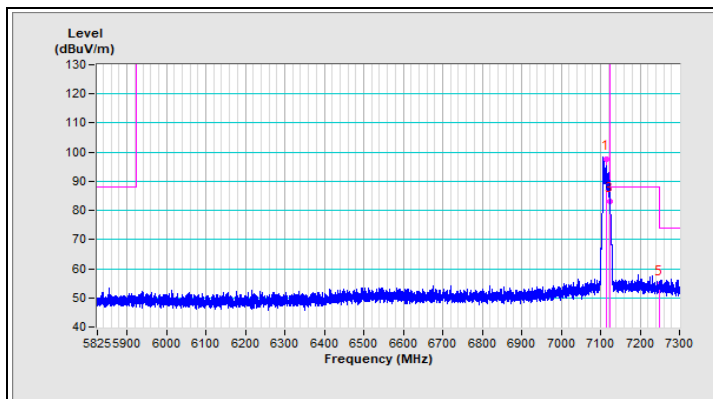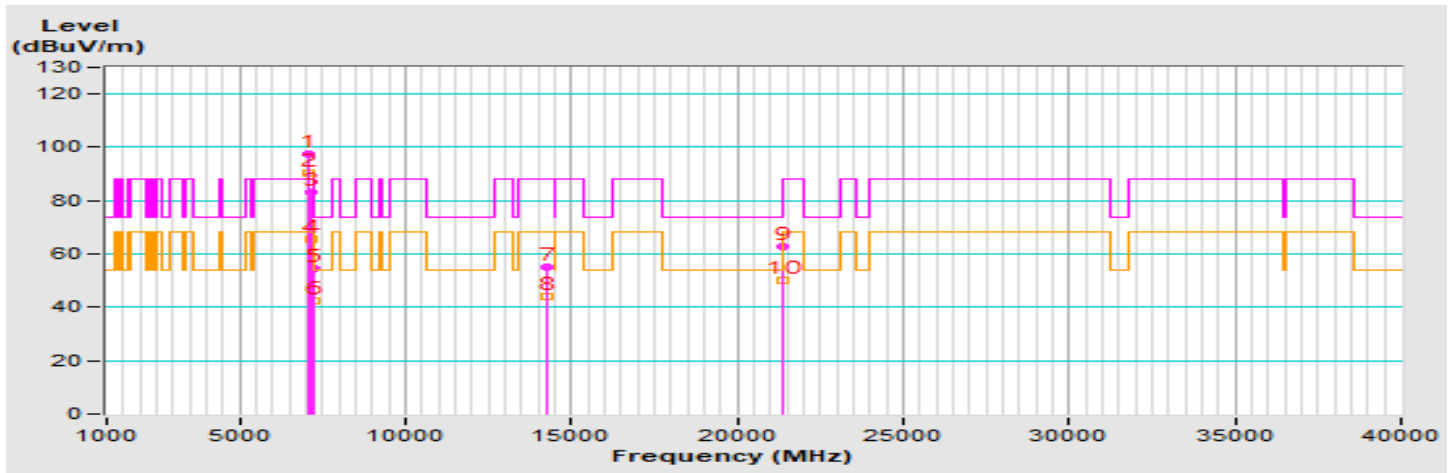

Vertical (Peak)

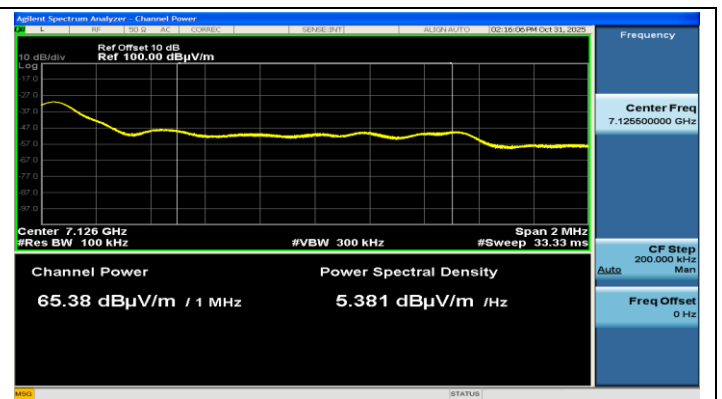



For Integration method: Vertical (Average)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.7 PK			1.76 V	210	86.9	10.8
2	*7115.00	90.1 AV			1.76 V	210	79.3	10.8
3	#7125.00	83.1 PK	88.2	-5.1	1.76 V	210	72.2	10.9
4	#7125.00	65.4 AV	68.2	-2.8	1.76 V	210	54.5	10.9
5	7250.00	54.5 PK	74.0	-19.5	1.76 V	210	43.7	10.8
6	7250.00	42.5 AV	54.0	-11.5	1.76 V	210	31.7	10.8
7	#14230.00	54.9 PK	88.2	-33.3	3.20 V	55	35.1	19.8
8	#14230.00	44.2 AV	68.2	-24.0	3.20 V	55	24.4	19.8
9	21345.00	62.8 PK	74.0	-11.2	3.09 V	90	65.3	-2.5
10	21345.00	50.3 AV	54.0	-3.7	3.09 V	90	52.8	-2.5


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	11.5

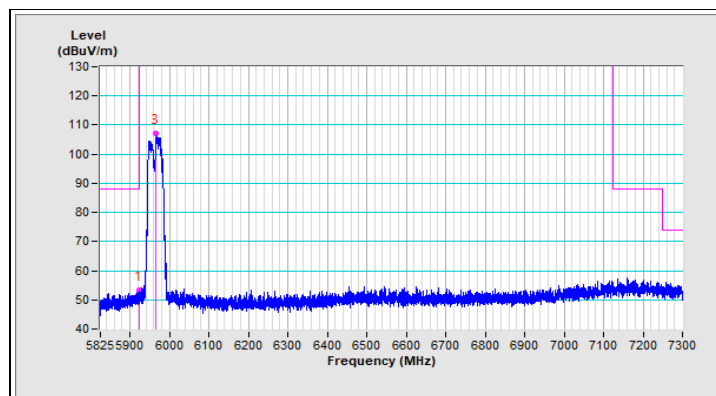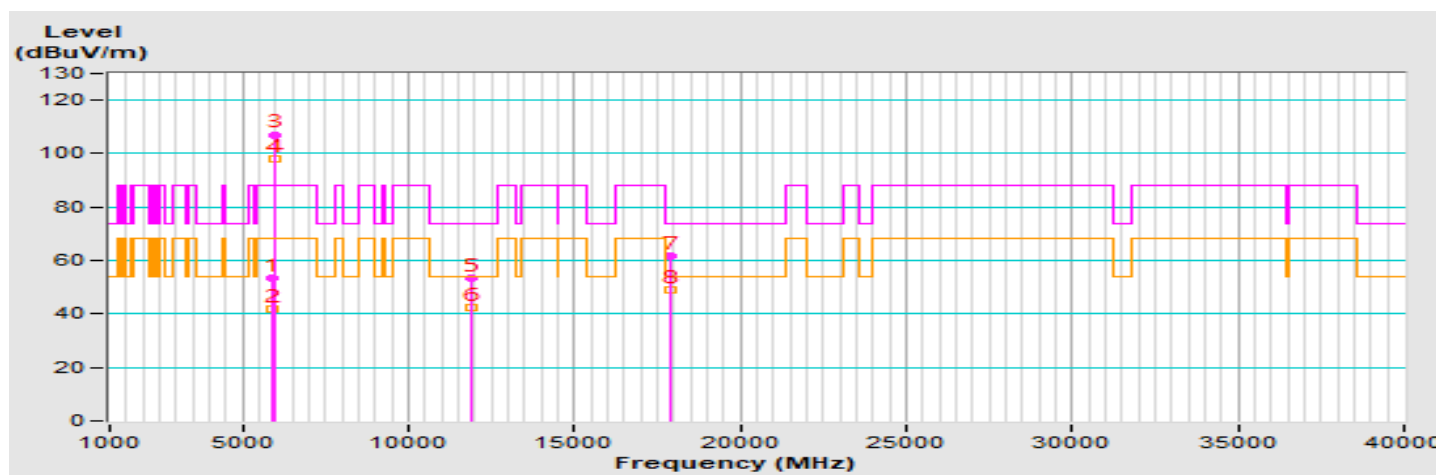

Horizontal (Peak)

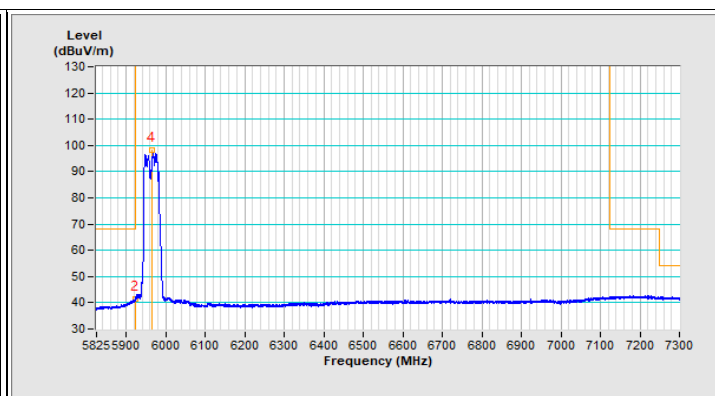



Horizontal (Average)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.2 PK	88.2	-35.0	1.58 H	139	46.9	6.3
2	#5925.00	41.6 AV	68.2	-26.6	1.58 H	139	35.3	6.3
3	*5965.00	107.1 PK			1.58 H	139	100.9	6.2
4	*5965.00	98.2 AV			1.58 H	139	92.0	6.2
5	11930.00	53.5 PK	74.0	-20.5	2.90 H	193	38.1	15.4
6	11930.00	42.3 AV	54.0	-11.7	2.90 H	193	26.9	15.4
7	17895.00	61.7 PK	74.0	-12.3	2.65 H	249	33.2	28.5
8	17895.00	49.2 AV	54.0	-4.8	2.65 H	249	20.7	28.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	11.5

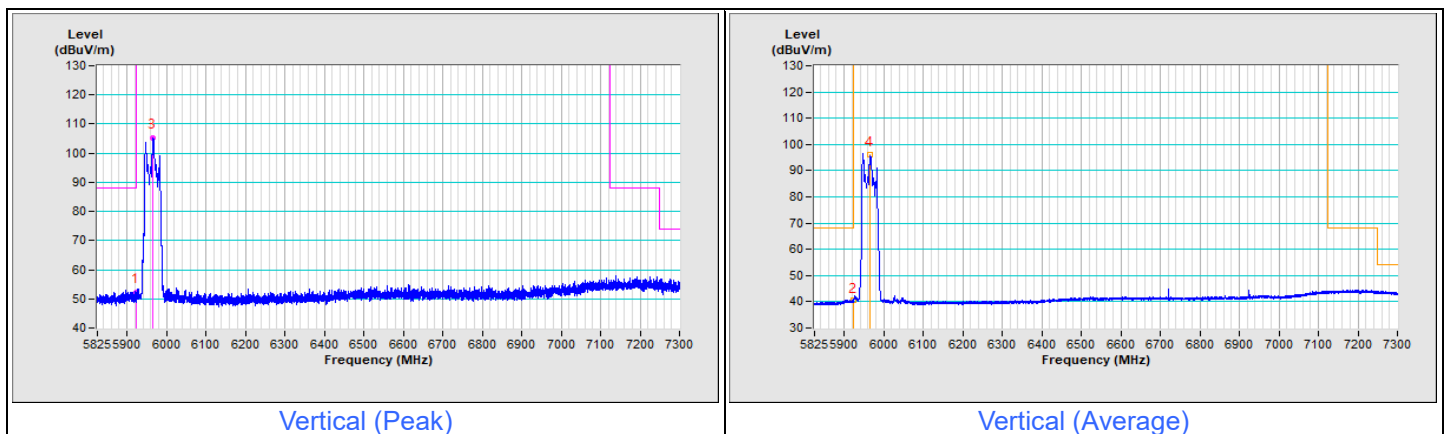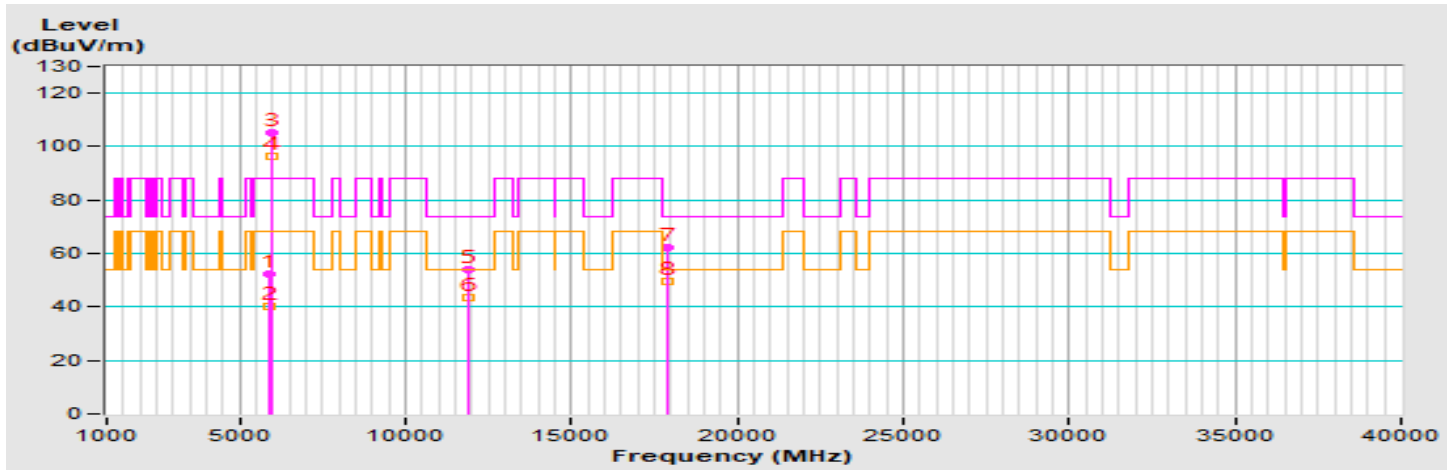


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.1 PK	88.2	-36.1	2.46 V	105	45.8	6.3
2	#5925.00	40.4 AV	68.2	-27.8	2.46 V	105	34.1	6.3
3	*5965.00	105.3 PK			2.46 V	105	99.1	6.2
4	*5965.00	96.3 AV			2.46 V	105	90.1	6.2
5	11930.00	54.2 PK	74.0	-19.8	3.20 V	85	38.8	15.4
6	11930.00	43.6 AV	54.0	-10.4	3.20 V	85	28.2	15.4
7	17895.00	62.3 PK	74.0	-11.7	3.07 V	141	33.8	28.5
8	17895.00	49.8 AV	54.0	-4.2	3.07 V	141	21.3	28.5

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
- " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	12

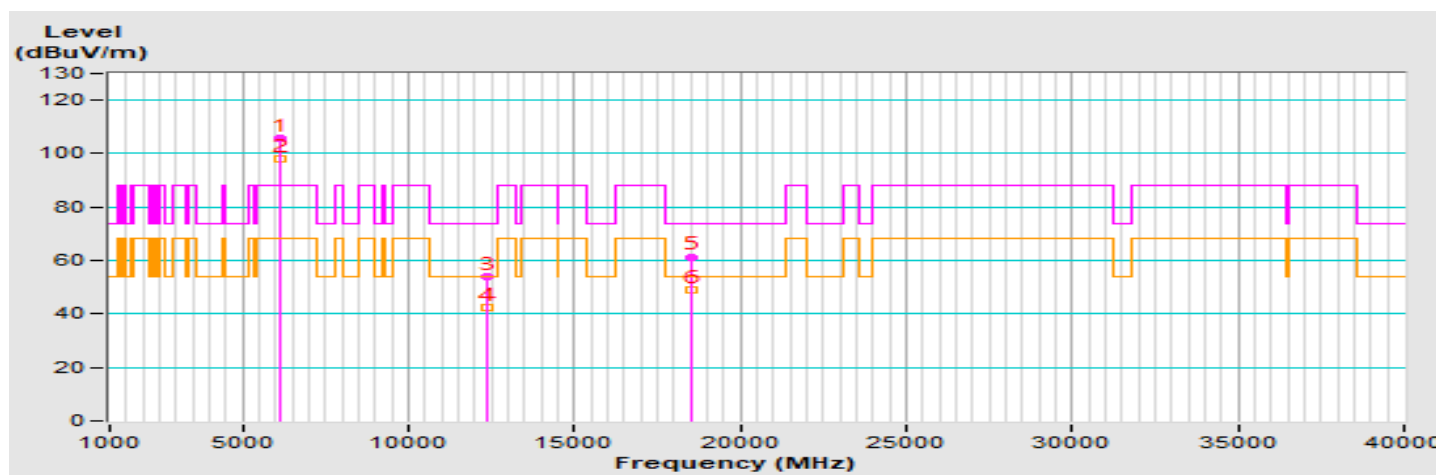


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	105.8 PK			2.28 H	275	99.2	6.6
2	*6165.00	98.2 AV			2.28 H	275	91.6	6.6
3	12330.00	53.8 PK	74.0	-20.2	2.91 H	196	38.6	15.2
4	12330.00	42.5 AV	54.0	-11.5	2.91 H	196	27.3	15.2
5	18495.00	61.4 PK	74.0	-12.6	2.64 H	255	66.3	-4.9
6	18495.00	48.9 AV	54.0	-5.1	2.64 H	255	53.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	12

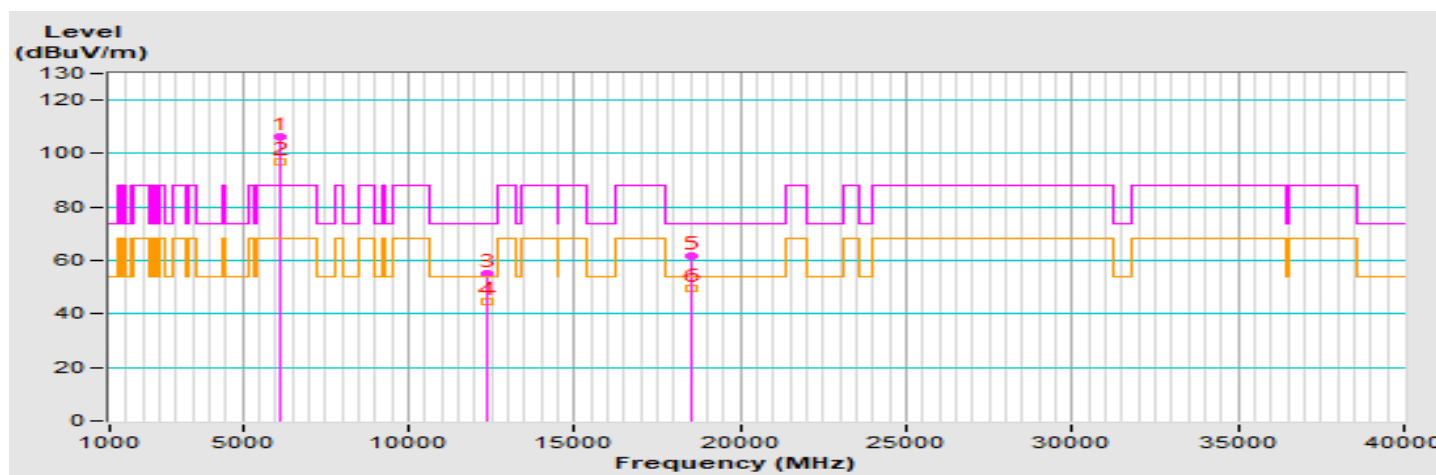


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	106.2 PK			2.76 V	80	99.6	6.6
2	*6165.00	97.1 AV			2.76 V	80	90.5	6.6
3	12330.00	55.2 PK	74.0	-18.8	3.09 V	42	40.0	15.2
4	12330.00	44.5 AV	54.0	-9.5	3.09 V	42	29.3	15.2
5	18495.00	61.7 PK	74.0	-12.3	2.94 V	80	66.6	-4.9
6	18495.00	49.5 AV	54.0	-4.5	2.94 V	80	54.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	10.5

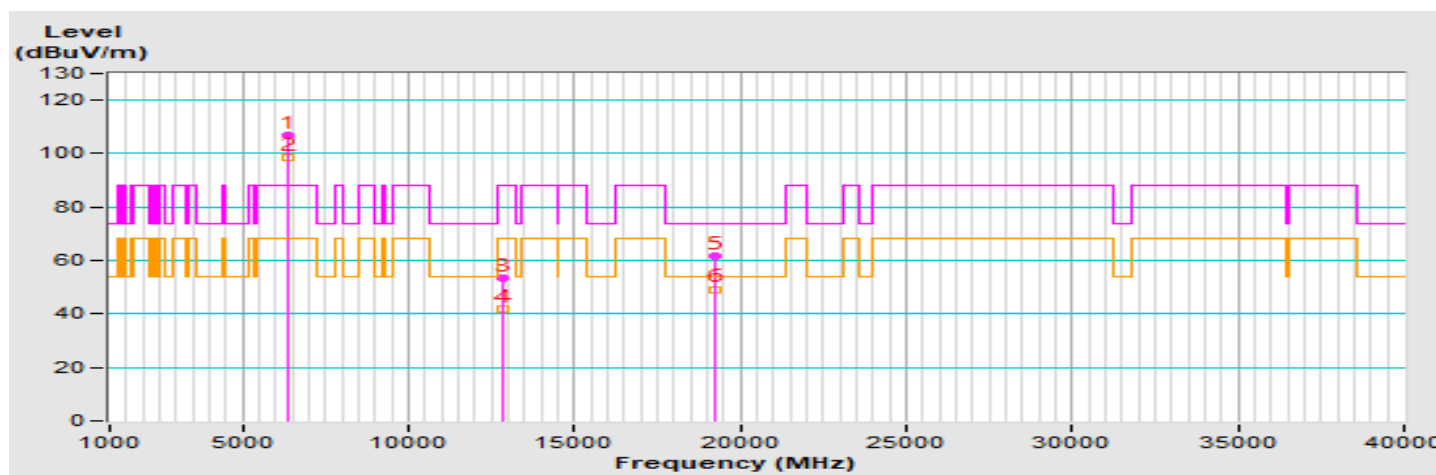


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	106.7 PK			2.53 H	294	99.1	7.6
2	*6405.00	98.7 AV			2.53 H	294	91.1	7.6
3	#12810.00	53.2 PK	88.2	-35.0	2.93 H	178	37.6	15.6
4	#12810.00	41.9 AV	68.2	-26.3	2.93 H	178	26.3	15.6
5	19215.00	61.8 PK	74.0	-12.2	2.61 H	244	66.2	-4.4
6	19215.00	49.3 AV	54.0	-4.7	2.61 H	244	53.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	10.5

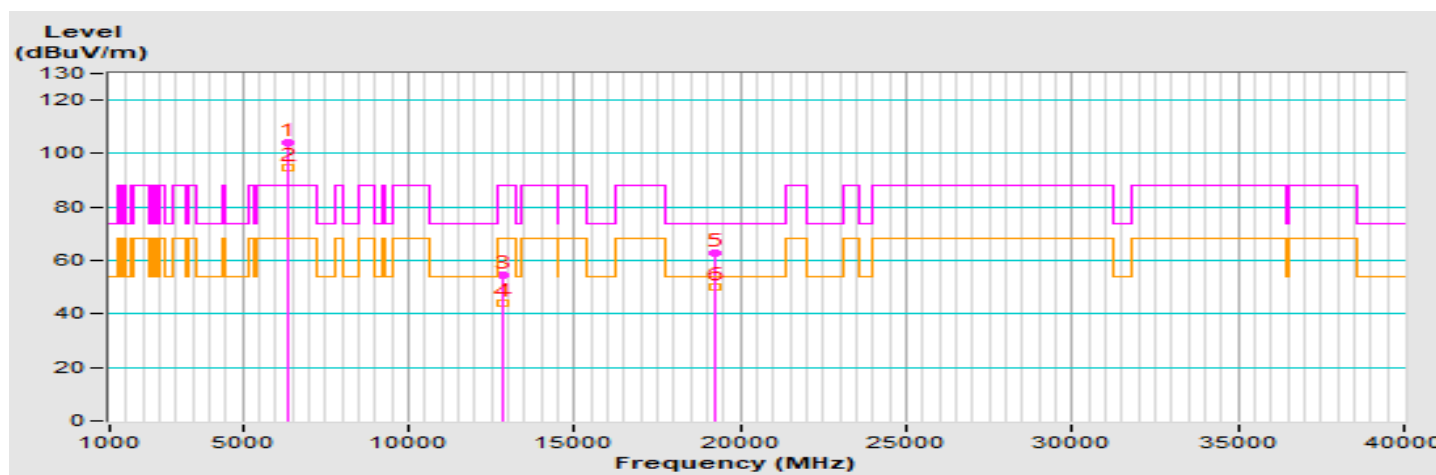


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	104.2 PK			2.52 V	78	96.6	7.6
2	*6405.00	94.6 AV			2.52 V	78	87.0	7.6
3	#12810.00	54.5 PK	88.2	-33.7	3.21 V	90	38.9	15.6
4	#12810.00	44.1 AV	68.2	-24.1	3.21 V	90	28.5	15.6
5	19215.00	62.8 PK	74.0	-11.2	3.10 V	147	67.2	-4.4
6	19215.00	49.9 AV	54.0	-4.1	3.10 V	147	54.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9

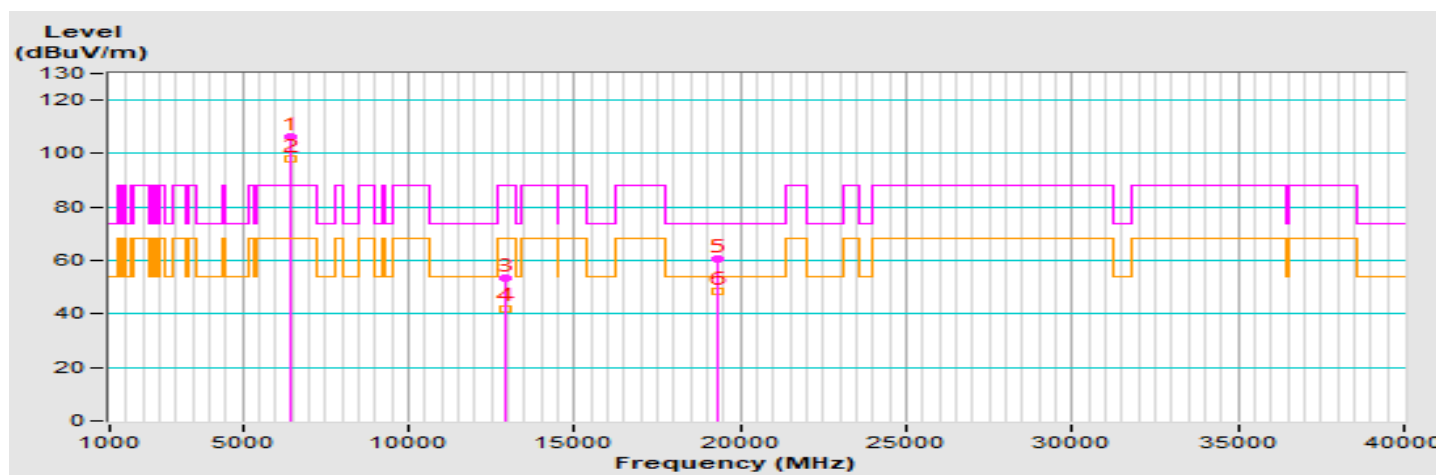


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	106.3 PK			2.17 H	292	98.5	7.8
2	*6445.00	98.2 AV			2.17 H	292	90.4	7.8
3	#12890.00	53.2 PK	88.2	-35.0	2.94 H	187	37.5	15.7
4	#12890.00	42.1 AV	68.2	-26.1	2.94 H	187	26.4	15.7
5	19335.00	60.8 PK	74.0	-13.2	2.64 H	249	64.6	-3.8
6	19335.00	48.5 AV	54.0	-5.5	2.64 H	249	52.3	-3.8

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
- " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9

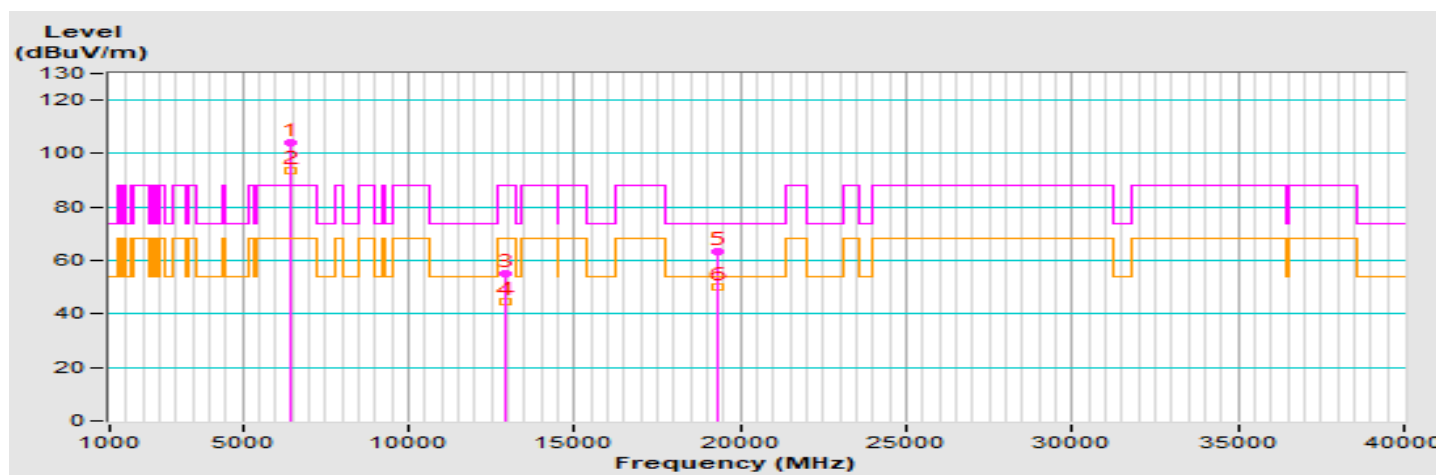


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	103.9 PK			2.35 V	85	96.1	7.8
2	*6445.00	93.7 AV			2.35 V	85	85.9	7.8
3	#12890.00	55.1 PK	88.2	-33.1	3.22 V	93	39.4	15.7
4	#12890.00	44.4 AV	68.2	-23.8	3.22 V	93	28.7	15.7
5	19335.00	63.5 PK	74.0	-10.5	3.15 V	132	67.3	-3.8
6	19335.00	50.3 AV	54.0	-3.7	3.15 V	132	54.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9.5

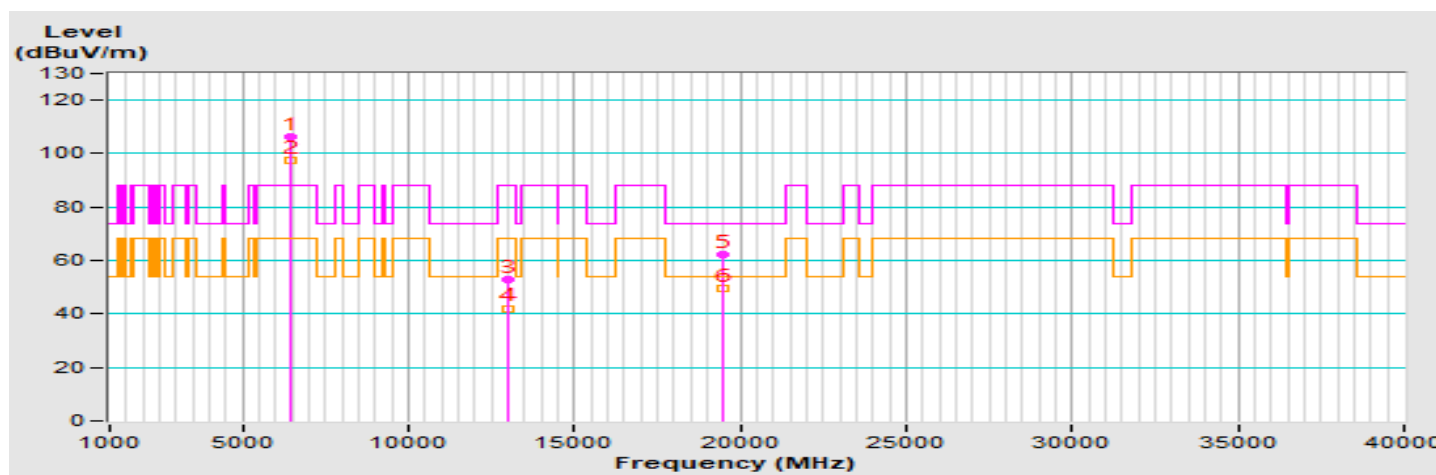


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6485.00	106.1 PK			2.70 H	291	98.0	8.1
2	*6485.00	97.6 AV			2.70 H	291	89.5	8.1
3	#12970.00	53.1 PK	88.2	-35.1	2.88 H	187	37.6	15.5
4	#12970.00	42.1 AV	68.2	-26.1	2.88 H	187	26.6	15.5
5	19455.00	62.1 PK	74.0	-11.9	2.60 H	253	65.4	-3.3
6	19455.00	49.6 AV	54.0	-4.4	2.60 H	253	52.9	-3.3

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9.5

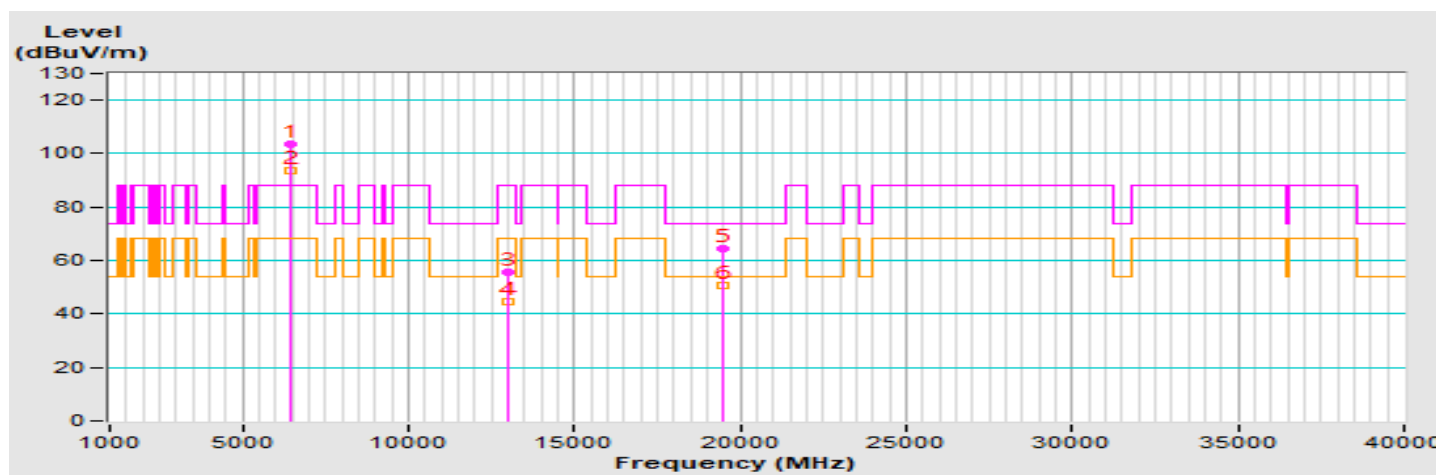


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	103.6 PK			1.82 V	75	95.5	8.1
2	*6485.00	93.8 AV			1.82 V	75	85.7	8.1
3	#12970.00	55.4 PK	88.2	-32.8	3.19 V	89	39.9	15.5
4	#12970.00	44.5 AV	68.2	-23.7	3.19 V	89	29.0	15.5
5	19455.00	64.2 PK	74.0	-9.8	3.15 V	118	67.5	-3.3
6	19455.00	50.7 AV	54.0	-3.3	3.15 V	118	54.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9.5

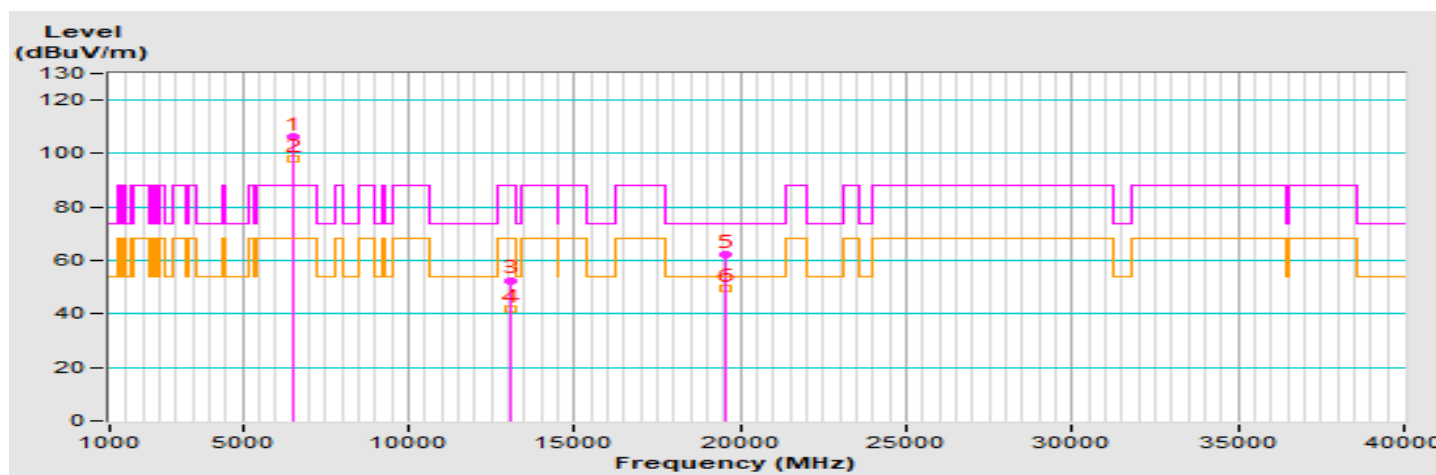


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6525.00	106.1 PK			2.39 H	295	97.7	8.4
2	*6525.00	98.1 AV			2.39 H	295	89.7	8.4
3	#13050.00	52.6 PK	88.2	-35.6	2.83 H	191	36.9	15.7
4	#13050.00	41.8 AV	68.2	-26.4	2.83 H	191	26.1	15.7
5	19575.00	62.3 PK	74.0	-11.7	2.57 H	249	65.9	-3.6
6	19575.00	49.8 AV	54.0	-4.2	2.57 H	249	53.4	-3.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9.5

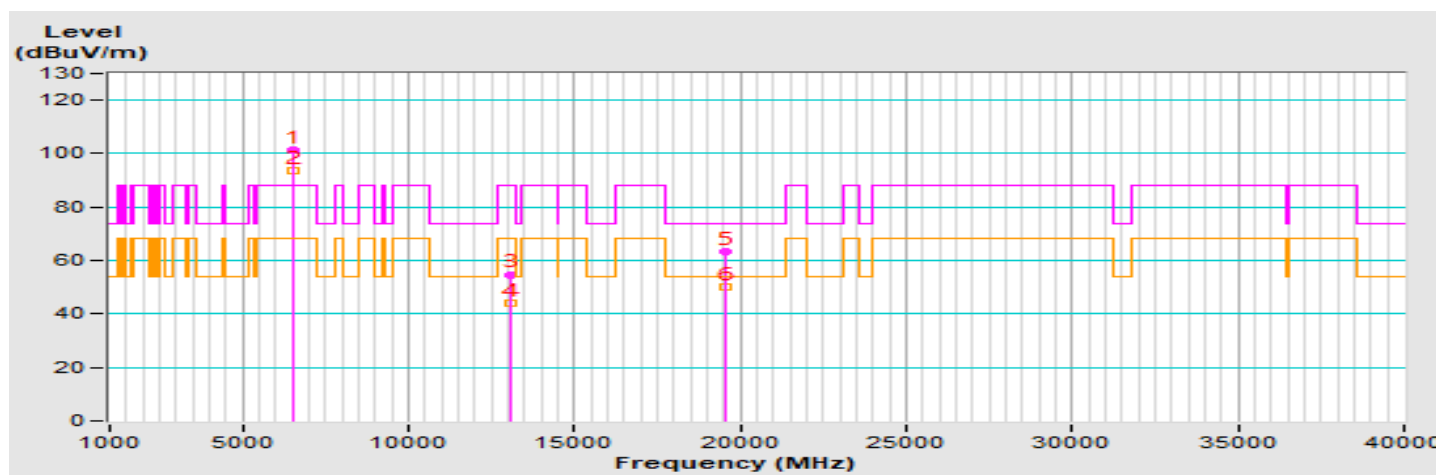


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	101.4 PK			3.44 V	75	93.0	8.4
2	*6525.00	93.4 AV			3.44 V	75	85.0	8.4
3	#13050.00	54.8 PK	88.2	-33.4	3.18 V	98	39.1	15.7
4	#13050.00	43.9 AV	68.2	-24.3	3.18 V	98	28.2	15.7
5	19575.00	63.2 PK	74.0	-10.8	3.12 V	123	66.8	-3.6
6	19575.00	50.2 AV	54.0	-3.8	3.12 V	123	53.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9.5

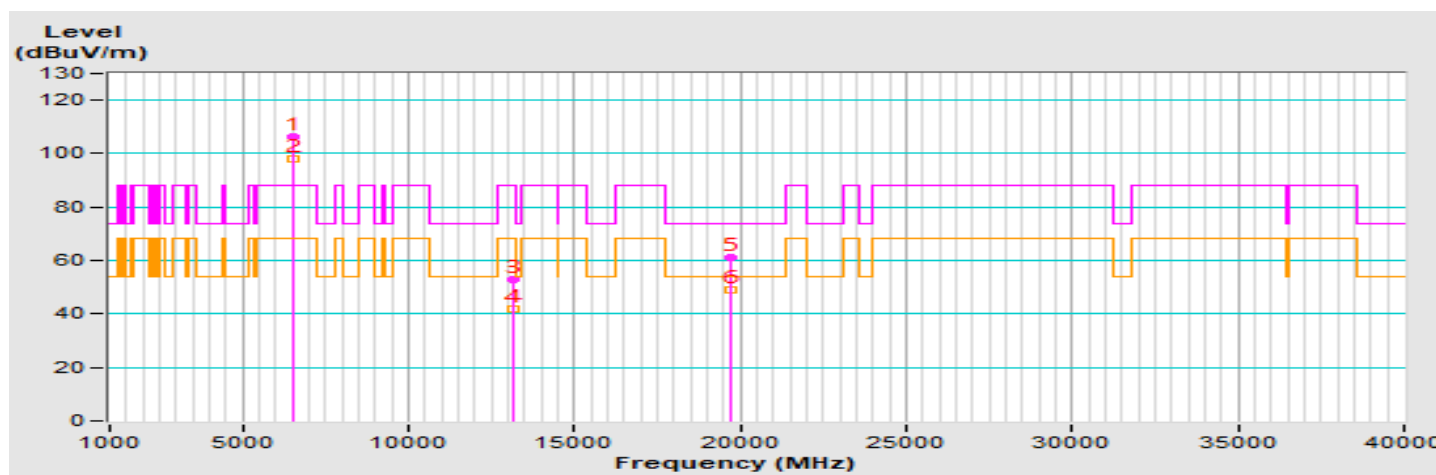


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6565.00	106.1 PK			2.56 H	292	97.4	8.7
2	*6565.00	97.9 AV			2.56 H	292	89.2	8.7
3	#13130.00	52.8 PK	88.2	-35.4	2.89 H	196	36.8	16.0
4	#13130.00	41.9 AV	68.2	-26.3	2.89 H	196	25.9	16.0
5	19695.00	60.9 PK	74.0	-13.1	2.60 H	259	64.8	-3.9
6	19695.00	48.8 AV	54.0	-5.2	2.60 H	259	52.7	-3.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9.5

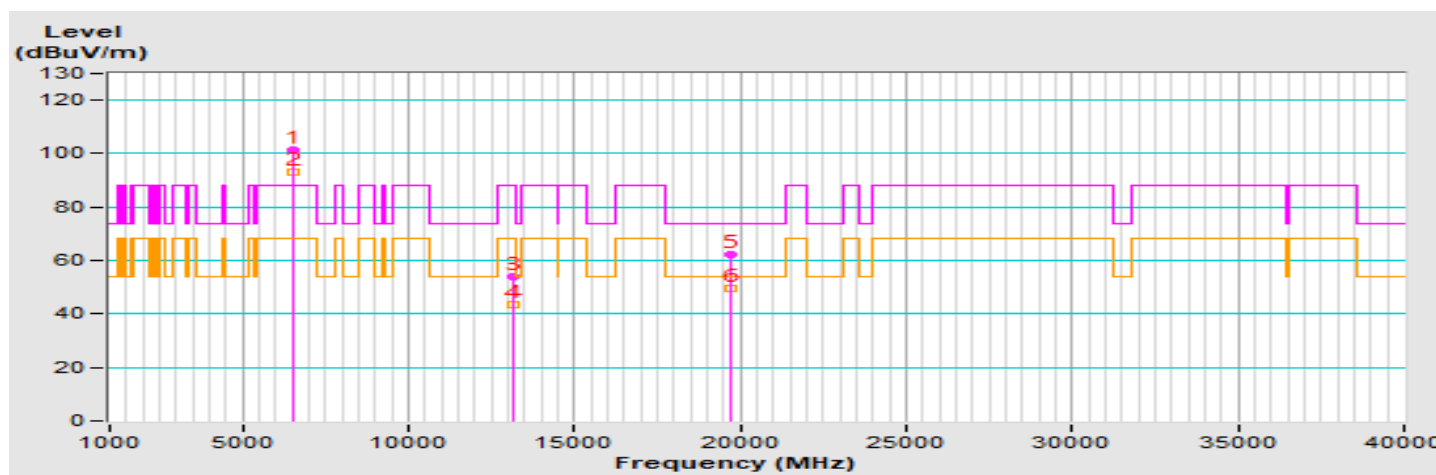


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	101.2 PK			3.52 V	73	92.5	8.7
2	*6565.00	93.1 AV			3.52 V	73	84.4	8.7
3	#13130.00	53.9 PK	88.2	-34.3	3.04 V	67	37.9	16.0
4	#13130.00	43.7 AV	68.2	-24.5	3.04 V	67	27.7	16.0
5	19695.00	62.1 PK	74.0	-11.9	3.01 V	80	66.0	-3.9
6	19695.00	49.4 AV	54.0	-4.6	3.01 V	80	53.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	10

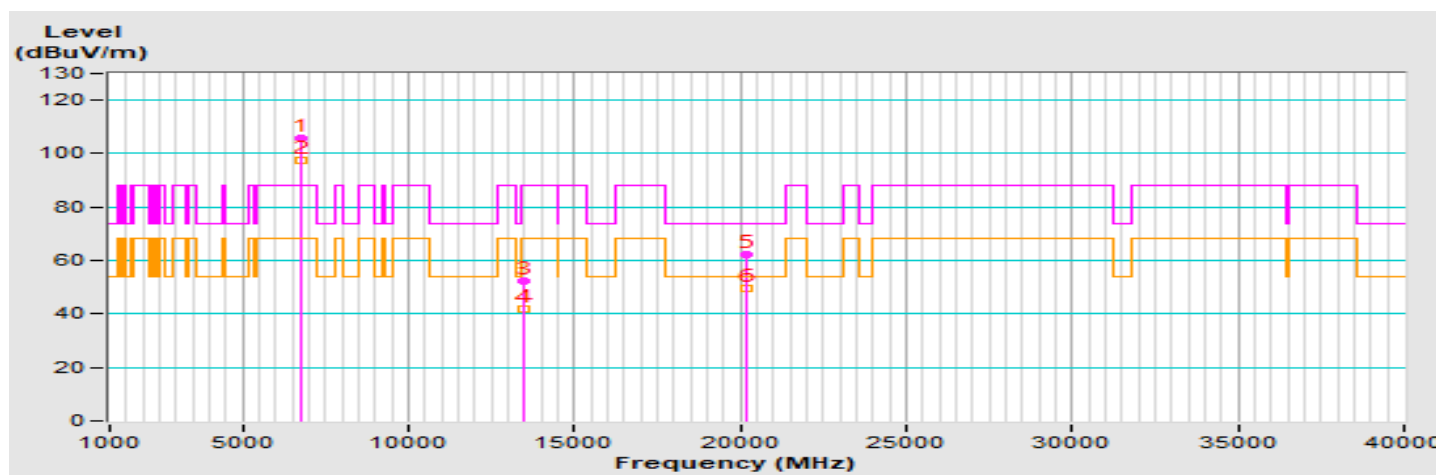


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	105.8 PK			2.71 H	293	97.0	8.8
2	*6725.00	97.7 AV			2.71 H	293	88.9	8.8
3	#13450.00	52.5 PK	88.2	-35.7	2.80 H	206	34.5	18.0
4	#13450.00	41.8 AV	68.2	-26.4	2.80 H	206	23.8	18.0
5	20175.00	62.1 PK	74.0	-11.9	2.54 H	258	65.7	-3.6
6	20175.00	49.7 AV	54.0	-4.3	2.54 H	258	53.3	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	10

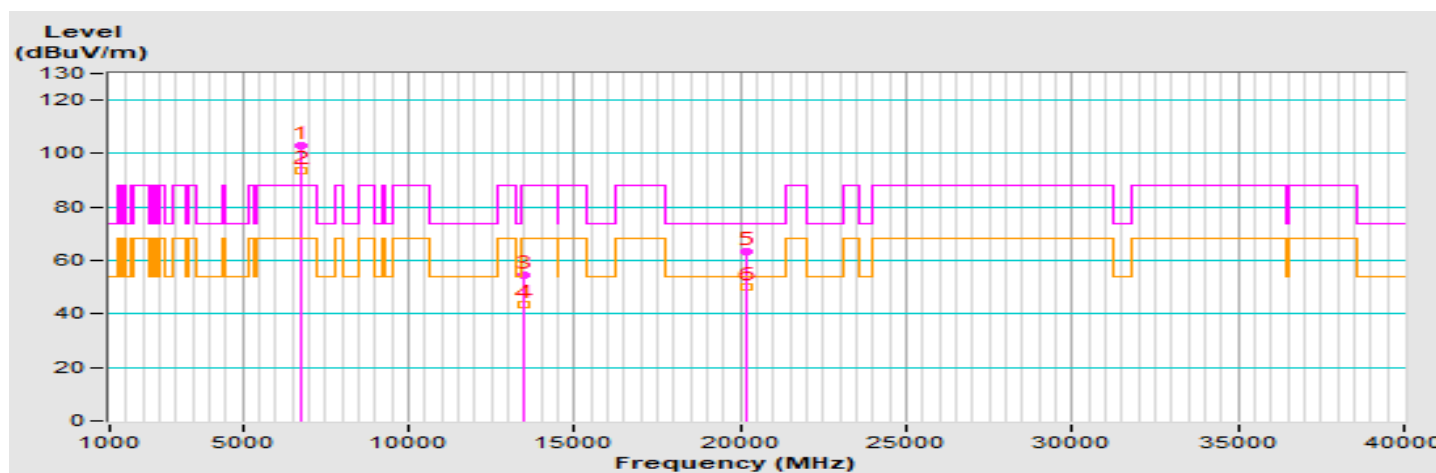


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	102.8 PK			2.99 V	121	94.0	8.8
2	*6725.00	93.4 AV			2.99 V	121	84.6	8.8
3	#13450.00	54.3 PK	88.2	-33.9	3.23 V	95	36.3	18.0
4	#13450.00	43.4 AV	68.2	-24.8	3.23 V	95	25.4	18.0
5	20175.00	63.5 PK	74.0	-10.5	3.13 V	108	67.1	-3.6
6	20175.00	50.3 AV	54.0	-3.7	3.13 V	108	53.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	10

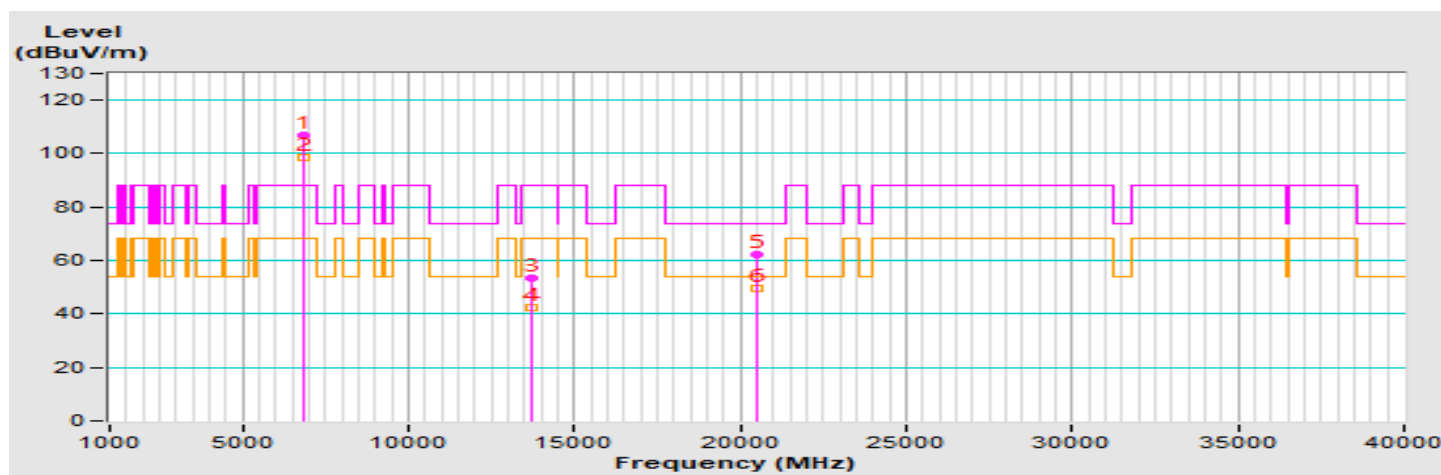


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	106.7 PK			2.54 H	295	97.5	9.2
2	*6845.00	98.5 AV			2.54 H	295	89.3	9.2
3	#13690.00	53.4 PK	88.2	-34.8	2.85 H	181	34.8	18.6
4	#13690.00	42.3 AV	68.2	-25.9	2.85 H	181	23.7	18.6
5	20535.00	62.3 PK	74.0	-11.7	2.63 H	242	65.5	-3.2
6	20535.00	49.7 AV	54.0	-4.3	2.63 H	242	52.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	10

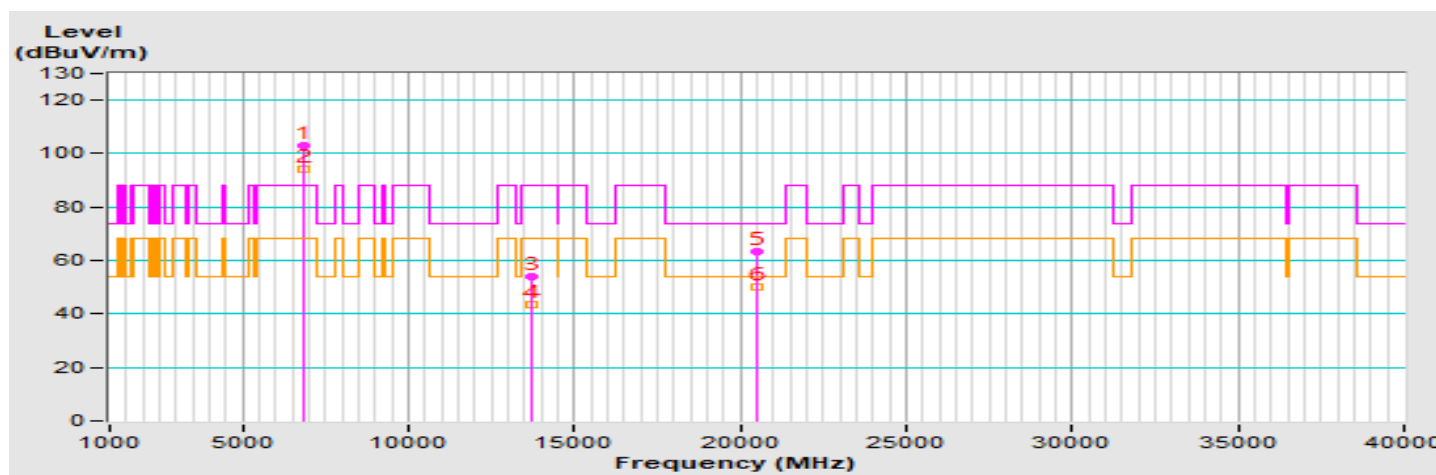


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	103.2 PK			3.41 V	118	94.0	9.2
2	*6845.00	94.2 AV			3.41 V	118	85.0	9.2
3	#13690.00	54.2 PK	88.2	-34.0	3.18 V	105	35.6	18.6
4	#13690.00	43.5 AV	68.2	-24.7	3.18 V	105	24.9	18.6
5	20535.00	63.4 PK	74.0	-10.6	3.14 V	121	66.6	-3.2
6	20535.00	50.3 AV	54.0	-3.7	3.14 V	121	53.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9

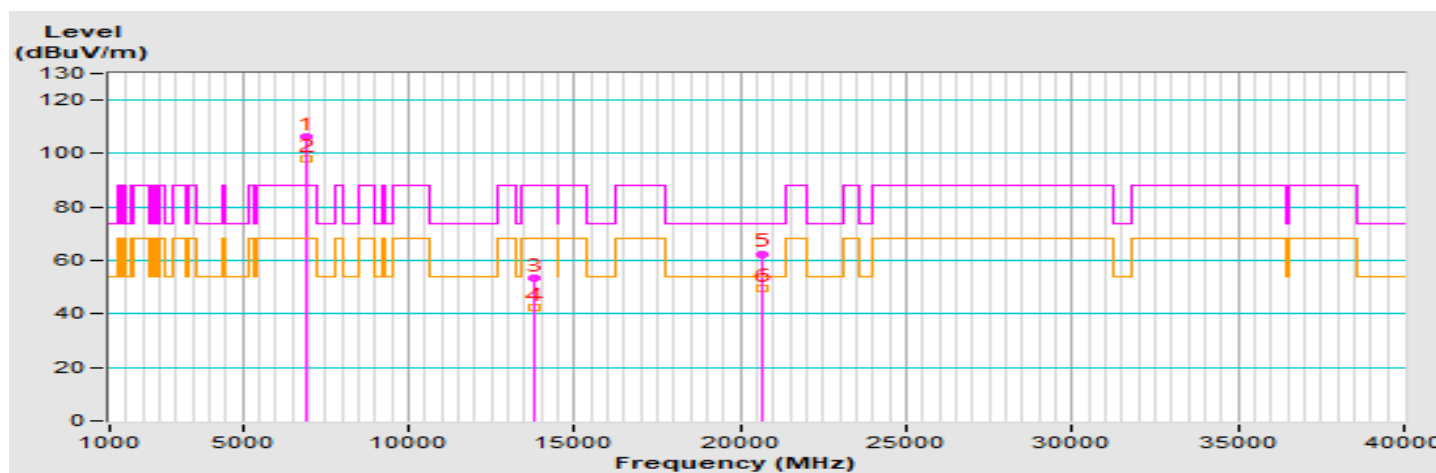


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6885.00	106.1 PK			2.21 H	289	96.9	9.2
2	*6885.00	98.2 AV			2.21 H	289	89.0	9.2
3	#13770.00	53.5 PK	88.2	-34.7	2.87 H	171	34.9	18.6
4	#13770.00	42.6 AV	68.2	-25.6	2.87 H	171	24.0	18.6
5	20655.00	62.5 PK	74.0	-11.5	2.62 H	244	65.6	-3.1
6	20655.00	49.8 AV	54.0	-4.2	2.62 H	244	52.9	-3.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	9

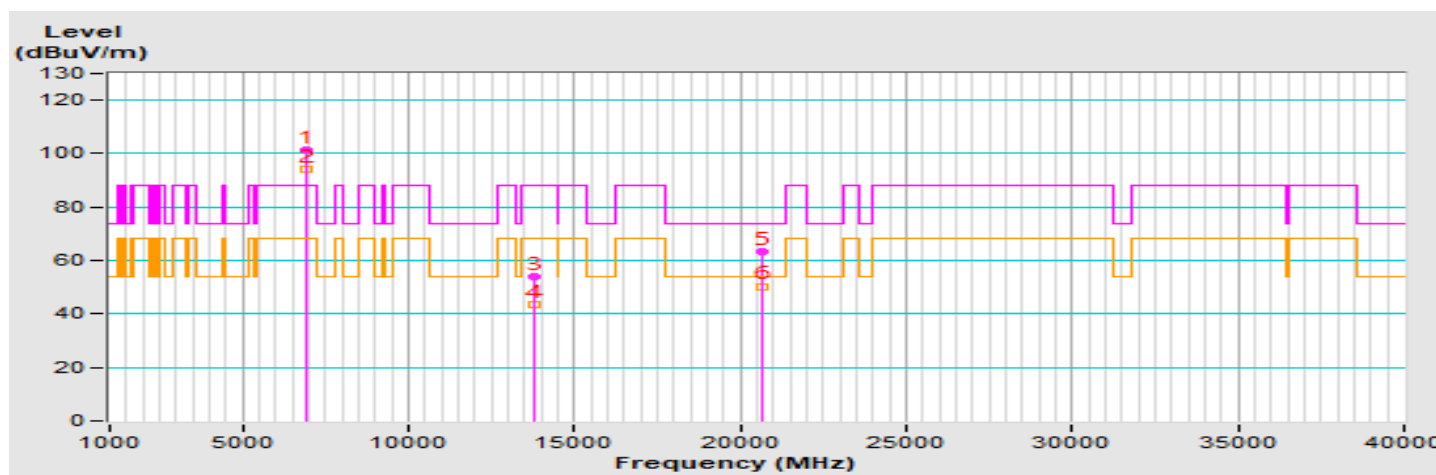


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	101.4 PK			3.99 V	241	92.2	9.2
2	*6885.00	94.4 AV			3.99 V	241	85.2	9.2
3	#13770.00	53.8 PK	88.2	-34.4	3.15 V	101	35.2	18.6
4	#13770.00	43.3 AV	68.2	-24.9	3.15 V	101	24.7	18.6
5	20655.00	63.5 PK	74.0	-10.5	3.17 V	116	66.6	-3.1
6	20655.00	50.4 AV	54.0	-3.6	3.17 V	116	53.5	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	12.5

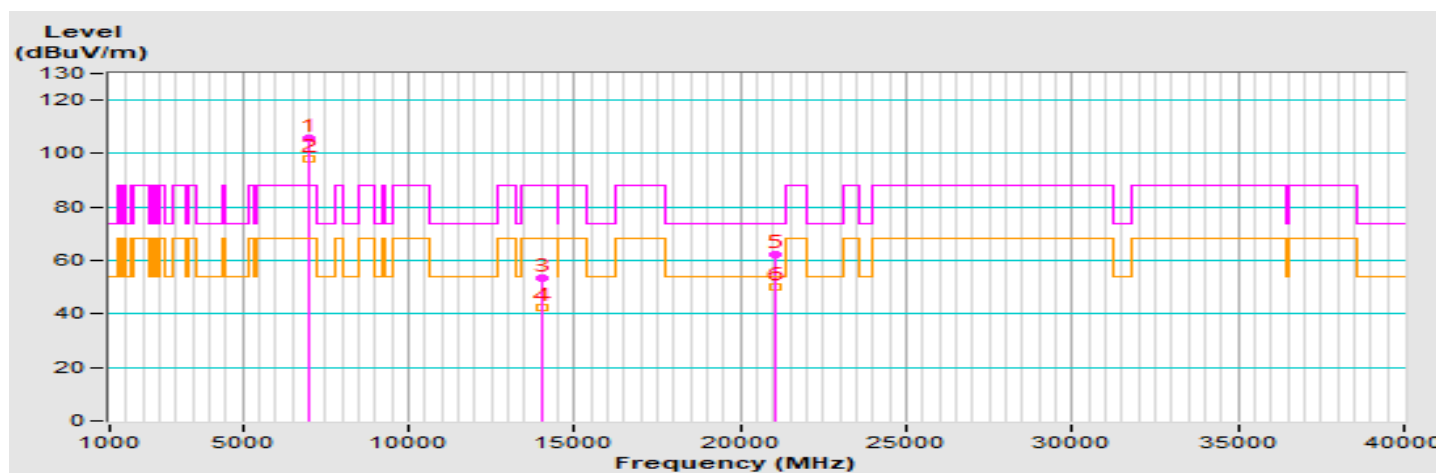

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*7005.00	105.9 PK			2.27 H	293	96.0	9.9
2	*7005.00	97.9 AV			2.27 H	293	88.0	9.9
3	#14010.00	53.2 PK	88.2	-35.0	2.88 H	179	34.2	19.0
4	#14010.00	42.3 AV	68.2	-25.9	2.88 H	179	23.3	19.0
5	21015.00	62.4 PK	74.0	-11.6	2.60 H	243	65.3	-2.9
6	21015.00	49.9 AV	54.0	-4.1	2.60 H	243	52.8	-2.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.