


|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT40) | Channel                       | CH 211 : 7005 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 12.5                                                                 |


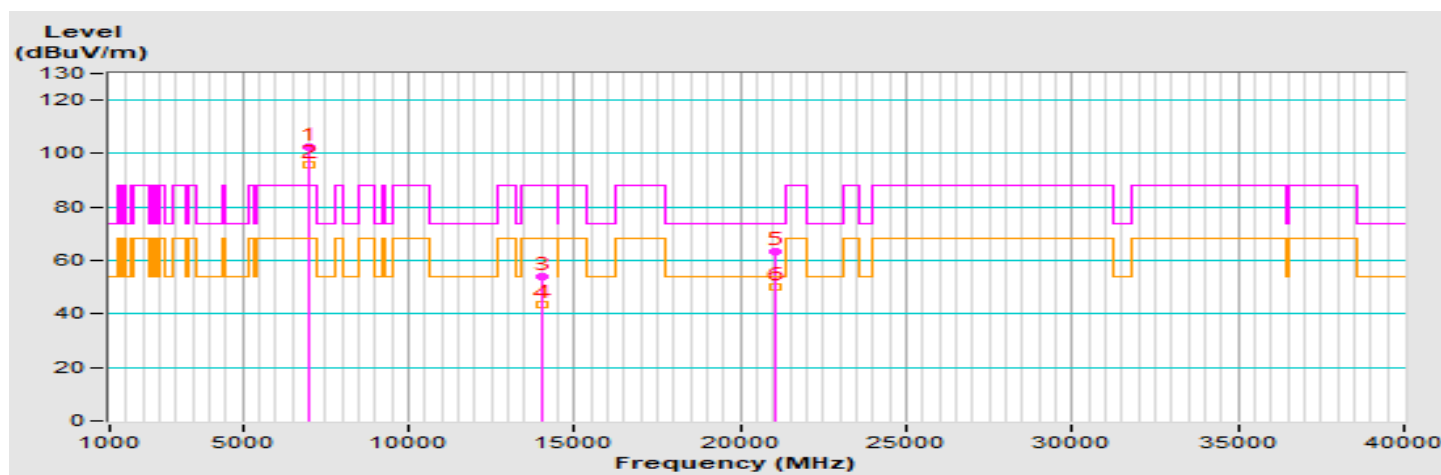


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *7005.00        | 102.5 PK                |                |             | 3.86 V             | 248                  | 92.6             | 9.9                      |
| 2                                                  | *7005.00        | 95.9 AV                 |                |             | 3.86 V             | 248                  | 86.0             | 9.9                      |
| 3                                                  | #14010.00       | 54.2 PK                 | 88.2           | -34.0       | 3.17 V             | 95                   | 35.2             | 19.0                     |
| 4                                                  | #14010.00       | 43.6 AV                 | 68.2           | -24.6       | 3.17 V             | 95                   | 24.6             | 19.0                     |
| 5                                                  | 21015.00        | 63.2 PK                 | 74.0           | -10.8       | 3.06 V             | 123                  | 66.1             | -2.9                     |
| 6                                                  | 21015.00        | 50.2 AV                 | 54.0           | -3.8        | 3.06 V             | 123                  | 53.1             | -2.9                     |


#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT40) | Channel                       | CH 227 : 7085 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 11.5                                                                 |

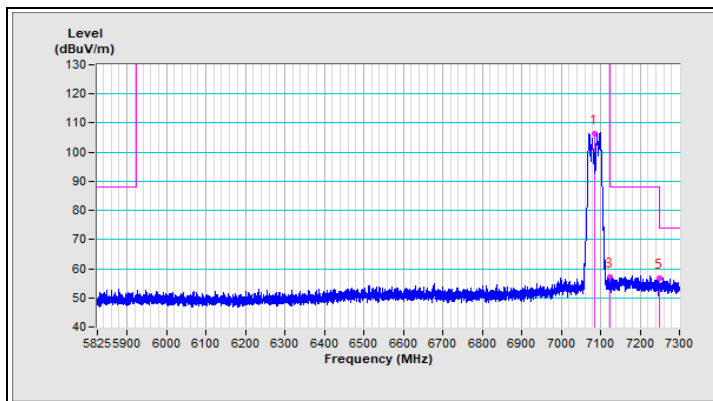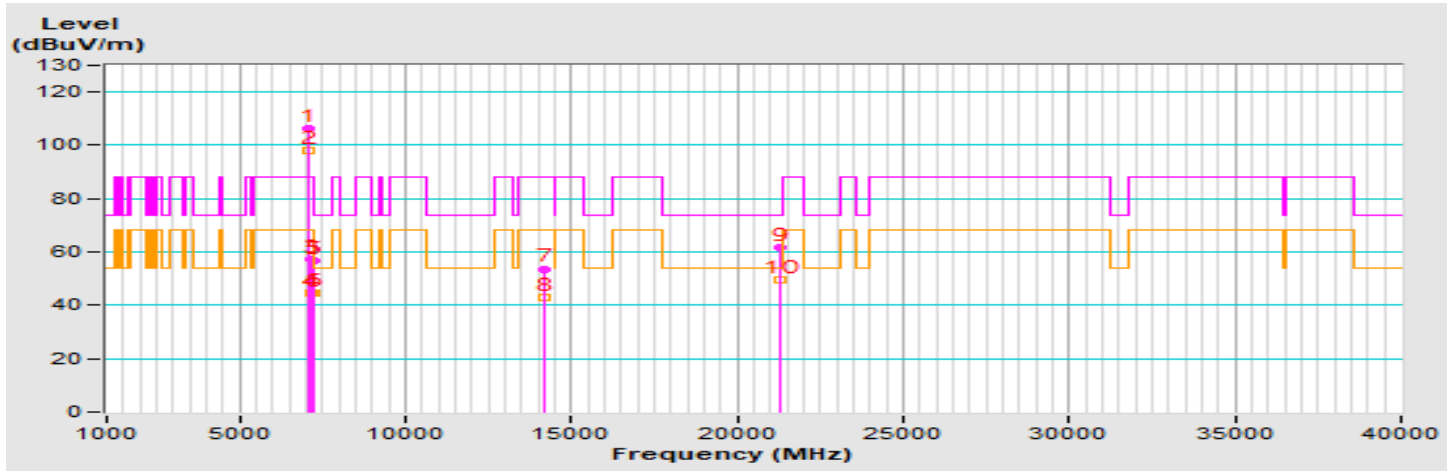

Horizontal (Peak)

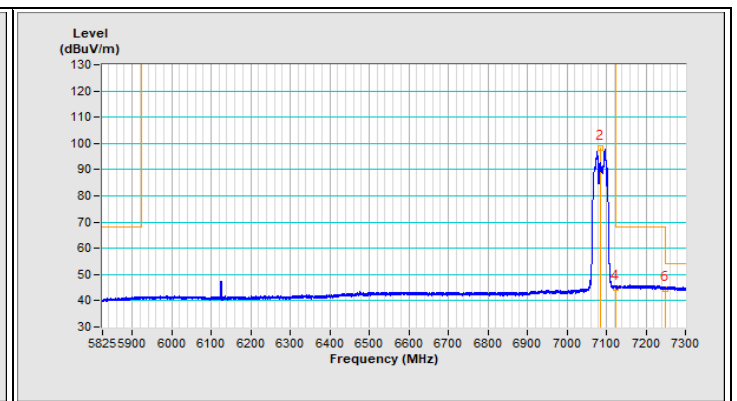



Horizontal (Average)

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *7085.00        | 106.2 PK                |                |             | 2.13 H             | 282                  | 95.5             | 10.7                     |
| 2                                                    | *7085.00        | 98.1 AV                 |                |             | 2.13 H             | 282                  | 87.4             | 10.7                     |
| 3                                                    | #7125.00        | 57.2 PK                 | 88.2           | -31.0       | 2.13 H             | 282                  | 46.3             | 10.9                     |
| 4                                                    | #7125.00        | 44.8 AV                 | 68.2           | -23.4       | 2.13 H             | 282                  | 33.9             | 10.9                     |
| 5                                                    | 7250.00         | 56.7 PK                 | 74.0           | -17.3       | 2.13 H             | 282                  | 45.9             | 10.8                     |
| 6                                                    | 7250.00         | 44.4 AV                 | 54.0           | -9.6        | 2.13 H             | 282                  | 33.6             | 10.8                     |
| 7                                                    | #14170.00       | 53.7 PK                 | 88.2           | -34.5       | 2.83 H             | 175                  | 34.2             | 19.5                     |
| 8                                                    | #14170.00       | 42.7 AV                 | 68.2           | -25.5       | 2.83 H             | 175                  | 23.2             | 19.5                     |
| 9                                                    | 21255.00        | 61.9 PK                 | 74.0           | -12.1       | 2.65 H             | 231                  | 64.7             | -2.8                     |
| 10                                                   | 21255.00        | 49.4 AV                 | 54.0           | -4.6        | 2.65 H             | 231                  | 52.2             | -2.8                     |


**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT40) | Channel                       | CH 227 : 7085 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 11.5                                                                 |

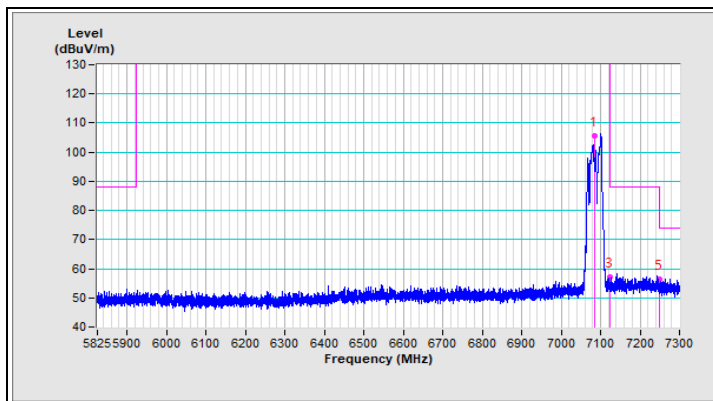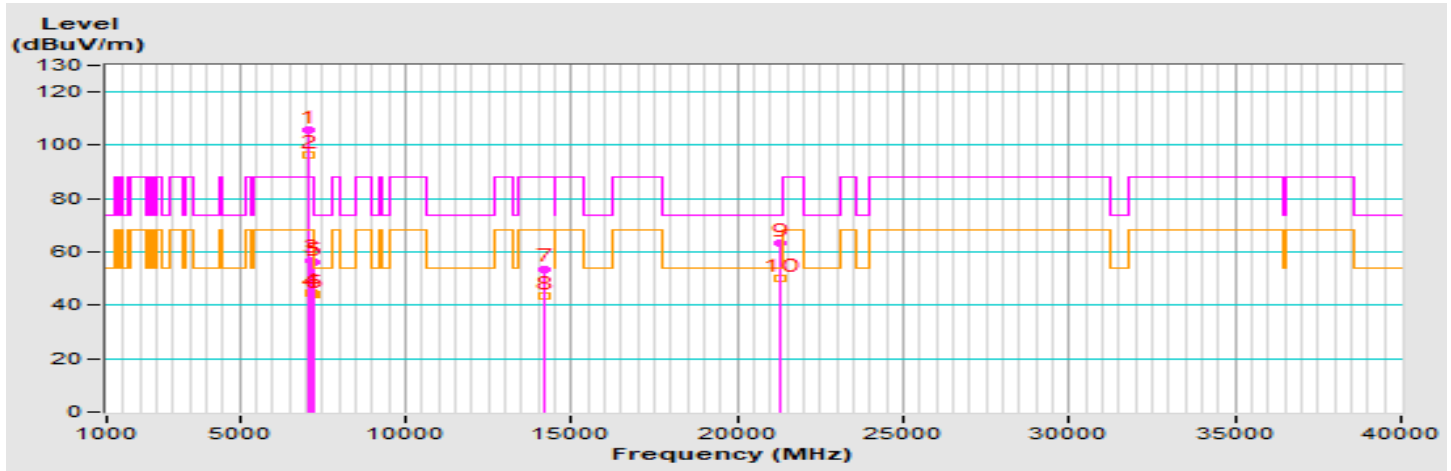

Vertical (Peak)

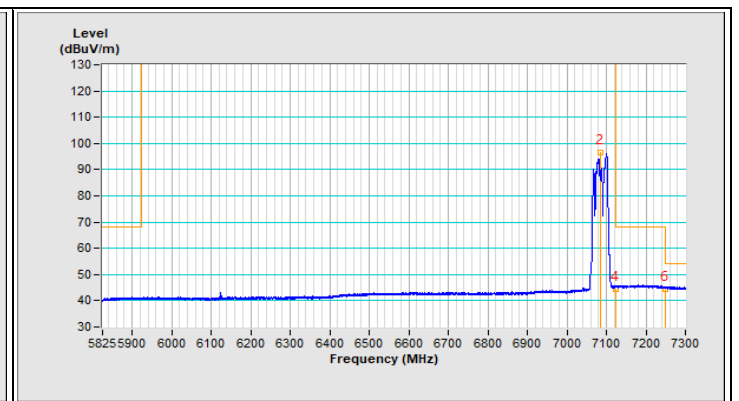



Vertical (Average)

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *7085.00        | 105.7 PK                |                |             | 2.86 V             | 112                  | 95.0             | 10.7                     |
| 2                                                  | *7085.00        | 96.4 AV                 |                |             | 2.86 V             | 112                  | 85.7             | 10.7                     |
| 3                                                  | #7125.00        | 57.0 PK                 | 88.2           | -31.2       | 2.86 V             | 112                  | 46.1             | 10.9                     |
| 4                                                  | #7125.00        | 44.6 AV                 | 68.2           | -23.6       | 2.86 V             | 112                  | 33.7             | 10.9                     |
| 5                                                  | 7250.00         | 56.4 PK                 | 74.0           | -17.6       | 2.86 V             | 112                  | 45.6             | 10.8                     |
| 6                                                  | 7250.00         | 44.3 AV                 | 54.0           | -9.7        | 2.86 V             | 112                  | 33.5             | 10.8                     |
| 7                                                  | #14170.00       | 53.7 PK                 | 88.2           | -34.5       | 3.20 V             | 96                   | 34.2             | 19.5                     |
| 8                                                  | #14170.00       | 43.3 AV                 | 68.2           | -24.9       | 3.20 V             | 96                   | 23.8             | 19.5                     |
| 9                                                  | 21255.00        | 63.1 PK                 | 74.0           | -10.9       | 3.12 V             | 106                  | 65.9             | -2.8                     |
| 10                                                 | 21255.00        | 50.2 AV                 | 54.0           | -3.8        | 3.12 V             | 106                  | 53.0             | -2.8                     |


#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 7 : 5985 MHz                                                      |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 14.5                                                                 |

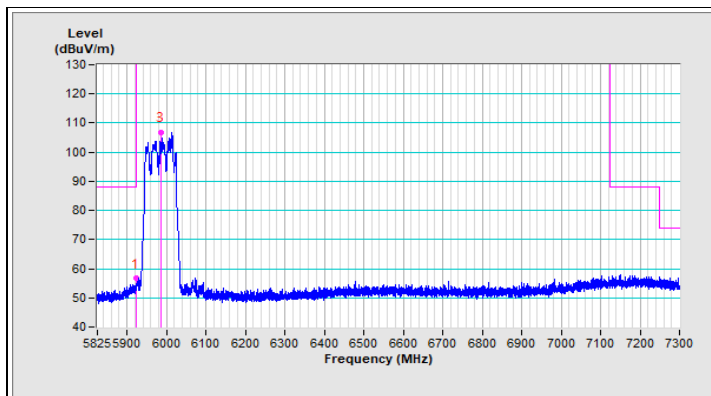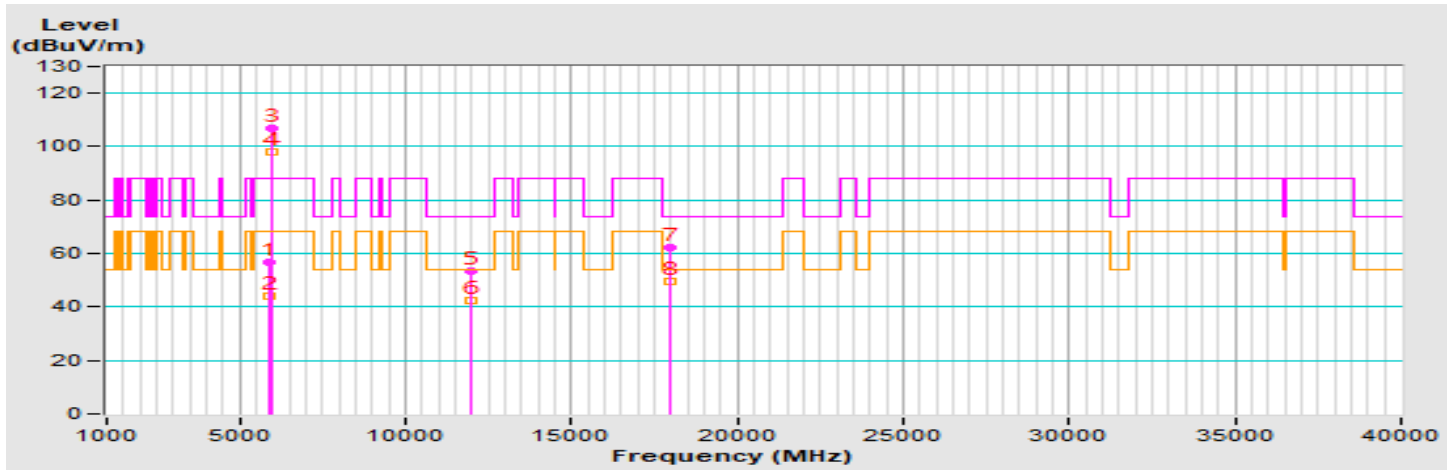

Horizontal (Peak)

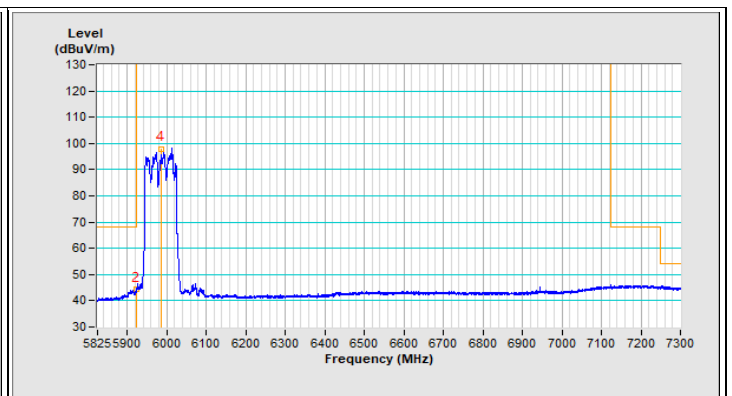



Horizontal (Average)

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5925.00        | 56.6 PK                 | 88.2           | -31.6       | 2.81 H             | 298                  | 50.3             | 6.3                      |
| 2                                                    | #5925.00        | 44.2 AV                 | 68.2           | -24.0       | 2.81 H             | 298                  | 37.9             | 6.3                      |
| 3                                                    | *5985.00        | 106.9 PK                |                |             | 2.81 H             | 298                  | 100.7            | 6.2                      |
| 4                                                    | *5985.00        | 97.9 AV                 |                |             | 2.81 H             | 298                  | 91.7             | 6.2                      |
| 5                                                    | 11970.00        | 53.3 PK                 | 74.0           | -20.7       | 2.82 H             | 174                  | 37.8             | 15.5                     |
| 6                                                    | 11970.00        | 42.2 AV                 | 54.0           | -11.8       | 2.82 H             | 174                  | 26.7             | 15.5                     |
| 7                                                    | 17955.00        | 62.4 PK                 | 74.0           | -11.6       | 2.67 H             | 244                  | 32.4             | 30.0                     |
| 8                                                    | 17955.00        | 49.8 AV                 | 54.0           | -4.2        | 2.67 H             | 244                  | 19.8             | 30.0                     |


#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 7 : 5985 MHz                                                      |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 14.5                                                                 |

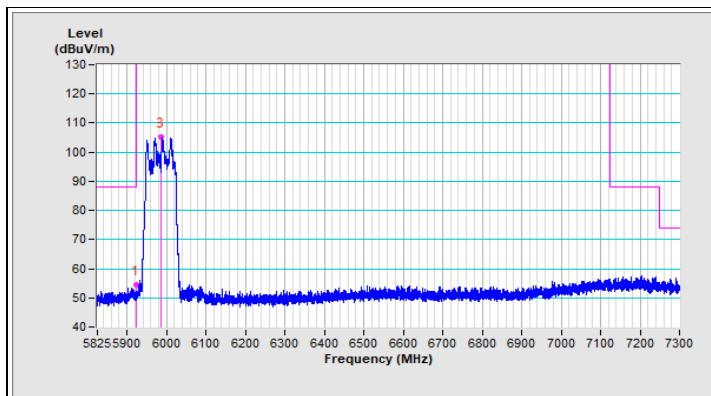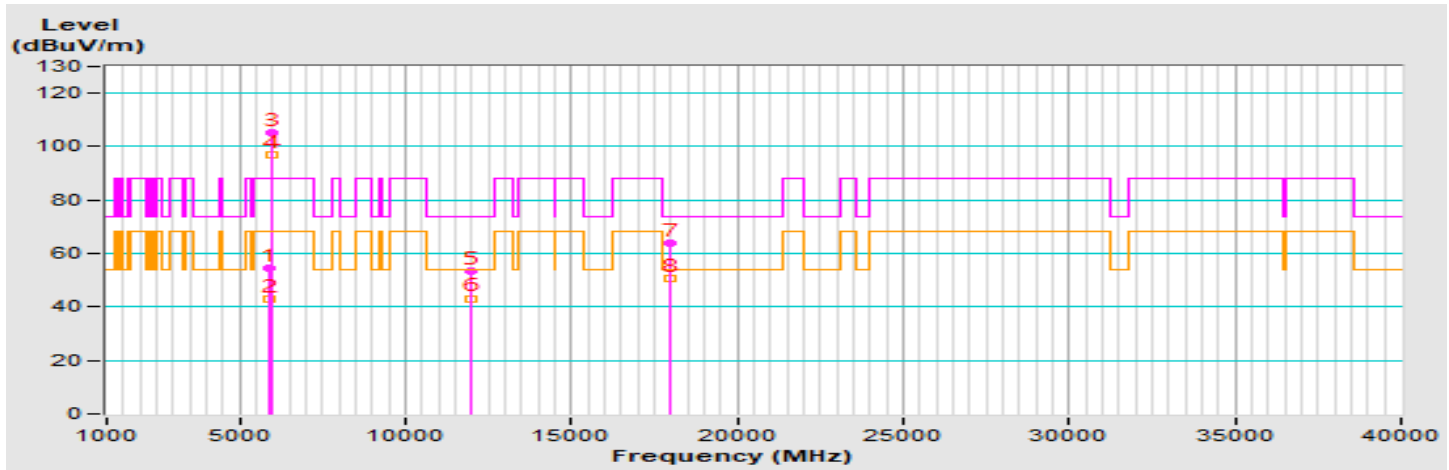

Vertical (Peak)

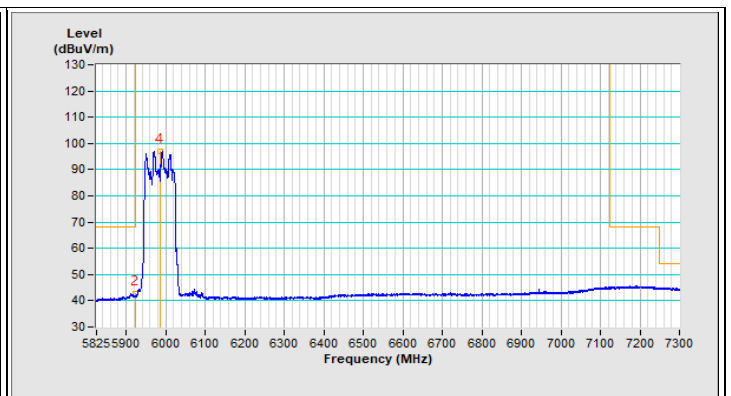


Vertical (Average)

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5925.00        | 54.5 PK                 | 88.2           | -33.7       | 3.91 V             | 70                   | 48.2             | 6.3                      |
| 2                                                  | #5925.00        | 42.7 AV                 | 68.2           | -25.5       | 3.91 V             | 70                   | 36.4             | 6.3                      |
| 3                                                  | *5985.00        | 105.1 PK                |                |             | 3.91 V             | 70                   | 98.9             | 6.2                      |
| 4                                                  | *5985.00        | 96.9 AV                 |                |             | 3.91 V             | 70                   | 90.7             | 6.2                      |
| 5                                                  | 11970.00        | 53.4 PK                 | 74.0           | -20.6       | 3.25 V             | 85                   | 37.9             | 15.5                     |
| 6                                                  | 11970.00        | 43.2 AV                 | 54.0           | -10.8       | 3.25 V             | 85                   | 27.7             | 15.5                     |
| 7                                                  | 17955.00        | 63.7 PK                 | 74.0           | -10.3       | 3.15 V             | 93                   | 33.7             | 30.0                     |
| 8                                                  | 17955.00        | 50.6 AV                 | 54.0           | -3.4        | 3.15 V             | 93                   | 20.6             | 30.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 39 : 6145 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 14.5                                                                 |

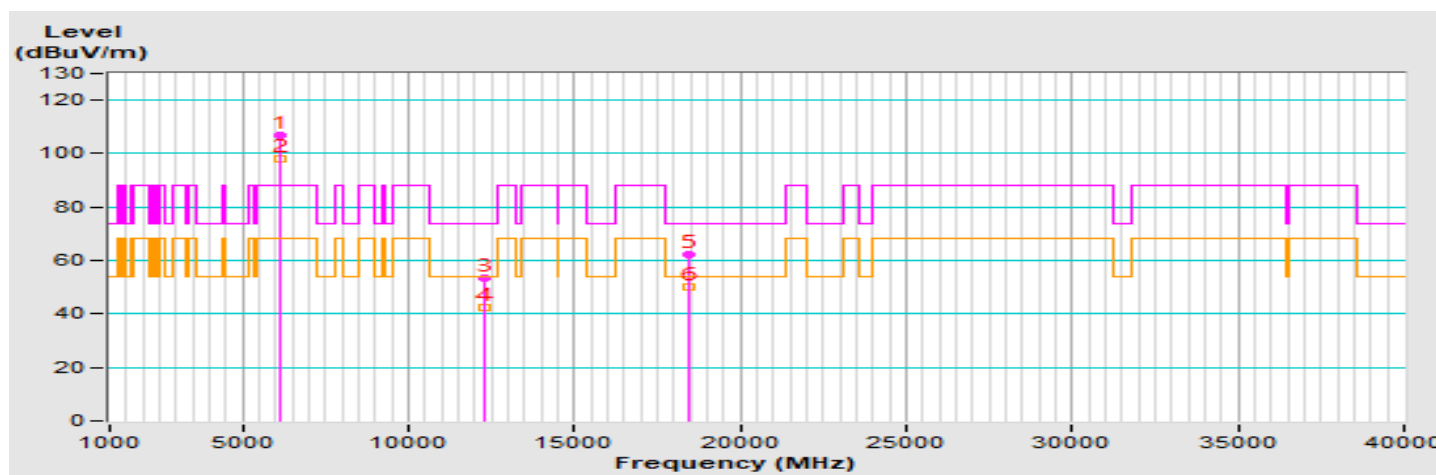


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6145.00        | 106.9 PK                |                |             | 2.74 H             | 275                  | 100.4            | 6.5                      |
| 2                                                    | *6145.00        | 98.2 AV                 |                |             | 2.74 H             | 275                  | 91.7             | 6.5                      |
| 3                                                    | 12290.00        | 53.5 PK                 | 74.0           | -20.5       | 2.93 H             | 172                  | 38.2             | 15.3                     |
| 4                                                    | 12290.00        | 42.3 AV                 | 54.0           | -11.7       | 2.93 H             | 172                  | 27.0             | 15.3                     |
| 5                                                    | 18435.00        | 62.2 PK                 | 74.0           | -11.8       | 2.59 H             | 242                  | 67.3             | -5.1                     |
| 6                                                    | 18435.00        | 49.9 AV                 | 54.0           | -4.1        | 2.59 H             | 242                  | 55.0             | -5.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 39 : 6145 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 14.5                                                                 |

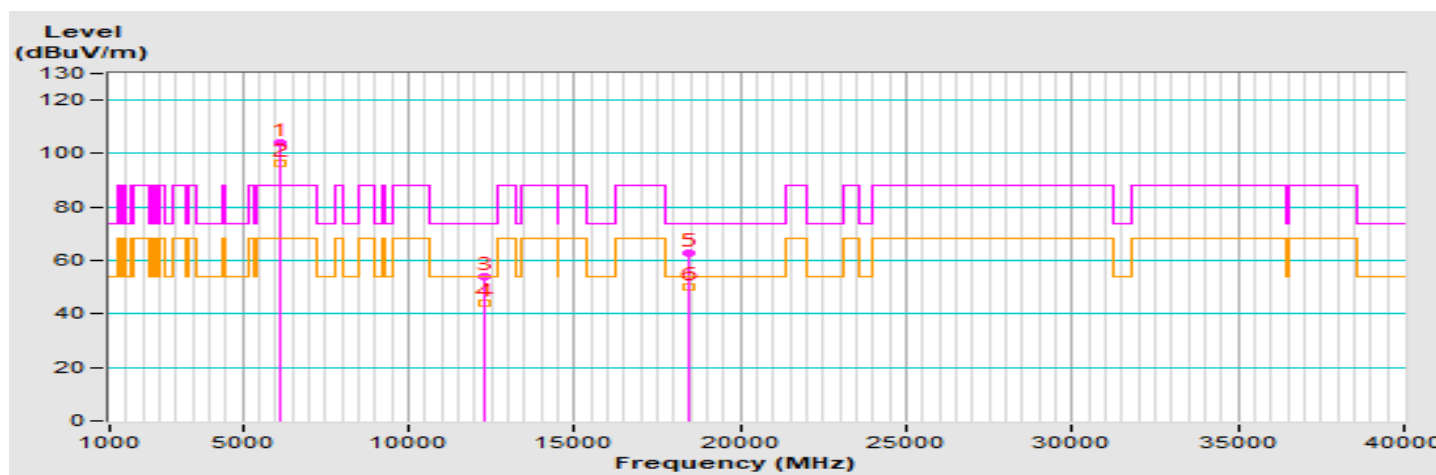


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6145.00        | 103.9 PK                |                |             | 2.59 V             | 76                   | 97.4             | 6.5                      |
| 2                                                  | *6145.00        | 96.2 AV                 |                |             | 2.59 V             | 76                   | 89.7             | 6.5                      |
| 3                                                  | 12290.00        | 54.2 PK                 | 74.0           | -19.8       | 3.11 V             | 98                   | 38.9             | 15.3                     |
| 4                                                  | 12290.00        | 43.8 AV                 | 54.0           | -10.2       | 3.11 V             | 98                   | 28.5             | 15.3                     |
| 5                                                  | 18435.00        | 62.9 PK                 | 74.0           | -11.1       | 3.18 V             | 101                  | 68.0             | -5.1                     |
| 6                                                  | 18435.00        | 50.1 AV                 | 54.0           | -3.9        | 3.18 V             | 101                  | 55.2             | -5.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 87 : 6385 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 13                                                                   |

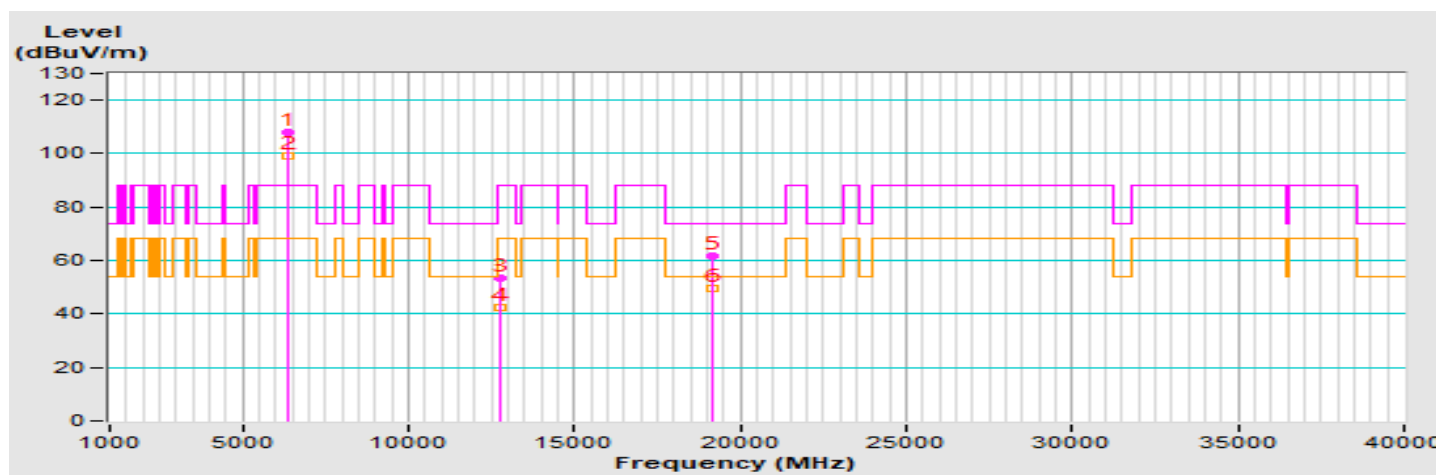


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6385.00        | 107.9 PK                |                |             | 2.59 H             | 291                  | 100.5            | 7.4                      |
| 2                                                    | *6385.00        | 98.9 AV                 |                |             | 2.59 H             | 291                  | 91.5             | 7.4                      |
| 3                                                    | #12770.00       | 53.5 PK                 | 88.2           | -34.7       | 2.88 H             | 181                  | 38.1             | 15.4                     |
| 4                                                    | #12770.00       | 42.2 AV                 | 68.2           | -26.0       | 2.88 H             | 181                  | 26.8             | 15.4                     |
| 5                                                    | 19155.00        | 61.7 PK                 | 74.0           | -12.3       | 2.54 H             | 244                  | 66.3             | -4.6                     |
| 6                                                    | 19155.00        | 49.5 AV                 | 54.0           | -4.5        | 2.54 H             | 244                  | 54.1             | -4.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 87 : 6385 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 13                                                                   |

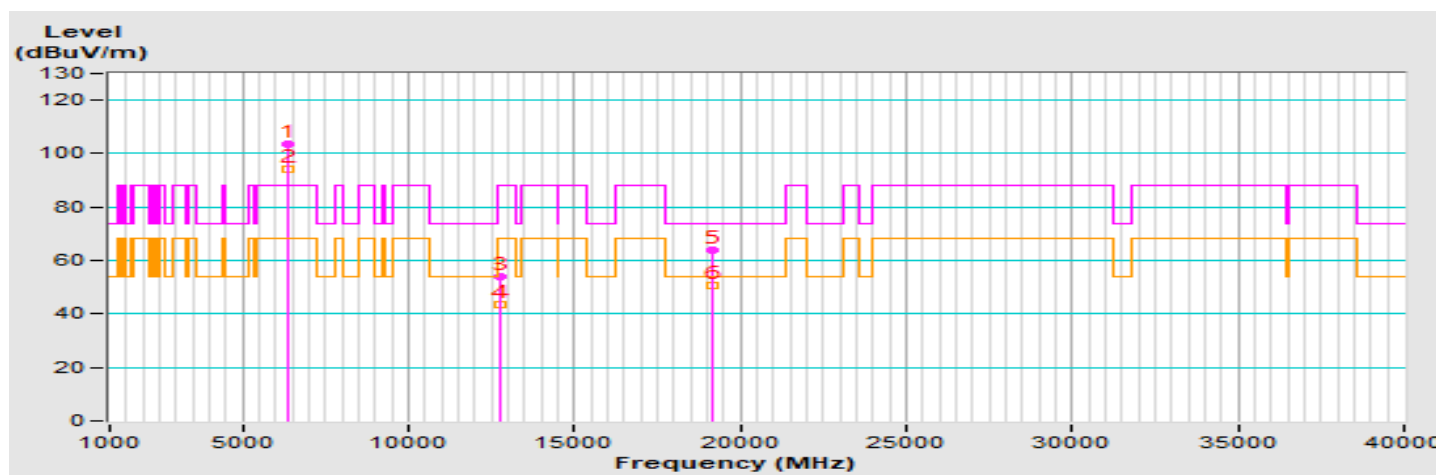


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6385.00        | 103.7 PK                |                |             | 2.26 V             | 81                   | 96.3             | 7.4                      |
| 2                                                  | *6385.00        | 94.3 AV                 |                |             | 2.26 V             | 81                   | 86.9             | 7.4                      |
| 3                                                  | #12770.00       | 54.1 PK                 | 88.2           | -34.1       | 3.18 V             | 92                   | 38.7             | 15.4                     |
| 4                                                  | #12770.00       | 43.5 AV                 | 68.2           | -24.7       | 3.18 V             | 92                   | 28.1             | 15.4                     |
| 5                                                  | 19155.00        | 63.8 PK                 | 74.0           | -10.2       | 3.14 V             | 106                  | 68.4             | -4.6                     |
| 6                                                  | 19155.00        | 50.6 AV                 | 54.0           | -3.4        | 3.14 V             | 106                  | 55.2             | -4.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 103 : 6465 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 12.5                                                                 |

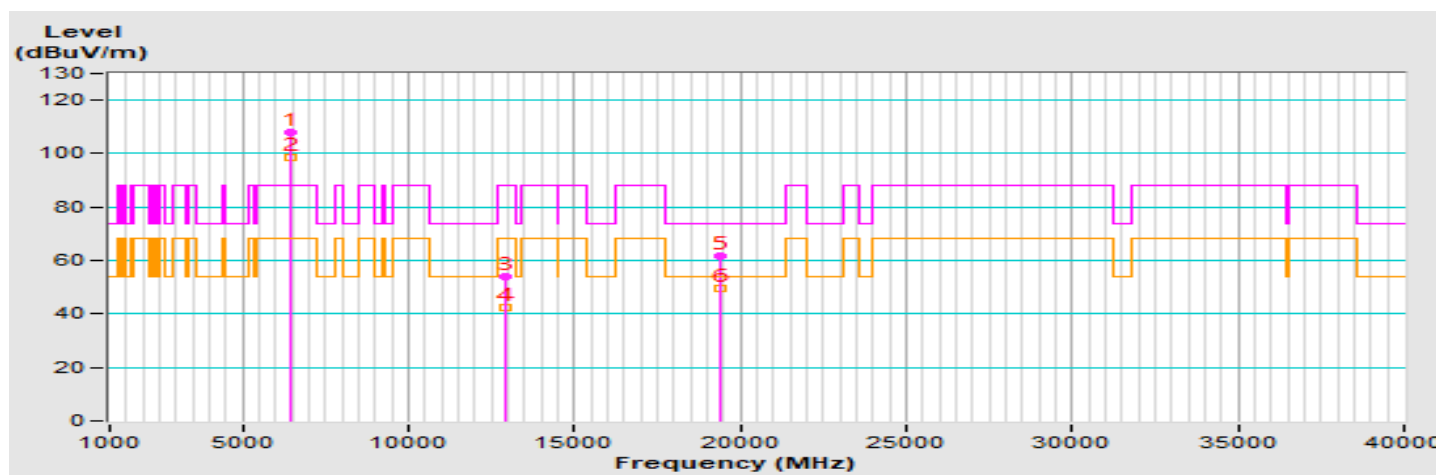


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6465.00        | 107.8 PK                |                |             | 2.23 H             | 294                  | 99.8             | 8.0                      |
| 2                                                    | *6465.00        | 98.4 AV                 |                |             | 2.23 H             | 294                  | 90.4             | 8.0                      |
| 3                                                    | #12930.00       | 53.8 PK                 | 88.2           | -34.4       | 2.91 H             | 163                  | 38.2             | 15.6                     |
| 4                                                    | #12930.00       | 42.4 AV                 | 68.2           | -25.8       | 2.91 H             | 163                  | 26.8             | 15.6                     |
| 5                                                    | 19395.00        | 61.9 PK                 | 74.0           | -12.1       | 2.54 H             | 249                  | 65.4             | -3.5                     |
| 6                                                    | 19395.00        | 49.4 AV                 | 54.0           | -4.6        | 2.54 H             | 249                  | 52.9             | -3.5                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 103 : 6465 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 12.5                                                                 |

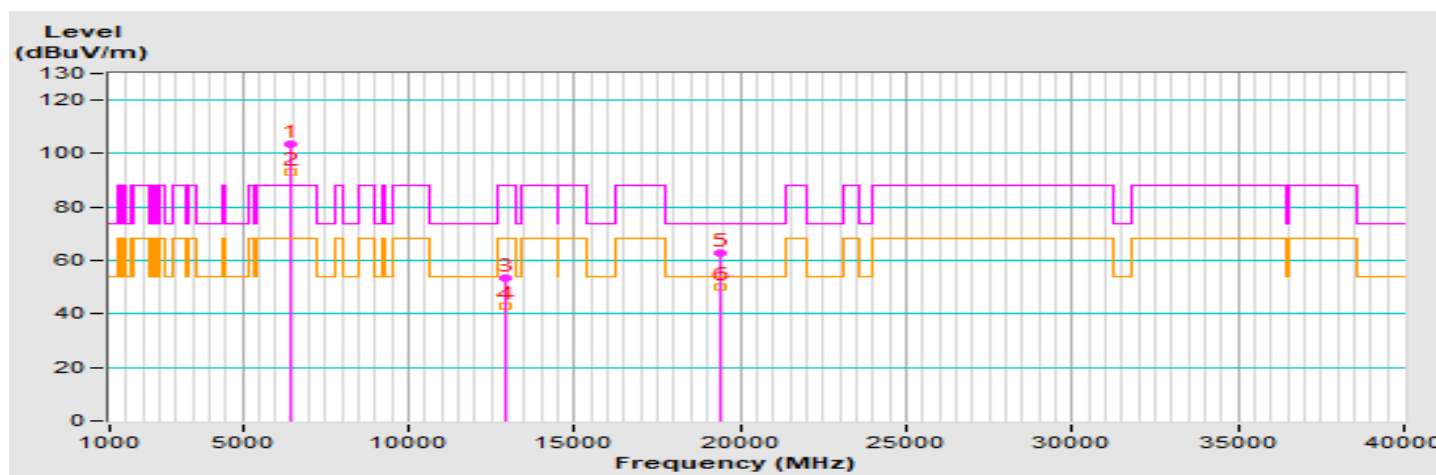


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6465.00        | 103.6 PK                |                |             | 3.28 V             | 76                   | 95.6             | 8.0                      |
| 2                                                  | *6465.00        | 93.3 AV                 |                |             | 3.28 V             | 76                   | 85.3             | 8.0                      |
| 3                                                  | #12930.00       | 53.3 PK                 | 88.2           | -34.9       | 3.26 V             | 105                  | 37.7             | 15.6                     |
| 4                                                  | #12930.00       | 42.8 AV                 | 68.2           | -25.4       | 3.26 V             | 105                  | 27.2             | 15.6                     |
| 5                                                  | 19395.00        | 62.8 PK                 | 74.0           | -11.2       | 3.14 V             | 96                   | 66.3             | -3.5                     |
| 6                                                  | 19395.00        | 49.9 AV                 | 54.0           | -4.1        | 3.14 V             | 96                   | 53.4             | -3.5                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 119 : 6545 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 12.5                                                                 |

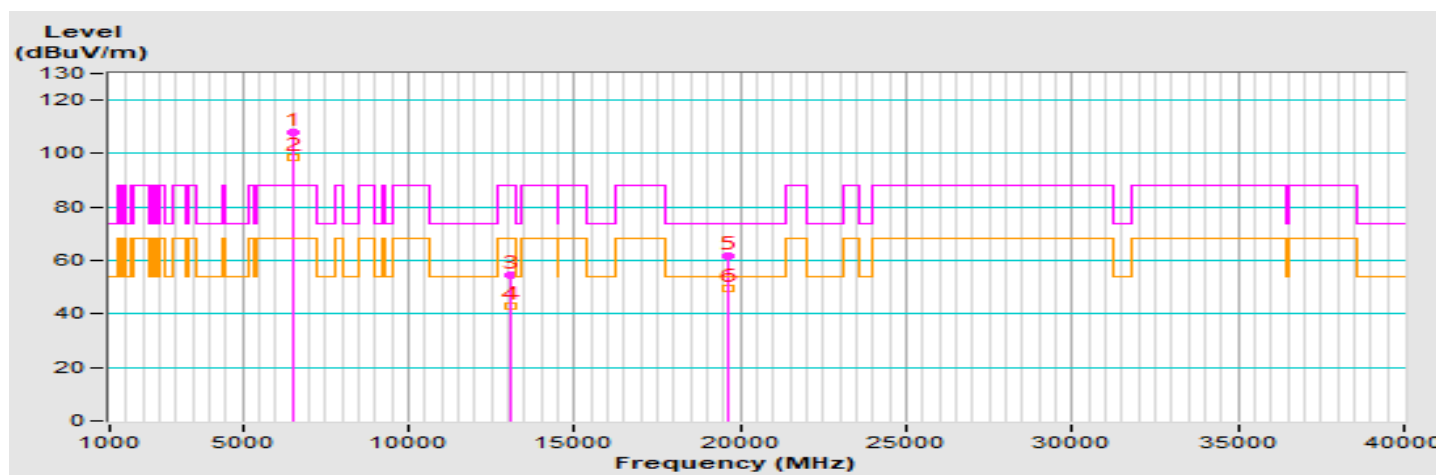


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6545.00        | 108.1 PK                |                |             | 2.65 H             | 293                  | 99.6             | 8.5                      |
| 2                                                    | *6545.00        | 98.5 AV                 |                |             | 2.65 H             | 293                  | 90.0             | 8.5                      |
| 3                                                    | #13090.00       | 54.5 PK                 | 88.2           | -33.7       | 2.94 H             | 164                  | 38.7             | 15.8                     |
| 4                                                    | #13090.00       | 42.8 AV                 | 68.2           | -25.4       | 2.94 H             | 164                  | 27.0             | 15.8                     |
| 5                                                    | 19635.00        | 61.9 PK                 | 74.0           | -12.1       | 2.58 H             | 261                  | 65.7             | -3.8                     |
| 6                                                    | 19635.00        | 49.5 AV                 | 54.0           | -4.5        | 2.58 H             | 261                  | 53.3             | -3.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 119 : 6545 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 12.5                                                                 |

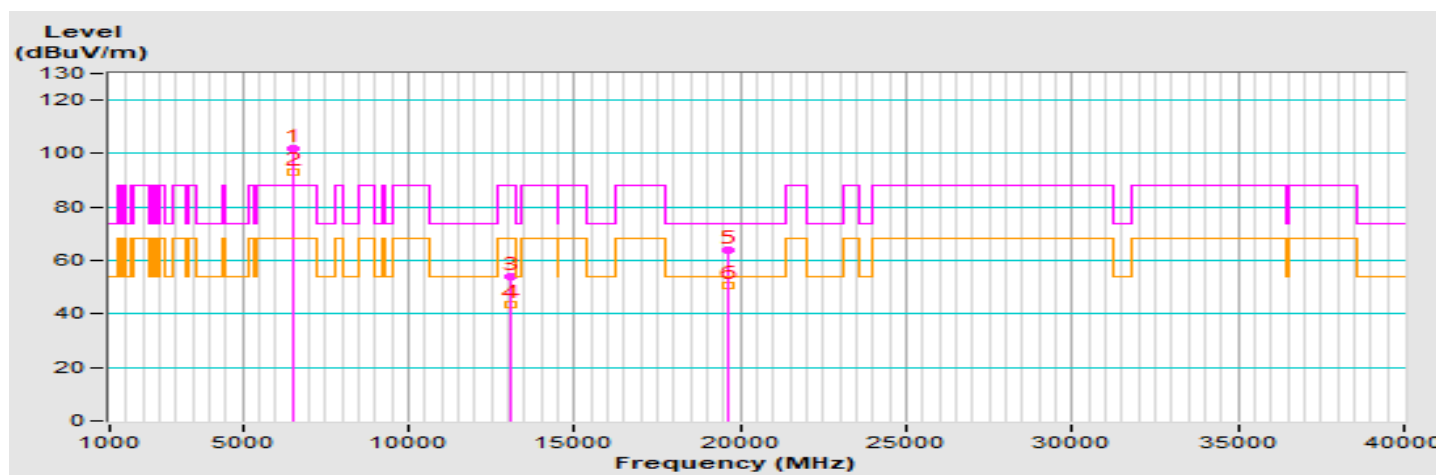


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6545.00        | 102.1 PK                |                |             | 3.37 V             | 75                   | 93.6             | 8.5                      |
| 2                                                  | *6545.00        | 93.1 AV                 |                |             | 3.37 V             | 75                   | 84.6             | 8.5                      |
| 3                                                  | #13090.00       | 53.8 PK                 | 88.2           | -34.4       | 3.14 V             | 81                   | 38.0             | 15.8                     |
| 4                                                  | #13090.00       | 43.4 AV                 | 68.2           | -24.8       | 3.14 V             | 81                   | 27.6             | 15.8                     |
| 5                                                  | 19635.00        | 63.8 PK                 | 74.0           | -10.2       | 3.10 V             | 104                  | 67.6             | -3.8                     |
| 6                                                  | 19635.00        | 50.5 AV                 | 54.0           | -3.5        | 3.10 V             | 104                  | 54.3             | -3.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 151 : 6705 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 12.5                                                                 |

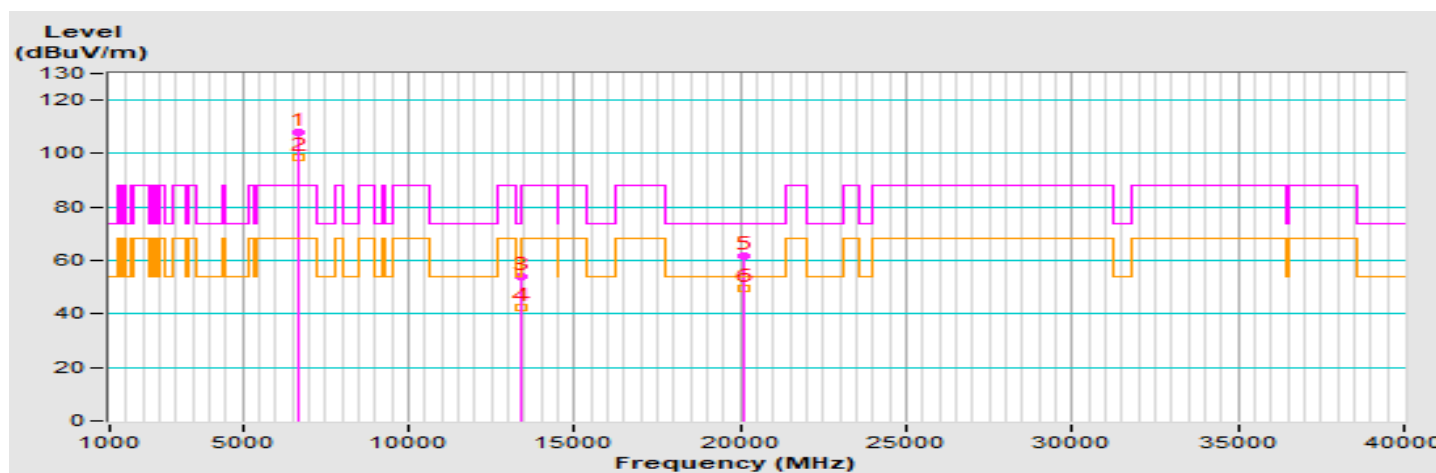


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1                                                    | *6705.00        | 107.8 PK                |                |             | 2.65 H             | 295                  | 99.0             | 8.8                      |
| 2                                                    | *6705.00        | 98.6 AV                 |                |             | 2.65 H             | 295                  | 89.8             | 8.8                      |
| 3                                                    | #13410.00       | 53.8 PK                 | 88.2           | -34.4       | 2.89 H             | 167                  | 36.0             | 17.8                     |
| 4                                                    | #13410.00       | 42.3 AV                 | 68.2           | -25.9       | 2.89 H             | 167                  | 24.5             | 17.8                     |
| 5                                                    | 20115.00        | 61.8 PK                 | 74.0           | -12.2       | 2.56 H             | 273                  | 65.5             | -3.7                     |
| 6                                                    | 20115.00        | 49.5 AV                 | 54.0           | -4.5        | 2.56 H             | 273                  | 53.2             | -3.7                     |

#### Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 151 : 6705 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 12.5                                                                 |

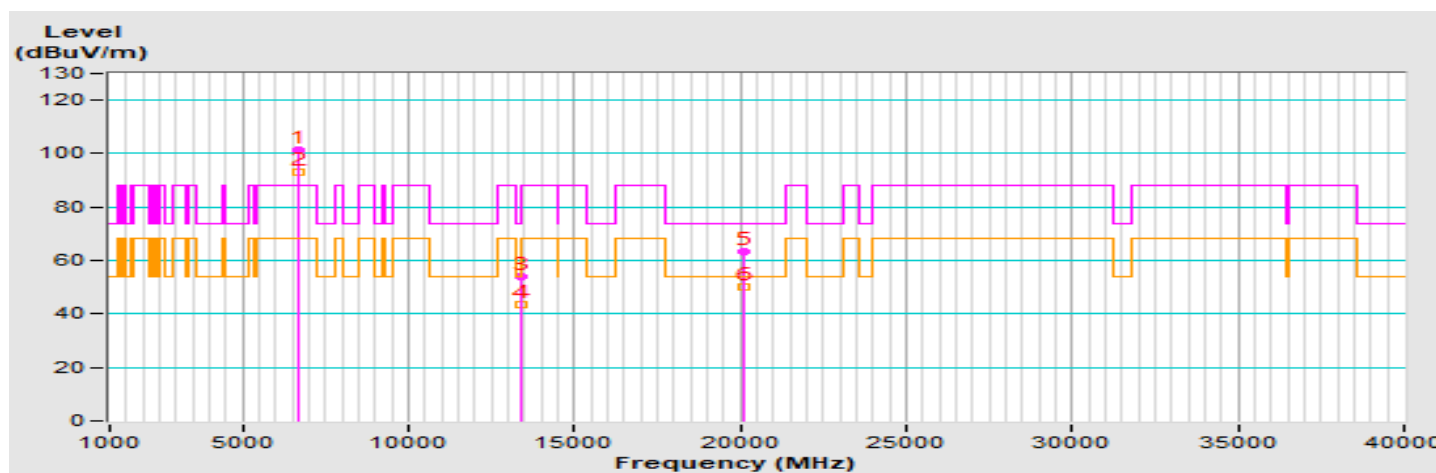


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6705.00        | 101.3 PK                |                |             | 2.29 V             | 82                   | 92.5             | 8.8                      |
| 2                                                  | *6705.00        | 93.2 AV                 |                |             | 2.29 V             | 82                   | 84.4             | 8.8                      |
| 3                                                  | #13410.00       | 53.8 PK                 | 88.2           | -34.4       | 3.17 V             | 109                  | 36.0             | 17.8                     |
| 4                                                  | #13410.00       | 43.3 AV                 | 68.2           | -24.9       | 3.17 V             | 109                  | 25.5             | 17.8                     |
| 5                                                  | 20115.00        | 63.5 PK                 | 74.0           | -10.5       | 3.11 V             | 135                  | 67.2             | -3.7                     |
| 6                                                  | 20115.00        | 50.1 AV                 | 54.0           | -3.9        | 3.11 V             | 135                  | 53.8             | -3.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 183 : 6865 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 13.5                                                                 |

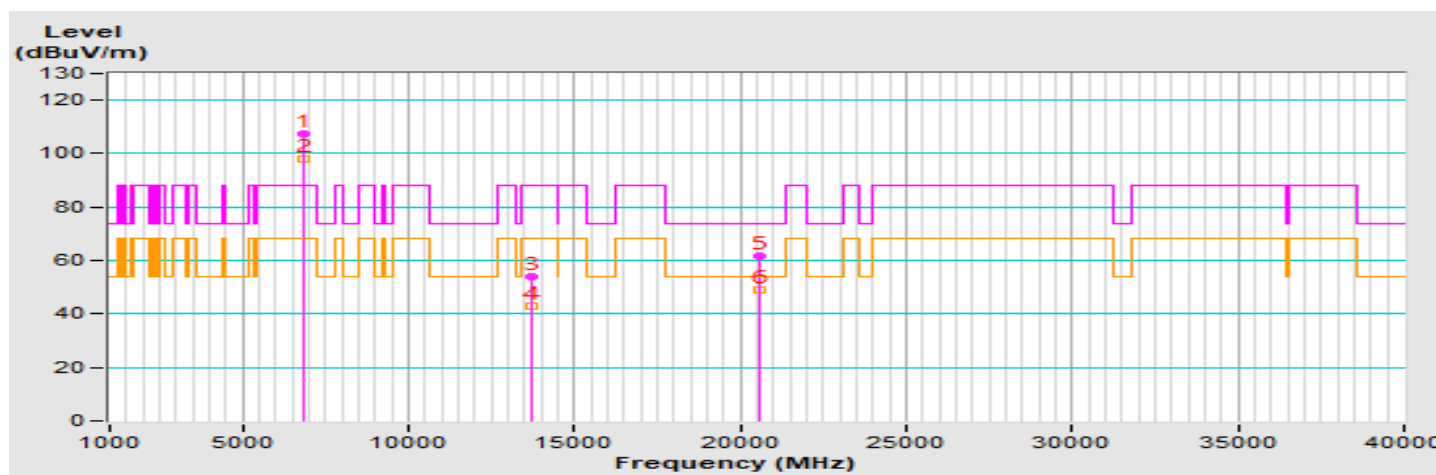


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1                                                    | *6865.00        | 107.6 PK                |                |             | 2.22 H             | 293                  | 98.4             | 9.2                      |
| 2                                                    | *6865.00        | 98.2 AV                 |                |             | 2.22 H             | 293                  | 89.0             | 9.2                      |
| 3                                                    | #13730.00       | 54.2 PK                 | 88.2           | -34.0       | 2.86 H             | 174                  | 35.7             | 18.5                     |
| 4                                                    | #13730.00       | 42.8 AV                 | 68.2           | -25.4       | 2.86 H             | 174                  | 24.3             | 18.5                     |
| 5                                                    | 20595.00        | 61.8 PK                 | 74.0           | -12.2       | 2.61 H             | 258                  | 65.1             | -3.3                     |
| 6                                                    | 20595.00        | 49.2 AV                 | 54.0           | -4.8        | 2.61 H             | 258                  | 52.5             | -3.3                     |

#### Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 183 : 6865 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 13.5                                                                 |

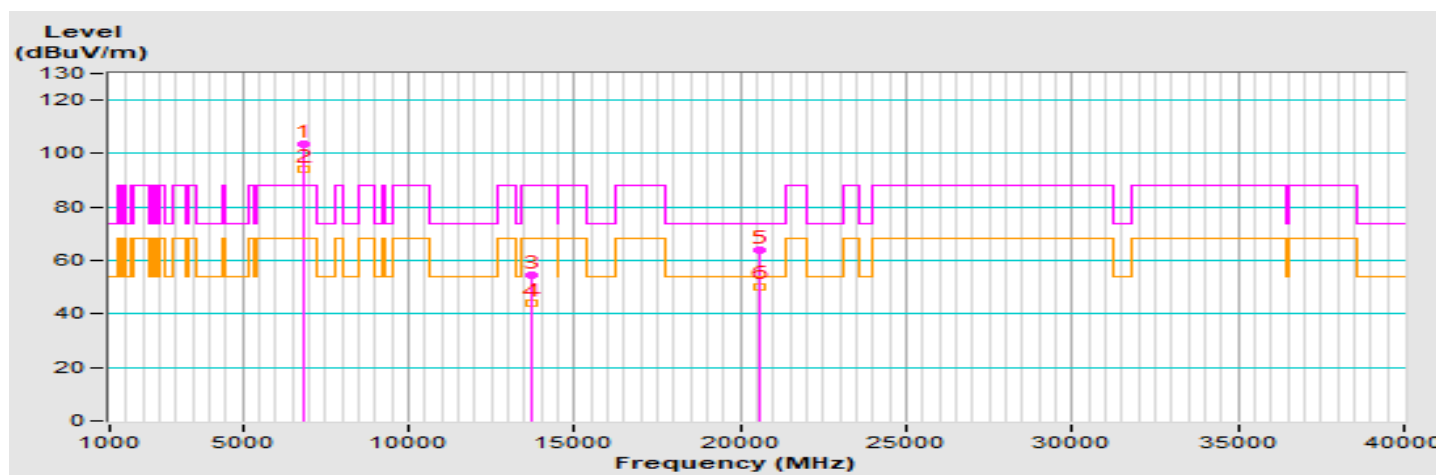


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6865.00        | 103.5 PK                |                |             | 3.80 V             | 252                  | 94.3             | 9.2                      |
| 2                                                  | *6865.00        | 94.4 AV                 |                |             | 3.80 V             | 252                  | 85.2             | 9.2                      |
| 3                                                  | #13730.00       | 54.5 PK                 | 88.2           | -33.7       | 3.17 V             | 77                   | 36.0             | 18.5                     |
| 4                                                  | #13730.00       | 43.8 AV                 | 68.2           | -24.4       | 3.17 V             | 77                   | 25.3             | 18.5                     |
| 5                                                  | 20595.00        | 63.7 PK                 | 74.0           | -10.3       | 3.12 V             | 112                  | 67.0             | -3.3                     |
| 6                                                  | 20595.00        | 50.4 AV                 | 54.0           | -3.6        | 3.12 V             | 112                  | 53.7             | -3.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 199 : 6945 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 14                                                                   |

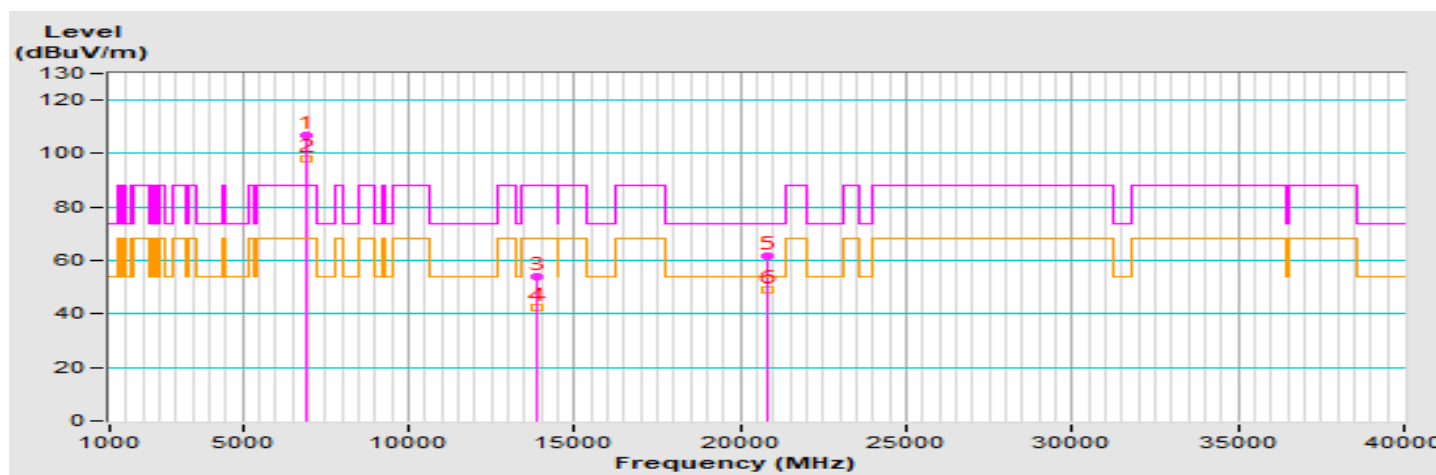


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6945.00        | 106.6 PK                |                |             | 2.62 H             | 292                  | 96.6             | 10.0                     |
| 2                                                    | *6945.00        | 98.1 AV                 |                |             | 2.62 H             | 292                  | 88.1             | 10.0                     |
| 3                                                    | #13890.00       | 54.1 PK                 | 88.2           | -34.1       | 2.88 H             | 183                  | 35.5             | 18.6                     |
| 4                                                    | #13890.00       | 42.4 AV                 | 68.2           | -25.8       | 2.88 H             | 183                  | 23.8             | 18.6                     |
| 5                                                    | 20835.00        | 61.8 PK                 | 74.0           | -12.2       | 2.66 H             | 250                  | 64.5             | -2.7                     |
| 6                                                    | 20835.00        | 49.2 AV                 | 54.0           | -4.8        | 2.66 H             | 250                  | 51.9             | -2.7                     |

#### Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- \* \*: Fundamental frequency, the limit was restricted at the RF Output Power.
- # #: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 199 : 6945 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 14                                                                   |


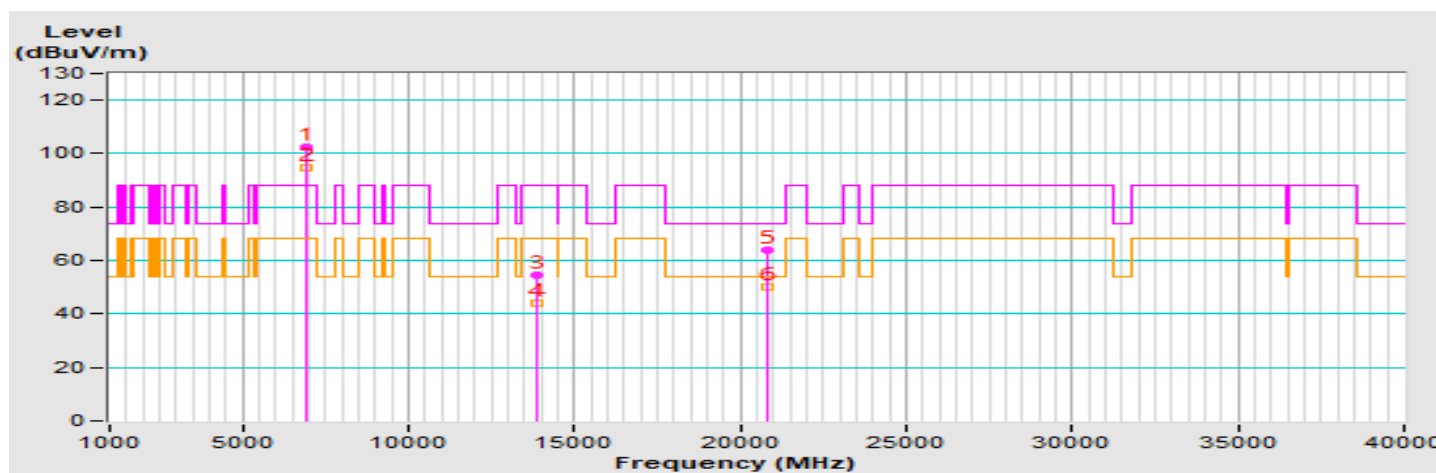


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6945.00        | 102.6 PK                |                |             | 3.84 V             | 251                  | 92.6             | 10.0                     |
| 2                                                  | *6945.00        | 94.9 AV                 |                |             | 3.84 V             | 251                  | 84.9             | 10.0                     |
| 3                                                  | #13890.00       | 54.7 PK                 | 88.2           | -33.5       | 3.16 V             | 71                   | 36.1             | 18.6                     |
| 4                                                  | #13890.00       | 43.9 AV                 | 68.2           | -24.3       | 3.16 V             | 71                   | 25.3             | 18.6                     |
| 5                                                  | 20835.00        | 63.7 PK                 | 74.0           | -10.3       | 3.09 V             | 112                  | 66.4             | -2.7                     |
| 6                                                  | 20835.00        | 50.3 AV                 | 54.0           | -3.7        | 3.09 V             | 112                  | 53.0             | -2.7                     |


#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 215 : 7025 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 15                                                                   |

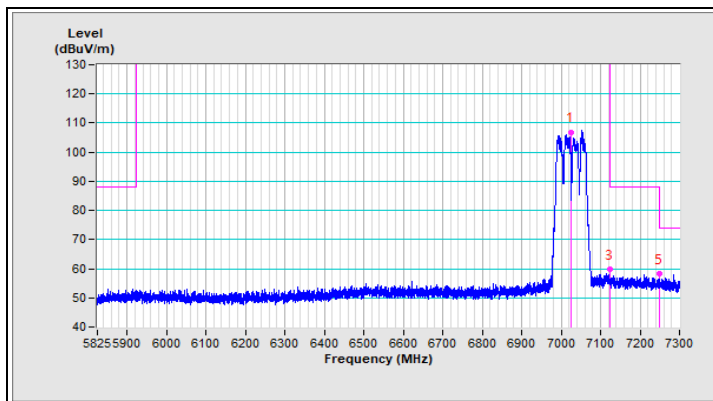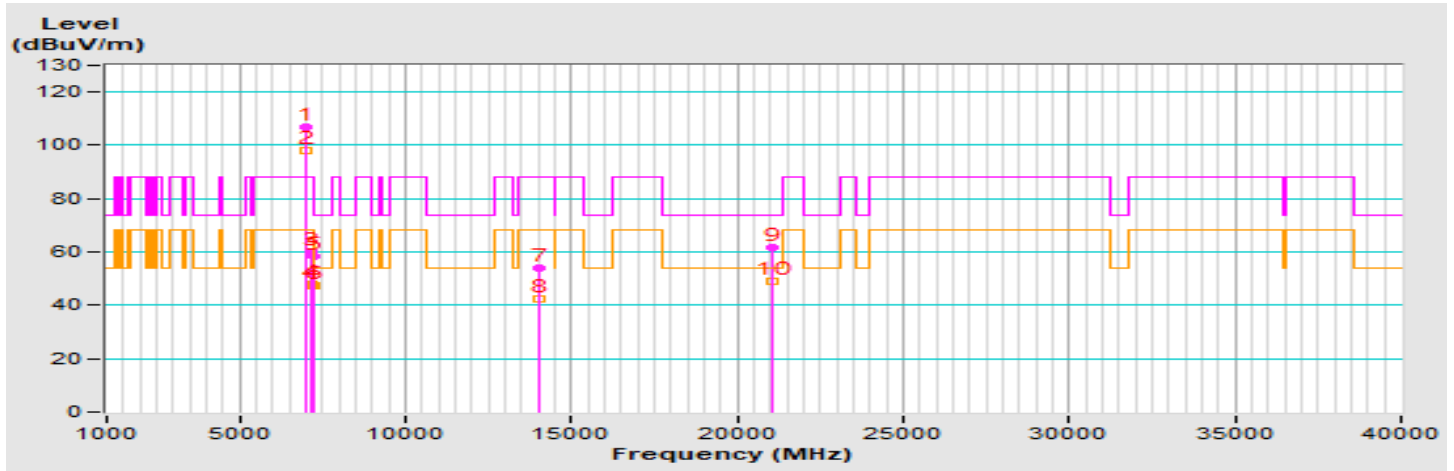

Horizontal (Peak)

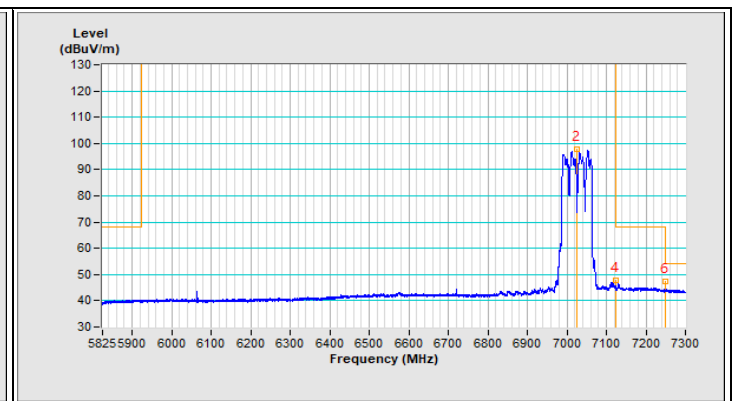



Horizontal (Average)

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *7025.00        | 106.9 PK                |                |             | 2.62 H             | 291                  | 97.0             | 9.9                      |
| 2                                                    | *7025.00        | 97.9 AV                 |                |             | 2.62 H             | 291                  | 88.0             | 9.9                      |
| 3                                                    | #7125.00        | 59.8 PK                 | 88.2           | -28.4       | 2.23 H             | 292                  | 48.9             | 10.9                     |
| 4                                                    | #7125.00        | 47.8 AV                 | 68.2           | -20.4       | 2.23 H             | 292                  | 36.9             | 10.9                     |
| 5                                                    | 7250.00         | 58.2 PK                 | 74.0           | -15.8       | 2.23 H             | 292                  | 47.4             | 10.8                     |
| 6                                                    | 7250.00         | 47.4 AV                 | 54.0           | -6.6        | 2.23 H             | 292                  | 36.6             | 10.8                     |
| 7                                                    | #14050.00       | 54.1 PK                 | 88.2           | -34.1       | 2.84 H             | 179                  | 35.1             | 19.0                     |
| 8                                                    | #14050.00       | 42.5 AV                 | 68.2           | -25.7       | 2.84 H             | 179                  | 23.5             | 19.0                     |
| 9                                                    | 21075.00        | 61.7 PK                 | 74.0           | -12.3       | 2.69 H             | 251                  | 64.7             | -3.0                     |
| 10                                                   | 21075.00        | 49.1 AV                 | 54.0           | -4.9        | 2.69 H             | 251                  | 52.1             | -3.0                     |


#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT80) | Channel                       | CH 215 : 7025 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 15                                                                   |

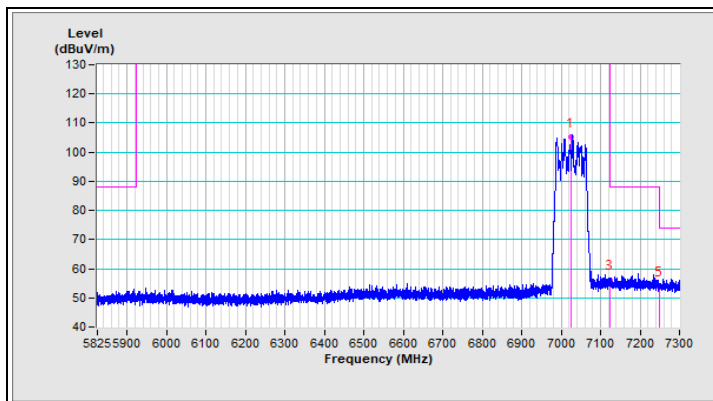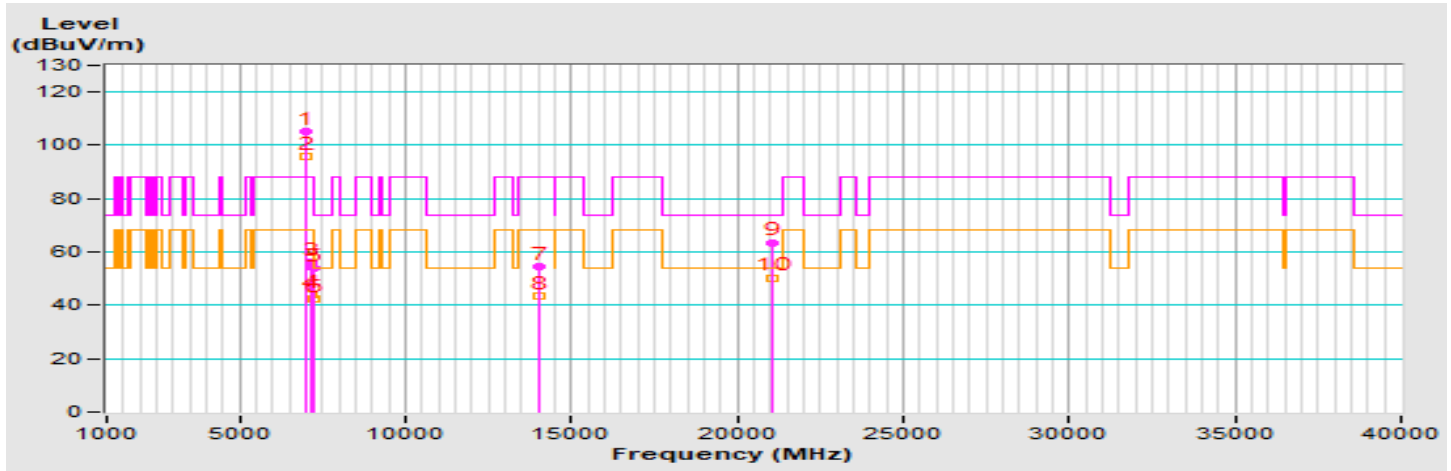

Vertical (Peak)

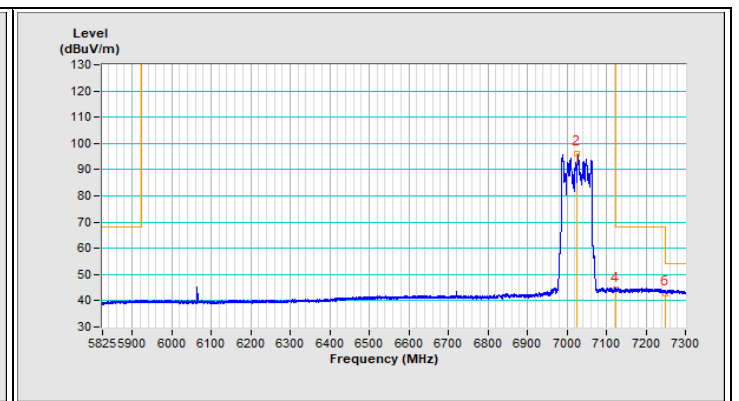



Vertical (Average)

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *7025.00        | 105.2 PK                |                |             | 3.23 V             | 117                  | 95.3             | 9.9                      |
| 2                                                  | *7025.00        | 96.0 AV                 |                |             | 3.23 V             | 117                  | 86.1             | 9.9                      |
| 3                                                  | #7125.00        | 56.2 PK                 | 88.2           | -32.0       | 3.23 V             | 117                  | 45.3             | 10.9                     |
| 4                                                  | #7125.00        | 44.2 AV                 | 68.2           | -24.0       | 3.23 V             | 117                  | 33.3             | 10.9                     |
| 5                                                  | 7250.00         | 53.9 PK                 | 74.0           | -20.1       | 3.23 V             | 117                  | 43.1             | 10.8                     |
| 6                                                  | 7250.00         | 42.6 AV                 | 54.0           | -11.4       | 3.23 V             | 117                  | 31.8             | 10.8                     |
| 7                                                  | #14050.00       | 54.5 PK                 | 88.2           | -33.7       | 3.12 V             | 58                   | 35.5             | 19.0                     |
| 8                                                  | #14050.00       | 43.6 AV                 | 68.2           | -24.6       | 3.12 V             | 58                   | 24.6             | 19.0                     |
| 9                                                  | 21075.00        | 63.6 PK                 | 74.0           | -10.4       | 3.07 V             | 105                  | 66.6             | -3.0                     |
| 10                                                 | 21075.00        | 50.4 AV                 | 54.0           | -3.6        | 3.07 V             | 105                  | 53.4             | -3.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 15 : 6025 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 17.5                                                                 |

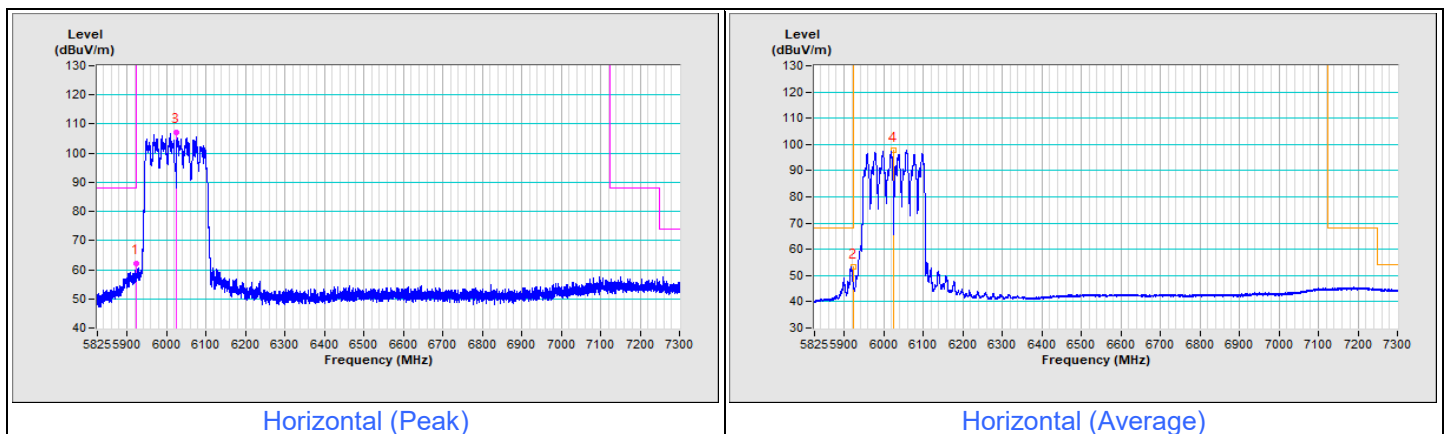
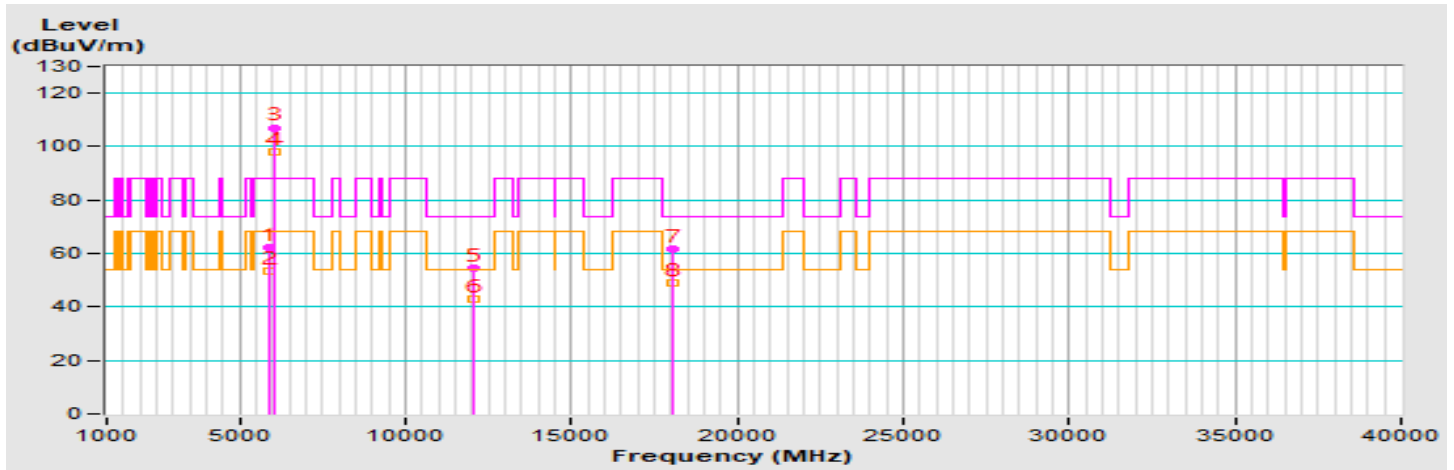


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5925.00        | 62.1 PK                 | 88.2           | -26.1       | 2.31 H             | 279                  | 55.8             | 6.3                      |
| 2                                                    | #5925.00        | 53.4 AV                 | 68.2           | -14.8       | 2.31 H             | 279                  | 47.1             | 6.3                      |
| 3                                                    | *6025.00        | 107.1 PK                |                |             | 2.31 H             | 279                  | 101.0            | 6.1                      |
| 4                                                    | *6025.00        | 97.9 AV                 |                |             | 2.31 H             | 279                  | 91.8             | 6.1                      |
| 5                                                    | 12050.00        | 54.3 PK                 | 74.0           | -19.7       | 2.93 H             | 175                  | 38.7             | 15.6                     |
| 6                                                    | 12050.00        | 42.7 AV                 | 54.0           | -11.3       | 2.93 H             | 175                  | 27.1             | 15.6                     |
| 7                                                    | 18075.00        | 61.6 PK                 | 74.0           | -12.4       | 2.70 H             | 245                  | 66.7             | -5.1                     |
| 8                                                    | 18075.00        | 49.2 AV                 | 54.0           | -4.8        | 2.70 H             | 245                  | 54.3             | -5.1                     |


#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 15 : 6025 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 17.5                                                                 |

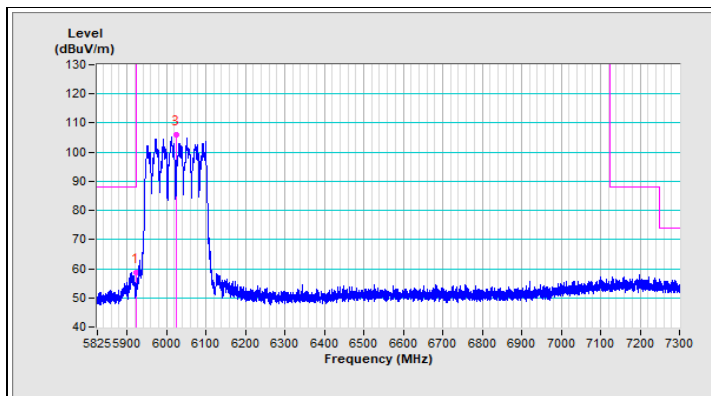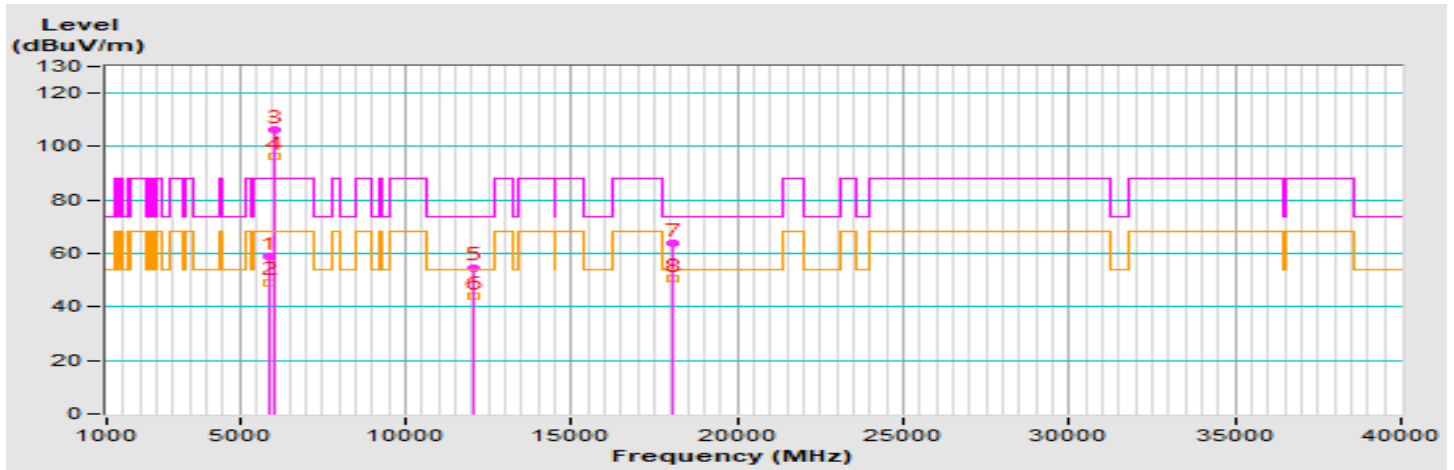

Vertical (Peak)

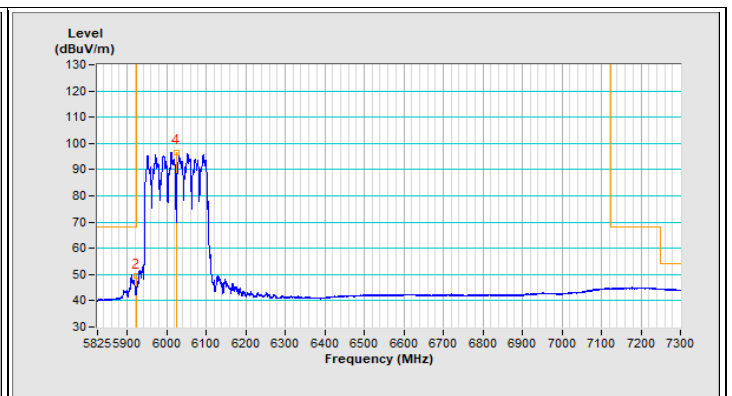


Vertical (Average)

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5925.00        | 58.8 PK                 | 88.2           | -29.4       | 3.16 V             | 73                   | 52.5             | 6.3                      |
| 2                                                  | #5925.00        | 49.3 AV                 | 68.2           | -18.9       | 3.16 V             | 73                   | 43.0             | 6.3                      |
| 3                                                  | *6025.00        | 106.1 PK                |                |             | 3.16 V             | 73                   | 100.0            | 6.1                      |
| 4                                                  | *6025.00        | 96.6 AV                 |                |             | 3.16 V             | 73                   | 90.5             | 6.1                      |
| 5                                                  | 12050.00        | 54.8 PK                 | 74.0           | -19.2       | 3.11 V             | 64                   | 39.2             | 15.6                     |
| 6                                                  | 12050.00        | 43.8 AV                 | 54.0           | -10.2       | 3.11 V             | 64                   | 28.2             | 15.6                     |
| 7                                                  | 18075.00        | 64.1 PK                 | 74.0           | -9.9        | 3.12 V             | 99                   | 69.2             | -5.1                     |
| 8                                                  | 18075.00        | 50.8 AV                 | 54.0           | -3.2        | 3.12 V             | 99                   | 55.9             | -5.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 47 : 6185 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 17.5                                                                 |

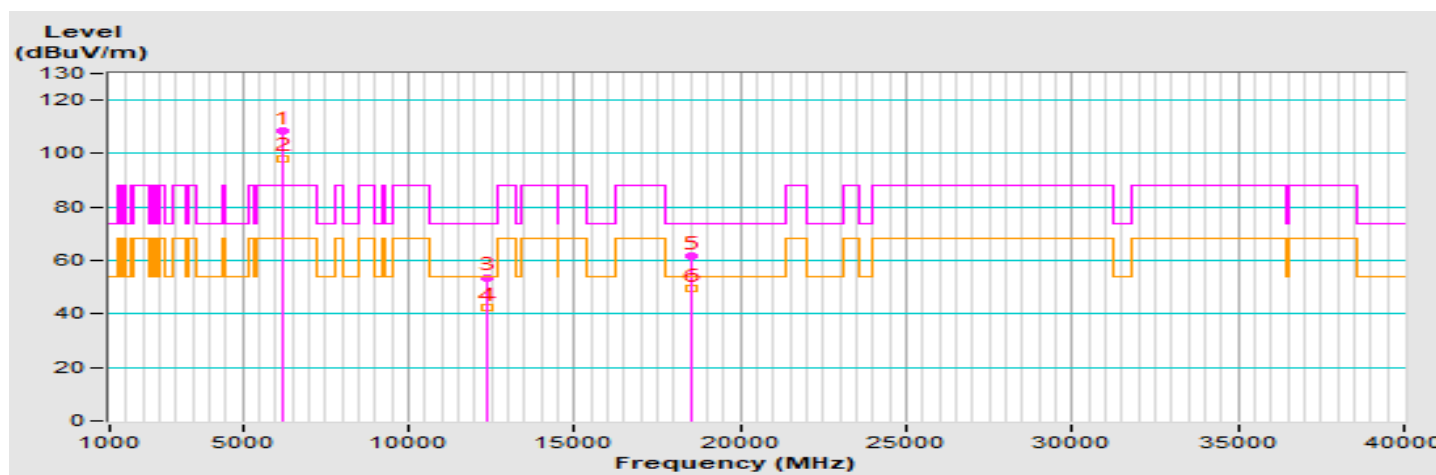


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1                                                    | *6185.00        | 108.4 PK                |                |             | 2.20 H             | 291                  | 101.6            | 6.8                      |
| 2                                                    | *6185.00        | 98.3 AV                 |                |             | 2.20 H             | 291                  | 91.5             | 6.8                      |
| 3                                                    | 12370.00        | 53.7 PK                 | 74.0           | -20.3       | 2.92 H             | 194                  | 38.7             | 15.0                     |
| 4                                                    | 12370.00        | 42.2 AV                 | 54.0           | -11.8       | 2.92 H             | 194                  | 27.2             | 15.0                     |
| 5                                                    | 18555.00        | 61.9 PK                 | 74.0           | -12.1       | 2.62 H             | 244                  | 66.8             | -4.9                     |
| 6                                                    | 18555.00        | 49.4 AV                 | 54.0           | -4.6        | 2.62 H             | 244                  | 54.3             | -4.9                     |

#### Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 47 : 6185 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 17.5                                                                 |

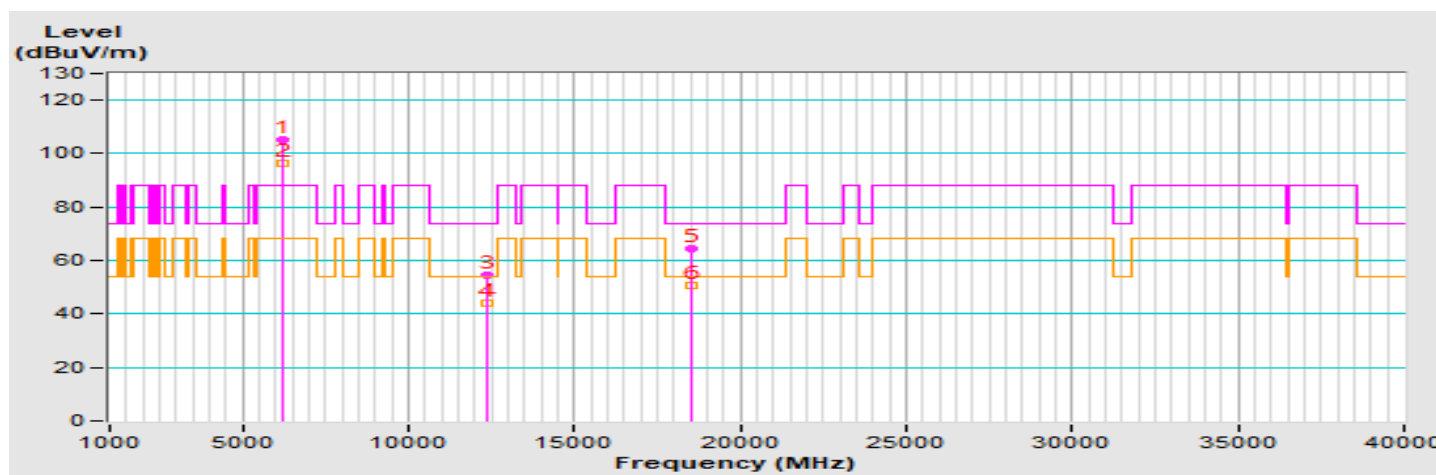


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6185.00        | 105.1 PK                |                |             | 2.89 V             | 81                   | 98.3             | 6.8                      |
| 2                                                  | *6185.00        | 96.4 AV                 |                |             | 2.89 V             | 81                   | 89.6             | 6.8                      |
| 3                                                  | 12370.00        | 54.7 PK                 | 74.0           | -19.3       | 3.10 V             | 73                   | 39.7             | 15.0                     |
| 4                                                  | 12370.00        | 43.8 AV                 | 54.0           | -10.2       | 3.10 V             | 73                   | 28.8             | 15.0                     |
| 5                                                  | 18555.00        | 64.3 PK                 | 74.0           | -9.7        | 3.09 V             | 103                  | 69.2             | -4.9                     |
| 6                                                  | 18555.00        | 50.7 AV                 | 54.0           | -3.3        | 3.09 V             | 103                  | 55.6             | -4.9                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 79 : 6345 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 16.5                                                                 |

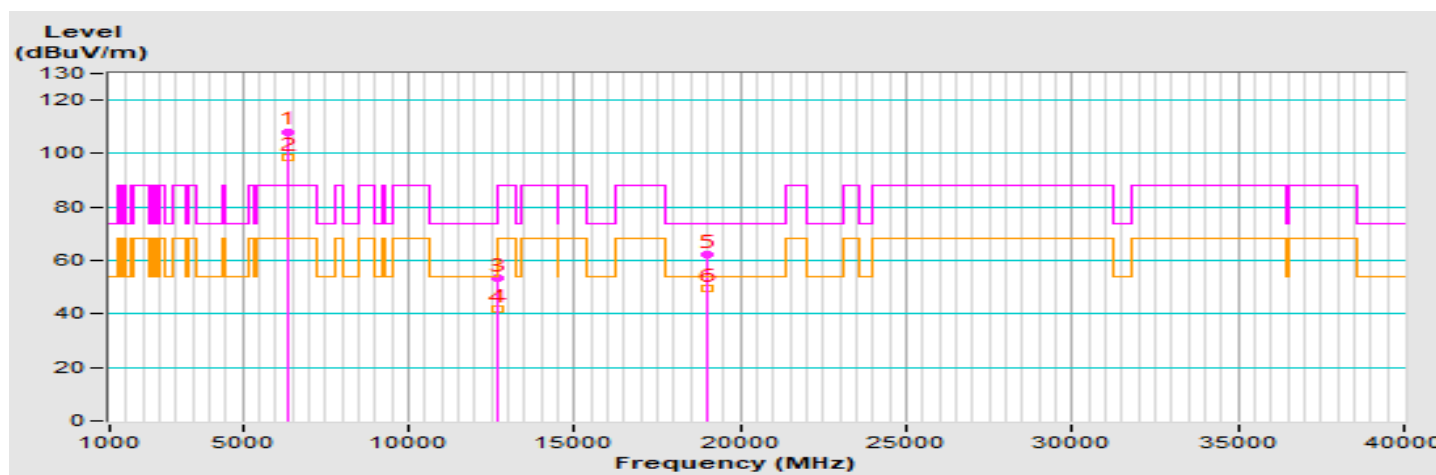


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6345.00        | 108.2 PK                |                |             | 2.64 H             | 293                  | 100.8            | 7.4                      |
| 2                                                    | *6345.00        | 98.5 AV                 |                |             | 2.64 H             | 293                  | 91.1             | 7.4                      |
| 3                                                    | 12690.00        | 53.2 PK                 | 74.0           | -20.8       | 2.95 H             | 195                  | 38.3             | 14.9                     |
| 4                                                    | 12690.00        | 41.9 AV                 | 54.0           | -12.1       | 2.95 H             | 195                  | 27.0             | 14.9                     |
| 5                                                    | 19035.00        | 62.2 PK                 | 74.0           | -11.8       | 2.57 H             | 257                  | 66.9             | -4.7                     |
| 6                                                    | 19035.00        | 49.5 AV                 | 54.0           | -4.5        | 2.57 H             | 257                  | 54.2             | -4.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 79 : 6345 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 16.5                                                                 |

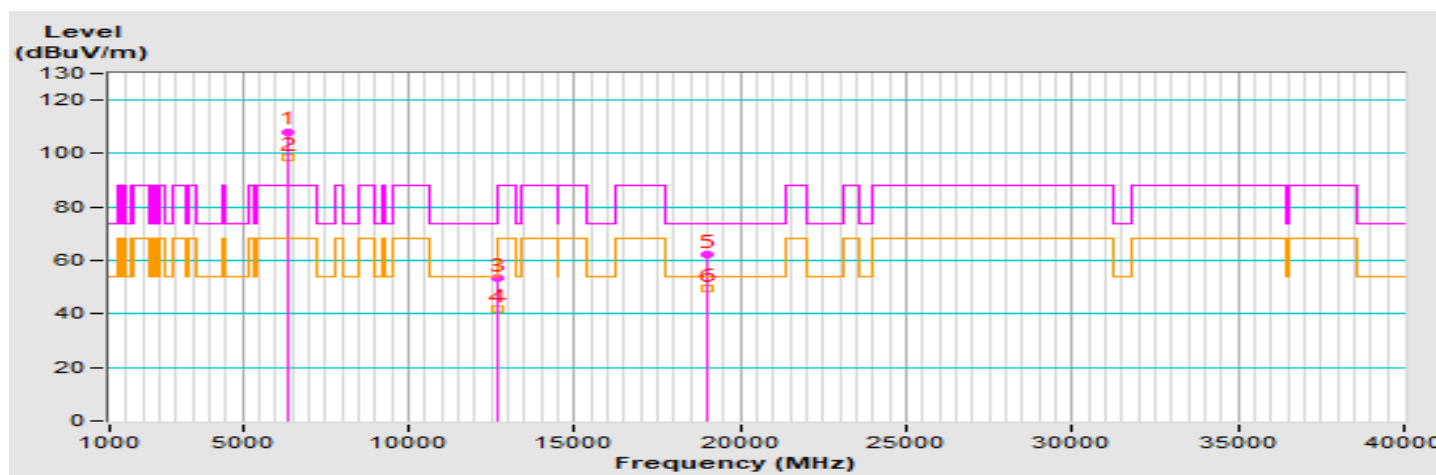


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6345.00        | 104.8 PK                |                |             | 3.16 V             | 251                  | 97.4             | 7.4                      |
| 2                                                  | *6345.00        | 95.1 AV                 |                |             | 3.16 V             | 251                  | 87.7             | 7.4                      |
| 3                                                  | 12690.00        | 54.9 PK                 | 74.0           | -19.1       | 3.06 V             | 52                   | 40.0             | 14.9                     |
| 4                                                  | 12690.00        | 44.2 AV                 | 54.0           | -9.8        | 3.06 V             | 52                   | 29.3             | 14.9                     |
| 5                                                  | 19035.00        | 63.8 PK                 | 74.0           | -10.2       | 3.11 V             | 90                   | 68.5             | -4.7                     |
| 6                                                  | 19035.00        | 50.8 AV                 | 54.0           | -3.2        | 3.11 V             | 90                   | 55.5             | -4.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 111 : 6505 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 15.5                                                                 |

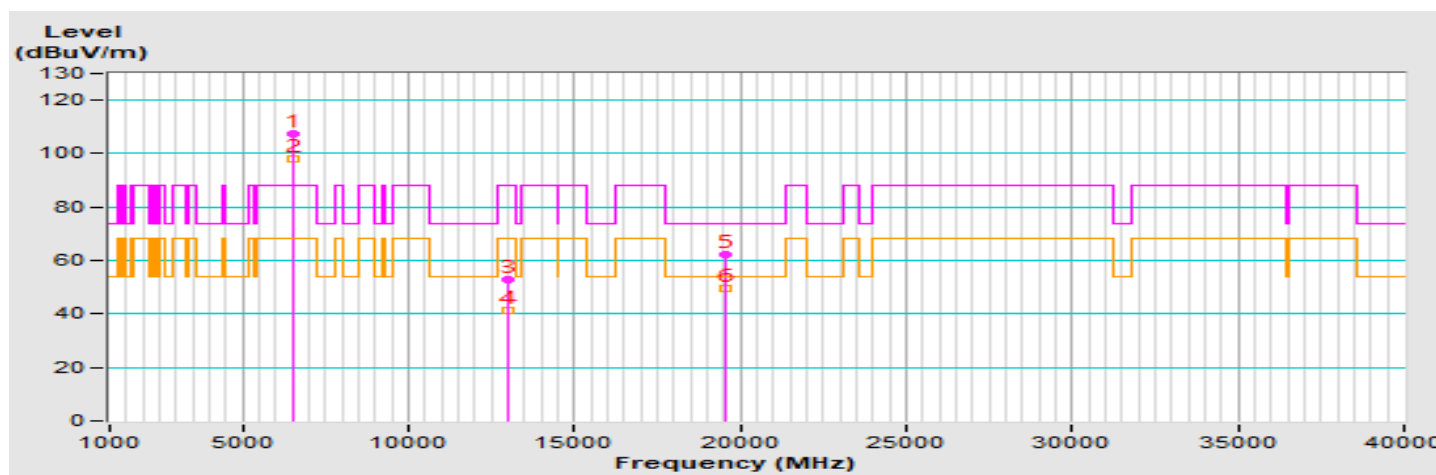


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6505.00        | 107.2 PK                |                |             | 2.21 H             | 293                  | 99.0             | 8.2                      |
| 2                                                    | *6505.00        | 97.9 AV                 |                |             | 2.21 H             | 293                  | 89.7             | 8.2                      |
| 3                                                    | #13010.00       | 52.7 PK                 | 88.2           | -35.5       | 2.99 H             | 185                  | 37.2             | 15.5                     |
| 4                                                    | #13010.00       | 41.4 AV                 | 68.2           | -26.8       | 2.99 H             | 185                  | 25.9             | 15.5                     |
| 5                                                    | 19515.00        | 62.3 PK                 | 74.0           | -11.7       | 2.56 H             | 254                  | 65.5             | -3.2                     |
| 6                                                    | 19515.00        | 49.4 AV                 | 54.0           | -4.6        | 2.56 H             | 254                  | 52.6             | -3.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 111 : 6505 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 15.5                                                                 |

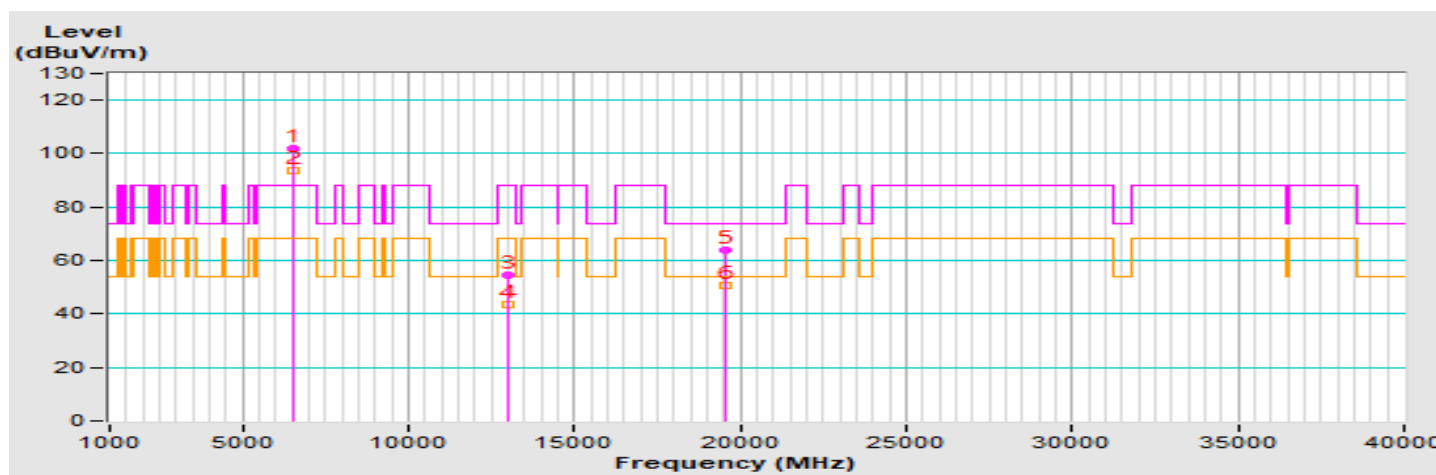


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6505.00        | 102.1 PK                |                |             | 3.22 V             | 71                   | 93.9             | 8.2                      |
| 2                                                  | *6505.00        | 93.5 AV                 |                |             | 3.22 V             | 71                   | 85.3             | 8.2                      |
| 3                                                  | #13010.00       | 54.4 PK                 | 88.2           | -33.8       | 3.20 V             | 67                   | 38.9             | 15.5                     |
| 4                                                  | #13010.00       | 43.7 AV                 | 68.2           | -24.5       | 3.20 V             | 67                   | 28.2             | 15.5                     |
| 5                                                  | 19515.00        | 64.1 PK                 | 74.0           | -9.9        | 3.03 V             | 111                  | 67.3             | -3.2                     |
| 6                                                  | 19515.00        | 50.5 AV                 | 54.0           | -3.5        | 3.03 V             | 111                  | 53.7             | -3.2                     |

#### Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- \* \*: Fundamental frequency, the limit was restricted at the RF Output Power.
- # #: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 143 : 6665 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 15.5                                                                 |

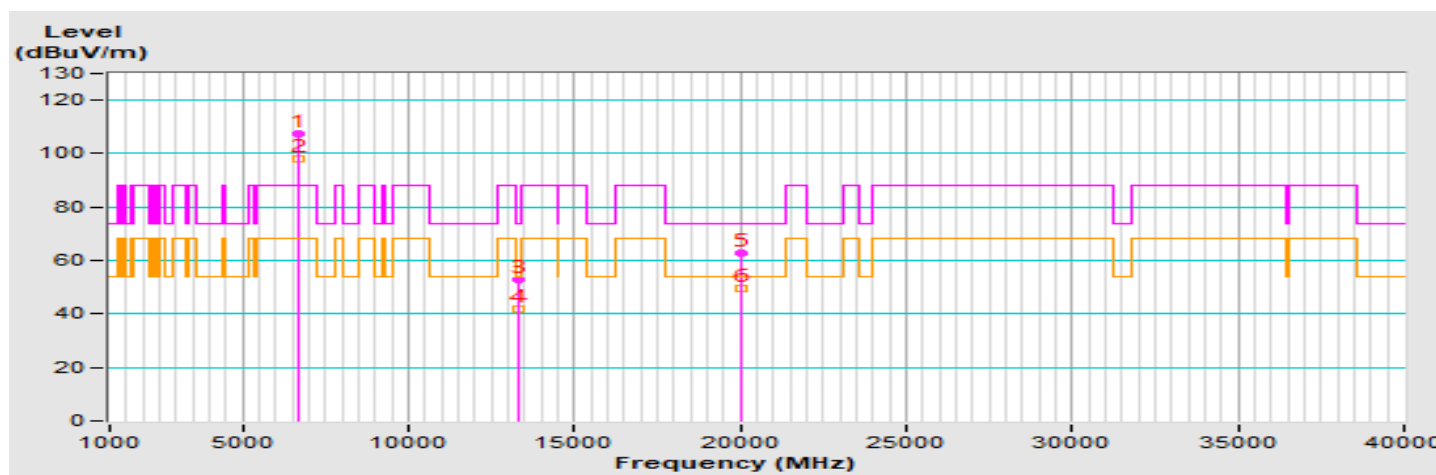


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1                                                    | *6665.00        | 107.3 PK                |                |             | 2.49 H             | 296                  | 98.4             | 8.9                      |
| 2                                                    | *6665.00        | 98.0 AV                 |                |             | 2.49 H             | 296                  | 89.1             | 8.9                      |
| 3                                                    | 13330.00        | 53.1 PK                 | 74.0           | -20.9       | 2.95 H             | 196                  | 35.7             | 17.4                     |
| 4                                                    | 13330.00        | 41.6 AV                 | 54.0           | -12.4       | 2.95 H             | 196                  | 24.2             | 17.4                     |
| 5                                                    | 19995.00        | 62.6 PK                 | 74.0           | -11.4       | 2.58 H             | 254                  | 66.7             | -4.1                     |
| 6                                                    | 19995.00        | 49.8 AV                 | 54.0           | -4.2        | 2.58 H             | 254                  | 53.9             | -4.1                     |

#### Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 143 : 6665 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 15.5                                                                 |

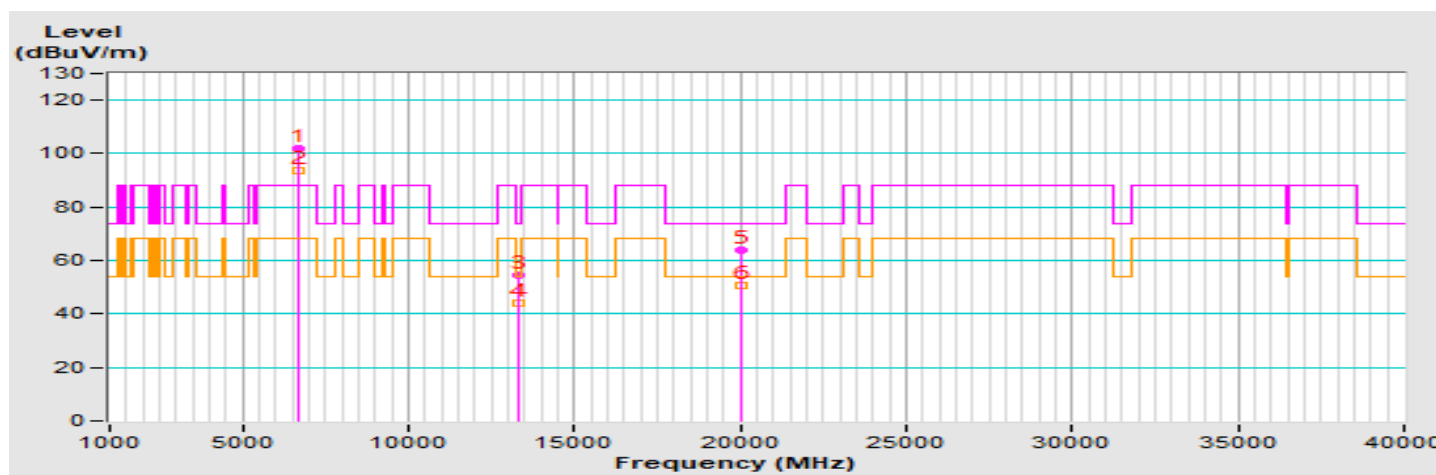


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1                                                  | *6665.00        | 101.7 PK                |                |             | 3.18 V             | 67                   | 92.8             | 8.9                      |
| 2                                                  | *6665.00        | 93.4 AV                 |                |             | 3.18 V             | 67                   | 84.5             | 8.9                      |
| 3                                                  | 13330.00        | 54.5 PK                 | 74.0           | -19.5       | 3.17 V             | 80                   | 37.1             | 17.4                     |
| 4                                                  | 13330.00        | 43.9 AV                 | 54.0           | -10.1       | 3.17 V             | 80                   | 26.5             | 17.4                     |
| 5                                                  | 19995.00        | 64.1 PK                 | 74.0           | -9.9        | 2.98 V             | 101                  | 68.2             | -4.1                     |
| 6                                                  | 19995.00        | 50.7 AV                 | 54.0           | -3.3        | 2.98 V             | 101                  | 54.8             | -4.1                     |

#### Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 175 : 6825 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 14.5                                                                 |

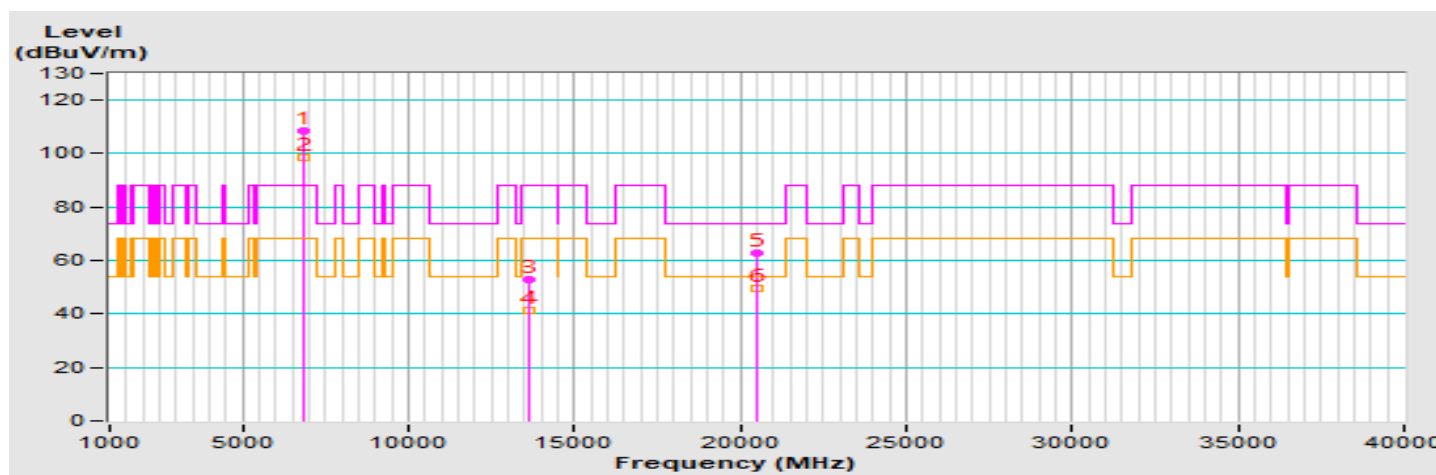


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1                                                    | *6825.00        | 108.3 PK                |                |             | 2.13 H             | 295                  | 99.3             | 9.0                      |
| 2                                                    | *6825.00        | 98.5 AV                 |                |             | 2.13 H             | 295                  | 89.5             | 9.0                      |
| 3                                                    | #13650.00       | 52.7 PK                 | 88.2           | -35.5       | 2.93 H             | 185                  | 34.1             | 18.6                     |
| 4                                                    | #13650.00       | 41.4 AV                 | 68.2           | -26.8       | 2.93 H             | 185                  | 22.8             | 18.6                     |
| 5                                                    | 20475.00        | 62.8 PK                 | 74.0           | -11.2       | 2.63 H             | 247                  | 65.8             | -3.0                     |
| 6                                                    | 20475.00        | 49.7 AV                 | 54.0           | -4.3        | 2.63 H             | 247                  | 52.7             | -3.0                     |

#### Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 175 : 6825 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 14.5                                                                 |


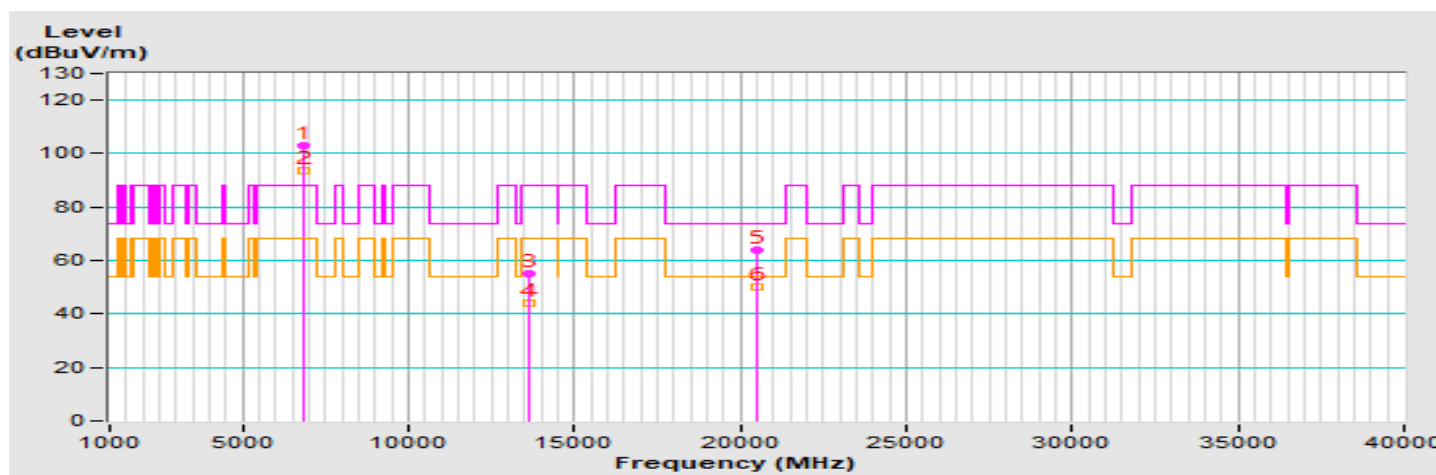


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6825.00        | 103.1 PK                |                |             | 3.61 V             | 246                  | 94.1             | 9.0                      |
| 2                                                  | *6825.00        | 93.7 AV                 |                |             | 3.61 V             | 246                  | 84.7             | 9.0                      |
| 3                                                  | #13650.00       | 55.2 PK                 | 88.2           | -33.0       | 3.17 V             | 81                   | 36.6             | 18.6                     |
| 4                                                  | #13650.00       | 44.3 AV                 | 68.2           | -23.9       | 3.17 V             | 81                   | 25.7             | 18.6                     |
| 5                                                  | 20475.00        | 63.9 PK                 | 74.0           | -10.1       | 2.98 V             | 85                   | 66.9             | -3.0                     |
| 6                                                  | 20475.00        | 50.3 AV                 | 54.0           | -3.7        | 2.98 V             | 85                   | 53.3             | -3.0                     |


#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 207 : 6985 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 17.5                                                                 |

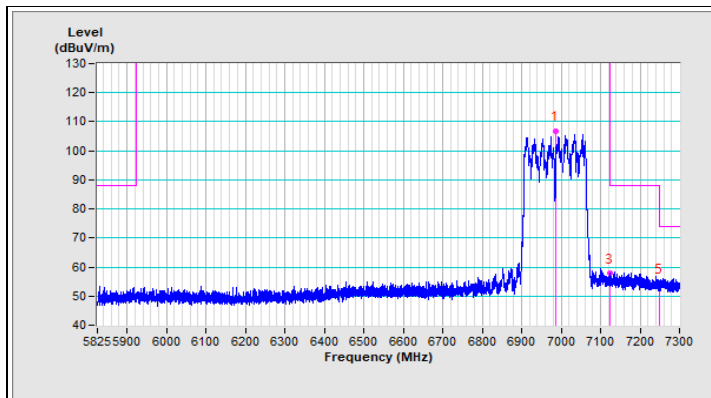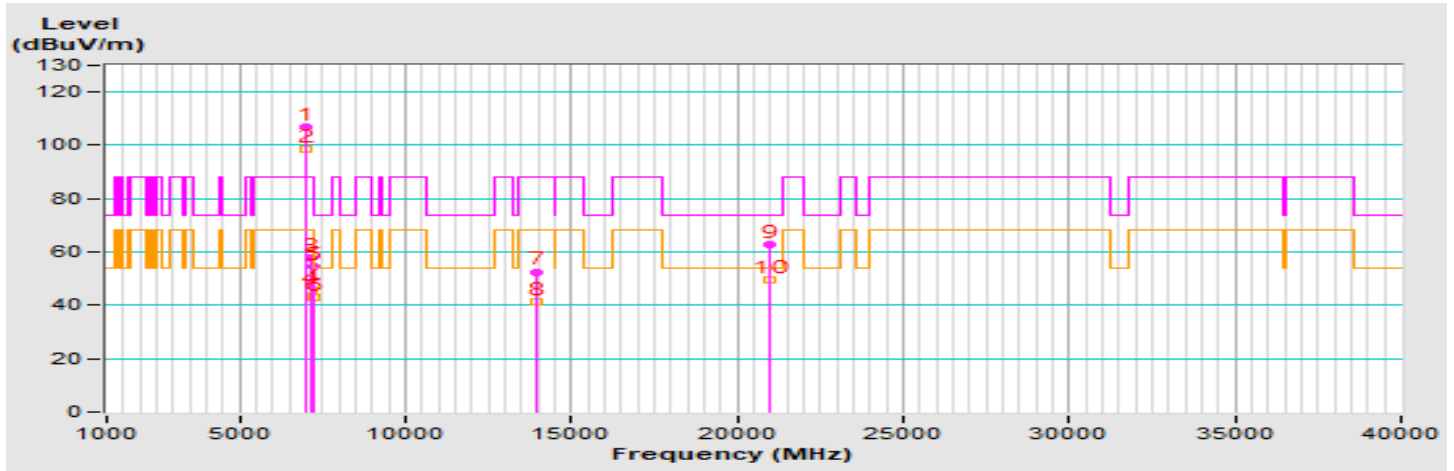

Horizontal (Peak)

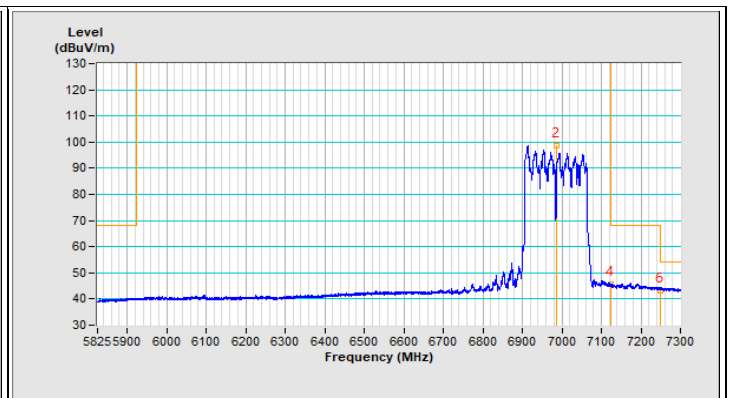



Horizontal (Average)

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6985.00        | 106.9 PK                |                |             | 2.33 H             | 297                  | 96.9             | 10.0                     |
| 2                                                    | *6985.00        | 98.7 AV                 |                |             | 2.33 H             | 297                  | 88.7             | 10.0                     |
| 3                                                    | #7125.00        | 57.9 PK                 | 88.2           | -30.3       | 2.33 H             | 297                  | 47.0             | 10.9                     |
| 4                                                    | #7125.00        | 45.6 AV                 | 68.2           | -22.6       | 2.33 H             | 297                  | 34.7             | 10.9                     |
| 5                                                    | 7250.00         | 54.5 PK                 | 74.0           | -19.5       | 2.33 H             | 297                  | 43.7             | 10.8                     |
| 6                                                    | 7250.00         | 43.1 AV                 | 54.0           | -10.9       | 2.33 H             | 297                  | 32.3             | 10.8                     |
| 7                                                    | #13970.00       | 52.6 PK                 | 88.2           | -35.6       | 2.94 H             | 183                  | 33.6             | 19.0                     |
| 8                                                    | #13970.00       | 41.1 AV                 | 68.2           | -27.1       | 2.94 H             | 183                  | 22.1             | 19.0                     |
| 9                                                    | 20955.00        | 62.7 PK                 | 74.0           | -11.3       | 2.64 H             | 233                  | 65.4             | -2.7                     |
| 10                                                   | 20955.00        | 49.7 AV                 | 54.0           | -4.3        | 2.64 H             | 233                  | 52.4             | -2.7                     |


**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT160) | Channel                       | CH 207 : 6985 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 17.5                                                                 |

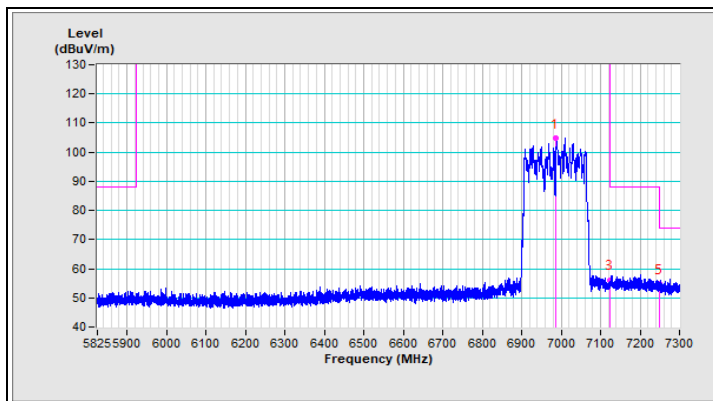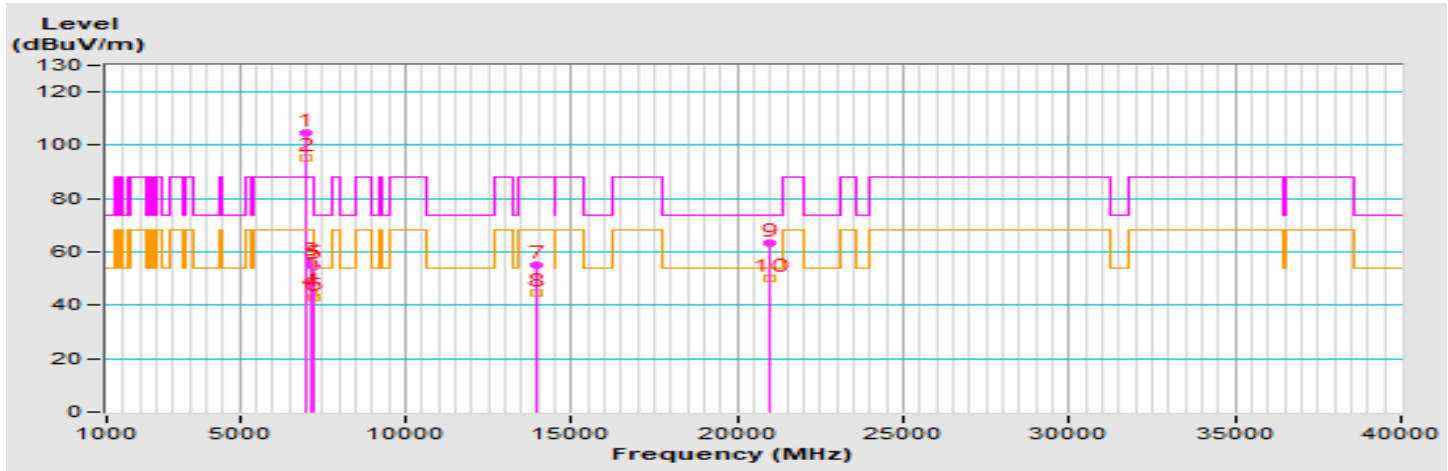

Vertical (Peak)

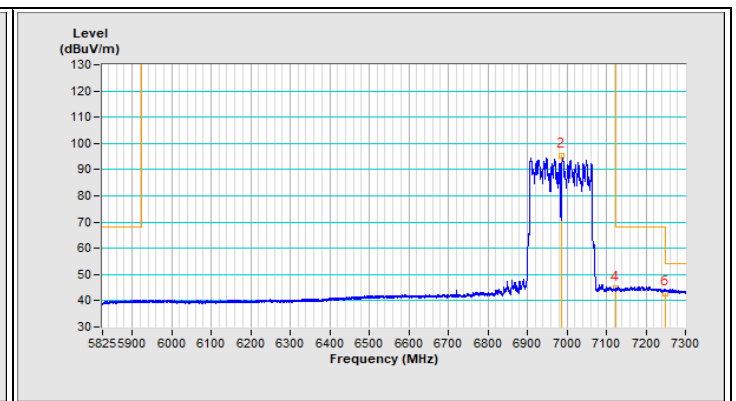



Vertical (Average)

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6985.00        | 104.8 PK                |                |             | 3.00 V             | 116                  | 94.8             | 10.0                     |
| 2                                                  | *6985.00        | 95.2 AV                 |                |             | 3.00 V             | 116                  | 85.2             | 10.0                     |
| 3                                                  | #7125.00        | 56.2 PK                 | 88.2           | -32.0       | 3.00 V             | 116                  | 45.3             | 10.9                     |
| 4                                                  | #7125.00        | 44.7 AV                 | 68.2           | -23.5       | 3.00 V             | 116                  | 33.8             | 10.9                     |
| 5                                                  | 7250.00         | 54.8 PK                 | 74.0           | -19.2       | 3.00 V             | 116                  | 44.0             | 10.8                     |
| 6                                                  | 7250.00         | 42.7 AV                 | 54.0           | -11.3       | 3.00 V             | 116                  | 31.9             | 10.8                     |
| 7                                                  | #13970.00       | 55.3 PK                 | 88.2           | -32.9       | 3.17 V             | 85                   | 36.3             | 19.0                     |
| 8                                                  | #13970.00       | 44.6 AV                 | 68.2           | -23.6       | 3.17 V             | 85                   | 25.6             | 19.0                     |
| 9                                                  | 20955.00        | 63.5 PK                 | 74.0           | -10.5       | 3.04 V             | 72                   | 66.2             | -2.7                     |
| 10                                                 | 20955.00        | 50.1 AV                 | 54.0           | -3.9        | 3.04 V             | 72                   | 52.8             | -2.7                     |


**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT320) | Channel                       | CH 31 : 6105 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 21                                                                   |

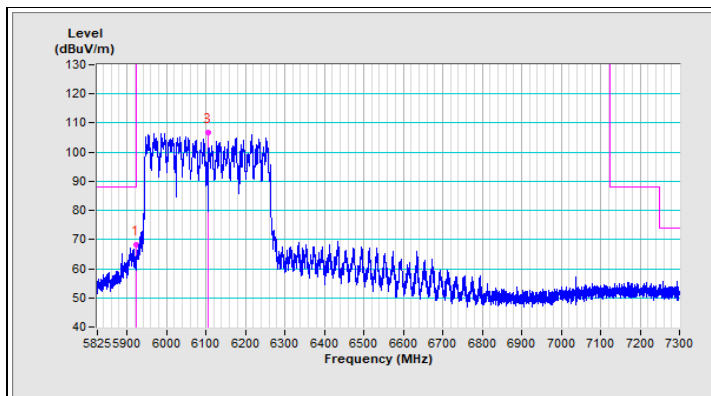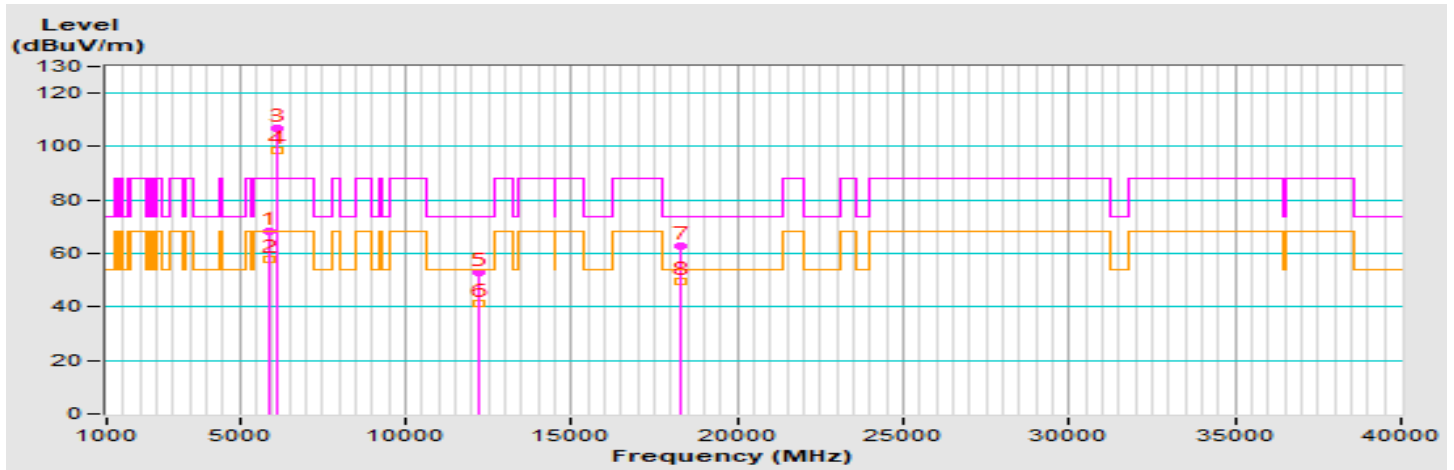

Horizontal (Peak)

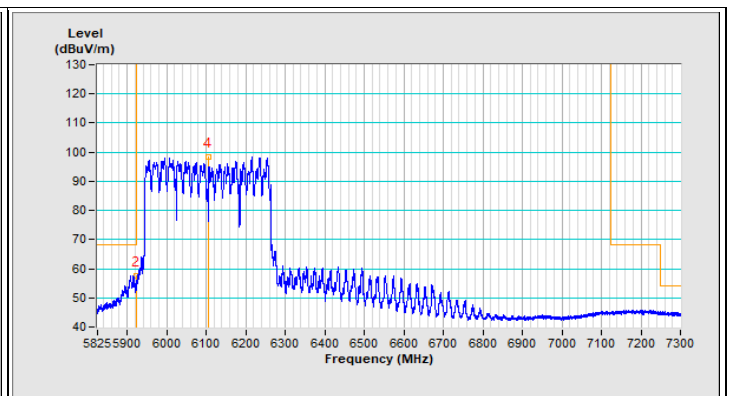



Horizontal (Average)

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5925.00        | 68.1 PK                 | 88.2           | -20.1       | 2.73 H             | 297                  | 61.8             | 6.3                      |
| 2                                                    | #5925.00        | 57.6 AV                 | 68.2           | -10.6       | 2.73 H             | 297                  | 51.3             | 6.3                      |
| 3                                                    | *6105.00        | 106.6 PK                |                |             | 2.73 H             | 297                  | 100.3            | 6.3                      |
| 4                                                    | *6105.00        | 98.4 AV                 |                |             | 2.73 H             | 297                  | 92.1             | 6.3                      |
| 5                                                    | 12210.00        | 52.8 PK                 | 74.0           | -21.2       | 2.96 H             | 175                  | 37.3             | 15.5                     |
| 6                                                    | 12210.00        | 41.2 AV                 | 54.0           | -12.8       | 2.96 H             | 175                  | 25.7             | 15.5                     |
| 7                                                    | 18315.00        | 62.6 PK                 | 74.0           | -11.4       | 2.62 H             | 220                  | 67.8             | -5.2                     |
| 8                                                    | 18315.00        | 49.5 AV                 | 54.0           | -4.5        | 2.62 H             | 220                  | 54.7             | -5.2                     |


#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT320) | Channel                       | CH 31 : 6105 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 21                                                                   |

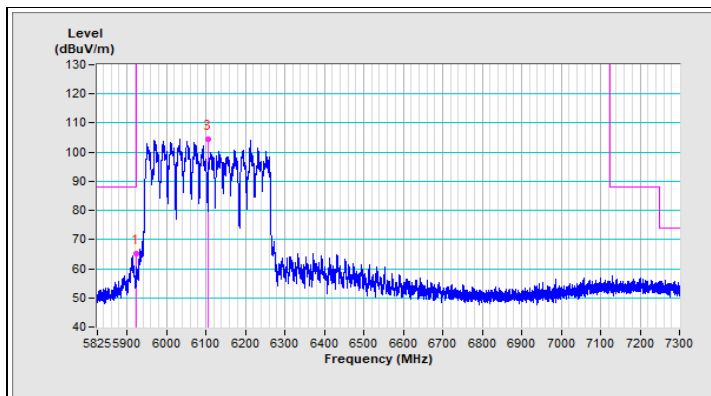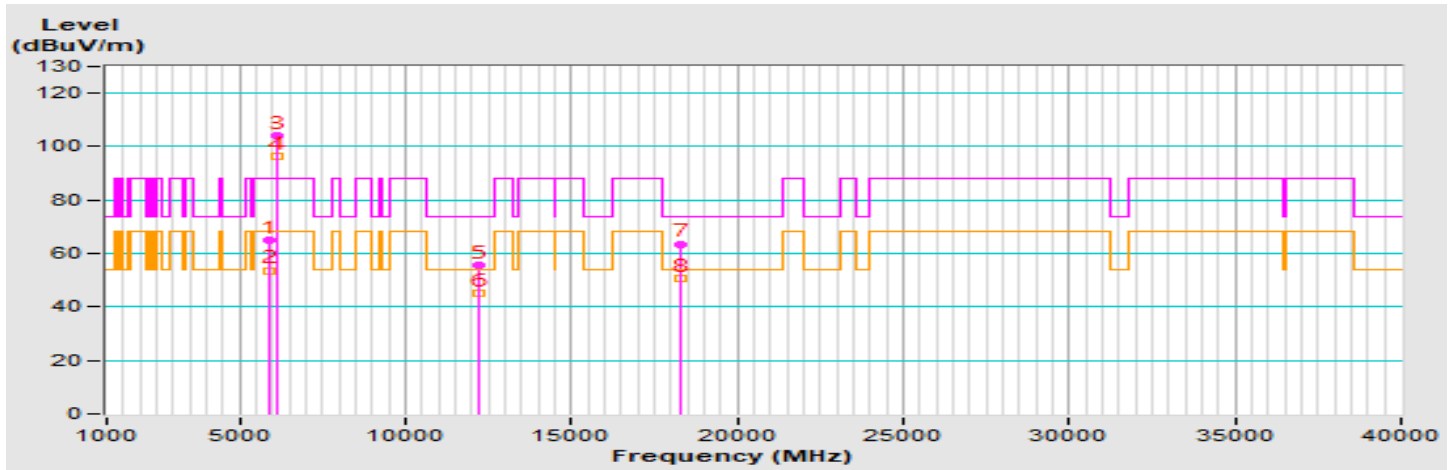

Vertical (Peak)

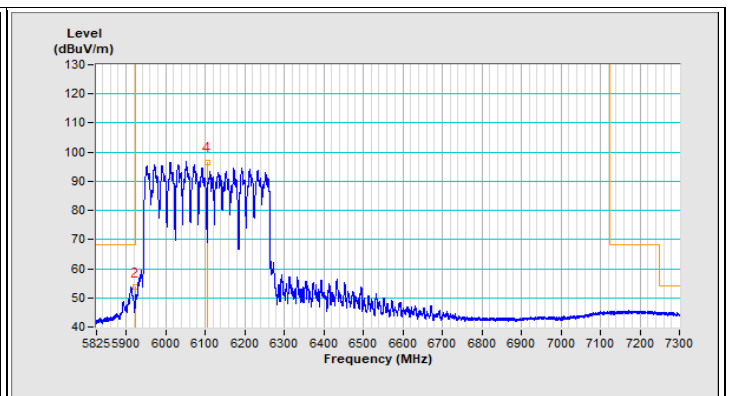


Vertical (Average)

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5925.00        | 65.1 PK                 | 88.2           | -23.1       | 3.34 V             | 71                   | 58.8             | 6.3                      |
| 2                                                  | #5925.00        | 53.7 AV                 | 68.2           | -14.5       | 3.34 V             | 71                   | 47.4             | 6.3                      |
| 3                                                  | *6105.00        | 104.3 PK                |                |             | 3.34 V             | 71                   | 98.0             | 6.3                      |
| 4                                                  | *6105.00        | 96.6 AV                 |                |             | 3.34 V             | 71                   | 90.3             | 6.3                      |
| 5                                                  | 12210.00        | 55.5 PK                 | 74.0           | -18.5       | 3.13 V             | 82                   | 40.0             | 15.5                     |
| 6                                                  | 12210.00        | 44.9 AV                 | 54.0           | -9.1        | 3.13 V             | 82                   | 29.4             | 15.5                     |
| 7                                                  | 18315.00        | 63.6 PK                 | 74.0           | -10.4       | 3.05 V             | 60                   | 68.8             | -5.2                     |
| 8                                                  | 18315.00        | 50.5 AV                 | 54.0           | -3.5        | 3.05 V             | 60                   | 55.7             | -5.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT320) | Channel                       | CH 63 : 6265 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 20                                                                   |

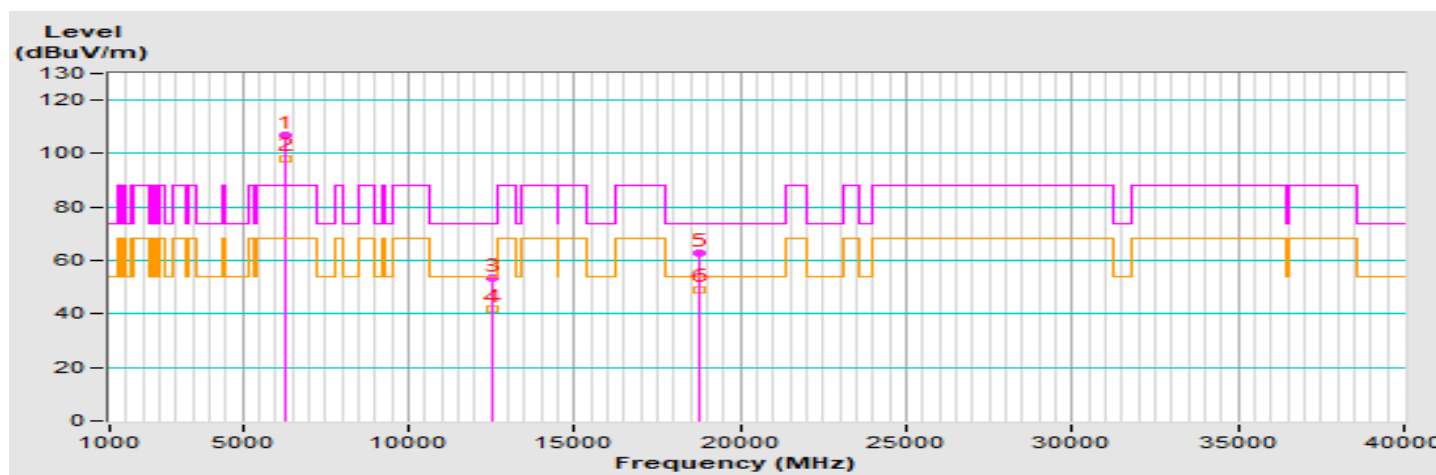


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6265.00        | 106.9 PK                |                |             | 2.67 H             | 288                  | 99.8             | 7.1                      |
| 2                                                    | *6265.00        | 98.3 AV                 |                |             | 2.67 H             | 288                  | 91.2             | 7.1                      |
| 3                                                    | 12530.00        | 53.2 PK                 | 74.0           | -20.8       | 2.91 H             | 177                  | 38.5             | 14.7                     |
| 4                                                    | 12530.00        | 41.6 AV                 | 54.0           | -12.4       | 2.91 H             | 177                  | 26.9             | 14.7                     |
| 5                                                    | 18795.00        | 62.7 PK                 | 74.0           | -11.3       | 2.60 H             | 210                  | 67.5             | -4.8                     |
| 6                                                    | 18795.00        | 49.3 AV                 | 54.0           | -4.7        | 2.60 H             | 210                  | 54.1             | -4.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT320) | Channel                       | CH 63 : 6265 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 20                                                                   |

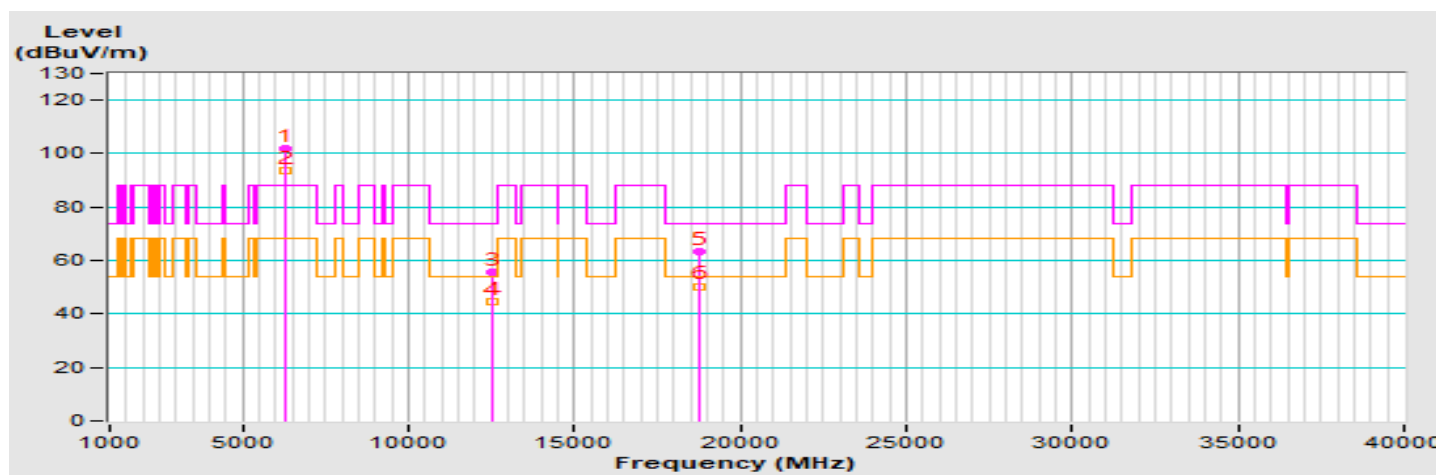


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6265.00        | 101.7 PK                |                |             | 3.47 V             | 69                   | 94.6             | 7.1                      |
| 2                                                  | *6265.00        | 93.8 AV                 |                |             | 3.47 V             | 69                   | 86.7             | 7.1                      |
| 3                                                  | 12530.00        | 55.6 PK                 | 74.0           | -18.4       | 3.04 V             | 68                   | 40.9             | 14.7                     |
| 4                                                  | 12530.00        | 44.6 AV                 | 54.0           | -9.4        | 3.04 V             | 68                   | 29.9             | 14.7                     |
| 5                                                  | 18795.00        | 63.3 PK                 | 74.0           | -10.7       | 3.14 V             | 101                  | 68.1             | -4.8                     |
| 6                                                  | 18795.00        | 50.4 AV                 | 54.0           | -3.6        | 3.14 V             | 101                  | 55.2             | -4.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT320) | Channel                       | CH 95 : 6425 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 20                                                                   |

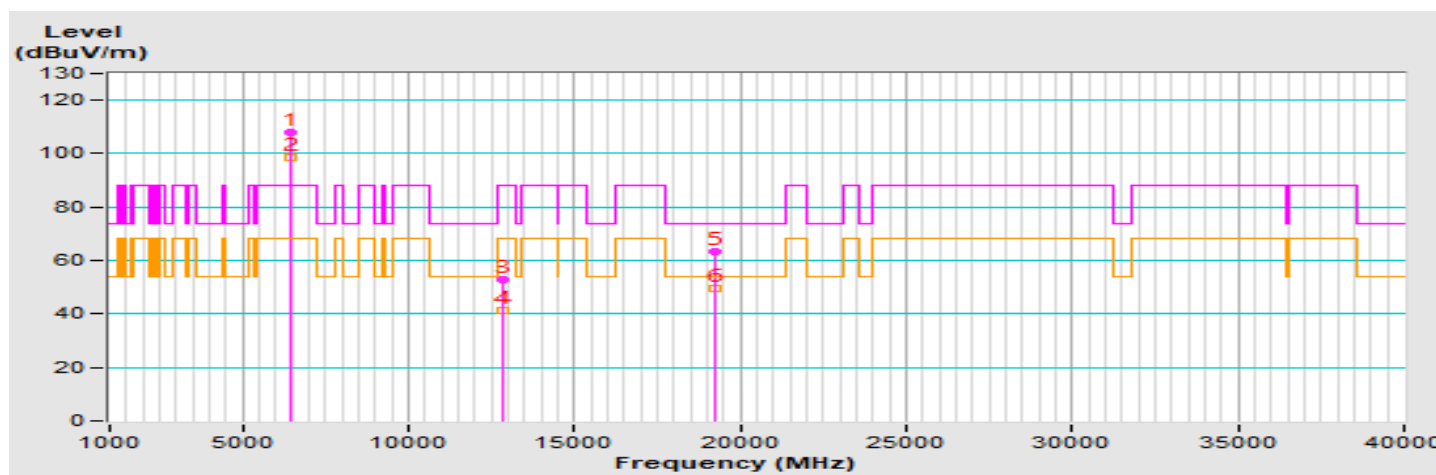


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6425.00        | 107.9 PK                |                |             | 2.59 H             | 291                  | 100.2            | 7.7                      |
| 2                                                    | *6425.00        | 98.5 AV                 |                |             | 2.59 H             | 291                  | 90.8             | 7.7                      |
| 3                                                    | #12850.00       | 52.7 PK                 | 88.2           | -35.5       | 2.87 H             | 165                  | 37.1             | 15.6                     |
| 4                                                    | #12850.00       | 41.1 AV                 | 68.2           | -27.1       | 2.87 H             | 165                  | 25.5             | 15.6                     |
| 5                                                    | 19275.00        | 63.2 PK                 | 74.0           | -10.8       | 2.57 H             | 197                  | 67.4             | -4.2                     |
| 6                                                    | 19275.00        | 49.5 AV                 | 54.0           | -4.5        | 2.57 H             | 197                  | 53.7             | -4.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT320) | Channel                       | CH 95 : 6425 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 20                                                                   |

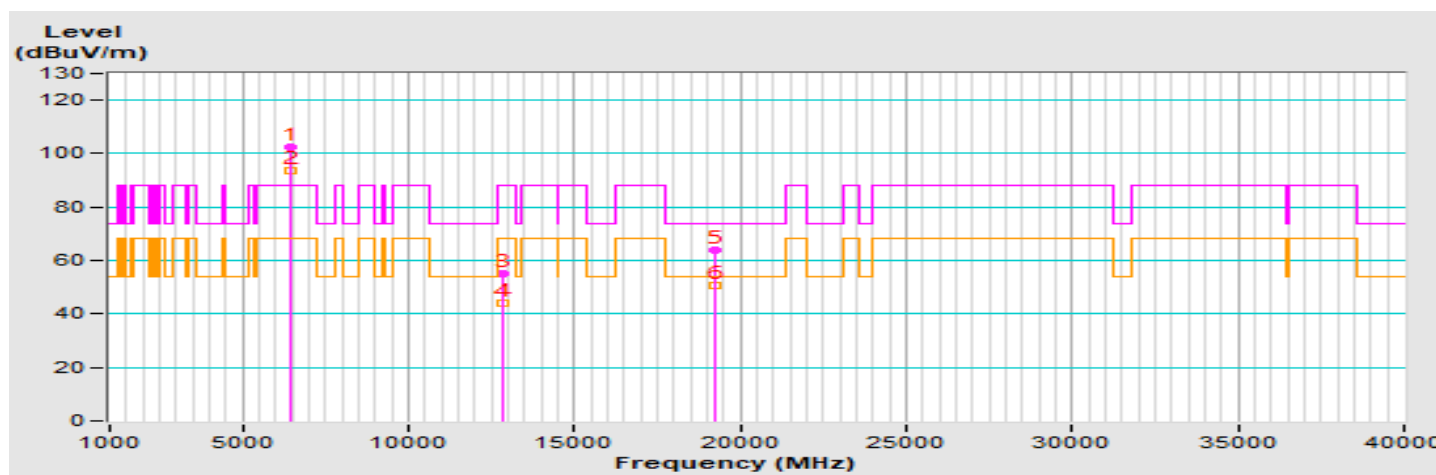


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6425.00        | 102.3 PK                |                |             | 3.44 V             | 71                   | 94.6             | 7.7                      |
| 2                                                  | *6425.00        | 93.6 AV                 |                |             | 3.44 V             | 71                   | 85.9             | 7.7                      |
| 3                                                  | #12850.00       | 55.2 PK                 | 88.2           | -33.0       | 3.11 V             | 87                   | 39.6             | 15.6                     |
| 4                                                  | #12850.00       | 44.3 AV                 | 68.2           | -23.9       | 3.11 V             | 87                   | 28.7             | 15.6                     |
| 5                                                  | 19275.00        | 63.9 PK                 | 74.0           | -10.1       | 3.01 V             | 57                   | 68.1             | -4.2                     |
| 6                                                  | 19275.00        | 50.5 AV                 | 54.0           | -3.5        | 3.01 V             | 57                   | 54.7             | -4.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT320) | Channel                       | CH 127 : 6585 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 19.5                                                                 |

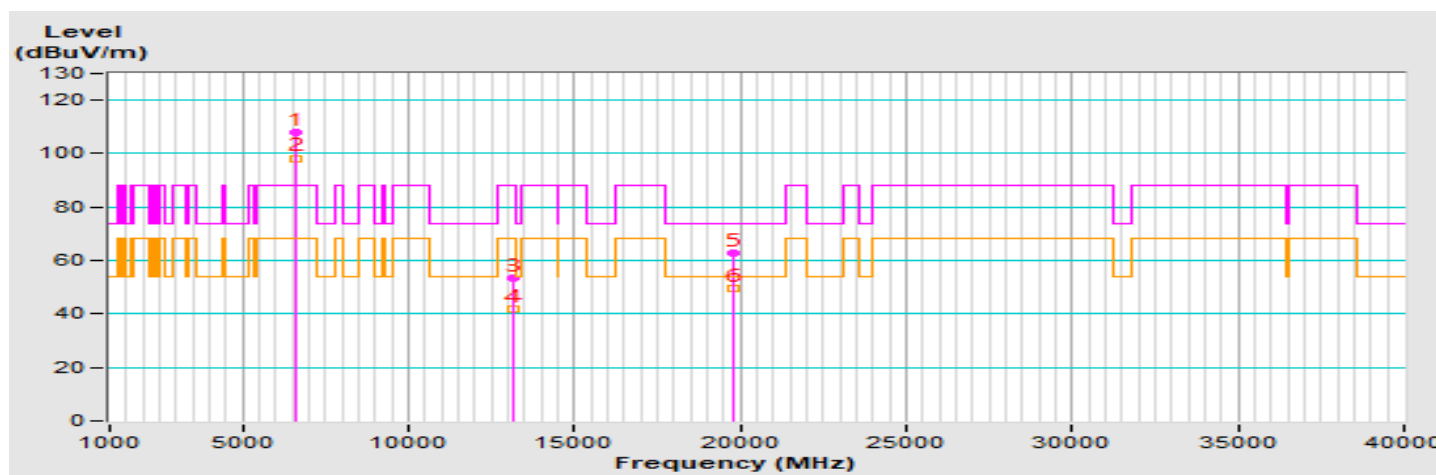


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1                                                    | *6585.00        | 107.7 PK                |                |             | 2.17 H             | 292                  | 99.0             | 8.7                      |
| 2                                                    | *6585.00        | 98.3 AV                 |                |             | 2.17 H             | 292                  | 89.6             | 8.7                      |
| 3                                                    | #13170.00       | 53.6 PK                 | 88.2           | -34.6       | 2.88 H             | 173                  | 37.5             | 16.1                     |
| 4                                                    | #13170.00       | 41.7 AV                 | 68.2           | -26.5       | 2.88 H             | 173                  | 25.6             | 16.1                     |
| 5                                                    | 19755.00        | 62.7 PK                 | 74.0           | -11.3       | 2.65 H             | 205                  | 66.7             | -4.0                     |
| 6                                                    | 19755.00        | 49.4 AV                 | 54.0           | -4.6        | 2.65 H             | 205                  | 53.4             | -4.0                     |

#### Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT320) | Channel                       | CH 127 : 6585 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 19.5                                                                 |

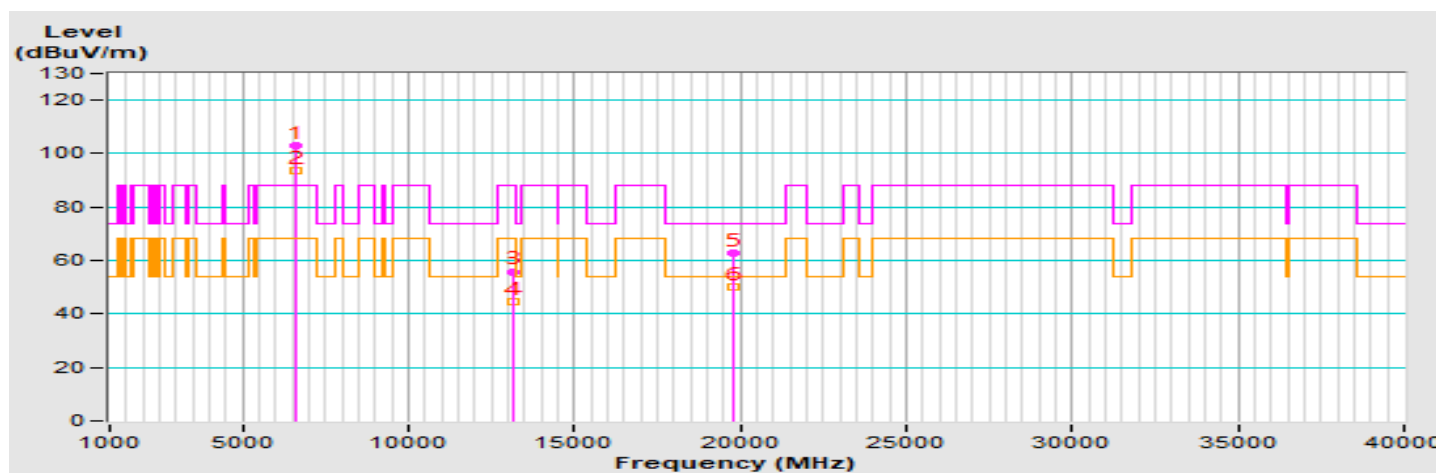


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6585.00        | 102.9 PK                |                |             | 3.44 V             | 74                   | 94.2             | 8.7                      |
| 2                                                  | *6585.00        | 93.5 AV                 |                |             | 3.44 V             | 74                   | 84.8             | 8.7                      |
| 3                                                  | #13170.00       | 55.9 PK                 | 88.2           | -32.3       | 3.08 V             | 78                   | 39.8             | 16.1                     |
| 4                                                  | #13170.00       | 44.8 AV                 | 68.2           | -23.4       | 3.08 V             | 78                   | 28.7             | 16.1                     |
| 5                                                  | 19755.00        | 62.8 PK                 | 74.0           | -11.2       | 3.13 V             | 92                   | 66.8             | -4.0                     |
| 6                                                  | 19755.00        | 49.9 AV                 | 54.0           | -4.1        | 3.13 V             | 92                   | 53.9             | -4.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT320) | Channel                       | CH 159 : 6745 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 19.5                                                                 |

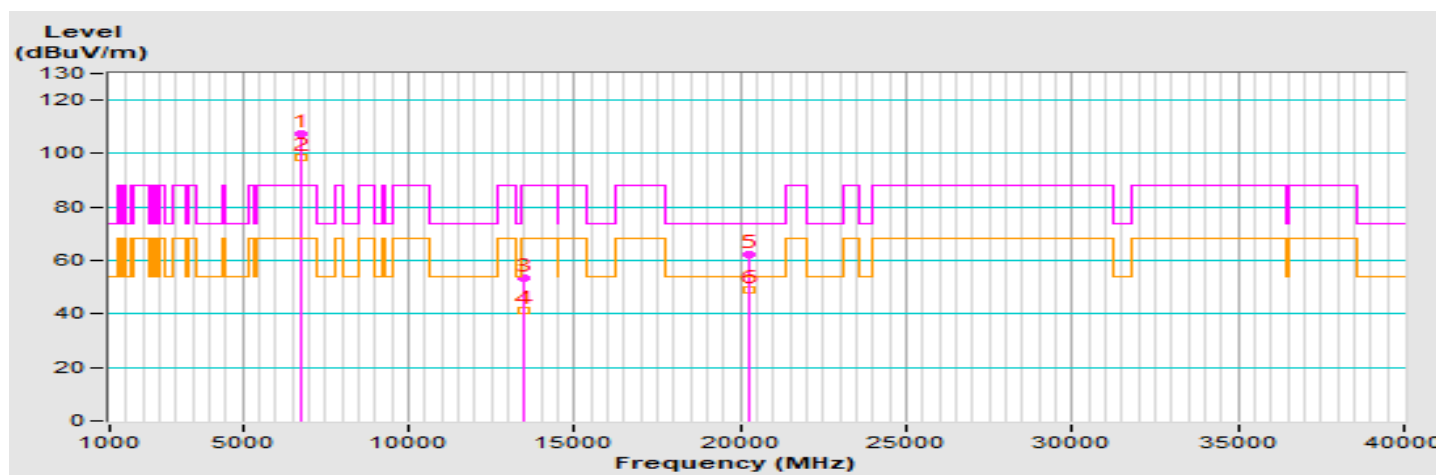


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6745.00        | 107.6 PK                |                |             | 2.72 H             | 294                  | 98.8             | 8.8                      |
| 2                                                    | *6745.00        | 98.7 AV                 |                |             | 2.72 H             | 294                  | 89.9             | 8.8                      |
| 3                                                    | #13490.00       | 53.4 PK                 | 88.2           | -34.8       | 2.87 H             | 179                  | 35.1             | 18.3                     |
| 4                                                    | #13490.00       | 41.5 AV                 | 68.2           | -26.7       | 2.87 H             | 179                  | 23.2             | 18.3                     |
| 5                                                    | 20235.00        | 62.4 PK                 | 74.0           | -11.6       | 2.60 H             | 199                  | 65.7             | -3.3                     |
| 6                                                    | 20235.00        | 48.9 AV                 | 54.0           | -5.1        | 2.60 H             | 199                  | 52.2             | -3.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT320) | Channel                       | CH 159 : 6745 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 19.5                                                                 |


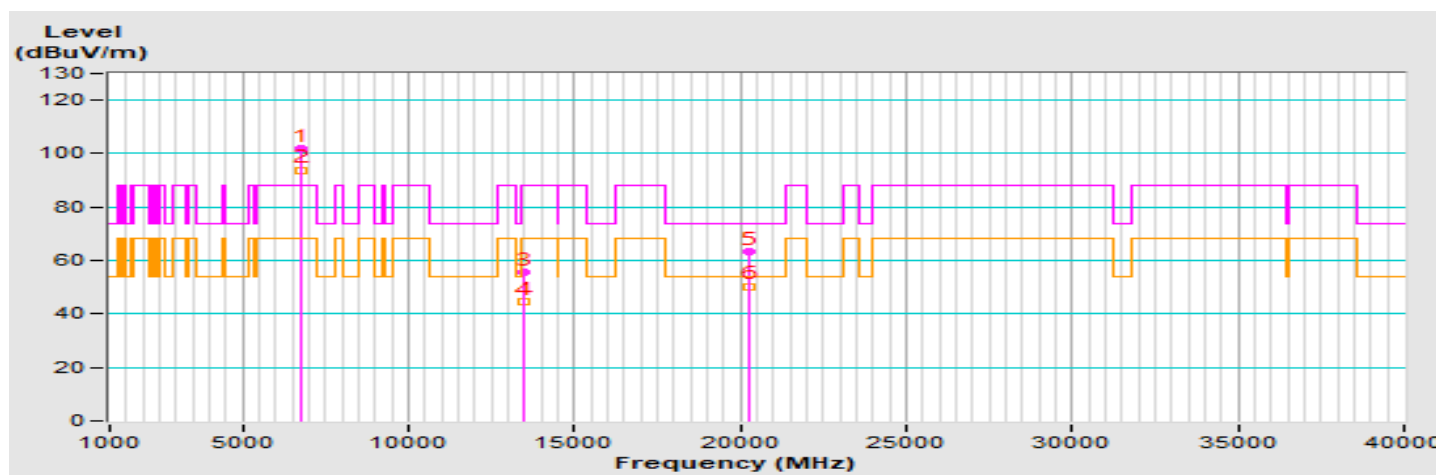


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6745.00        | 101.9 PK                |                |             | 3.24 V             | 123                  | 93.1             | 8.8                      |
| 2                                                  | *6745.00        | 93.9 AV                 |                |             | 3.24 V             | 123                  | 85.1             | 8.8                      |
| 3                                                  | #13490.00       | 55.4 PK                 | 88.2           | -32.8       | 3.14 V             | 79                   | 37.1             | 18.3                     |
| 4                                                  | #13490.00       | 44.4 AV                 | 68.2           | -23.8       | 3.14 V             | 79                   | 26.1             | 18.3                     |
| 5                                                  | 20235.00        | 63.3 PK                 | 74.0           | -10.7       | 3.14 V             | 99                   | 66.6             | -3.3                     |
| 6                                                  | 20235.00        | 50.4 AV                 | 54.0           | -3.6        | 3.14 V             | 99                   | 53.7             | -3.3                     |


#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT320) | Channel                       | CH 191 : 6905 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 18.5                                                                 |

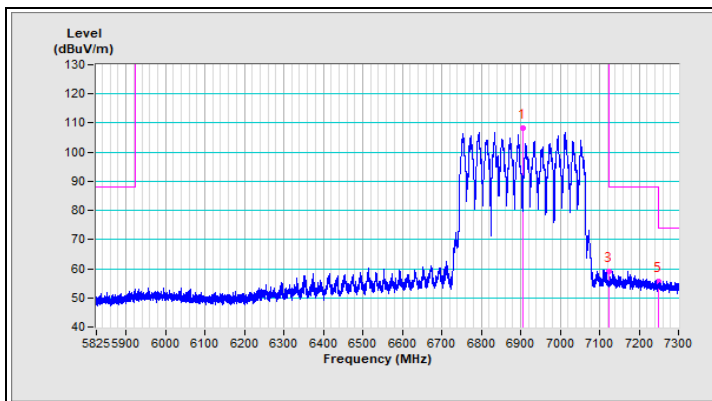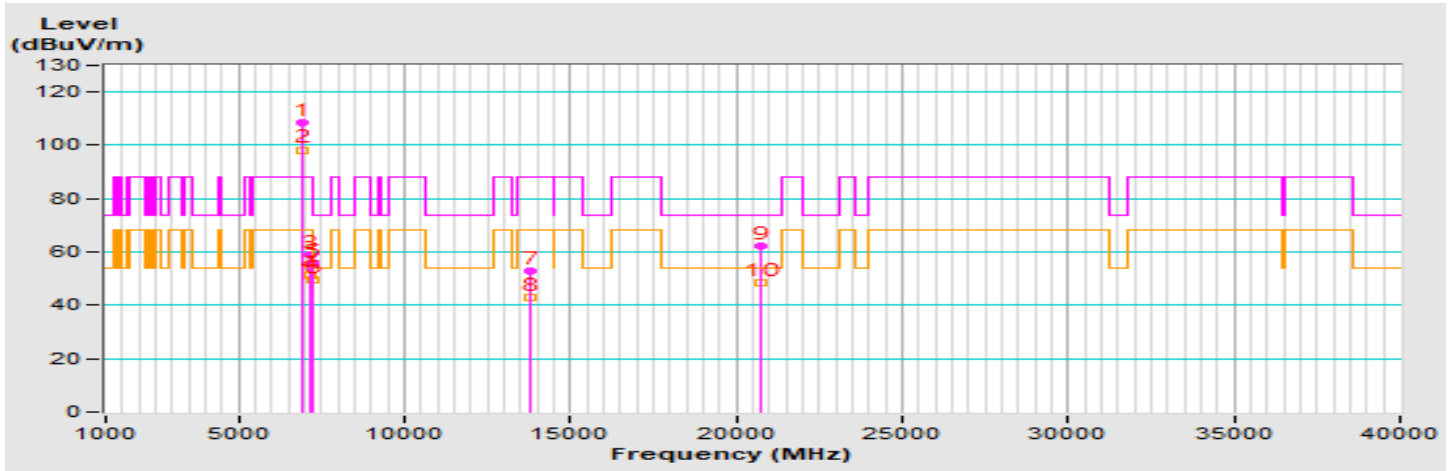

Horizontal (Peak)

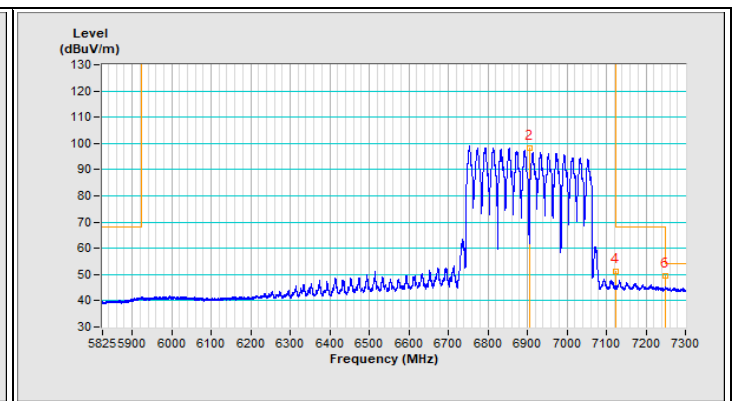



Horizontal (Average)

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6905.00        | 108.4 PK                |                |             | 2.21 H             | 291                  | 99.1             | 9.3                      |
| 2                                                    | *6905.00        | 98.3 AV                 |                |             | 2.21 H             | 291                  | 89.0             | 9.3                      |
| 3                                                    | #7125.00        | 59.0 PK                 | 88.2           | -29.2       | 2.21 H             | 291                  | 48.1             | 10.9                     |
| 4                                                    | #7125.00        | 51.3 AV                 | 68.2           | -16.9       | 2.21 H             | 291                  | 40.4             | 10.9                     |
| 5                                                    | 7250.00         | 55.7 PK                 | 74.0           | -18.3       | 2.21 H             | 291                  | 44.9             | 10.8                     |
| 6                                                    | 7250.00         | 49.4 AV                 | 54.0           | -4.6        | 2.21 H             | 291                  | 38.6             | 10.8                     |
| 7                                                    | #13810.00       | 53.1 PK                 | 88.2           | -35.1       | 2.88 H             | 216                  | 34.7             | 18.4                     |
| 8                                                    | #13810.00       | 42.7 AV                 | 68.2           | -25.5       | 2.88 H             | 216                  | 24.3             | 18.4                     |
| 9                                                    | 20715.00        | 62.1 PK                 | 74.0           | -11.9       | 2.65 H             | 187                  | 65.0             | -2.9                     |
| 10                                                   | 20715.00        | 48.7 AV                 | 54.0           | -5.3        | 2.65 H             | 187                  | 51.6             | -2.9                     |


**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                   |                               |                                                                      |
|-----------------|-------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT320) | Channel                       | CH 191 : 6905 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz    | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz    | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu           | Power Setting                 | 18.5                                                                 |

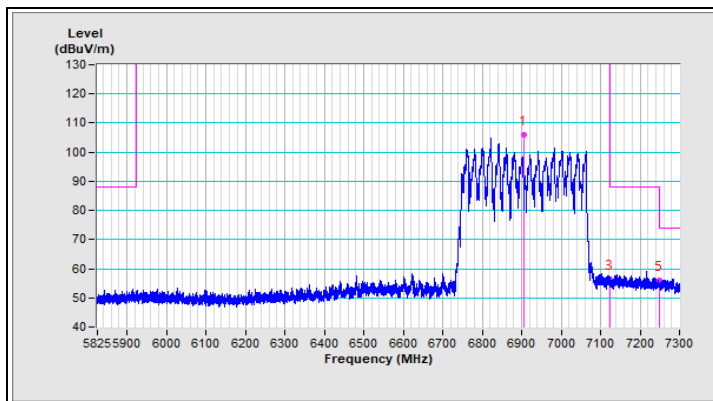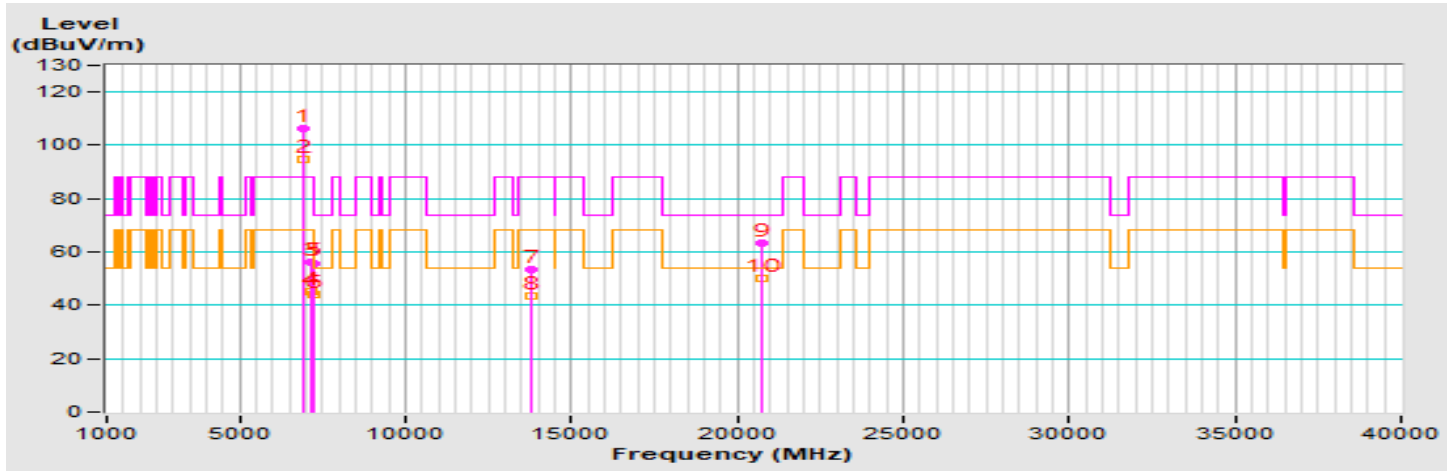

Vertical (Peak)

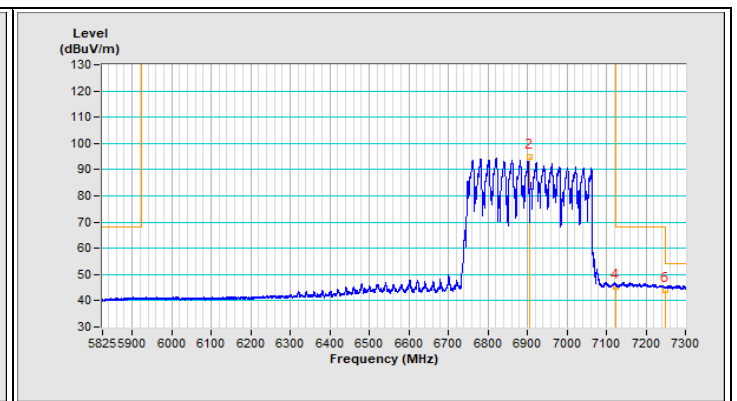

Vertical (Average)



| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6905.00        | 106.1 PK                |                |             | 2.79 V             | 122                  | 96.8             | 9.3                      |
| 2                                                  | *6905.00        | 94.9 AV                 |                |             | 2.79 V             | 122                  | 85.6             | 9.3                      |
| 3                                                  | #7125.00        | 56.4 PK                 | 88.2           | -31.8       | 2.79 V             | 122                  | 45.5             | 10.9                     |
| 4                                                  | #7125.00        | 45.3 AV                 | 68.2           | -22.9       | 2.79 V             | 122                  | 34.4             | 10.9                     |
| 5                                                  | 7250.00         | 55.9 PK                 | 74.0           | -18.1       | 2.79 V             | 122                  | 45.1             | 10.8                     |
| 6                                                  | 7250.00         | 43.9 AV                 | 54.0           | -10.1       | 2.79 V             | 122                  | 33.1             | 10.8                     |
| 7                                                  | #13810.00       | 53.6 PK                 | 88.2           | -34.6       | 3.07 V             | 77                   | 35.2             | 18.4                     |
| 8                                                  | #13810.00       | 43.4 AV                 | 68.2           | -24.8       | 3.07 V             | 77                   | 25.0             | 18.4                     |
| 9                                                  | 20715.00        | 63.2 PK                 | 74.0           | -10.8       | 3.09 V             | 112                  | 66.1             | -2.9                     |
| 10                                                 | 20715.00        | 50.3 AV                 | 54.0           | -3.7        | 3.09 V             | 112                  | 53.2             | -2.9                     |

#### Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

## Beamforming Mode

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 1 : 5955 MHz                                                      |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 30                                                                   |

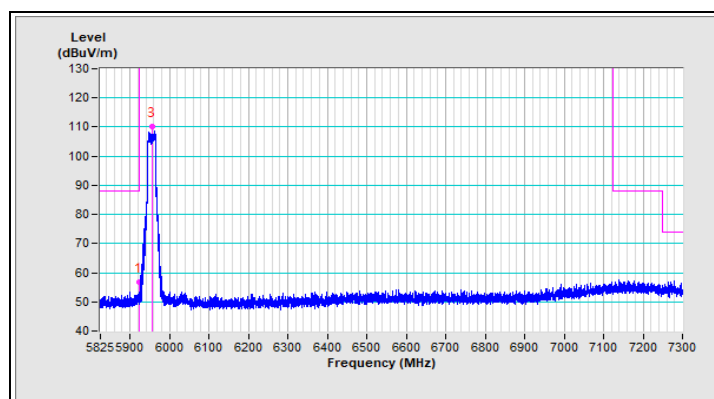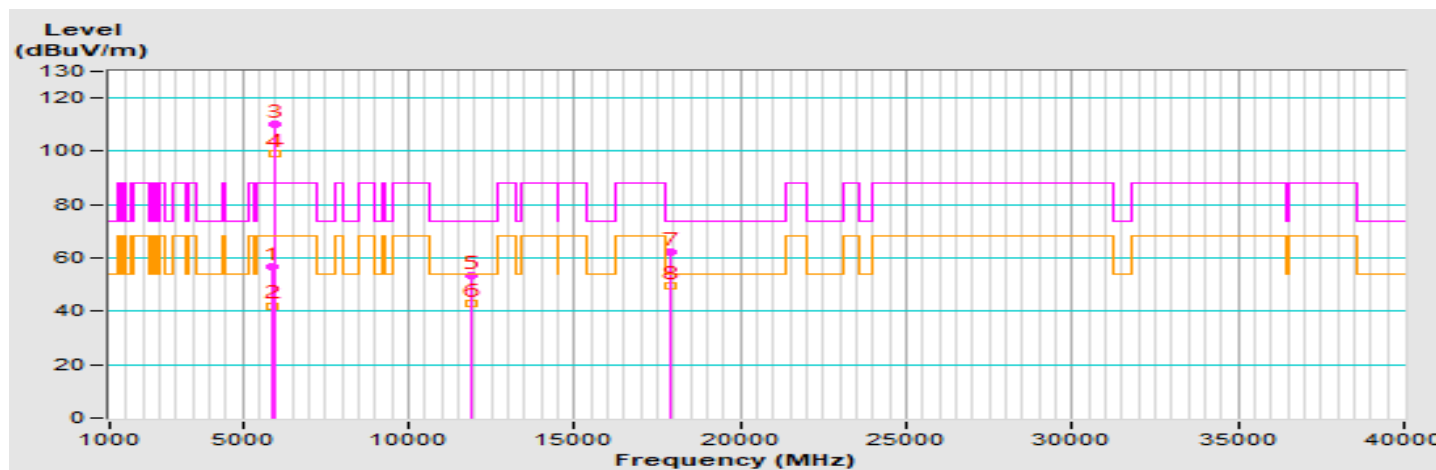

Horizontal (Peak)

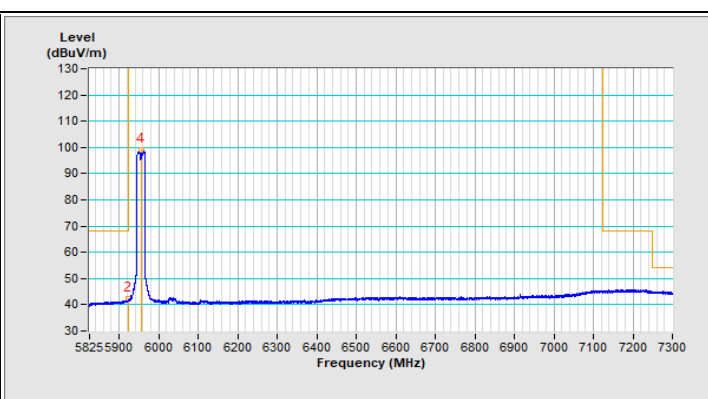



Horizontal (Average)

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5925.00        | 56.6 PK                 | 88.2           | -31.6       | 2.66 H             | 264                  | 50.3             | 6.3                      |
| 2                                                    | #5925.00        | 42.1 AV                 | 68.2           | -26.1       | 2.66 H             | 264                  | 35.8             | 6.3                      |
| 3                                                    | *5955.00        | 110.1 PK                |                |             | 2.66 H             | 264                  | 103.9            | 6.2                      |
| 4                                                    | *5955.00        | 98.9 AV                 |                |             | 2.66 H             | 264                  | 92.7             | 6.2                      |
| 5                                                    | 11910.00        | 53.2 PK                 | 74.0           | -20.8       | 2.95 H             | 206                  | 37.8             | 15.4                     |
| 6                                                    | 11910.00        | 42.9 AV                 | 54.0           | -11.1       | 2.95 H             | 206                  | 27.5             | 15.4                     |
| 7                                                    | 17865.00        | 62.1 PK                 | 74.0           | -11.9       | 2.64 H             | 223                  | 34.3             | 27.8                     |
| 8                                                    | 17865.00        | 49.6 AV                 | 54.0           | -4.4        | 2.64 H             | 223                  | 21.8             | 27.8                     |


### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 25 °C, 75% RH                                                        |
| <b>Tested By</b>       | Tank Wu          | <b>Power Setting</b>                     | 30                                                                   |

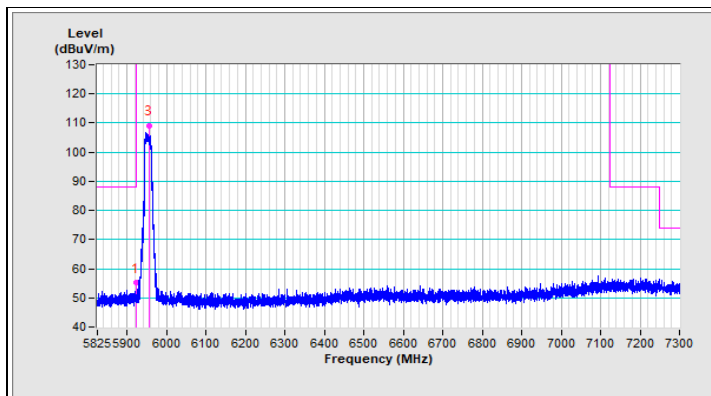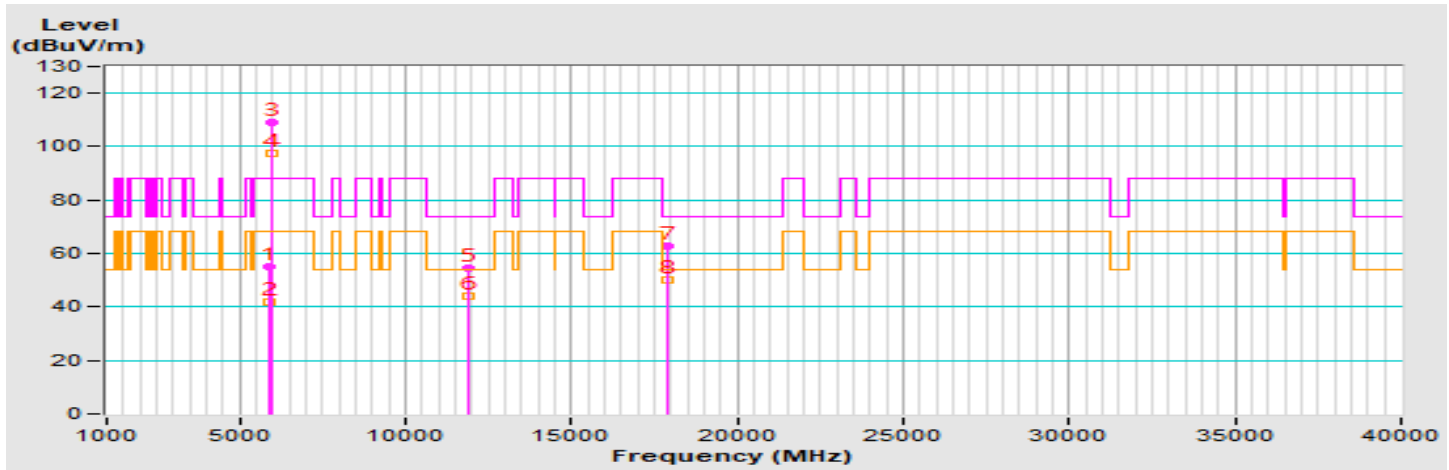

Vertical (Peak)

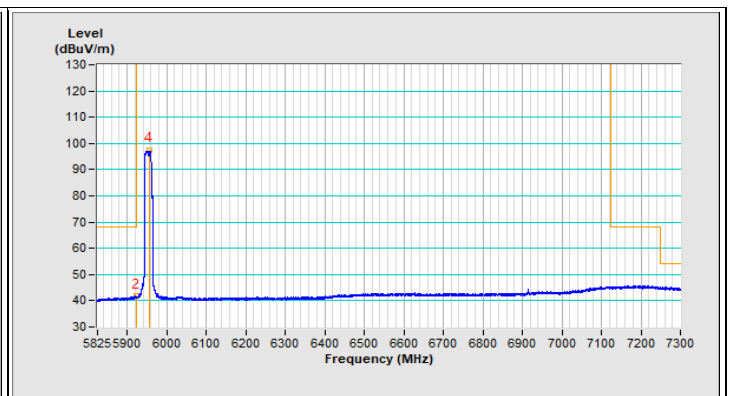


Vertical (Average)

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5925.00        | 55.1 PK                 | 88.2           | -33.1       | 1.69 V             | 114                  | 48.8             | 6.3                      |
| 2                                                  | #5925.00        | 41.7 AV                 | 68.2           | -26.5       | 1.69 V             | 114                  | 35.4             | 6.3                      |
| 3                                                  | *5955.00        | 109.2 PK                |                |             | 1.69 V             | 114                  | 103.0            | 6.2                      |
| 4                                                  | *5955.00        | 97.5 AV                 |                |             | 1.69 V             | 114                  | 91.3             | 6.2                      |
| 5                                                  | 11910.00        | 54.3 PK                 | 74.0           | -19.7       | 3.09 V             | 83                   | 38.9             | 15.4                     |
| 6                                                  | 11910.00        | 43.8 AV                 | 54.0           | -10.2       | 3.09 V             | 83                   | 28.4             | 15.4                     |
| 7                                                  | 17865.00        | 62.6 PK                 | 74.0           | -11.4       | 2.99 V             | 111                  | 34.8             | 27.8                     |
| 8                                                  | 17865.00        | 49.9 AV                 | 54.0           | -4.1        | 2.99 V             | 111                  | 22.1             | 27.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 45 : 6175 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 31                                                                   |

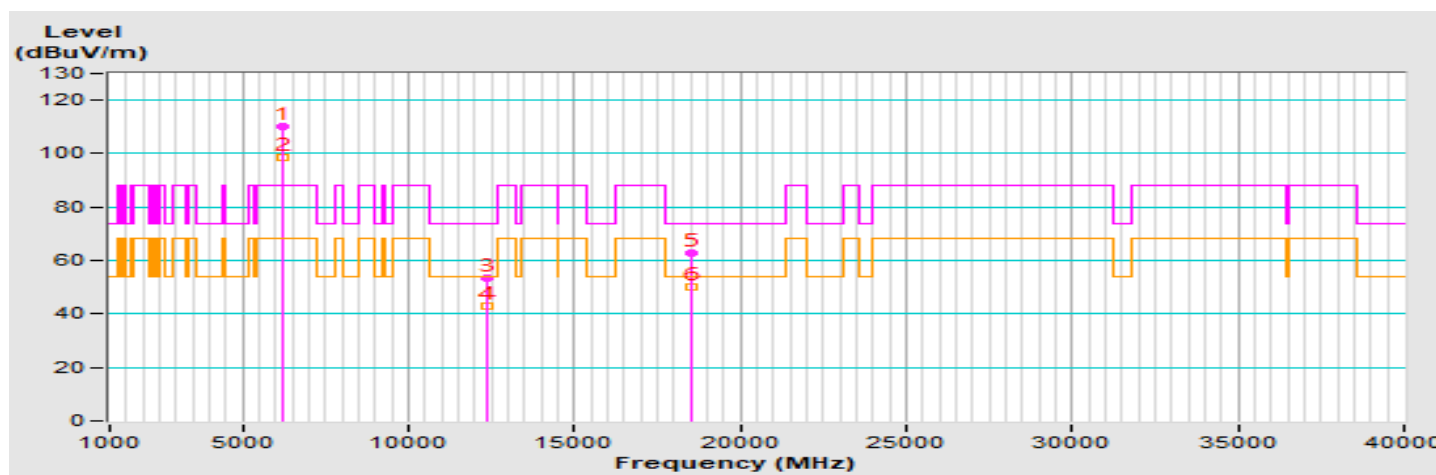


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6175.00        | 110.3 PK                |                |             | 2.17 H             | 281                  | 103.7            | 6.6                      |
| 2                                                    | *6175.00        | 98.6 AV                 |                |             | 2.17 H             | 281                  | 92.0             | 6.6                      |
| 3                                                    | 12350.00        | 53.4 PK                 | 74.0           | -20.6       | 2.85 H             | 207                  | 38.3             | 15.1                     |
| 4                                                    | 12350.00        | 42.8 AV                 | 54.0           | -11.2       | 2.85 H             | 207                  | 27.7             | 15.1                     |
| 5                                                    | 18525.00        | 62.8 PK                 | 74.0           | -11.2       | 2.60 H             | 245                  | 67.7             | -4.9                     |
| 6                                                    | 18525.00        | 50.0 AV                 | 54.0           | -4.0        | 2.60 H             | 245                  | 54.9             | -4.9                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 45 : 6175 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 31                                                                   |

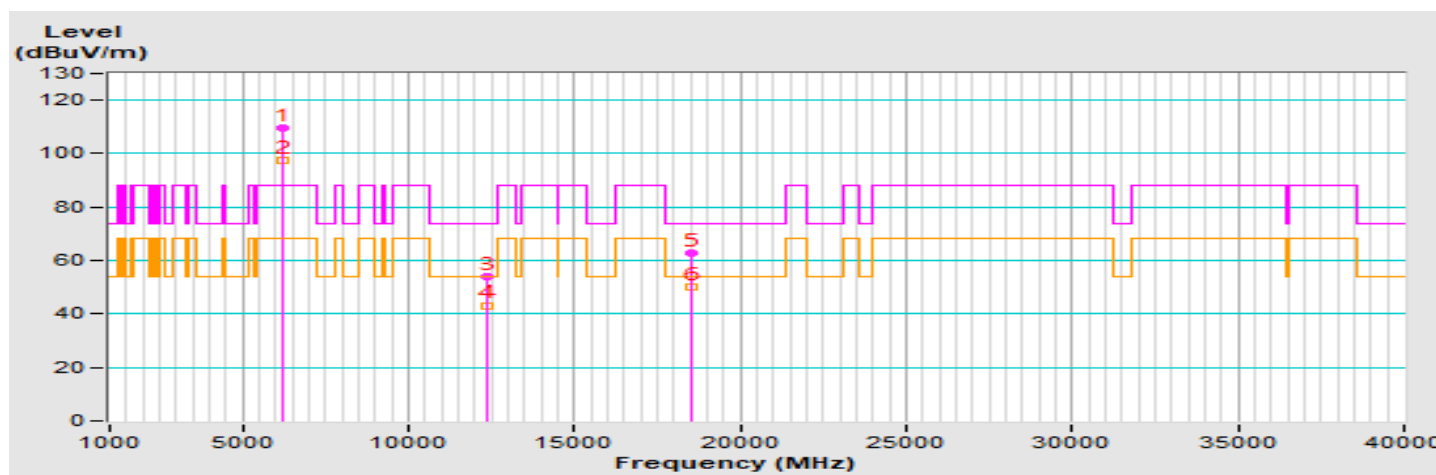


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6175.00        | 109.6 PK                |                |             | 2.31 V             | 78                   | 103.0            | 6.6                      |
| 2                                                  | *6175.00        | 97.3 AV                 |                |             | 2.31 V             | 78                   | 90.7             | 6.6                      |
| 3                                                  | 12350.00        | 53.9 PK                 | 74.0           | -20.1       | 3.09 V             | 98                   | 38.8             | 15.1                     |
| 4                                                  | 12350.00        | 43.2 AV                 | 54.0           | -10.8       | 3.09 V             | 98                   | 28.1             | 15.1                     |
| 5                                                  | 18525.00        | 62.7 PK                 | 74.0           | -11.3       | 2.99 V             | 112                  | 67.6             | -4.9                     |
| 6                                                  | 18525.00        | 50.1 AV                 | 54.0           | -3.9        | 2.99 V             | 112                  | 55.0             | -4.9                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 93 : 6415 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 31                                                                   |

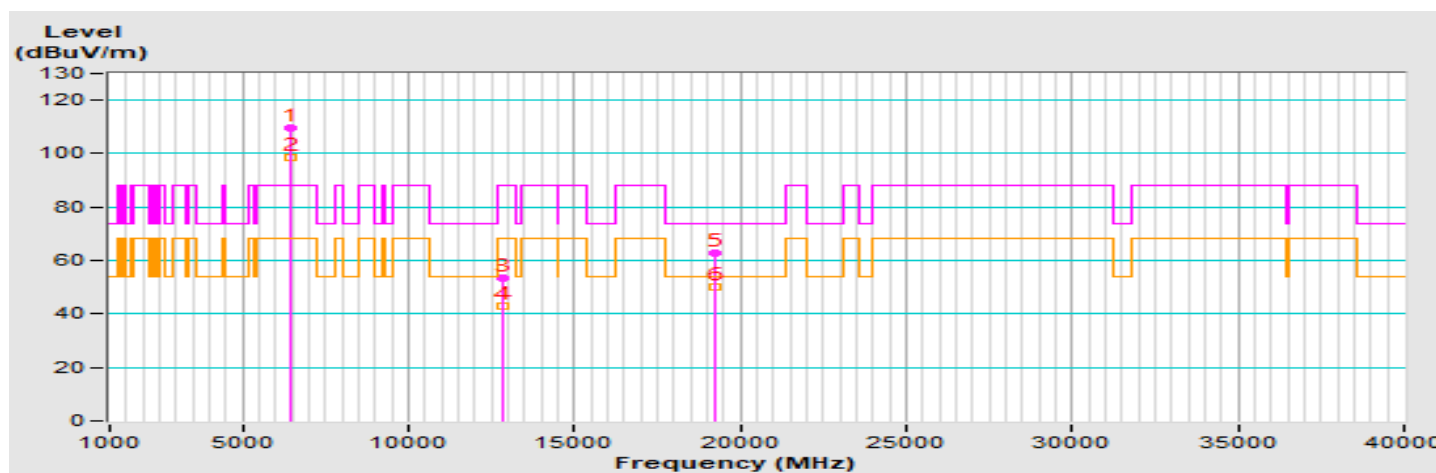


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1                                                    | *6415.00        | 109.8 PK                |                |             | 2.17 H             | 297                  | 102.2            | 7.6                      |
| 2                                                    | *6415.00        | 98.8 AV                 |                |             | 2.17 H             | 297                  | 91.2             | 7.6                      |
| 3                                                    | #12830.00       | 53.2 PK                 | 88.2           | -35.0       | 2.95 H             | 192                  | 37.6             | 15.6                     |
| 4                                                    | #12830.00       | 42.8 AV                 | 68.2           | -25.4       | 2.95 H             | 192                  | 27.2             | 15.6                     |
| 5                                                    | 19245.00        | 62.6 PK                 | 74.0           | -11.4       | 2.53 H             | 248                  | 66.9             | -4.3                     |
| 6                                                    | 19245.00        | 49.9 AV                 | 54.0           | -4.1        | 2.53 H             | 248                  | 54.2             | -4.3                     |

#### Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 93 : 6415 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 31                                                                   |

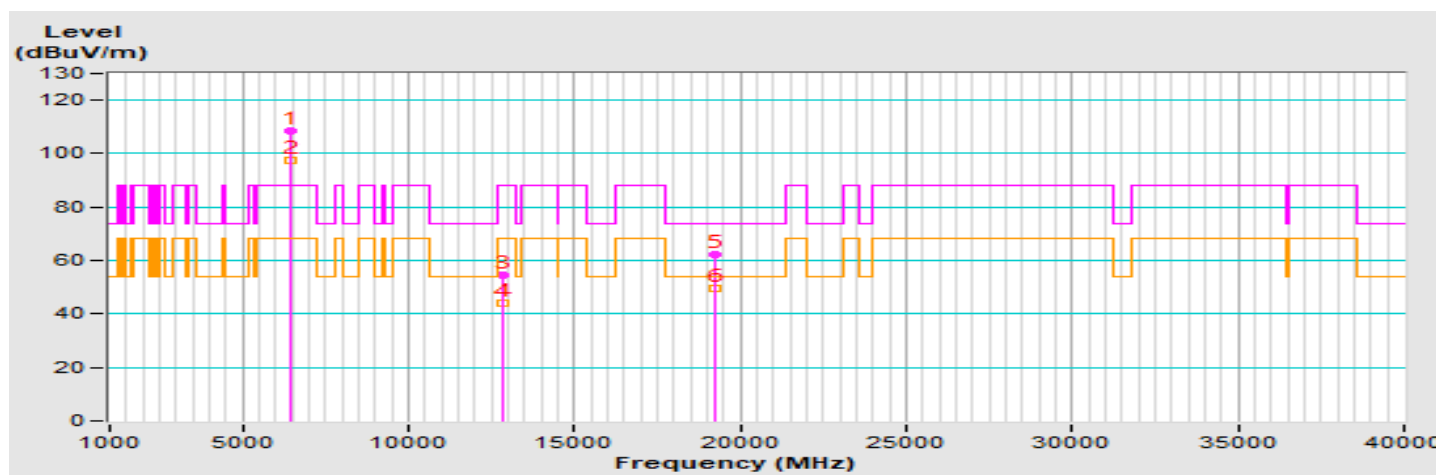


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6415.00        | 108.4 PK                |                |             | 2.82 V             | 73                   | 100.8            | 7.6                      |
| 2                                                  | *6415.00        | 97.5 AV                 |                |             | 2.82 V             | 73                   | 89.9             | 7.6                      |
| 3                                                  | #12830.00       | 54.3 PK                 | 88.2           | -33.9       | 3.16 V             | 71                   | 38.7             | 15.6                     |
| 4                                                  | #12830.00       | 44.1 AV                 | 68.2           | -24.1       | 3.16 V             | 71                   | 28.5             | 15.6                     |
| 5                                                  | 19245.00        | 62.3 PK                 | 74.0           | -11.7       | 3.05 V             | 107                  | 66.6             | -4.3                     |
| 6                                                  | 19245.00        | 49.8 AV                 | 54.0           | -4.2        | 3.05 V             | 107                  | 54.1             | -4.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 97 : 6435 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 27                                                                   |

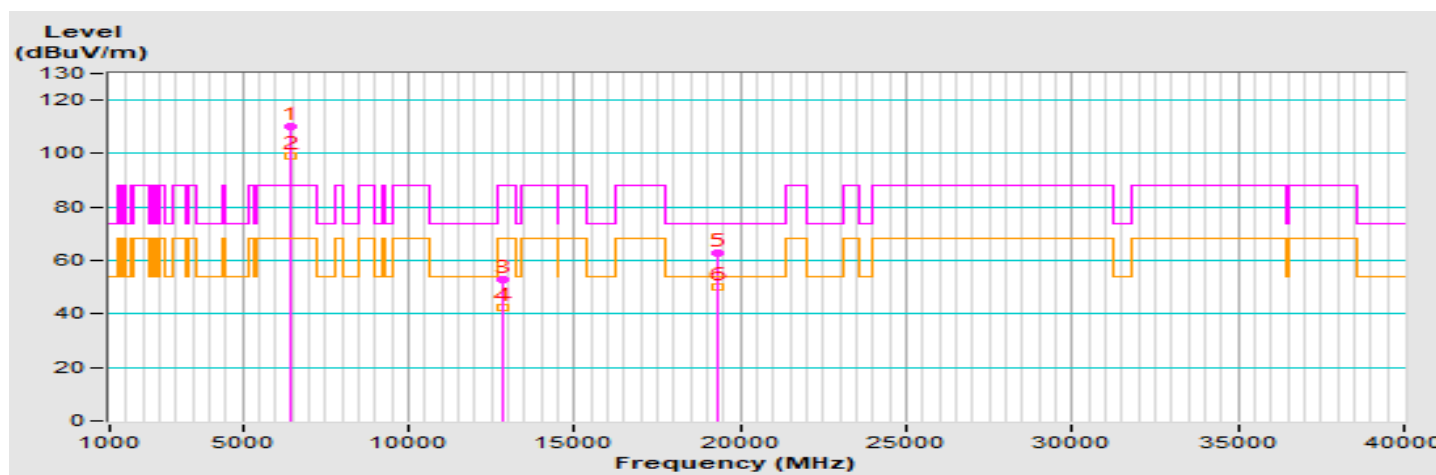


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6435.00        | 110.3 PK                |                |             | 2.14 H             | 295                  | 102.5            | 7.8                      |
| 2                                                    | *6435.00        | 98.9 AV                 |                |             | 2.14 H             | 295                  | 91.1             | 7.8                      |
| 3                                                    | #12870.00       | 53.1 PK                 | 88.2           | -35.1       | 2.79 H             | 182                  | 37.4             | 15.7                     |
| 4                                                    | #12870.00       | 42.5 AV                 | 68.2           | -25.7       | 2.79 H             | 182                  | 26.8             | 15.7                     |
| 5                                                    | 19305.00        | 62.6 PK                 | 74.0           | -11.4       | 2.59 H             | 245                  | 66.6             | -4.0                     |
| 6                                                    | 19305.00        | 49.9 AV                 | 54.0           | -4.1        | 2.59 H             | 245                  | 53.9             | -4.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 97 : 6435 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 27                                                                   |

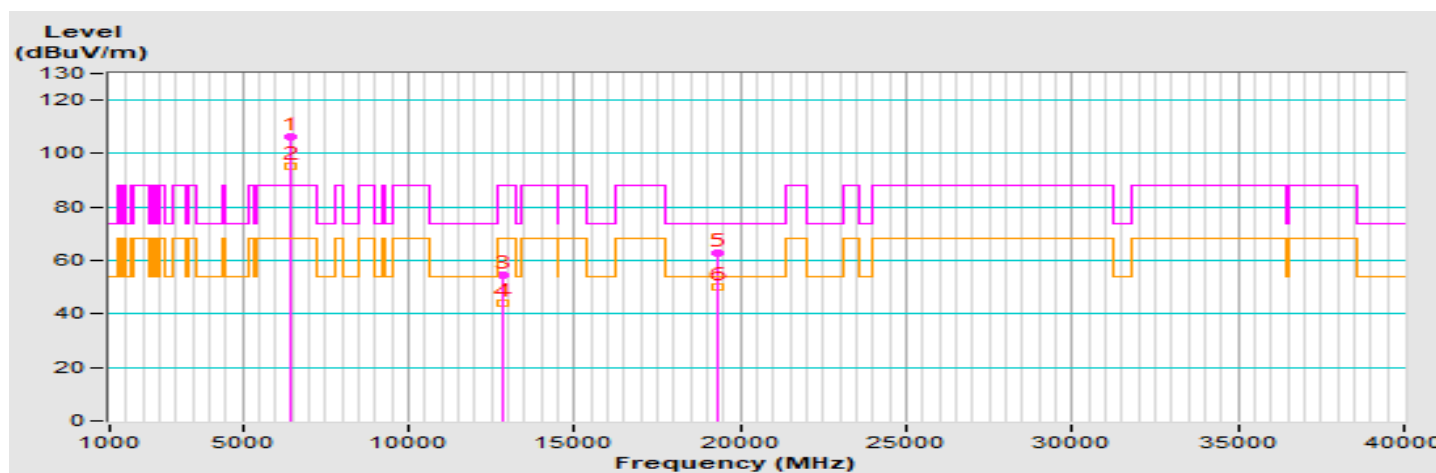


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6435.00        | 106.1 PK                |                |             | 2.71 V             | 76                   | 98.3             | 7.8                      |
| 2                                                  | *6435.00        | 95.1 AV                 |                |             | 2.71 V             | 76                   | 87.3             | 7.8                      |
| 3                                                  | #12870.00       | 54.5 PK                 | 88.2           | -33.7       | 3.10 V             | 47                   | 38.8             | 15.7                     |
| 4                                                  | #12870.00       | 44.1 AV                 | 68.2           | -24.1       | 3.10 V             | 47                   | 28.4             | 15.7                     |
| 5                                                  | 19305.00        | 62.6 PK                 | 74.0           | -11.4       | 3.01 V             | 84                   | 66.6             | -4.0                     |
| 6                                                  | 19305.00        | 50.1 AV                 | 54.0           | -3.9        | 3.01 V             | 84                   | 54.1             | -4.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 105 : 6475 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 27                                                                   |

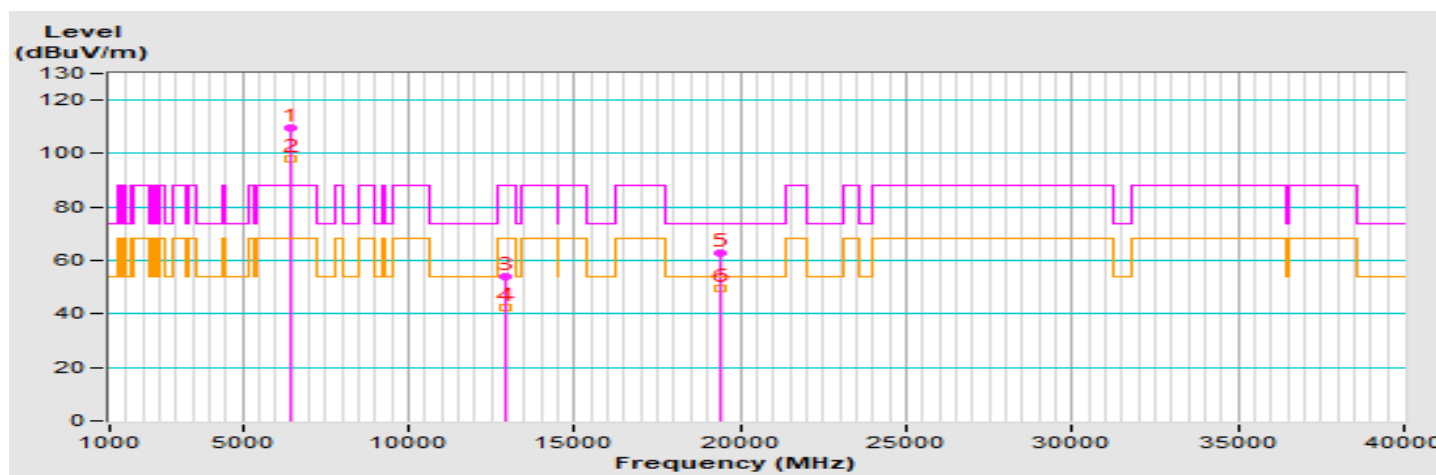


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1                                                    | *6475.00        | 109.7 PK                |                |             | 2.25 H             | 296                  | 101.6            | 8.1                      |
| 2                                                    | *6475.00        | 98.1 AV                 |                |             | 2.25 H             | 296                  | 90.0             | 8.1                      |
| 3                                                    | #12950.00       | 53.8 PK                 | 88.2           | -34.4       | 2.86 H             | 169                  | 38.3             | 15.5                     |
| 4                                                    | #12950.00       | 42.5 AV                 | 68.2           | -25.7       | 2.86 H             | 169                  | 27.0             | 15.5                     |
| 5                                                    | 19425.00        | 62.6 PK                 | 74.0           | -11.4       | 2.68 H             | 237                  | 66.1             | -3.5                     |
| 6                                                    | 19425.00        | 49.7 AV                 | 54.0           | -4.3        | 2.68 H             | 237                  | 53.2             | -3.5                     |

#### Remarks:

- Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- \* \*: Fundamental frequency, the limit was restricted at the RF Output Power.
- # #: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 105 : 6475 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 27                                                                   |

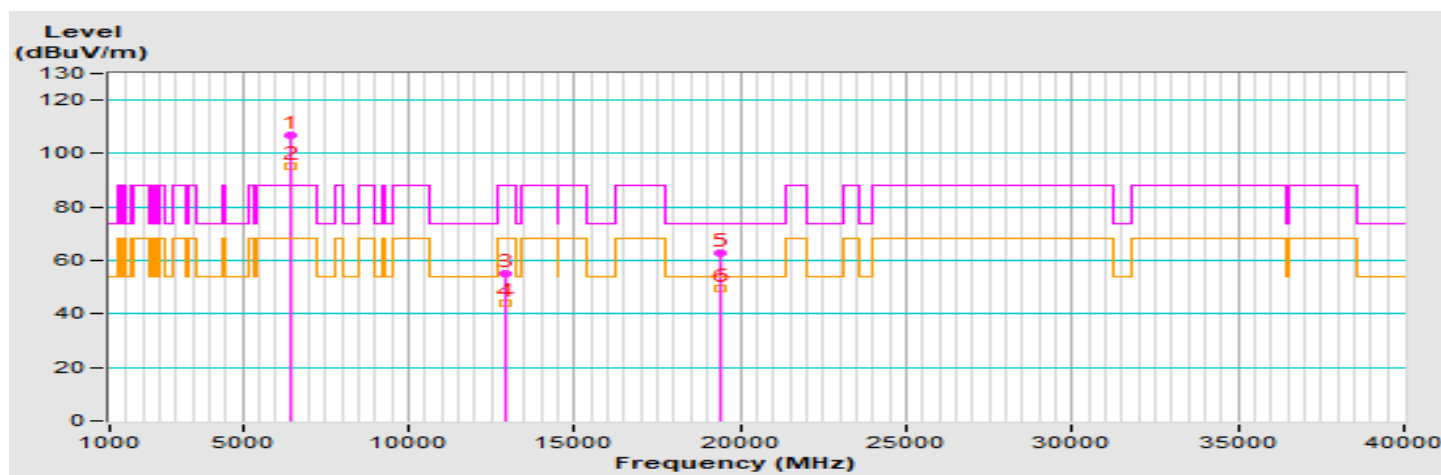


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6475.00        | 106.8 PK                |                |             | 2.64 V             | 77                   | 98.7             | 8.1                      |
| 2                                                  | *6475.00        | 95.2 AV                 |                |             | 2.64 V             | 77                   | 87.1             | 8.1                      |
| 3                                                  | #12950.00       | 54.9 PK                 | 88.2           | -33.3       | 3.09 V             | 48                   | 39.4             | 15.5                     |
| 4                                                  | #12950.00       | 44.1 AV                 | 68.2           | -24.1       | 3.09 V             | 48                   | 28.6             | 15.5                     |
| 5                                                  | 19425.00        | 62.6 PK                 | 74.0           | -11.4       | 3.00 V             | 95                   | 66.1             | -3.5                     |
| 6                                                  | 19425.00        | 49.7 AV                 | 54.0           | -4.3        | 3.00 V             | 95                   | 53.2             | -3.5                     |

#### Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- \* \*: Fundamental frequency, the limit was restricted at the RF Output Power.
- # #: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 113 : 6515 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 25                                                                   |

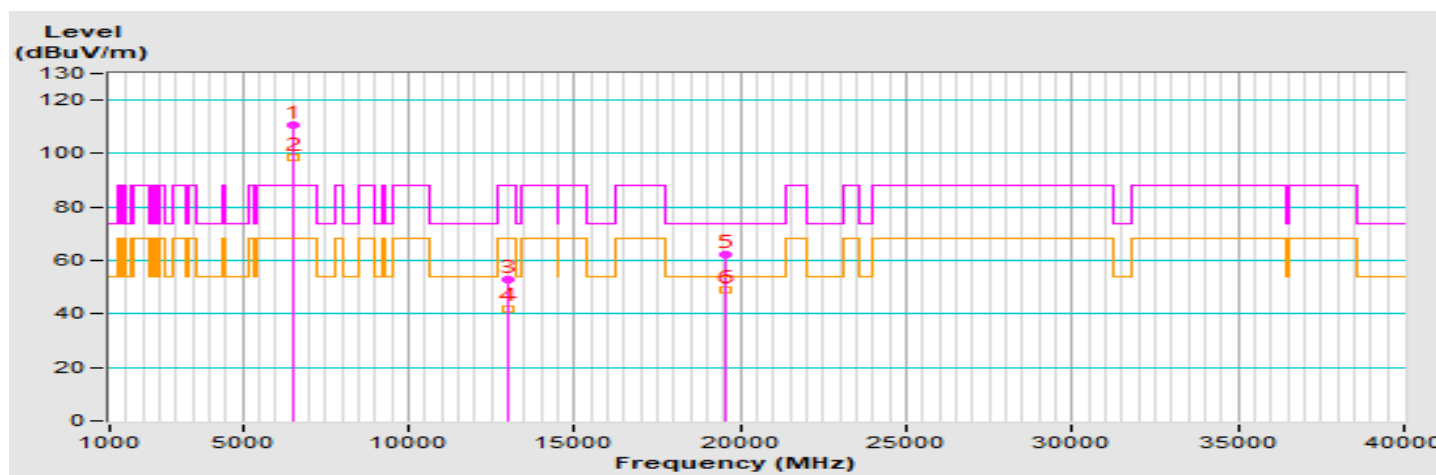


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1                                                    | *6515.00        | 110.5 PK                |                |             | 2.16 H             | 299                  | 102.1            | 8.4                      |
| 2                                                    | *6515.00        | 98.5 AV                 |                |             | 2.16 H             | 299                  | 90.1             | 8.4                      |
| 3                                                    | #13030.00       | 53.1 PK                 | 88.2           | -35.1       | 2.93 H             | 157                  | 37.5             | 15.6                     |
| 4                                                    | #13030.00       | 42.1 AV                 | 68.2           | -26.1       | 2.93 H             | 157                  | 26.5             | 15.6                     |
| 5                                                    | 19545.00        | 62.1 PK                 | 74.0           | -11.9       | 2.57 H             | 208                  | 65.5             | -3.4                     |
| 6                                                    | 19545.00        | 49.1 AV                 | 54.0           | -4.9        | 2.57 H             | 208                  | 52.5             | -3.4                     |

#### Remarks:

- Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- \* \*: Fundamental frequency, the limit was restricted at the RF Output Power.
- # #: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 113 : 6515 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 25                                                                   |

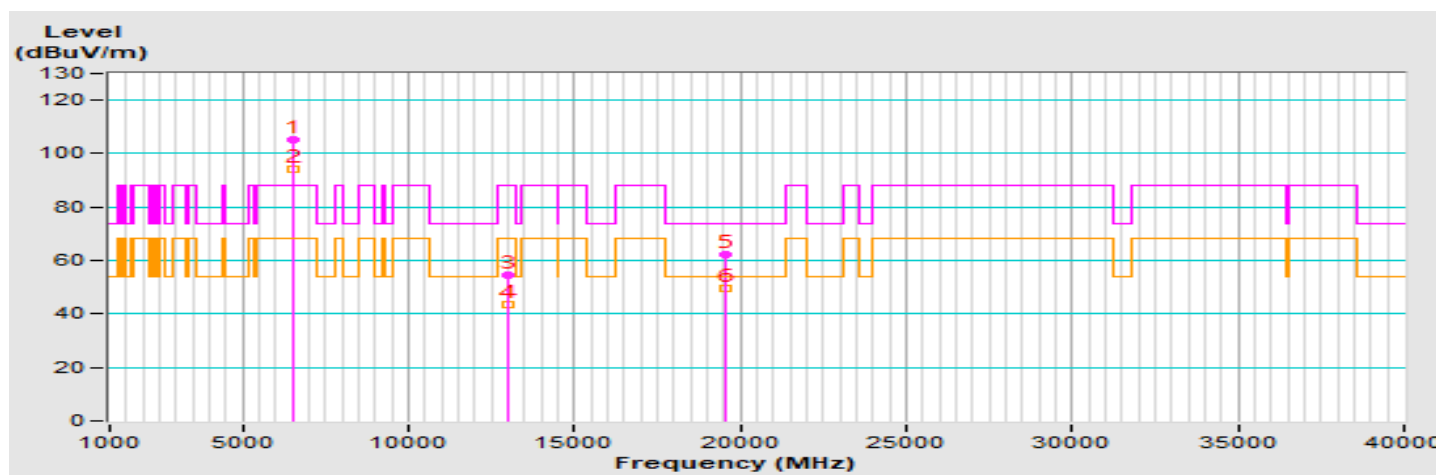


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6515.00        | 105.1 PK                |                |             | 1.70 V             | 83                   | 96.7             | 8.4                      |
| 2                                                  | *6515.00        | 94.2 AV                 |                |             | 1.70 V             | 83                   | 85.8             | 8.4                      |
| 3                                                  | #13030.00       | 54.5 PK                 | 88.2           | -33.7       | 3.04 V             | 68                   | 38.9             | 15.6                     |
| 4                                                  | #13030.00       | 43.7 AV                 | 68.2           | -24.5       | 3.04 V             | 68                   | 28.1             | 15.6                     |
| 5                                                  | 19545.00        | 62.2 PK                 | 74.0           | -11.8       | 3.06 V             | 82                   | 65.6             | -3.4                     |
| 6                                                  | 19545.00        | 49.5 AV                 | 54.0           | -4.5        | 3.06 V             | 82                   | 52.9             | -3.4                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 117 : 6535 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 26                                                                   |

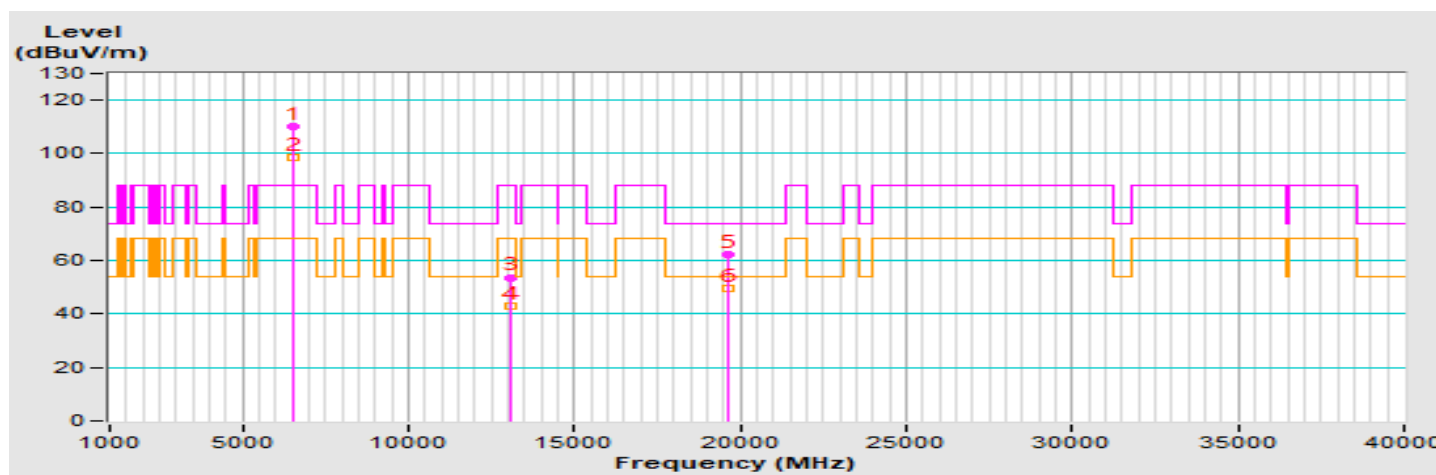


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6535.00        | 110.3 PK                |                |             | 2.18 H             | 303                  | 101.8            | 8.5                      |
| 2                                                    | *6535.00        | 98.7 AV                 |                |             | 2.18 H             | 303                  | 90.2             | 8.5                      |
| 3                                                    | #13070.00       | 53.7 PK                 | 88.2           | -34.5       | 2.94 H             | 155                  | 38.0             | 15.7                     |
| 4                                                    | #13070.00       | 42.8 AV                 | 68.2           | -25.4       | 2.94 H             | 155                  | 27.1             | 15.7                     |
| 5                                                    | 19605.00        | 62.3 PK                 | 74.0           | -11.7       | 2.53 H             | 200                  | 66.0             | -3.7                     |
| 6                                                    | 19605.00        | 49.7 AV                 | 54.0           | -4.3        | 2.53 H             | 200                  | 53.4             | -3.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 117 : 6535 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 26                                                                   |

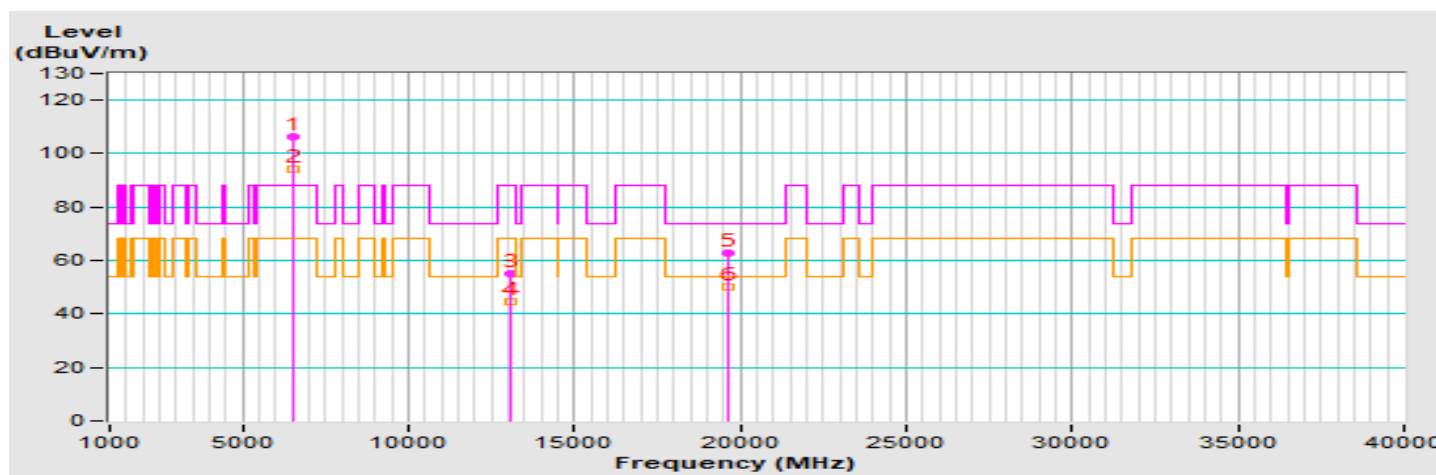


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6535.00        | 106.2 PK                |                |             | 1.72 V             | 81                   | 97.7             | 8.5                      |
| 2                                                  | *6535.00        | 94.4 AV                 |                |             | 1.72 V             | 81                   | 85.9             | 8.5                      |
| 3                                                  | #13070.00       | 55.3 PK                 | 88.2           | -32.9       | 3.15 V             | 66                   | 39.6             | 15.7                     |
| 4                                                  | #13070.00       | 44.8 AV                 | 68.2           | -23.4       | 3.15 V             | 66                   | 29.1             | 15.7                     |
| 5                                                  | 19605.00        | 62.6 PK                 | 74.0           | -11.4       | 3.04 V             | 87                   | 66.3             | -3.7                     |
| 6                                                  | 19605.00        | 50.3 AV                 | 54.0           | -3.7        | 3.04 V             | 87                   | 54.0             | -3.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 149 : 6695 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 29                                                                   |

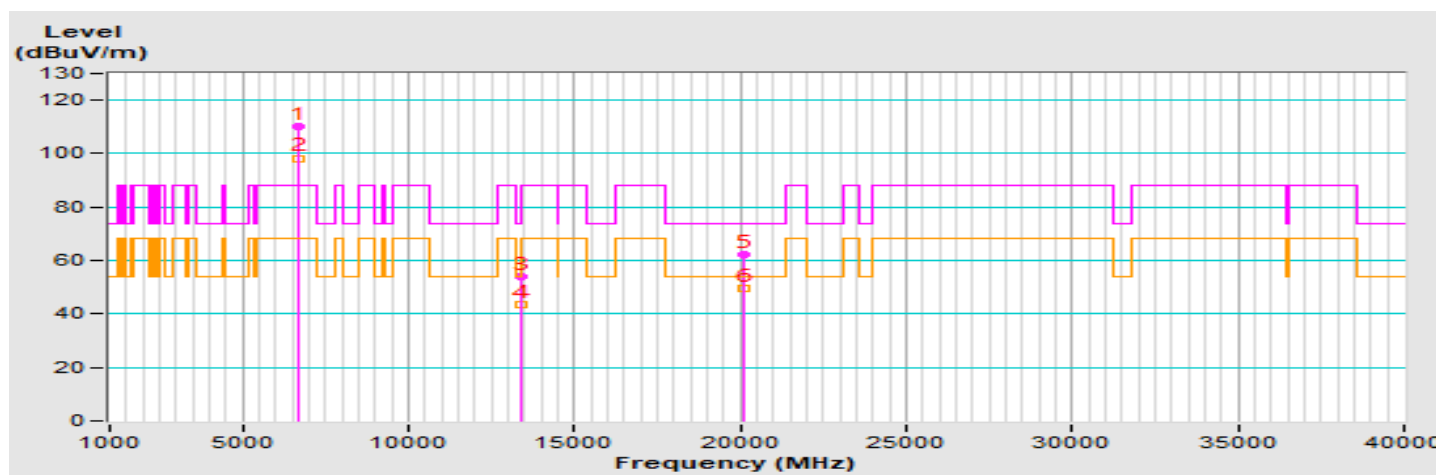


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1                                                    | *6695.00        | 110.3 PK                |                |             | 2.53 H             | 302                  | 101.5            | 8.8                      |
| 2                                                    | *6695.00        | 98.3 AV                 |                |             | 2.53 H             | 302                  | 89.5             | 8.8                      |
| 3                                                    | 13390.00        | 54.2 PK                 | 74.0           | -19.8       | 3.02 H             | 168                  | 36.5             | 17.7                     |
| 4                                                    | 13390.00        | 43.3 AV                 | 54.0           | -10.7       | 3.02 H             | 168                  | 25.6             | 17.7                     |
| 5                                                    | 20085.00        | 62.1 PK                 | 74.0           | -11.9       | 2.59 H             | 216                  | 65.9             | -3.8                     |
| 6                                                    | 20085.00        | 49.7 AV                 | 54.0           | -4.3        | 2.59 H             | 216                  | 53.5             | -3.8                     |

#### Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* ”: Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 149 : 6695 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 29                                                                   |

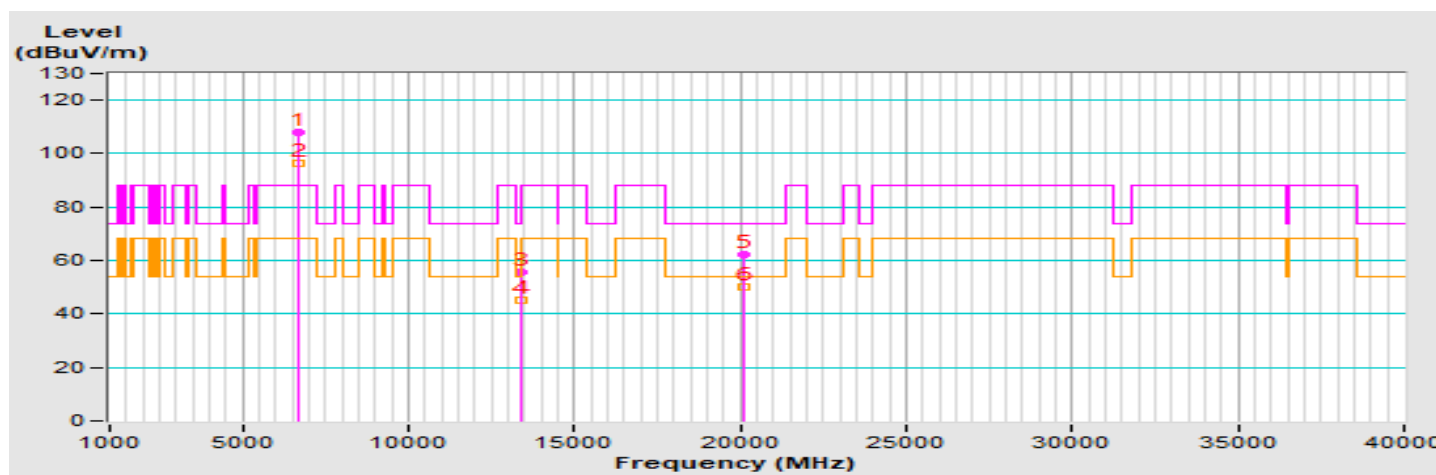


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6695.00        | 107.9 PK                |                |             | 3.41 V             | 77                   | 99.1             | 8.8                      |
| 2                                                  | *6695.00        | 96.5 AV                 |                |             | 3.41 V             | 77                   | 87.7             | 8.8                      |
| 3                                                  | 13390.00        | 55.5 PK                 | 74.0           | -18.5       | 3.09 V             | 57                   | 37.8             | 17.7                     |
| 4                                                  | 13390.00        | 44.9 AV                 | 54.0           | -9.1        | 3.09 V             | 57                   | 27.2             | 17.7                     |
| 5                                                  | 20085.00        | 62.4 PK                 | 74.0           | -11.6       | 3.04 V             | 86                   | 66.2             | -3.8                     |
| 6                                                  | 20085.00        | 49.9 AV                 | 54.0           | -4.1        | 3.04 V             | 86                   | 53.7             | -3.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* ”: Fundamental frequency, the limit was restricted at the RF Output Power.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 181 : 6855 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 29                                                                   |

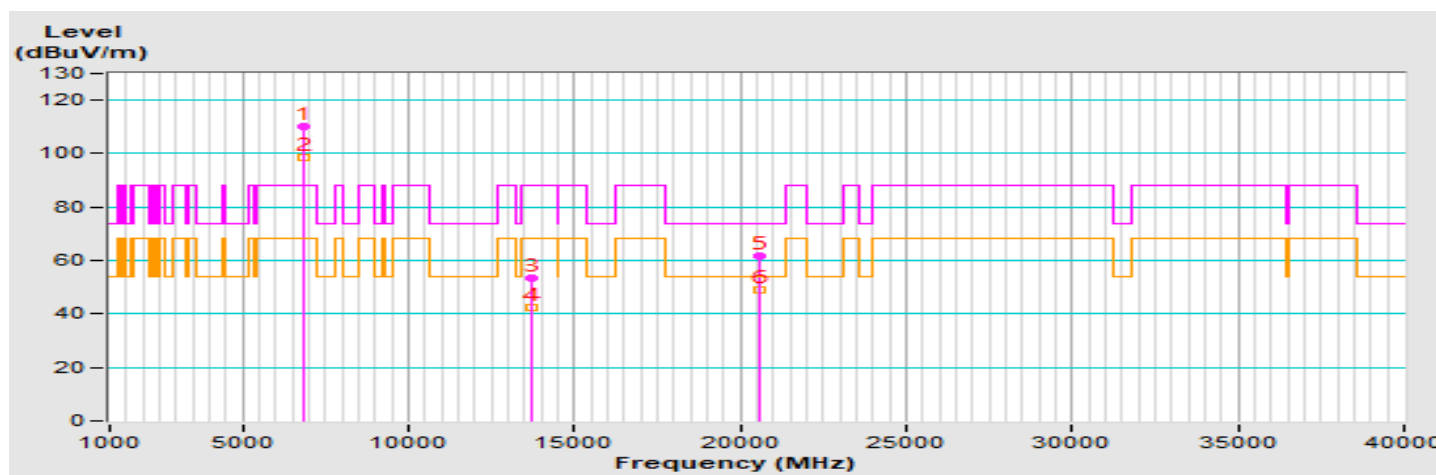


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1                                                    | *6855.00        | 110.1 PK                |                |             | 2.16 H             | 298                  | 100.8            | 9.3                      |
| 2                                                    | *6855.00        | 98.5 AV                 |                |             | 2.16 H             | 298                  | 89.2             | 9.3                      |
| 3                                                    | #13710.00       | 53.5 PK                 | 88.2           | -34.7       | 2.95 H             | 162                  | 35.0             | 18.5                     |
| 4                                                    | #13710.00       | 42.4 AV                 | 68.2           | -25.8       | 2.95 H             | 162                  | 23.9             | 18.5                     |
| 5                                                    | 20565.00        | 61.5 PK                 | 74.0           | -12.5       | 2.62 H             | 202                  | 64.7             | -3.2                     |
| 6                                                    | 20565.00        | 49.2 AV                 | 54.0           | -4.8        | 2.62 H             | 202                  | 52.4             | -3.2                     |

#### Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 181 : 6855 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 29                                                                   |

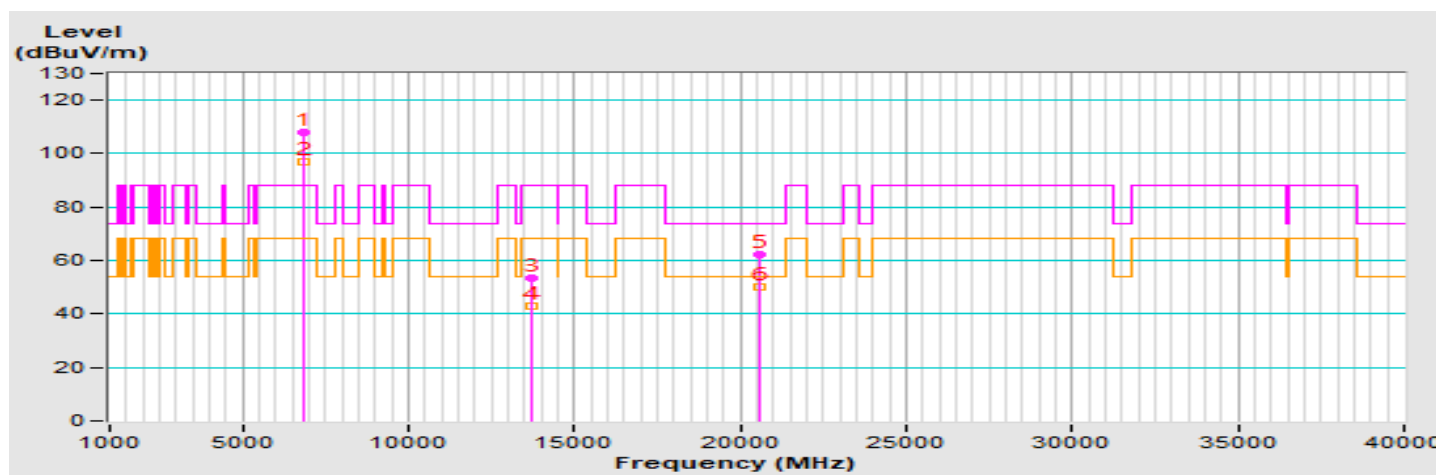


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6855.00        | 107.9 PK                |                |             | 2.82 V             | 77                   | 98.6             | 9.3                      |
| 2                                                  | *6855.00        | 96.9 AV                 |                |             | 2.82 V             | 77                   | 87.6             | 9.3                      |
| 3                                                  | #13710.00       | 53.4 PK                 | 88.2           | -34.8       | 3.12 V             | 91                   | 34.9             | 18.5                     |
| 4                                                  | #13710.00       | 43.1 AV                 | 68.2           | -25.1       | 3.12 V             | 91                   | 24.6             | 18.5                     |
| 5                                                  | 20565.00        | 62.2 PK                 | 74.0           | -11.8       | 3.09 V             | 123                  | 65.4             | -3.2                     |
| 6                                                  | 20565.00        | 49.9 AV                 | 54.0           | -4.1        | 3.09 V             | 123                  | 53.1             | -3.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 185 : 6875 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 31                                                                   |

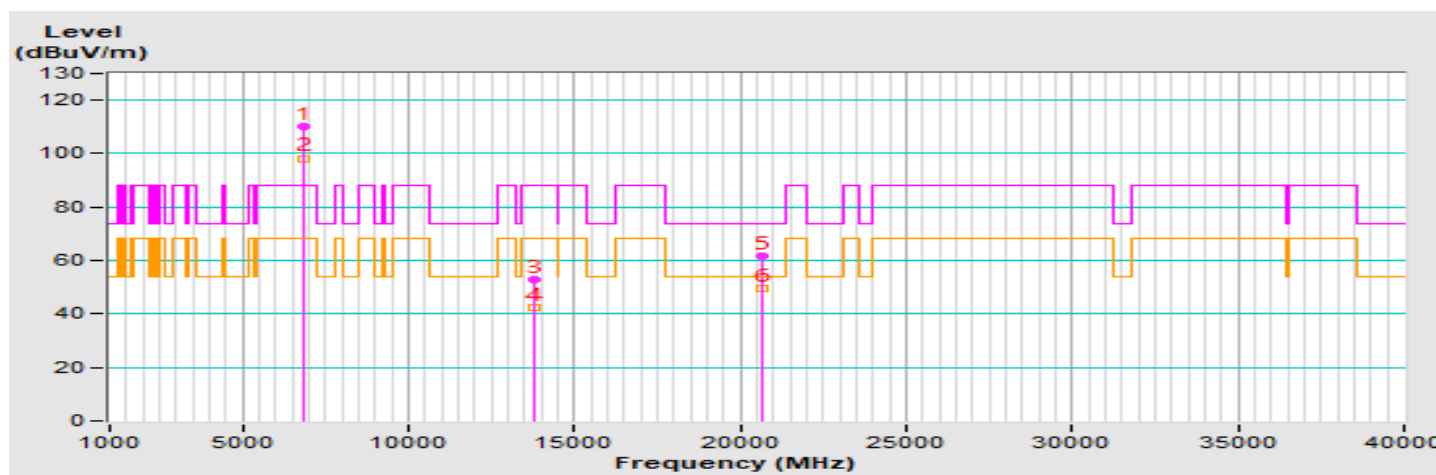


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6875.00        | 110.1 PK                |                |             | 1.61 H             | 335                  | 101.0            | 9.1                      |
| 2                                                    | *6875.00        | 98.3 AV                 |                |             | 1.61 H             | 335                  | 89.2             | 9.1                      |
| 3                                                    | #13750.00       | 53.1 PK                 | 88.2           | -35.1       | 2.95 H             | 152                  | 34.7             | 18.4                     |
| 4                                                    | #13750.00       | 42.4 AV                 | 68.2           | -25.8       | 2.95 H             | 152                  | 24.0             | 18.4                     |
| 5                                                    | 20625.00        | 61.8 PK                 | 74.0           | -12.2       | 2.66 H             | 214                  | 65.0             | -3.2                     |
| 6                                                    | 20625.00        | 49.6 AV                 | 54.0           | -4.4        | 2.66 H             | 214                  | 52.8             | -3.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 185 : 6875 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 31                                                                   |

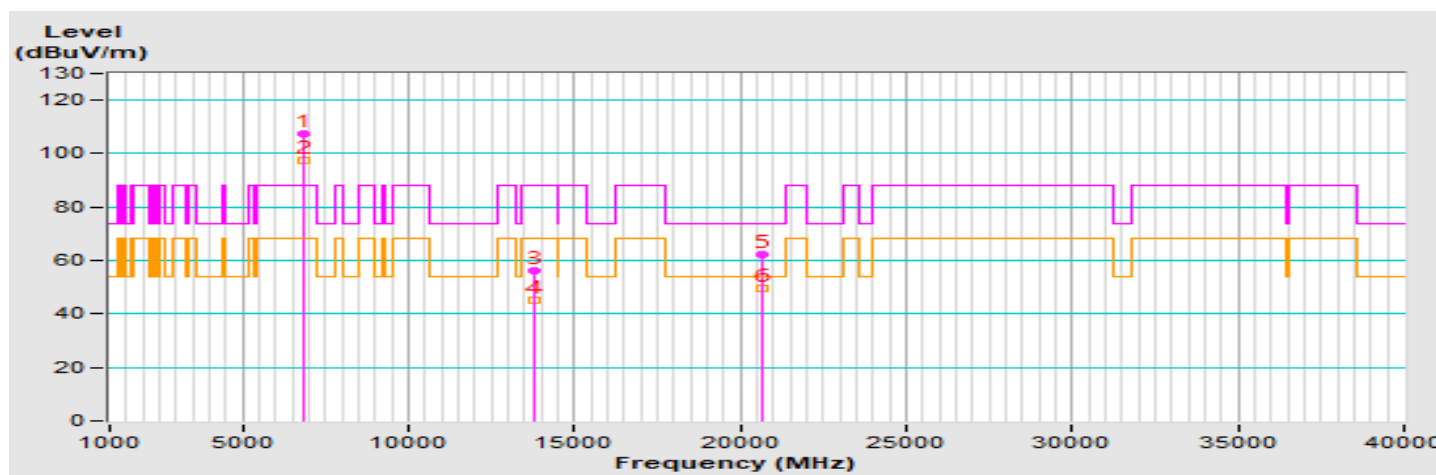


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6875.00        | 107.3 PK                |                |             | 2.89 V             | 73                   | 98.2             | 9.1                      |
| 2                                                  | *6875.00        | 97.5 AV                 |                |             | 2.89 V             | 73                   | 88.4             | 9.1                      |
| 3                                                  | #13750.00       | 56.3 PK                 | 88.2           | -31.9       | 3.05 V             | 34                   | 37.9             | 18.4                     |
| 4                                                  | #13750.00       | 45.1 AV                 | 68.2           | -23.1       | 3.05 V             | 34                   | 26.7             | 18.4                     |
| 5                                                  | 20625.00        | 62.1 PK                 | 74.0           | -11.9       | 2.91 V             | 54                   | 65.3             | -3.2                     |
| 6                                                  | 20625.00        | 49.8 AV                 | 54.0           | -4.2        | 2.91 V             | 54                   | 53.0             | -3.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 209 : 6995 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 31                                                                   |

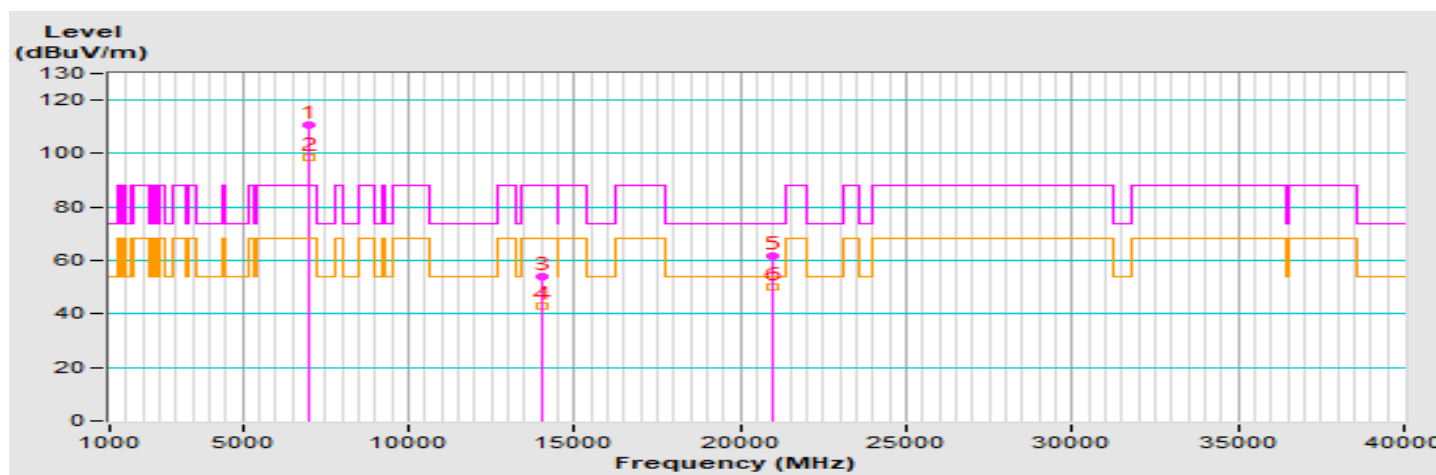


| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *6995.00        | 110.5 PK                |                |             | 1.75 H             | 281                  | 100.6            | 9.9                      |
| 2                                                    | *6995.00        | 98.4 AV                 |                |             | 1.75 H             | 281                  | 88.5             | 9.9                      |
| 3                                                    | #13990.00       | 54.1 PK                 | 88.2           | -34.1       | 3.07 H             | 180                  | 35.0             | 19.1                     |
| 4                                                    | #13990.00       | 42.7 AV                 | 68.2           | -25.5       | 3.07 H             | 180                  | 23.6             | 19.1                     |
| 5                                                    | 20985.00        | 61.9 PK                 | 74.0           | -12.1       | 2.63 H             | 207                  | 64.8             | -2.9                     |
| 6                                                    | 20985.00        | 49.9 AV                 | 54.0           | -4.1        | 2.63 H             | 207                  | 52.8             | -2.9                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 209 : 6995 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 31                                                                   |


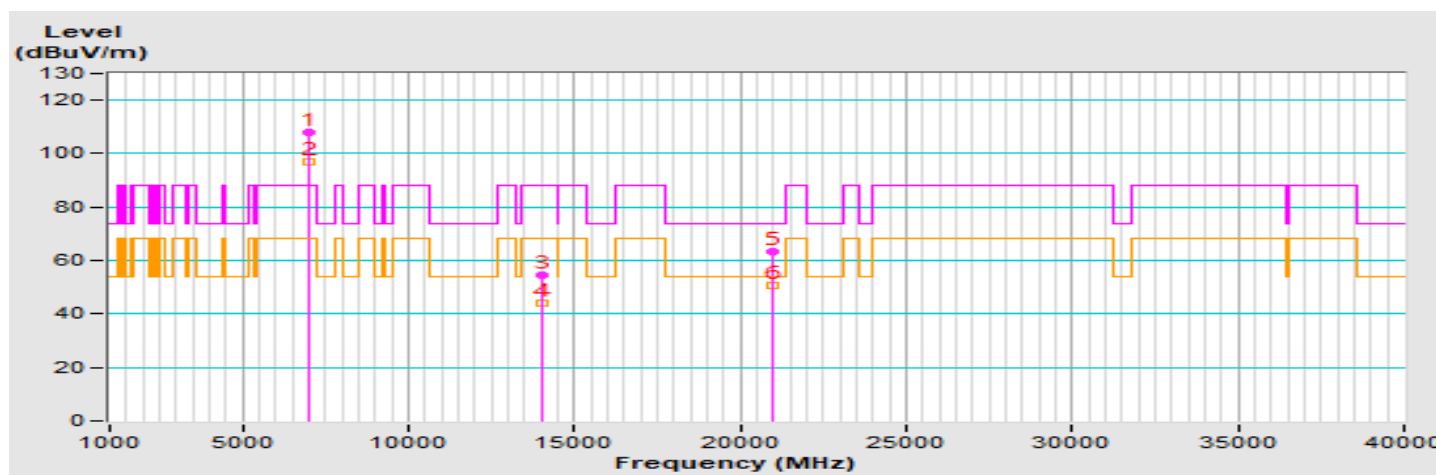


| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *6995.00        | 107.8 PK                |                |             | 3.26 V             | 117                  | 97.9             | 9.9                      |
| 2                                                  | *6995.00        | 96.9 AV                 |                |             | 3.26 V             | 117                  | 87.0             | 9.9                      |
| 3                                                  | #13990.00       | 54.6 PK                 | 88.2           | -33.6       | 3.24 V             | 95                   | 35.5             | 19.1                     |
| 4                                                  | #13990.00       | 43.8 AV                 | 68.2           | -24.4       | 3.24 V             | 95                   | 24.7             | 19.1                     |
| 5                                                  | 20985.00        | 63.4 PK                 | 74.0           | -10.6       | 3.12 V             | 123                  | 66.3             | -2.9                     |
| 6                                                  | 20985.00        | 50.5 AV                 | 54.0           | -3.5        | 3.12 V             | 123                  | 53.4             | -2.9                     |


#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 233 : 7115 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 15                                                                   |

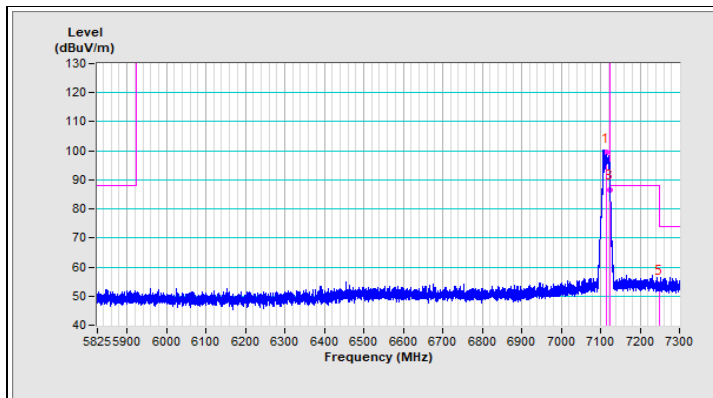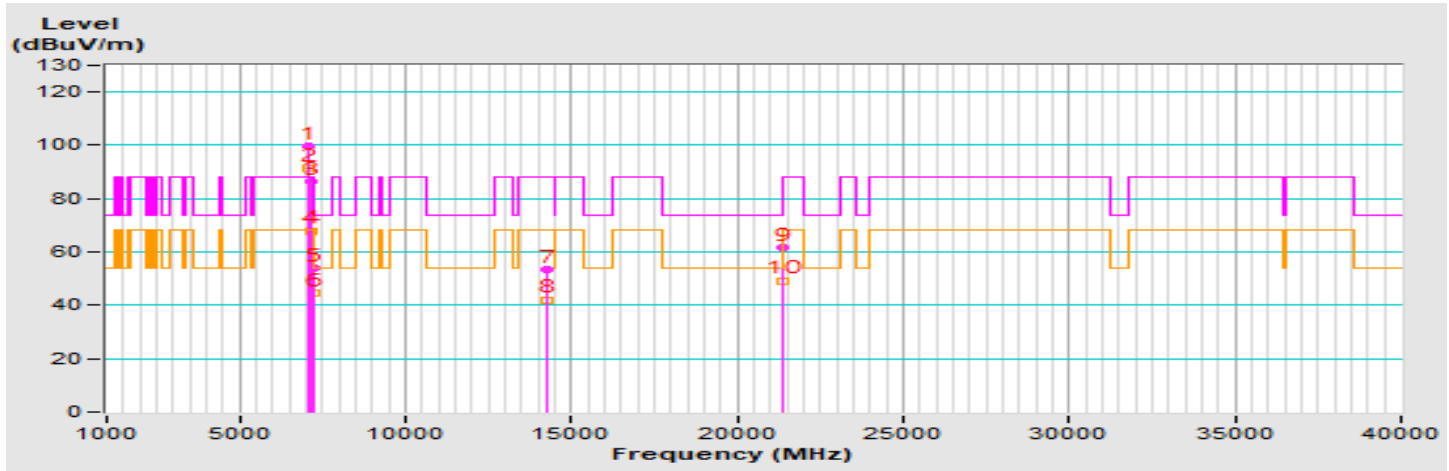

Horizontal (Peak)

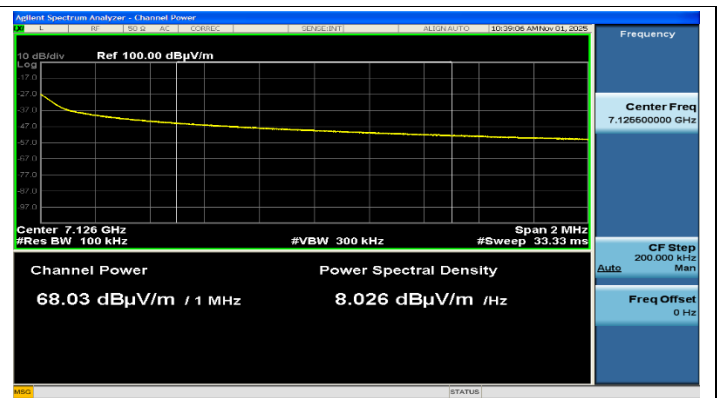



For Integration method : Horizontal (Average)

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *7115.00        | 99.6 PK                 |                |             | 2.23 H             | 287                  | 88.8             | 10.8                     |
| 2                                                    | *7115.00        | 91.2 AV                 |                |             | 2.23 H             | 287                  | 80.4             | 10.8                     |
| 3                                                    | #7125.00        | 86.7 PK                 | 88.2           | -1.5        | 2.23 H             | 287                  | 75.8             | 10.9                     |
| 4                                                    | #7125.00        | 68.0 AV                 | 68.2           | -0.2        | 2.23 H             | 287                  | 57.1             | 10.9                     |
| 5                                                    | 7250.00         | 54.2 PK                 | 74.0           | -19.8       | 2.23 H             | 287                  | 43.4             | 10.8                     |
| 6                                                    | 7250.00         | 44.5 AV                 | 54.0           | -9.5        | 2.23 H             | 287                  | 33.7             | 10.8                     |
| 7                                                    | #14230.00       | 53.5 PK                 | 88.2           | -34.7       | 3.05 H             | 167                  | 33.7             | 19.8                     |
| 8                                                    | #14230.00       | 42.1 AV                 | 68.2           | -26.1       | 3.05 H             | 167                  | 22.3             | 19.8                     |
| 9                                                    | 21345.00        | 61.7 PK                 | 74.0           | -12.3       | 2.57 H             | 209                  | 64.2             | -2.5                     |
| 10                                                   | 21345.00        | 49.3 AV                 | 54.0           | -4.7        | 2.57 H             | 209                  | 51.8             | -2.5                     |


Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.S
- \* \*: Fundamental frequency, the limit was restricted at the RF Output Power.
- # #: The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 233 : 7115 MHz                                                    |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 15                                                                   |

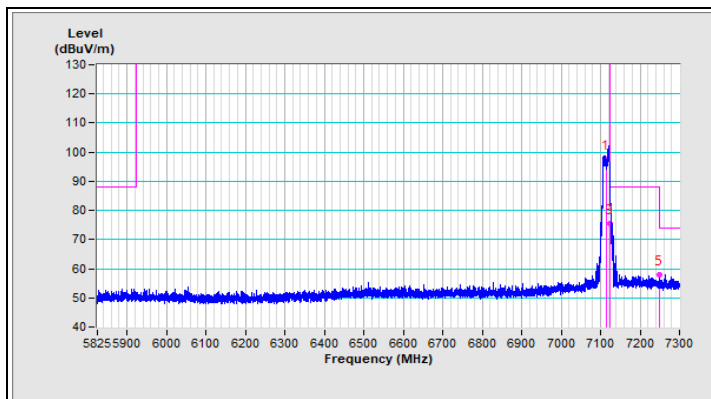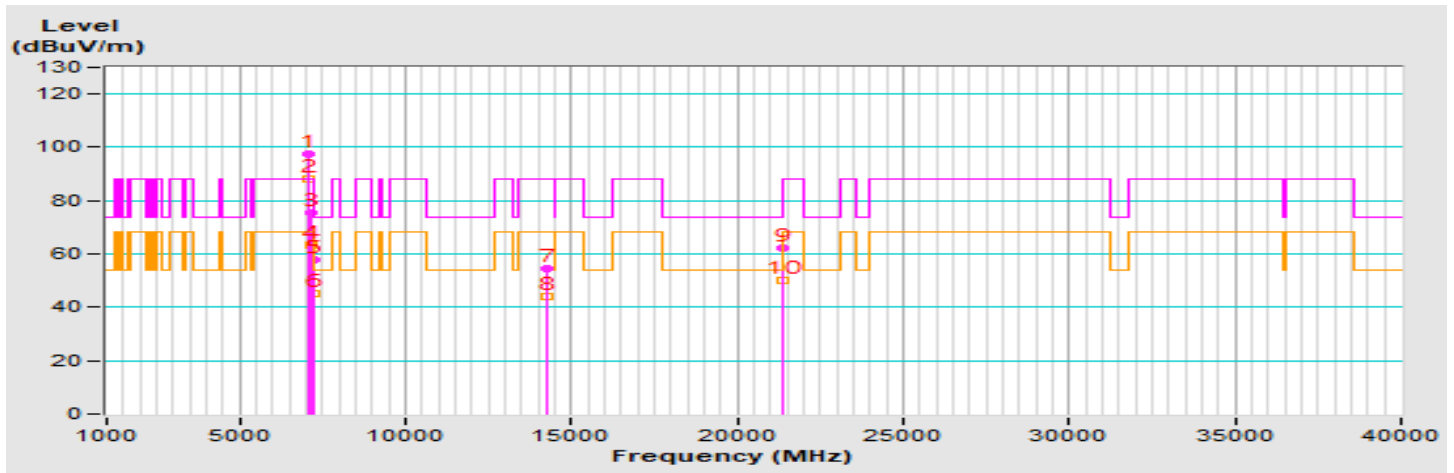

Vertical (Peak)

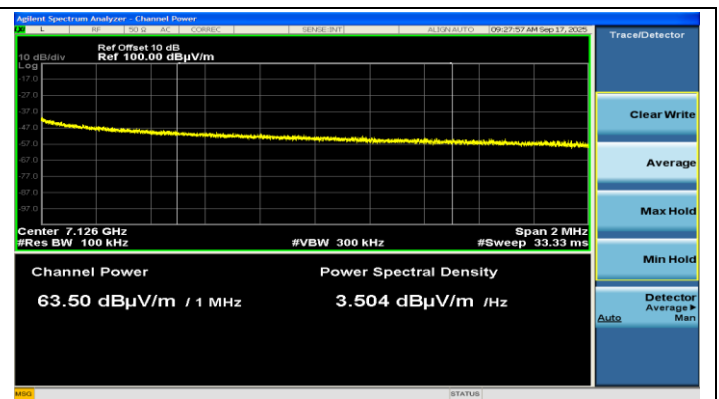



For Integration method : Vertical (Average)

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *7115.00        | 97.7 PK                 |                |             | 3.21 V             | 102                  | 86.9             | 10.8                     |
| 2                                                  | *7115.00        | 88.3 AV                 |                |             | 3.21 V             | 102                  | 77.5             | 10.8                     |
| 3                                                  | #7125.00        | 75.5 PK                 | 88.2           | -12.7       | 3.21 V             | 102                  | 64.6             | 10.9                     |
| 4                                                  | #7125.00        | 63.5 AV                 | 68.2           | -4.7        | 3.21 V             | 102                  | 52.6             | 10.9                     |
| 5                                                  | 7250.00         | 57.8 PK                 | 74.0           | -16.2       | 3.21 V             | 102                  | 47.0             | 10.8                     |
| 6                                                  | 7250.00         | 45.1 AV                 | 54.0           | -8.9        | 3.21 V             | 102                  | 34.3             | 10.8                     |
| 7                                                  | #14230.00       | 54.5 PK                 | 88.2           | -33.7       | 3.23 V             | 67                   | 34.7             | 19.8                     |
| 8                                                  | #14230.00       | 44.1 AV                 | 68.2           | -24.1       | 3.23 V             | 67                   | 24.3             | 19.8                     |
| 9                                                  | 21345.00        | 62.3 PK                 | 74.0           | -11.7       | 3.12 V             | 90                   | 64.8             | -2.5                     |
| 10                                                 | 21345.00        | 49.9 AV                 | 54.0           | -4.1        | 3.12 V             | 90                   | 52.4             | -2.5                     |


#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT40) | Channel                       | CH 3 : 5965 MHz                                                      |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 25 °C, 75% RH                                                        |
| Tested By       | Tank Wu          | Power Setting                 | 35                                                                   |

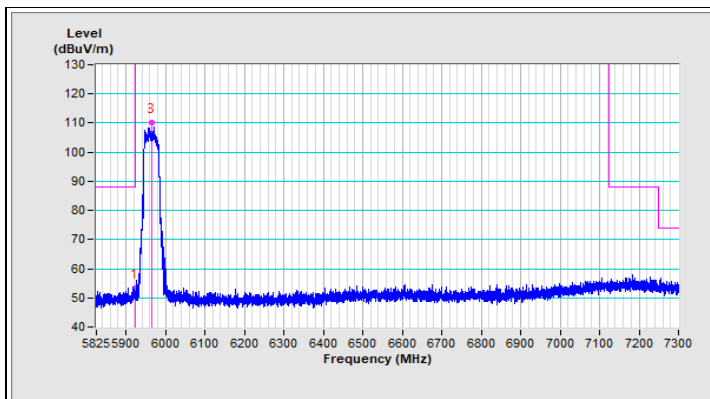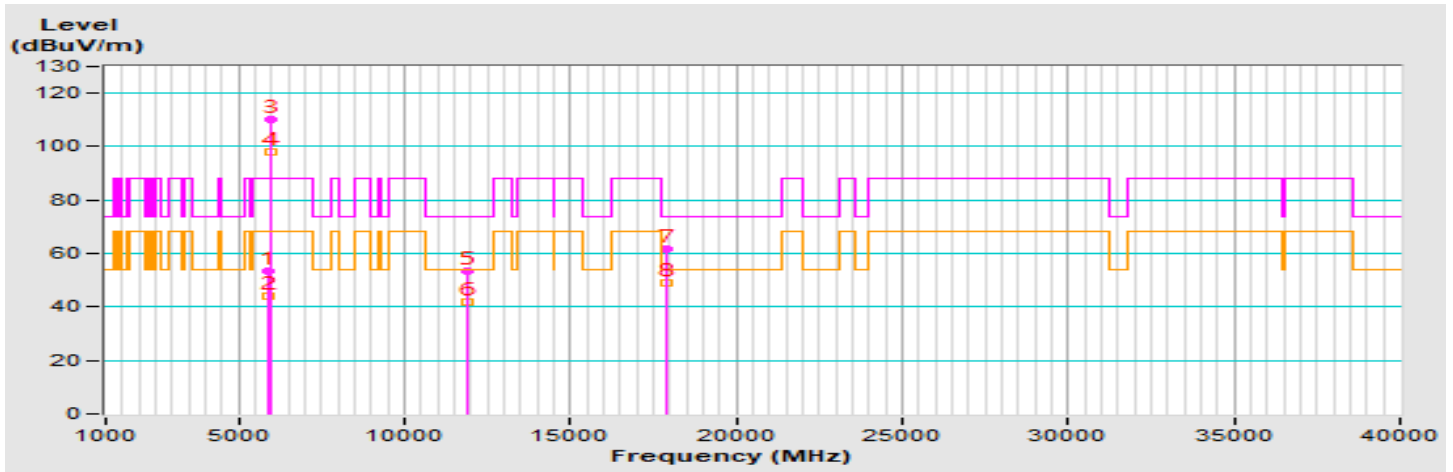

Horizontal (Peak)

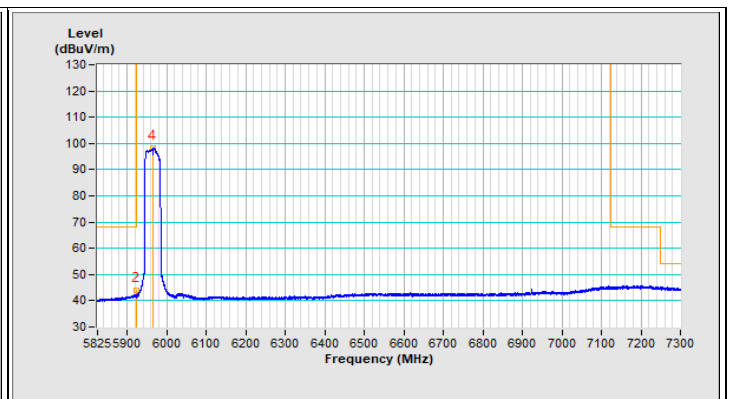

Horizontal (Average)

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5925.00        | 53.3 PK                 | 88.2           | -34.9       | 2.71 H             | 298                  | 47.0             | 6.3                      |
| 2                                                    | #5925.00        | 43.9 AV                 | 68.2           | -24.3       | 2.71 H             | 298                  | 37.6             | 6.3                      |
| 3                                                    | *5965.00        | 110.1 PK                |                |             | 2.71 H             | 298                  | 103.9            | 6.2                      |
| 4                                                    | *5965.00        | 98.2 AV                 |                |             | 2.71 H             | 298                  | 92.0             | 6.2                      |
| 5                                                    | 11930.00        | 53.2 PK                 | 74.0           | -20.8       | 2.94 H             | 202                  | 37.8             | 15.4                     |
| 6                                                    | 11930.00        | 41.9 AV                 | 54.0           | -12.1       | 2.94 H             | 202                  | 26.5             | 15.4                     |
| 7                                                    | 17895.00        | 61.5 PK                 | 74.0           | -12.5       | 2.67 H             | 250                  | 33.0             | 28.5                     |
| 8                                                    | 17895.00        | 48.9 AV                 | 54.0           | -5.1        | 2.67 H             | 250                  | 20.4             | 28.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ \* “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.