

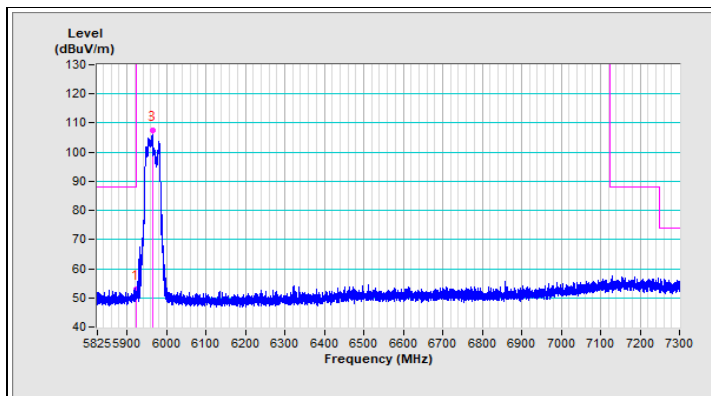


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	35

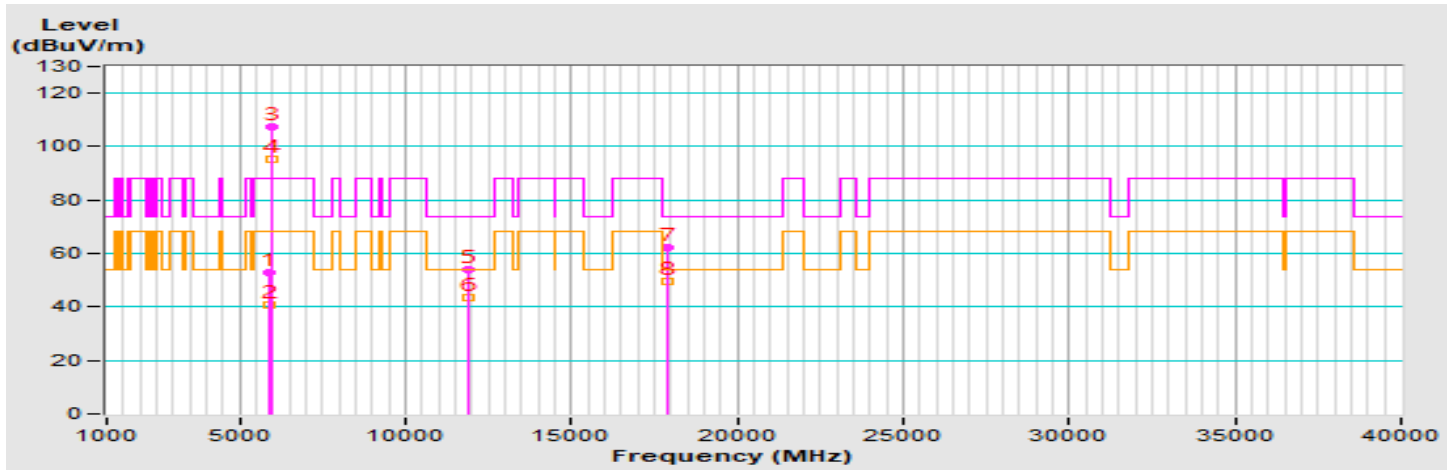

Vertical (Peak)

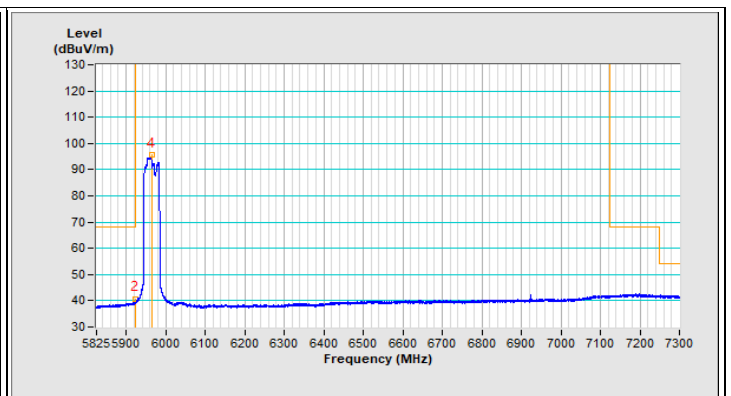


Vertical (Average)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.8 PK	88.2	-35.4	2.27 V	106	46.5	6.3
2	#5925.00	40.6 AV	68.2	-27.6	2.27 V	106	34.3	6.3
3	*5965.00	107.6 PK			2.27 V	106	101.4	6.2
4	*5965.00	95.5 AV			2.27 V	106	89.3	6.2
5	11930.00	53.9 PK	74.0	-20.1	3.24 V	95	38.5	15.4
6	11930.00	43.4 AV	54.0	-10.6	3.24 V	95	28.0	15.4
7	17895.00	62.1 PK	74.0	-11.9	3.06 V	135	33.6	28.5
8	17895.00	49.6 AV	54.0	-4.4	3.06 V	135	21.1	28.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	36

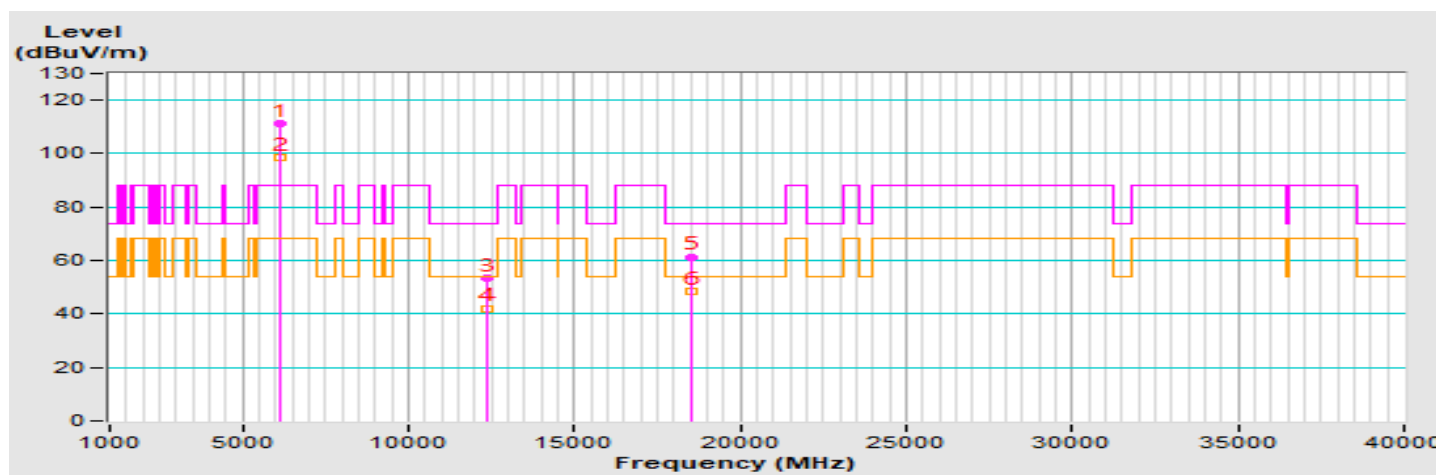


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6165.00	111.1 PK			1.83 H	298	104.5	6.6
2	*6165.00	98.6 AV			1.83 H	298	92.0	6.6
3	12330.00	53.3 PK	74.0	-20.7	2.95 H	189	38.1	15.2
4	12330.00	42.1 AV	54.0	-11.9	2.95 H	189	26.9	15.2
5	18495.00	61.4 PK	74.0	-12.6	2.69 H	251	66.3	-4.9
6	18495.00	48.6 AV	54.0	-5.4	2.69 H	251	53.5	-4.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	36

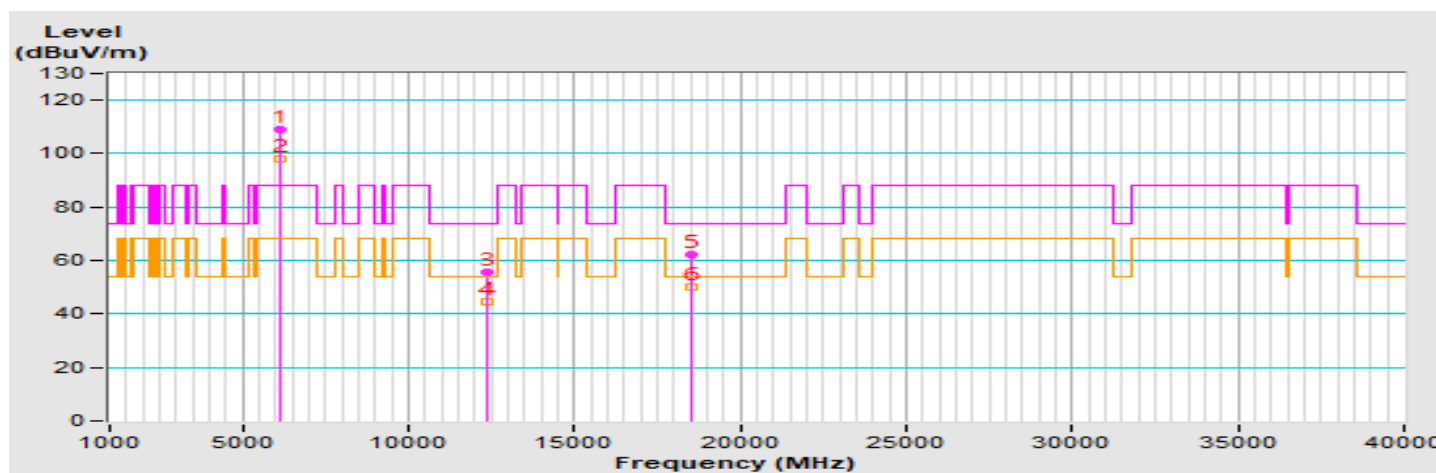


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	109.2 PK			3.11 V	74	102.6	6.6
2	*6165.00	97.8 AV			3.11 V	74	91.2	6.6
3	12330.00	55.4 PK	74.0	-18.6	3.13 V	51	40.2	15.2
4	12330.00	44.7 AV	54.0	-9.3	3.13 V	51	29.5	15.2
5	18495.00	62.2 PK	74.0	-11.8	2.98 V	92	67.1	-4.9
6	18495.00	50.0 AV	54.0	-4.0	2.98 V	92	54.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	37

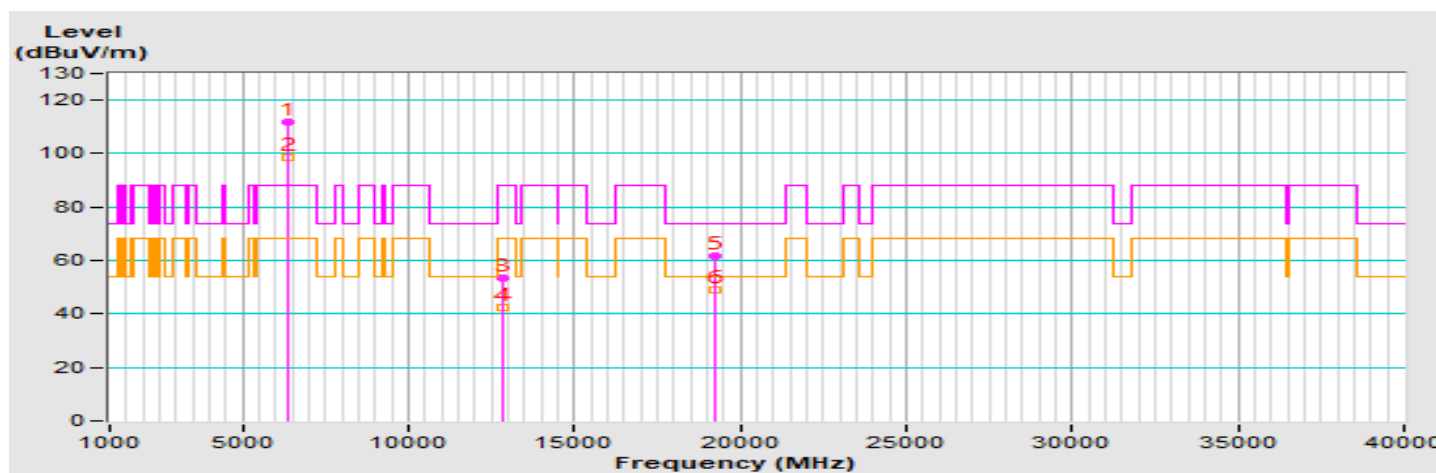


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	111.6 PK			2.19 H	296	104.0	7.6
2	*6405.00	98.7 AV			2.19 H	296	91.1	7.6
3	#12810.00	53.4 PK	88.2	-34.8	2.97 H	173	37.8	15.6
4	#12810.00	42.3 AV	68.2	-25.9	2.97 H	173	26.7	15.6
5	19215.00	61.5 PK	74.0	-12.5	2.60 H	242	65.9	-4.4
6	19215.00	49.2 AV	54.0	-4.8	2.60 H	242	53.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	37

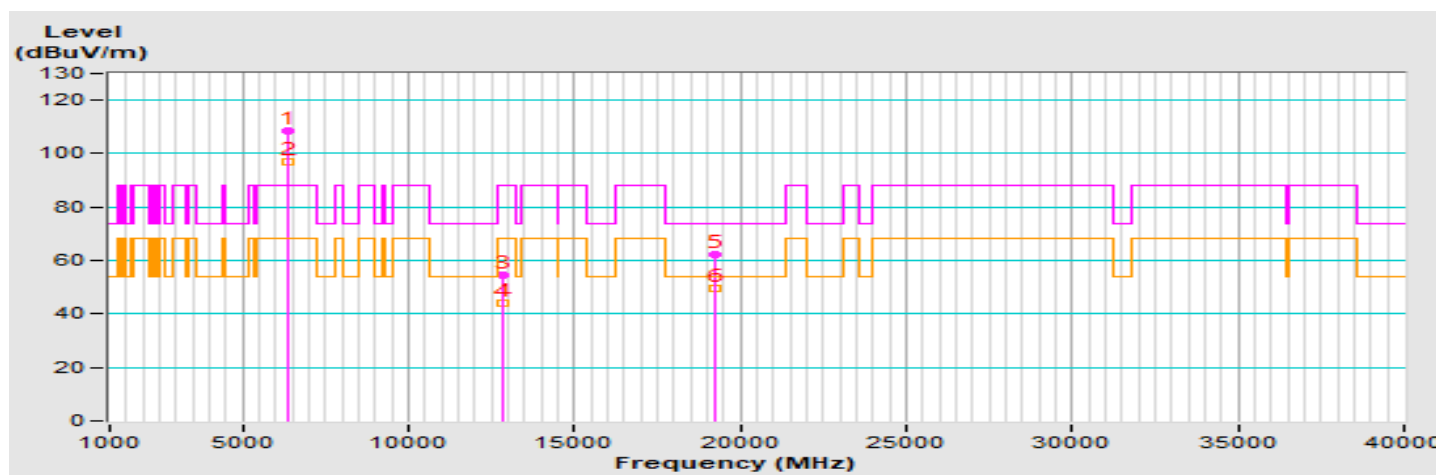


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	108.5 PK			2.95 V	66	100.9	7.6
2	*6405.00	96.9 AV			2.95 V	66	89.3	7.6
3	#12810.00	54.5 PK	88.2	-33.7	3.15 V	75	38.9	15.6
4	#12810.00	44.3 AV	68.2	-23.9	3.15 V	75	28.7	15.6
5	19215.00	62.4 PK	74.0	-11.6	3.10 V	138	66.8	-4.4
6	19215.00	49.5 AV	54.0	-4.5	3.10 V	138	53.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	34

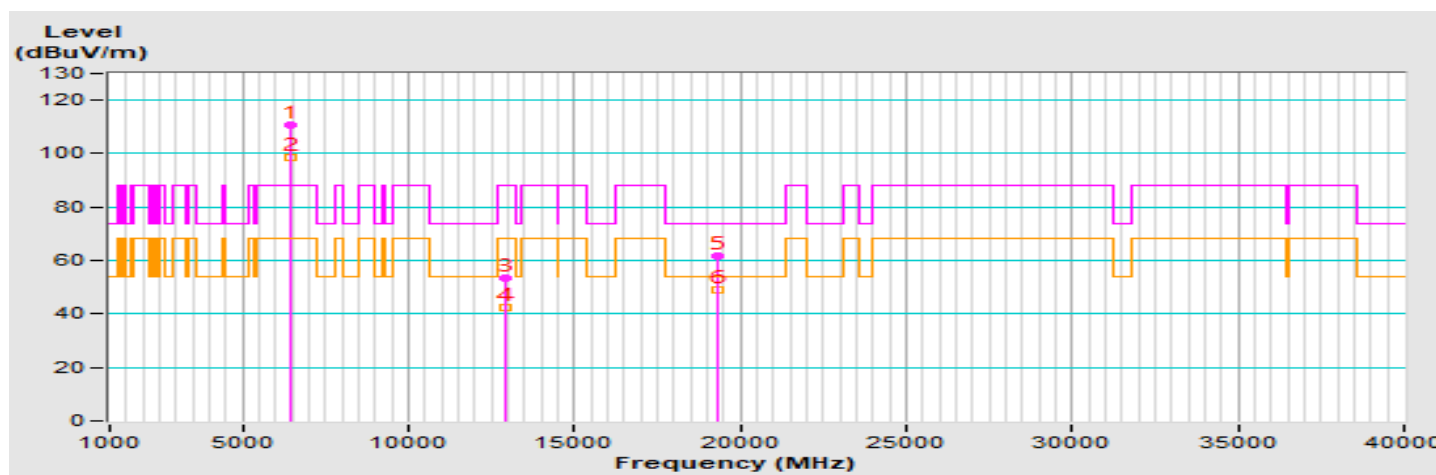


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6445.00	110.7 PK			2.59 H	293	102.9	7.8
2	*6445.00	98.6 AV			2.59 H	293	90.8	7.8
3	#12890.00	53.4 PK	88.2	-34.8	2.89 H	174	37.7	15.7
4	#12890.00	42.4 AV	68.2	-25.8	2.89 H	174	26.7	15.7
5	19335.00	61.5 PK	74.0	-12.5	2.64 H	238	65.3	-3.8
6	19335.00	48.9 AV	54.0	-5.1	2.64 H	238	52.7	-3.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	34

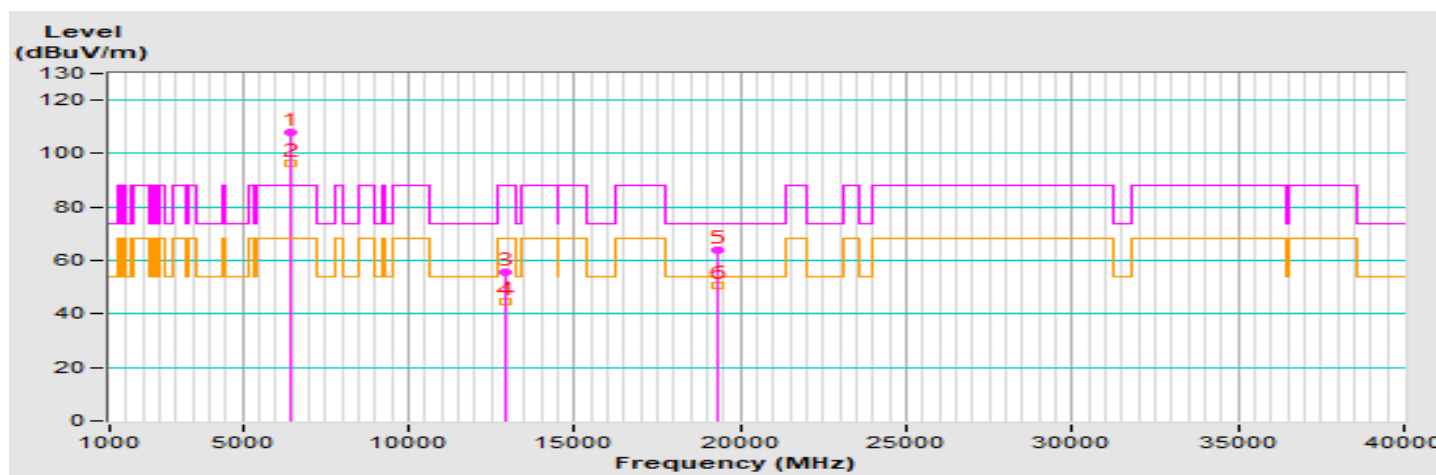


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	108.1 PK			2.90 V	77	100.3	7.8
2	*6445.00	96.6 AV			2.90 V	77	88.8	7.8
3	#12890.00	55.6 PK	88.2	-32.6	3.20 V	107	39.9	15.7
4	#12890.00	44.7 AV	68.2	-23.5	3.20 V	107	29.0	15.7
5	19335.00	63.8 PK	74.0	-10.2	3.18 V	148	67.6	-3.8
6	19335.00	50.7 AV	54.0	-3.3	3.18 V	148	54.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	34

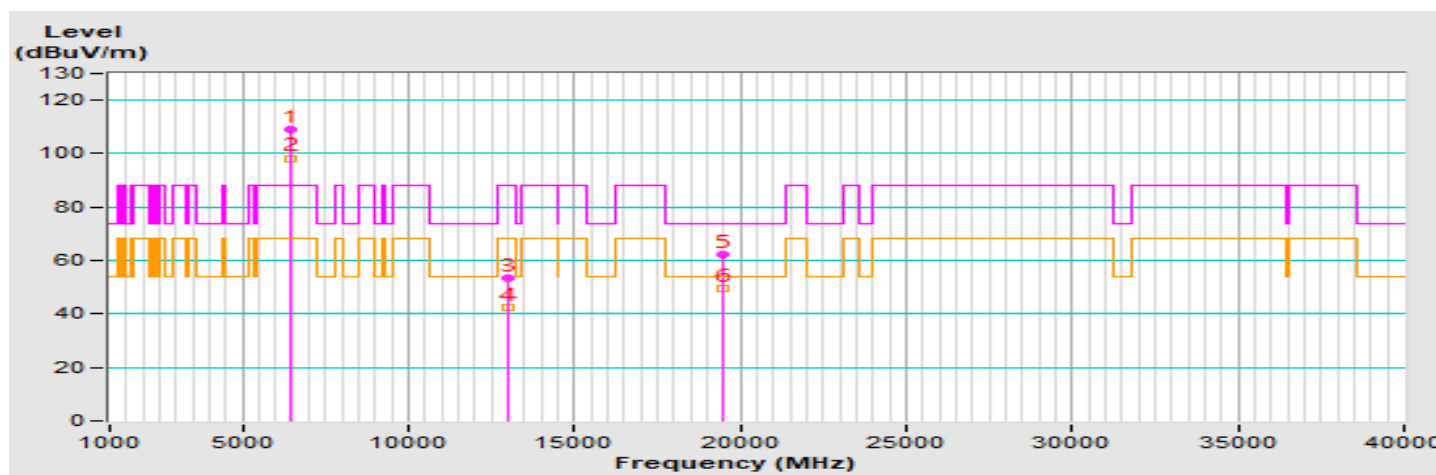


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6485.00	109.3 PK			2.23 H	303	101.2	8.1
2	*6485.00	98.3 AV			2.23 H	303	90.2	8.1
3	#12970.00	53.5 PK	88.2	-34.7	2.84 H	173	38.0	15.5
4	#12970.00	42.5 AV	68.2	-25.7	2.84 H	173	27.0	15.5
5	19455.00	62.1 PK	74.0	-11.9	2.61 H	242	65.4	-3.3
6	19455.00	49.8 AV	54.0	-4.2	2.61 H	242	53.1	-3.3

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	34

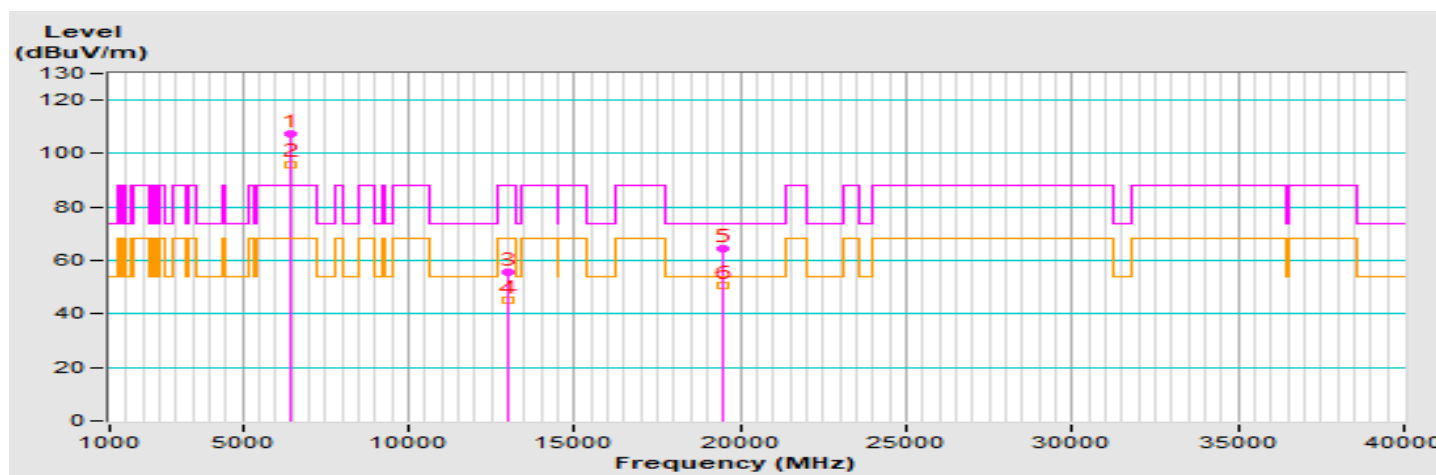


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	107.6 PK			2.75 V	74	99.5	8.1
2	*6485.00	96.1 AV			2.75 V	74	88.0	8.1
3	#12970.00	55.6 PK	88.2	-32.6	3.22 V	80	40.1	15.5
4	#12970.00	44.9 AV	68.2	-23.3	3.22 V	80	29.4	15.5
5	19455.00	64.6 PK	74.0	-9.4	3.19 V	105	67.9	-3.3
6	19455.00	50.9 AV	54.0	-3.1	3.19 V	105	54.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	34

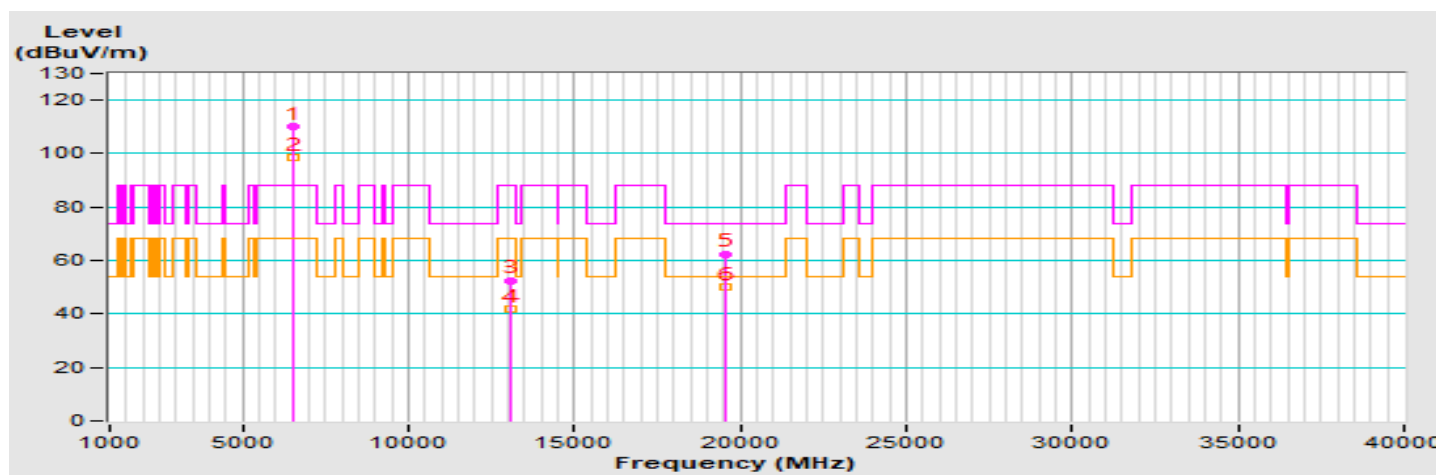


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6525.00	109.9 PK			2.51 H	296	101.5	8.4
2	*6525.00	98.7 AV			2.51 H	296	90.3	8.4
3	#13050.00	52.6 PK	88.2	-35.6	2.84 H	201	36.9	15.7
4	#13050.00	41.7 AV	68.2	-26.5	2.84 H	201	26.0	15.7
5	19575.00	62.5 PK	74.0	-11.5	2.57 H	234	66.1	-3.6
6	19575.00	50.1 AV	54.0	-3.9	2.57 H	234	53.7	-3.6

Remarks:

- Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- * *: Fundamental frequency, the limit was restricted at the RF Output Power.
- # #: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	34

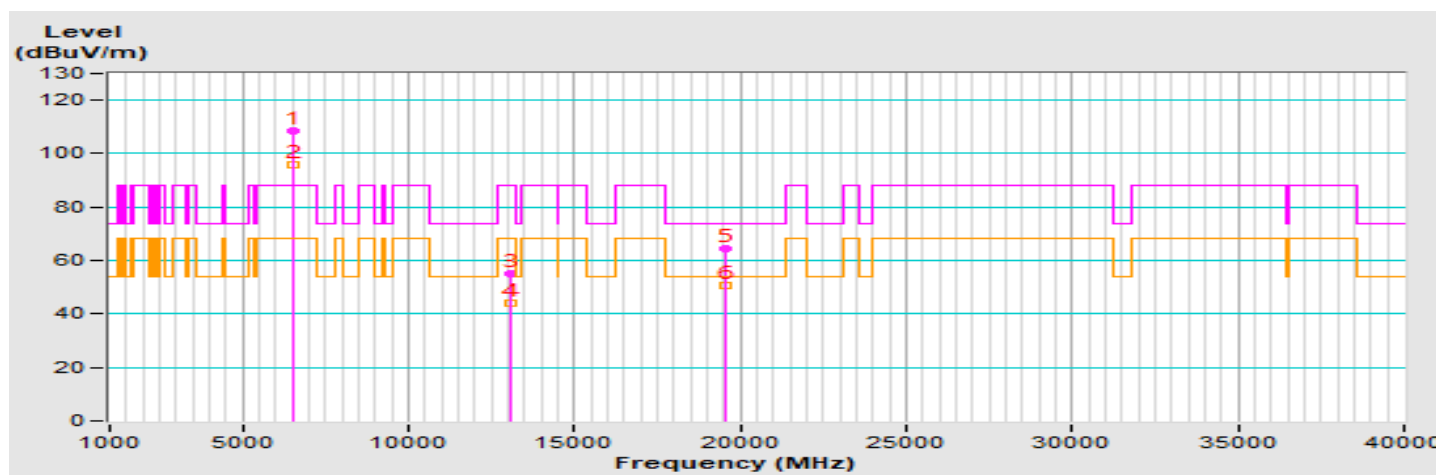


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	108.5 PK			3.05 V	120	100.1	8.4
2	*6525.00	95.9 AV			3.05 V	120	87.5	8.4
3	#13050.00	55.1 PK	88.2	-33.1	3.16 V	81	39.4	15.7
4	#13050.00	44.1 AV	68.2	-24.1	3.16 V	81	28.4	15.7
5	19575.00	64.6 PK	74.0	-9.4	3.21 V	117	68.2	-3.6
6	19575.00	50.8 AV	54.0	-3.2	3.21 V	117	54.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	35

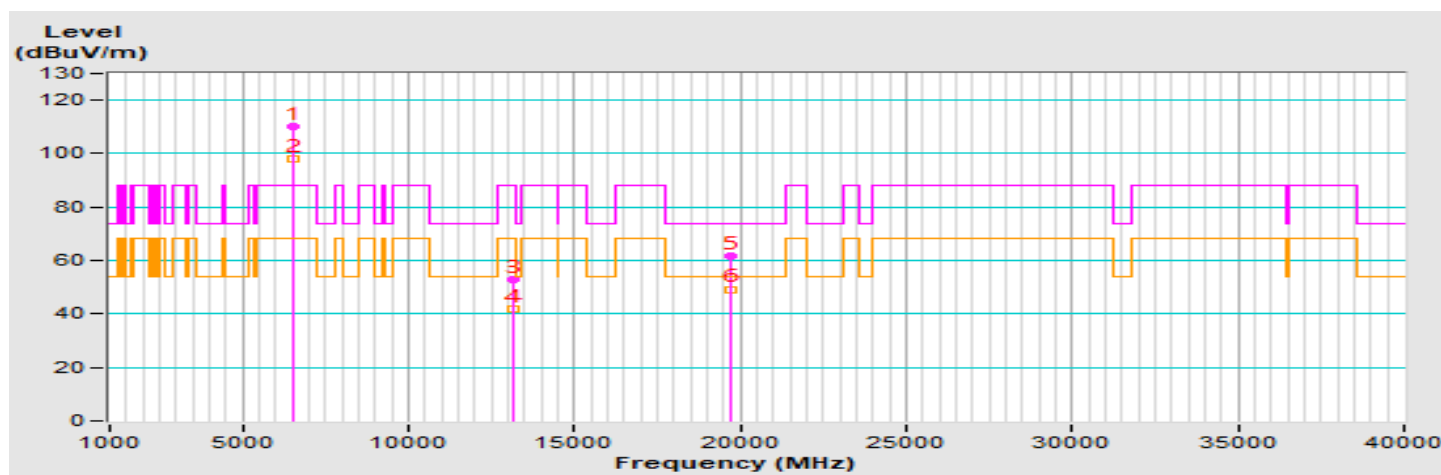


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.1 PK			2.52 H	294	101.4	8.7
2	*6565.00	98.2 AV			2.52 H	294	89.5	8.7
3	#13130.00	52.7 PK	88.2	-35.5	2.89 H	199	36.7	16.0
4	#13130.00	41.9 AV	68.2	-26.3	2.89 H	199	25.9	16.0
5	19695.00	61.6 PK	74.0	-12.4	2.61 H	245	65.5	-3.9
6	19695.00	49.3 AV	54.0	-4.7	2.61 H	245	53.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	35

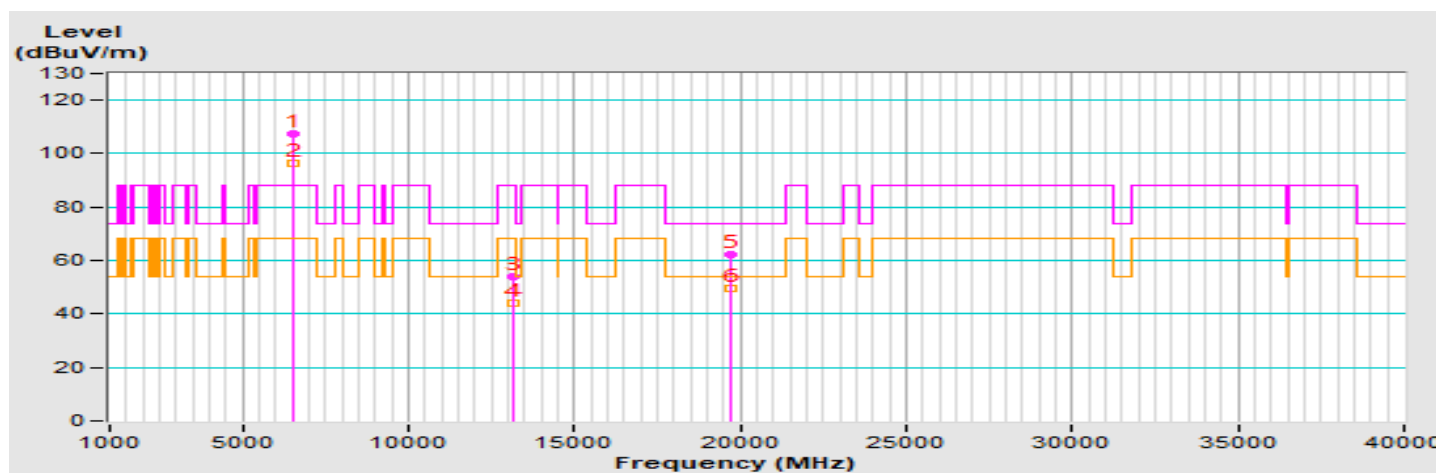


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	107.6 PK			3.01 V	63	98.9	8.7
2	*6565.00	96.3 AV			3.01 V	63	87.6	8.7
3	#13130.00	54.1 PK	88.2	-34.1	3.09 V	56	38.1	16.0
4	#13130.00	43.8 AV	68.2	-24.4	3.09 V	56	27.8	16.0
5	19695.00	62.1 PK	74.0	-11.9	2.98 V	82	66.0	-3.9
6	19695.00	49.7 AV	54.0	-4.3	2.98 V	82	53.6	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	34

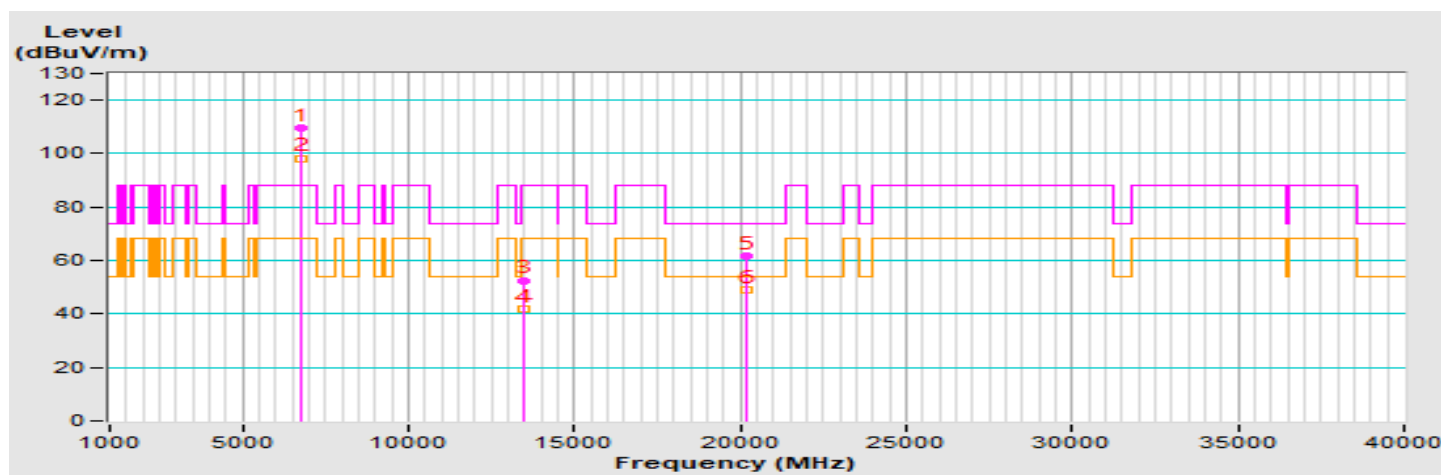


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6725.00	109.5 PK			2.15 H	300	100.7	8.8
2	*6725.00	98.3 AV			2.15 H	300	89.5	8.8
3	#13450.00	52.6 PK	88.2	-35.6	2.84 H	200	34.6	18.0
4	#13450.00	41.9 AV	68.2	-26.3	2.84 H	200	23.9	18.0
5	20175.00	61.6 PK	74.0	-12.4	2.60 H	248	65.2	-3.6
6	20175.00	49.2 AV	54.0	-4.8	2.60 H	248	52.8	-3.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	34

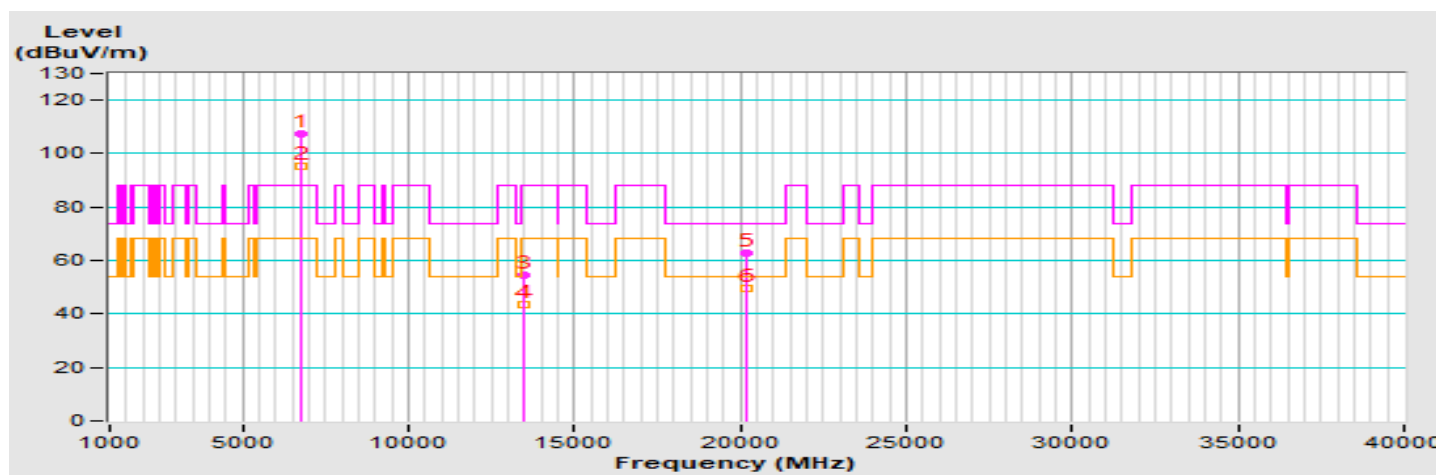


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	107.4 PK			3.03 V	122	98.6	8.8
2	*6725.00	95.5 AV			3.03 V	122	86.7	8.8
3	#13450.00	54.6 PK	88.2	-33.6	3.23 V	96	36.6	18.0
4	#13450.00	43.5 AV	68.2	-24.7	3.23 V	96	25.5	18.0
5	20175.00	62.7 PK	74.0	-11.3	3.09 V	120	66.3	-3.6
6	20175.00	49.8 AV	54.0	-4.2	3.09 V	120	53.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	35

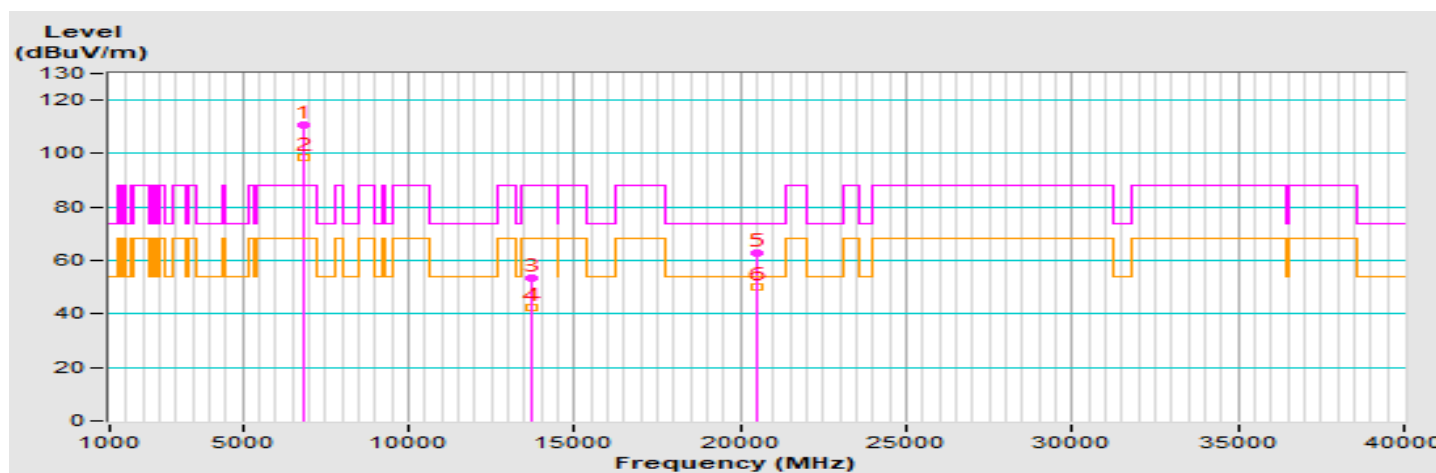


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.5 PK			2.07 H	304	101.3	9.2
2	*6845.00	98.6 AV			2.07 H	304	89.4	9.2
3	#13690.00	53.6 PK	88.2	-34.6	2.88 H	166	35.0	18.6
4	#13690.00	42.5 AV	68.2	-25.7	2.88 H	166	23.9	18.6
5	20535.00	63.0 PK	74.0	-11.0	2.63 H	237	66.2	-3.2
6	20535.00	50.1 AV	54.0	-3.9	2.63 H	237	53.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	35

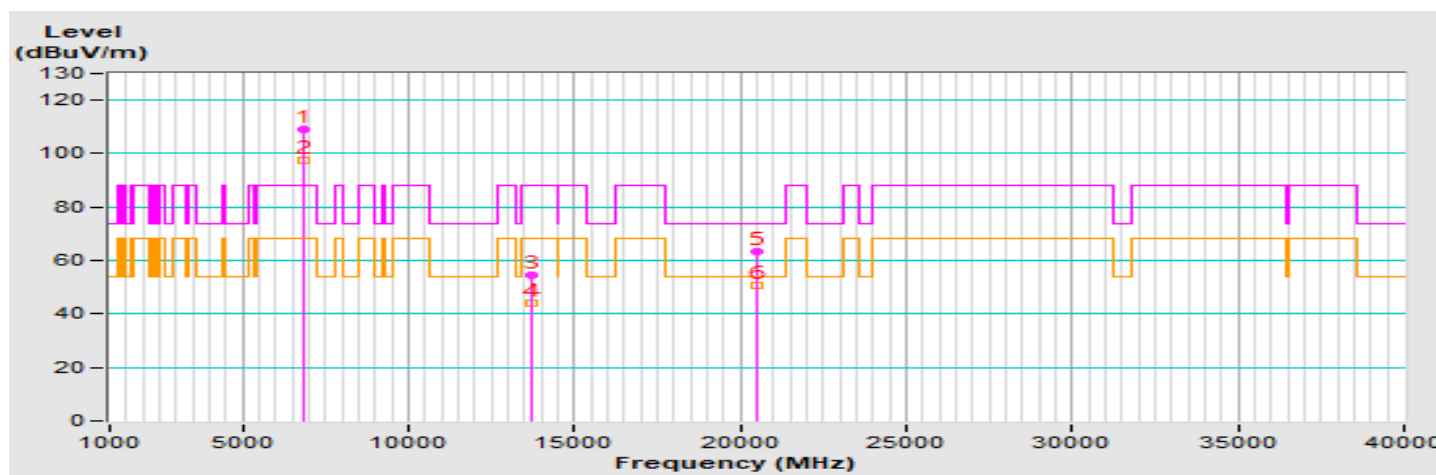


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	109.1 PK			3.03 V	118	99.9	9.2
2	*6845.00	97.6 AV			3.03 V	118	88.4	9.2
3	#13690.00	54.6 PK	88.2	-33.6	3.21 V	97	36.0	18.6
4	#13690.00	43.9 AV	68.2	-24.3	3.21 V	97	25.3	18.6
5	20535.00	63.4 PK	74.0	-10.6	3.14 V	120	66.6	-3.2
6	20535.00	50.5 AV	54.0	-3.5	3.14 V	120	53.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	35

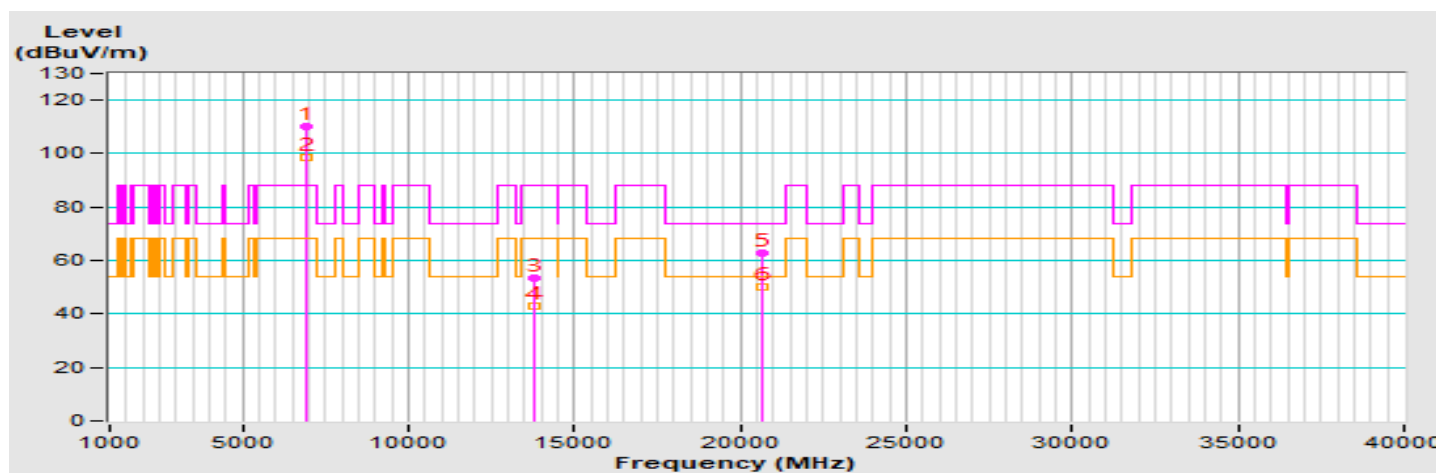


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6885.00	110.1 PK			2.17 H	302	100.9	9.2
2	*6885.00	98.5 AV			2.17 H	302	89.3	9.2
3	#13770.00	53.6 PK	88.2	-34.6	2.82 H	159	35.0	18.6
4	#13770.00	42.7 AV	68.2	-25.5	2.82 H	159	24.1	18.6
5	20655.00	63.0 PK	74.0	-11.0	2.66 H	255	66.1	-3.1
6	20655.00	50.1 AV	54.0	-3.9	2.66 H	255	53.2	-3.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	35

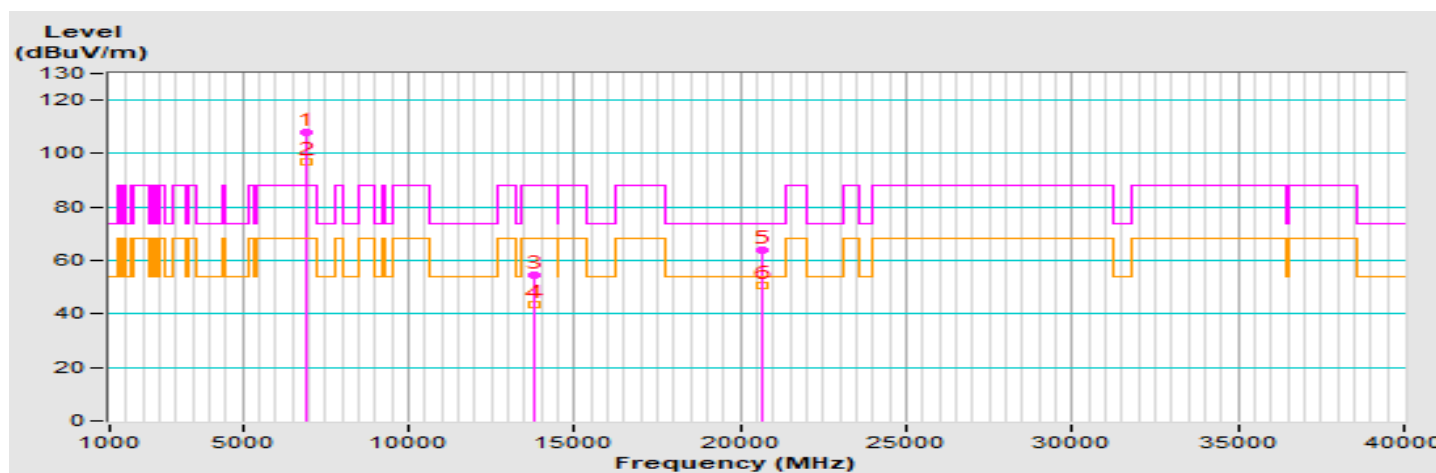


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	107.7 PK			3.35 V	119	98.5	9.2
2	*6885.00	96.9 AV			3.35 V	119	87.7	9.2
3	#13770.00	54.5 PK	88.2	-33.7	3.23 V	110	35.9	18.6
4	#13770.00	43.5 AV	68.2	-24.7	3.23 V	110	24.9	18.6
5	20655.00	63.7 PK	74.0	-10.3	3.17 V	129	66.8	-3.1
6	20655.00	50.6 AV	54.0	-3.4	3.17 V	129	53.7	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	36

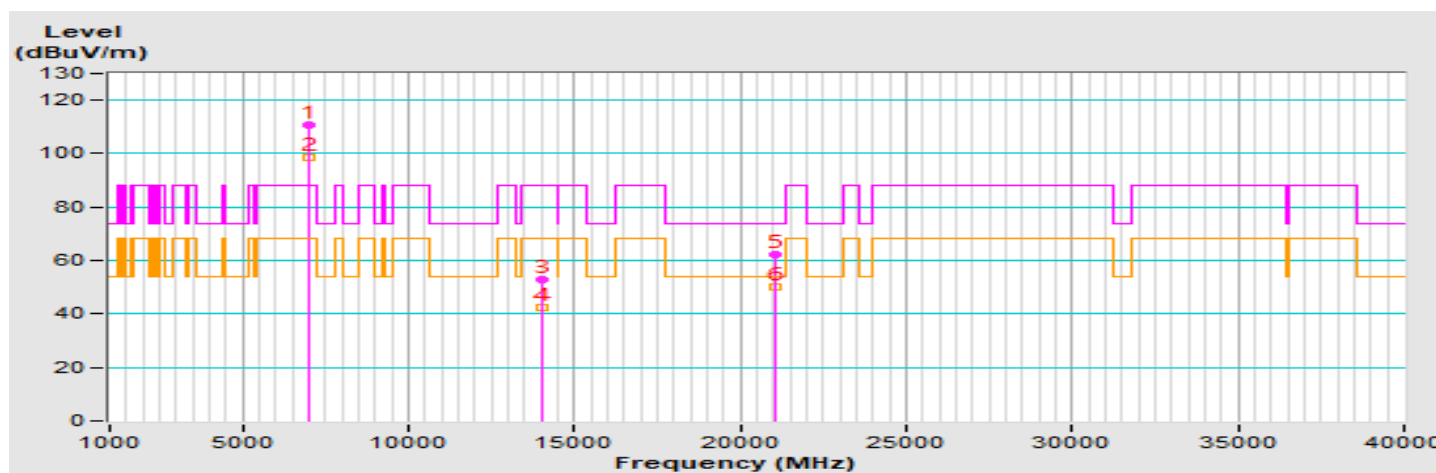


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*7005.00	110.5 PK			2.15 H	285	100.6	9.9
2	*7005.00	98.5 AV			2.15 H	285	88.6	9.9
3	#14010.00	53.1 PK	88.2	-35.1	2.82 H	190	34.1	19.0
4	#14010.00	42.3 AV	68.2	-25.9	2.82 H	190	23.3	19.0
5	21015.00	62.3 PK	74.0	-11.7	2.62 H	237	65.2	-2.9
6	21015.00	50.1 AV	54.0	-3.9	2.62 H	237	53.0	-2.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	36


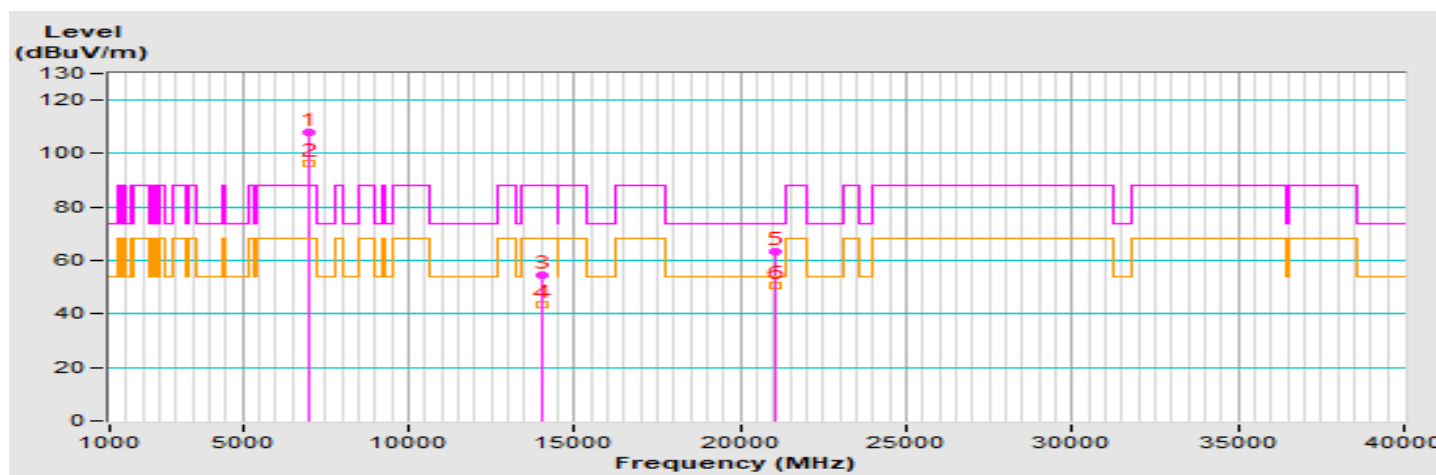


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	107.8 PK			2.67 V	120	97.9	9.9
2	*7005.00	96.3 AV			2.67 V	120	86.4	9.9
3	#14010.00	54.4 PK	88.2	-33.8	3.15 V	101	35.4	19.0
4	#14010.00	43.7 AV	68.2	-24.5	3.15 V	101	24.7	19.0
5	21015.00	63.3 PK	74.0	-10.7	3.11 V	111	66.2	-2.9
6	21015.00	50.5 AV	54.0	-3.5	3.11 V	111	53.4	-2.9


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	35

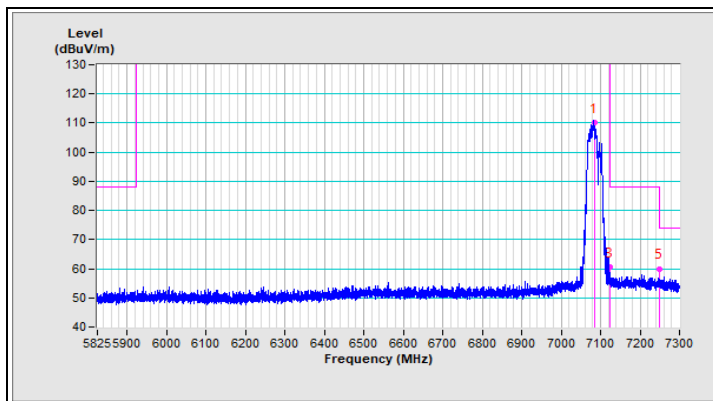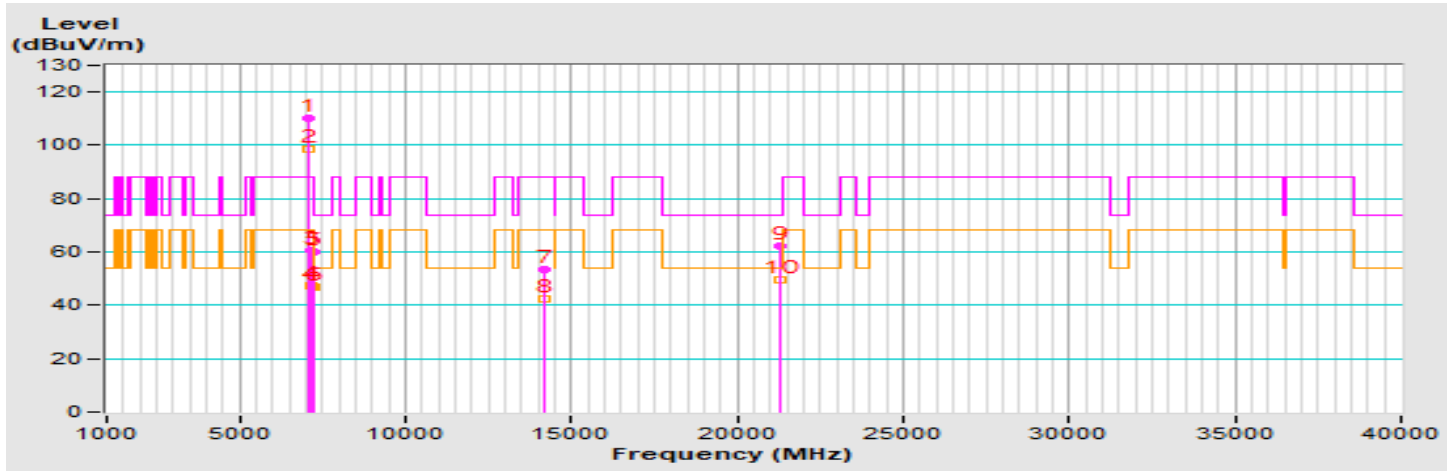

Horizontal (Peak)

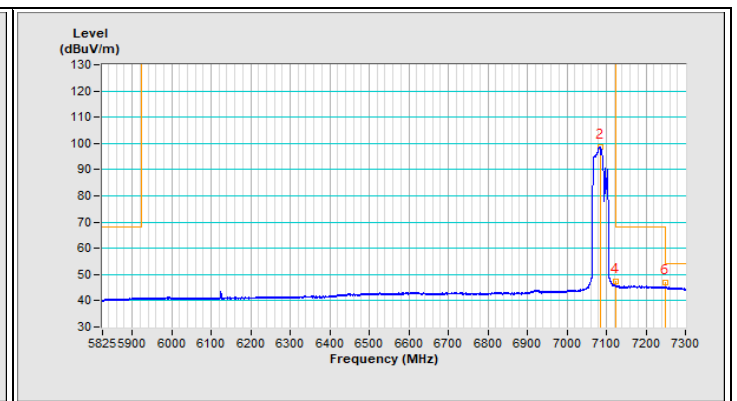



Horizontal (Average)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	110.2 PK			2.42 H	285	99.5	10.7
2	*7085.00	98.6 AV			2.42 H	285	87.9	10.7
3	#7125.00	60.5 PK	88.2	-27.7	2.42 H	285	49.6	10.9
4	#7125.00	47.5 AV	68.2	-20.7	2.42 H	285	36.6	10.9
5	7250.00	60.0 PK	74.0	-14.0	2.42 H	285	49.2	10.8
6	7250.00	46.9 AV	54.0	-7.1	2.42 H	285	36.1	10.8
7	#14170.00	53.5 PK	88.2	-34.7	2.82 H	172	34.0	19.5
8	#14170.00	42.3 AV	68.2	-25.9	2.82 H	172	22.8	19.5
9	21255.00	62.1 PK	74.0	-11.9	2.67 H	218	64.9	-2.8
10	21255.00	49.6 AV	54.0	-4.4	2.67 H	218	52.4	-2.8


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	35

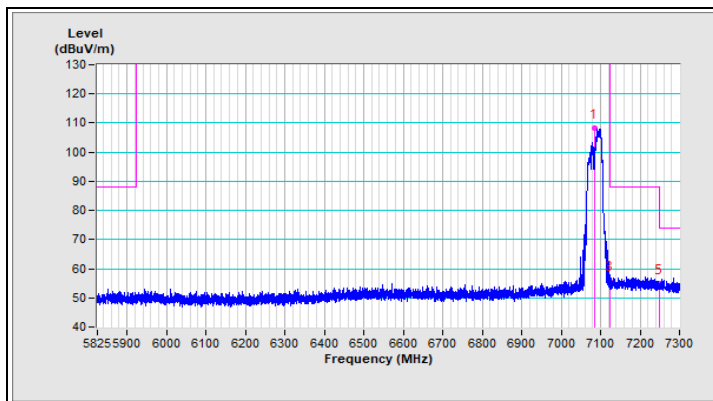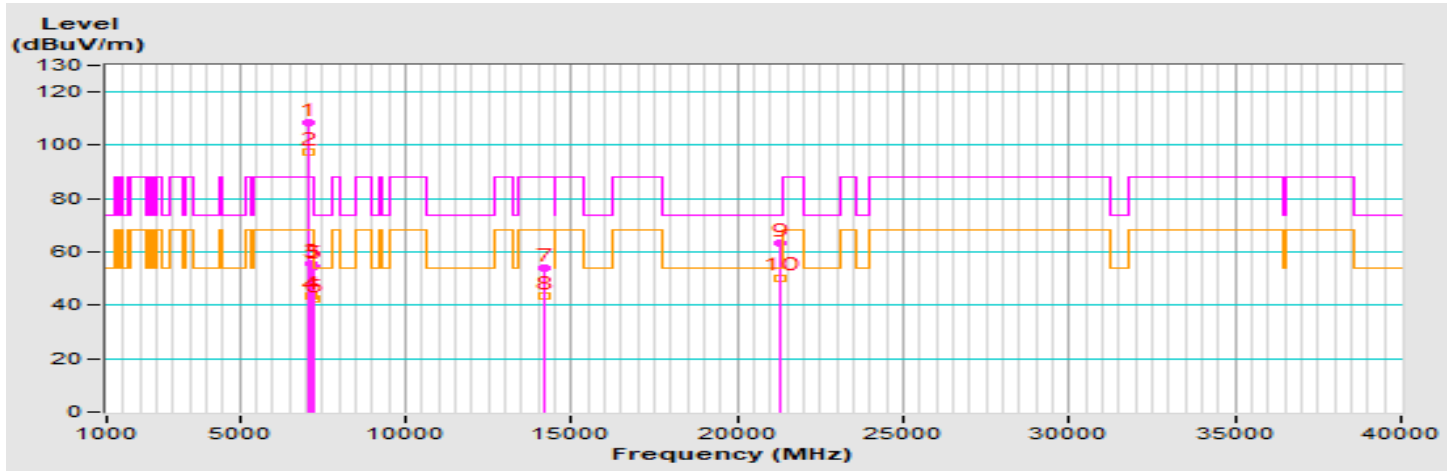

Vertical (Peak)

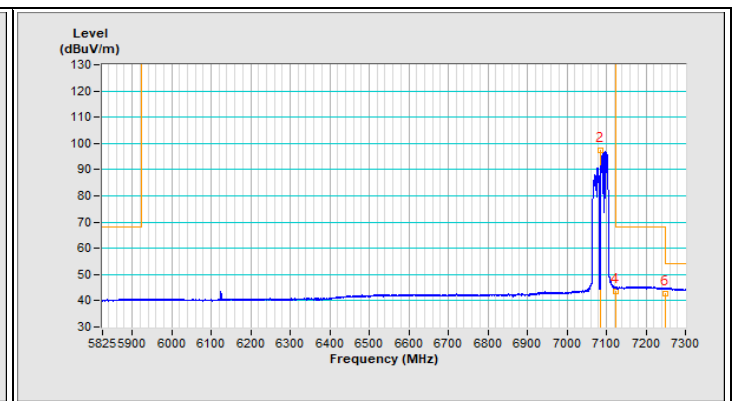



Vertical (Average)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	108.4 PK			3.28 V	114	97.7	10.7
2	*7085.00	97.5 AV			3.28 V	114	86.8	10.7
3	#7125.00	55.8 PK	88.2	-32.4	3.28 V	114	44.9	10.9
4	#7125.00	43.5 AV	68.2	-24.7	3.28 V	114	32.6	10.9
5	7250.00	54.8 PK	74.0	-19.2	3.28 V	114	44.0	10.8
6	7250.00	42.6 AV	54.0	-11.4	3.28 V	114	31.8	10.8
7	#14170.00	53.8 PK	88.2	-34.4	3.16 V	84	34.3	19.5
8	#14170.00	43.4 AV	68.2	-24.8	3.16 V	84	23.9	19.5
9	21255.00	63.5 PK	74.0	-10.5	3.17 V	121	66.3	-2.8
10	21255.00	50.4 AV	54.0	-3.6	3.17 V	121	53.2	-2.8


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	40

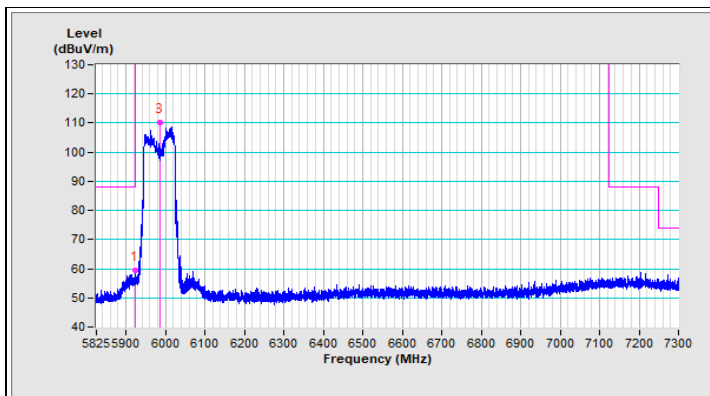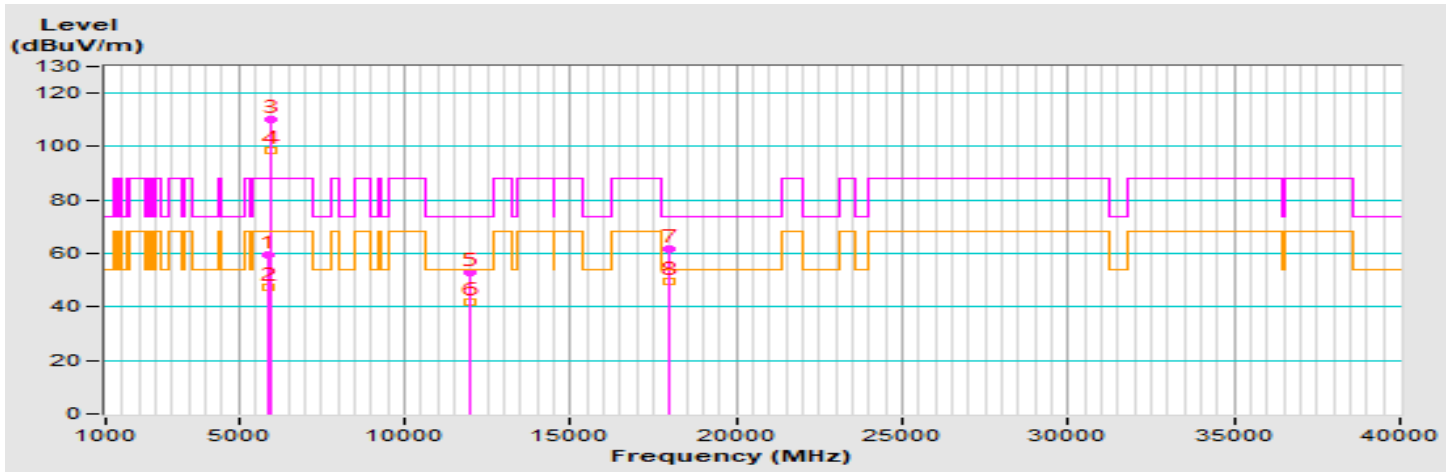

Horizontal (Peak)

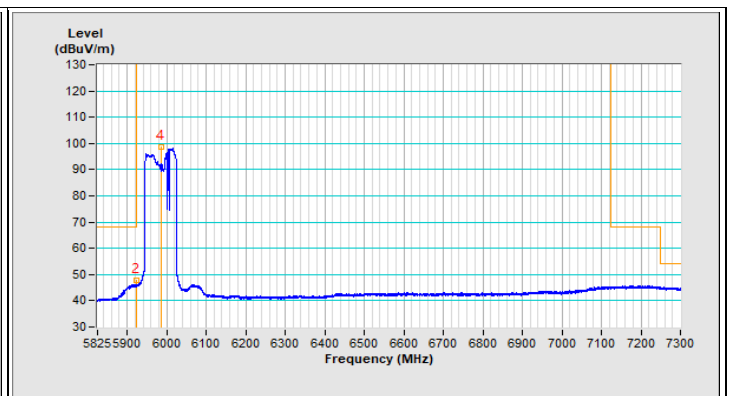



Horizontal (Average)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.3 PK	88.2	-28.9	2.22 H	288	53.0	6.3
2	#5925.00	47.6 AV	68.2	-20.6	2.22 H	288	41.3	6.3
3	*5985.00	110.3 PK			2.22 H	288	104.1	6.2
4	*5985.00	98.5 AV			2.22 H	288	92.3	6.2
5	11970.00	52.7 PK	74.0	-21.3	2.86 H	163	37.2	15.5
6	11970.00	41.8 AV	54.0	-12.2	2.86 H	163	26.3	15.5
7	17955.00	61.9 PK	74.0	-12.1	2.72 H	256	31.9	30.0
8	17955.00	49.4 AV	54.0	-4.6	2.72 H	256	19.4	30.0


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	40

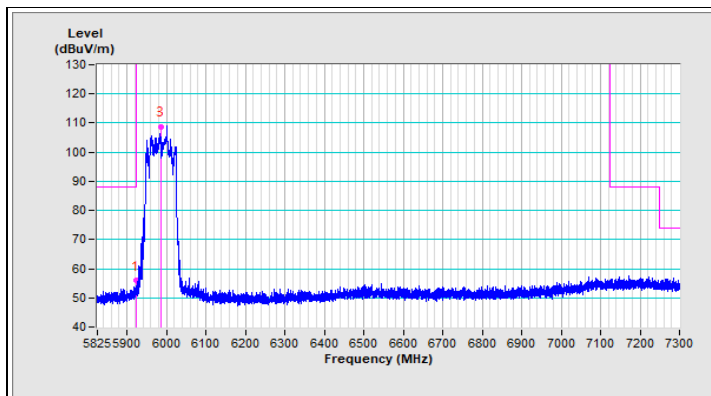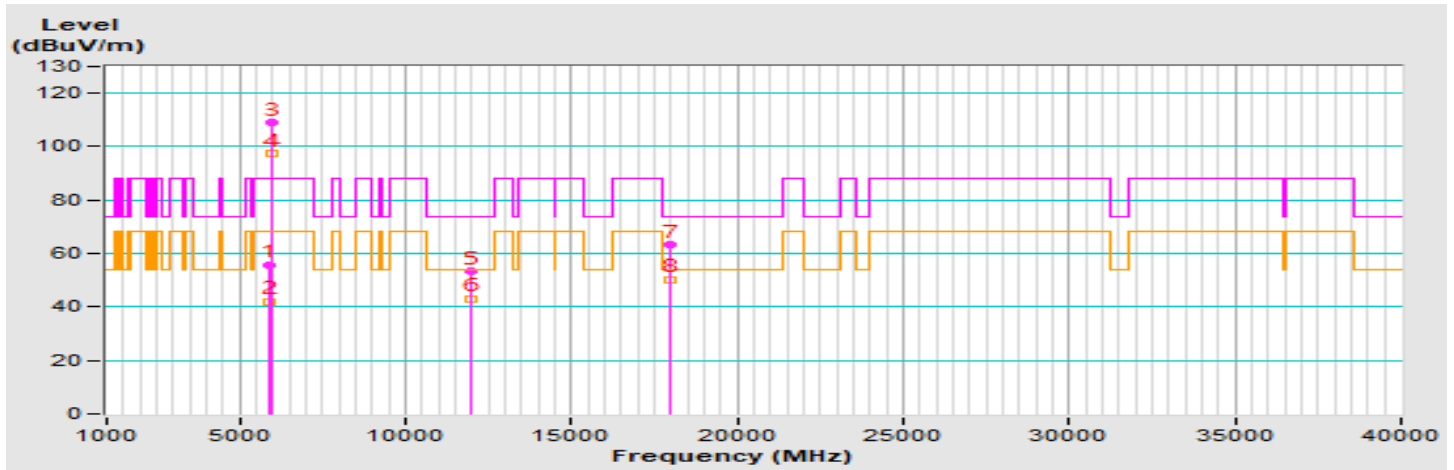

Vertical (Peak)

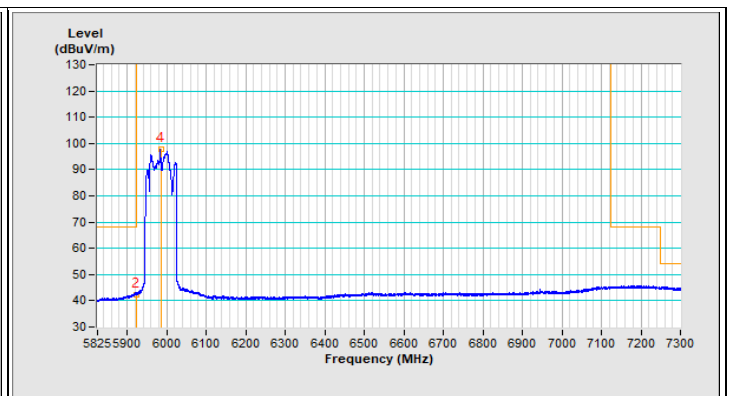


Vertical (Average)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.9 PK	88.2	-32.3	3.75 V	67	49.6	6.3
2	#5925.00	42.1 AV	68.2	-26.1	3.75 V	67	35.8	6.3
3	*5985.00	108.8 PK			3.75 V	67	102.6	6.2
4	*5985.00	97.6 AV			3.75 V	67	91.4	6.2
5	11970.00	53.5 PK	74.0	-20.5	3.20 V	92	38.0	15.5
6	11970.00	43.2 AV	54.0	-10.8	3.20 V	92	27.7	15.5
7	17955.00	63.4 PK	74.0	-10.6	3.19 V	108	33.4	30.0
8	17955.00	50.4 AV	54.0	-3.6	3.19 V	108	20.4	30.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	42

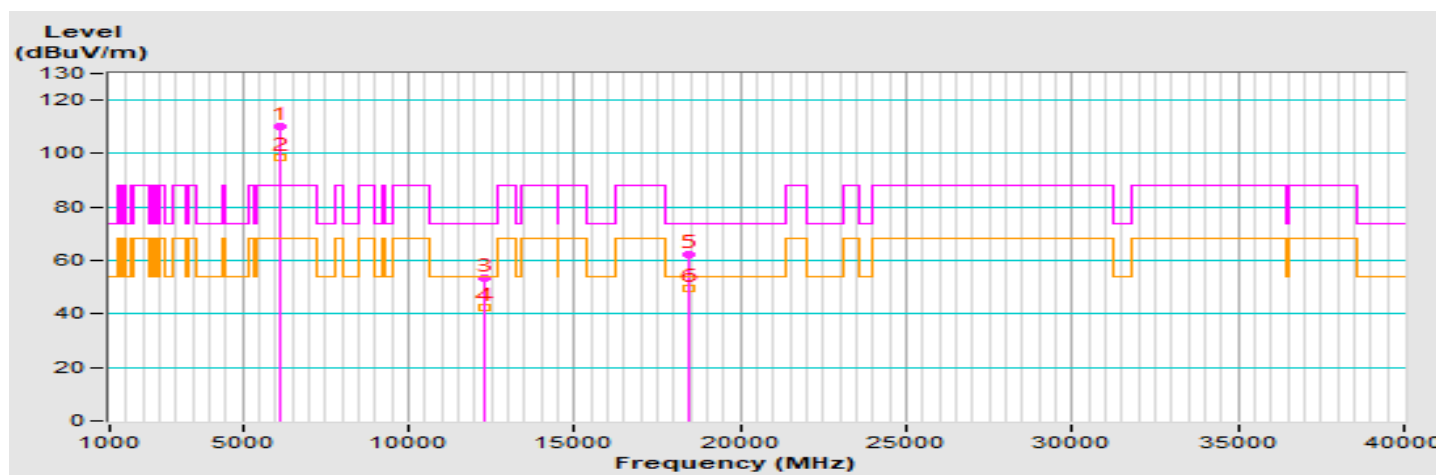


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6145.00	110.2 PK			2.12 H	283	103.7	6.5
2	*6145.00	98.4 AV			2.12 H	283	91.9	6.5
3	12290.00	53.4 PK	74.0	-20.6	2.89 H	183	38.1	15.3
4	12290.00	42.3 AV	54.0	-11.7	2.89 H	183	27.0	15.3
5	18435.00	62.1 PK	74.0	-11.9	2.63 H	234	67.2	-5.1
6	18435.00	49.5 AV	54.0	-4.5	2.63 H	234	54.6	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	42

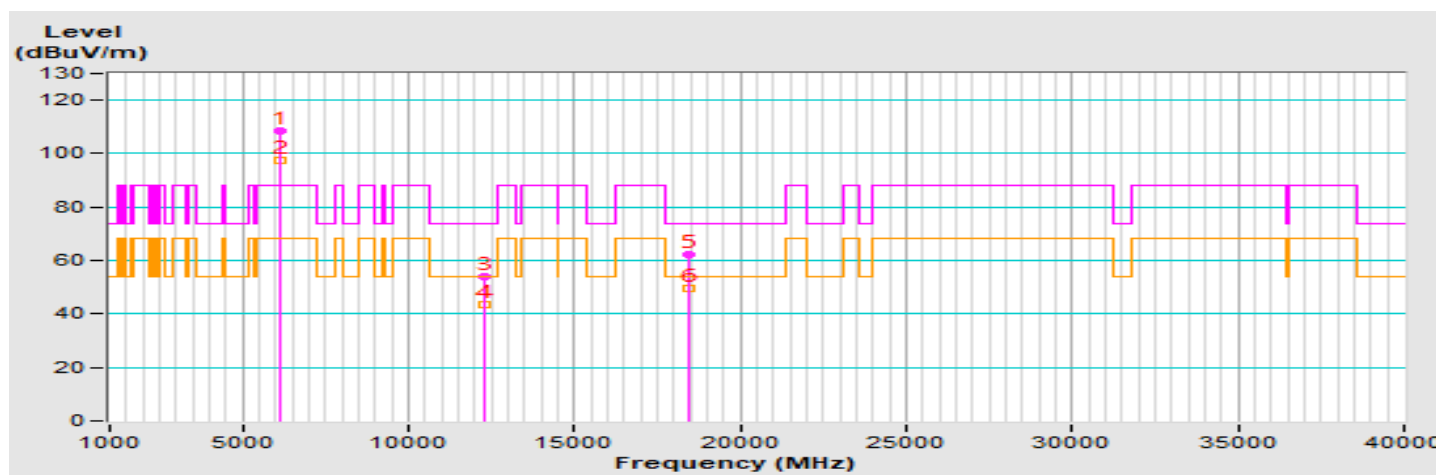


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	108.3 PK			3.30 V	66	101.8	6.5
2	*6145.00	97.5 AV			3.30 V	66	91.0	6.5
3	12290.00	53.9 PK	74.0	-20.1	3.14 V	92	38.6	15.3
4	12290.00	43.6 AV	54.0	-10.4	3.14 V	92	28.3	15.3
5	18435.00	62.2 PK	74.0	-11.8	3.19 V	87	67.3	-5.1
6	18435.00	49.7 AV	54.0	-4.3	3.19 V	87	54.8	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	40

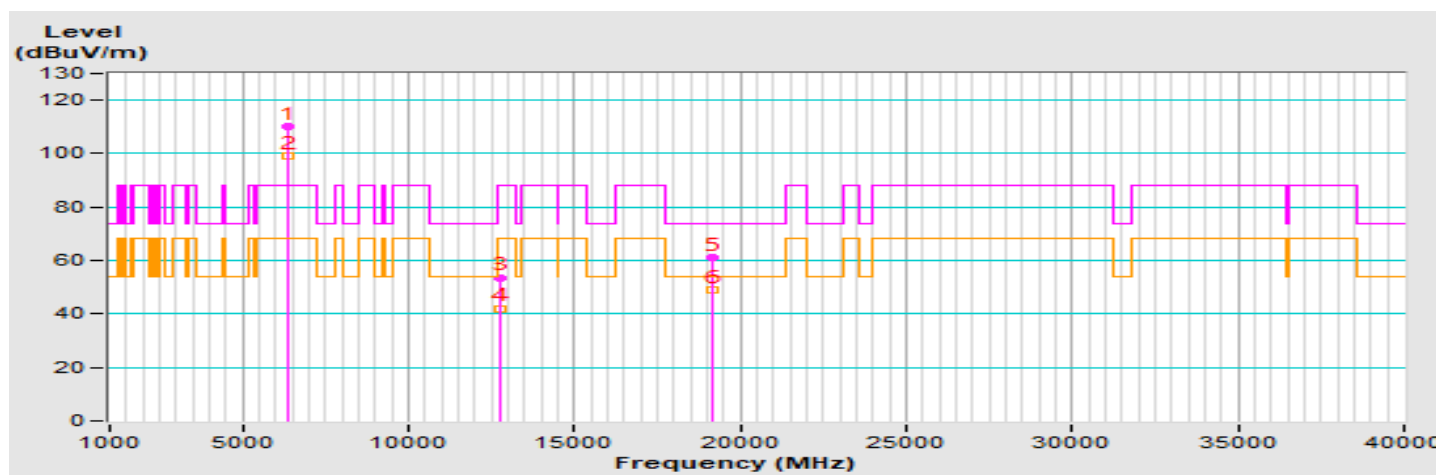


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.4 PK			2.11 H	293	103.0	7.4
2	*6385.00	98.9 AV			2.11 H	293	91.5	7.4
3	#12770.00	53.7 PK	88.2	-34.5	2.89 H	165	38.3	15.4
4	#12770.00	42.1 AV	68.2	-26.1	2.89 H	165	26.7	15.4
5	19155.00	61.1 PK	74.0	-12.9	2.57 H	253	65.7	-4.6
6	19155.00	49.2 AV	54.0	-4.8	2.57 H	253	53.8	-4.6

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- * *: Fundamental frequency, the limit was restricted at the RF Output Power.
- # #: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	40

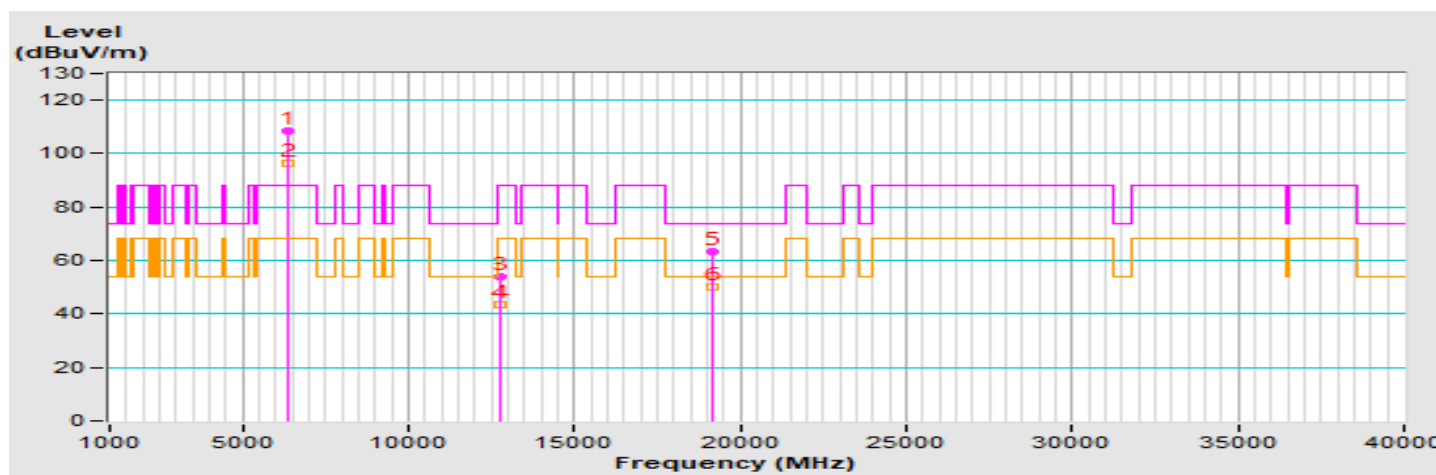


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	108.5 PK			2.32 V	75	101.1	7.4
2	*6385.00	96.6 AV			2.32 V	75	89.2	7.4
3	#12770.00	53.8 PK	88.2	-34.4	3.15 V	106	38.4	15.4
4	#12770.00	43.3 AV	68.2	-24.9	3.15 V	106	27.9	15.4
5	19155.00	63.5 PK	74.0	-10.5	3.14 V	93	68.1	-4.6
6	19155.00	50.3 AV	54.0	-3.7	3.14 V	93	54.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	42

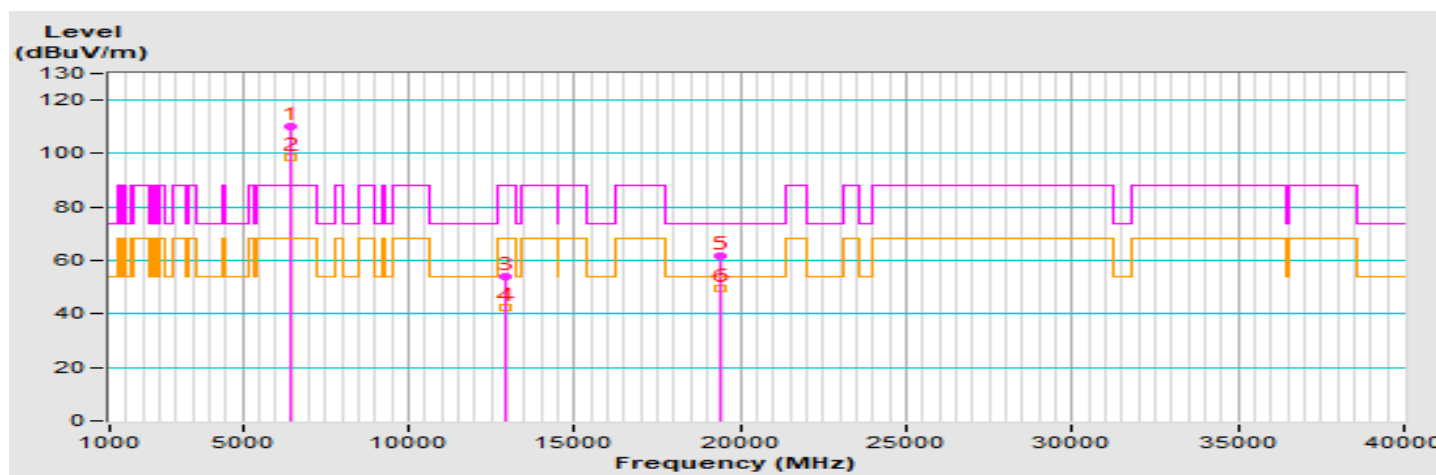


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.3 PK			2.10 H	297	102.3	8.0
2	*6465.00	98.8 AV			2.10 H	297	90.8	8.0
3	#12930.00	53.8 PK	88.2	-34.4	2.92 H	163	38.2	15.6
4	#12930.00	42.6 AV	68.2	-25.6	2.92 H	163	27.0	15.6
5	19395.00	61.7 PK	74.0	-12.3	2.59 H	235	65.2	-3.5
6	19395.00	49.5 AV	54.0	-4.5	2.59 H	235	53.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	42

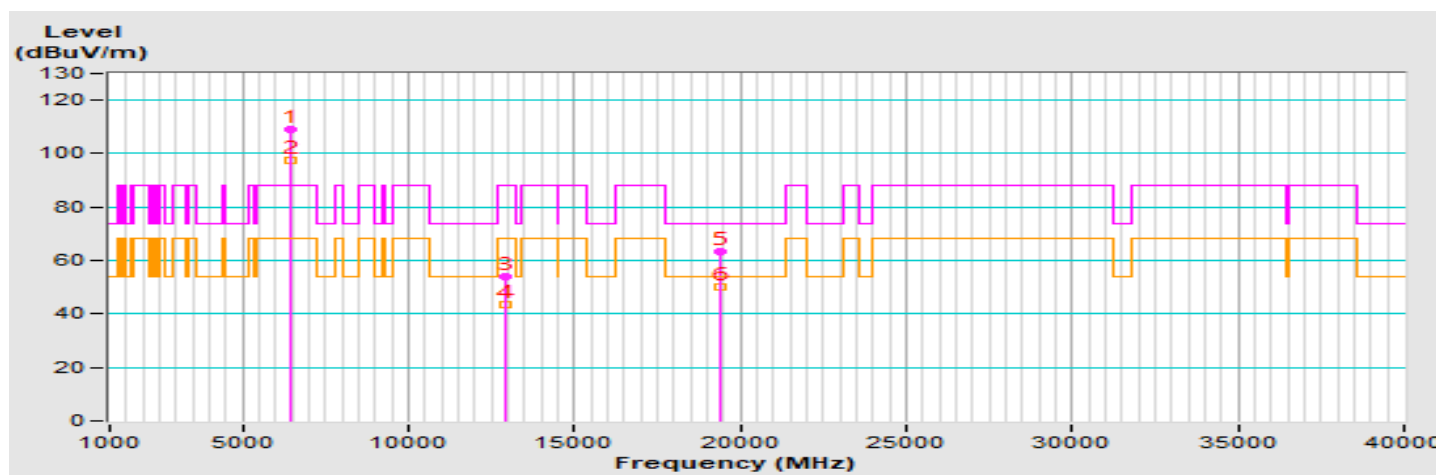


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.1 PK			3.31 V	76	101.1	8.0
2	*6465.00	97.3 AV			3.31 V	76	89.3	8.0
3	#12930.00	54.1 PK	88.2	-34.1	3.23 V	94	38.5	15.6
4	#12930.00	43.7 AV	68.2	-24.5	3.23 V	94	28.1	15.6
5	19395.00	63.4 PK	74.0	-10.6	3.18 V	115	66.9	-3.5
6	19395.00	50.2 AV	54.0	-3.8	3.18 V	115	53.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	38

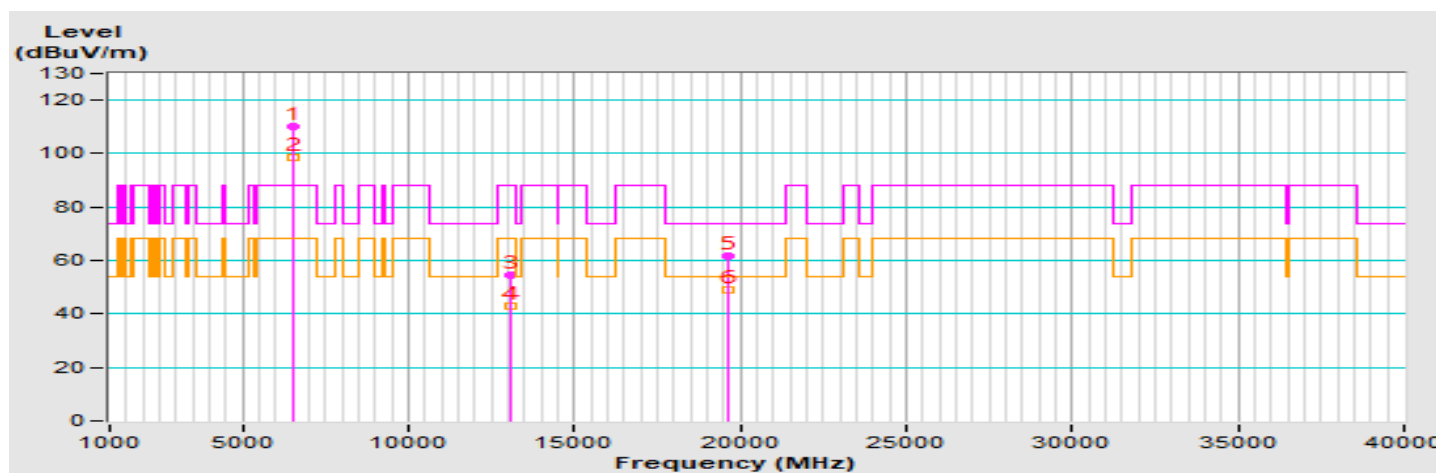


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6545.00	110.1 PK			2.17 H	299	101.6	8.5
2	*6545.00	98.8 AV			2.17 H	299	90.3	8.5
3	#13090.00	54.7 PK	88.2	-33.5	2.95 H	169	38.9	15.8
4	#13090.00	42.8 AV	68.2	-25.4	2.95 H	169	27.0	15.8
5	19635.00	61.7 PK	74.0	-12.3	2.61 H	248	65.5	-3.8
6	19635.00	49.2 AV	54.0	-4.8	2.61 H	248	53.0	-3.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	38

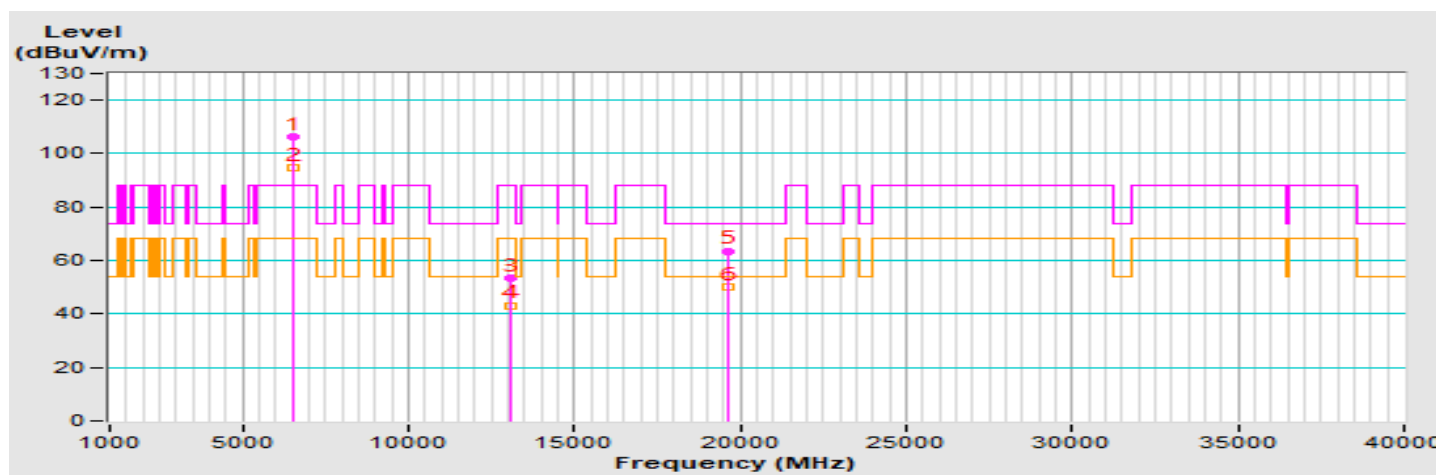


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	106.3 PK			3.35 V	124	97.8	8.5
2	*6545.00	94.7 AV			3.35 V	124	86.2	8.5
3	#13090.00	53.5 PK	88.2	-34.7	3.12 V	92	37.7	15.8
4	#13090.00	43.2 AV	68.2	-25.0	3.12 V	92	27.4	15.8
5	19635.00	63.6 PK	74.0	-10.4	3.04 V	95	67.4	-3.8
6	19635.00	50.2 AV	54.0	-3.8	3.04 V	95	54.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	39

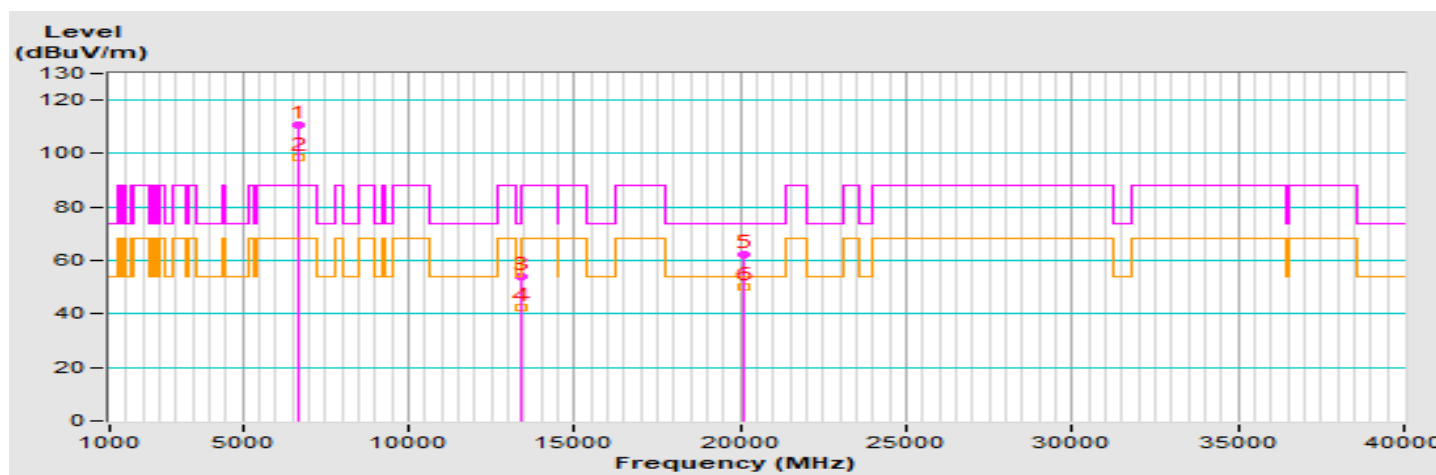


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.6 PK			2.16 H	302	101.8	8.8
2	*6705.00	98.5 AV			2.16 H	302	89.7	8.8
3	#13410.00	53.9 PK	88.2	-34.3	2.94 H	160	36.1	17.8
4	#13410.00	42.3 AV	68.2	-25.9	2.94 H	160	24.5	17.8
5	20115.00	62.2 PK	74.0	-11.8	2.51 H	236	65.9	-3.7
6	20115.00	49.9 AV	54.0	-4.1	2.51 H	236	53.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	39

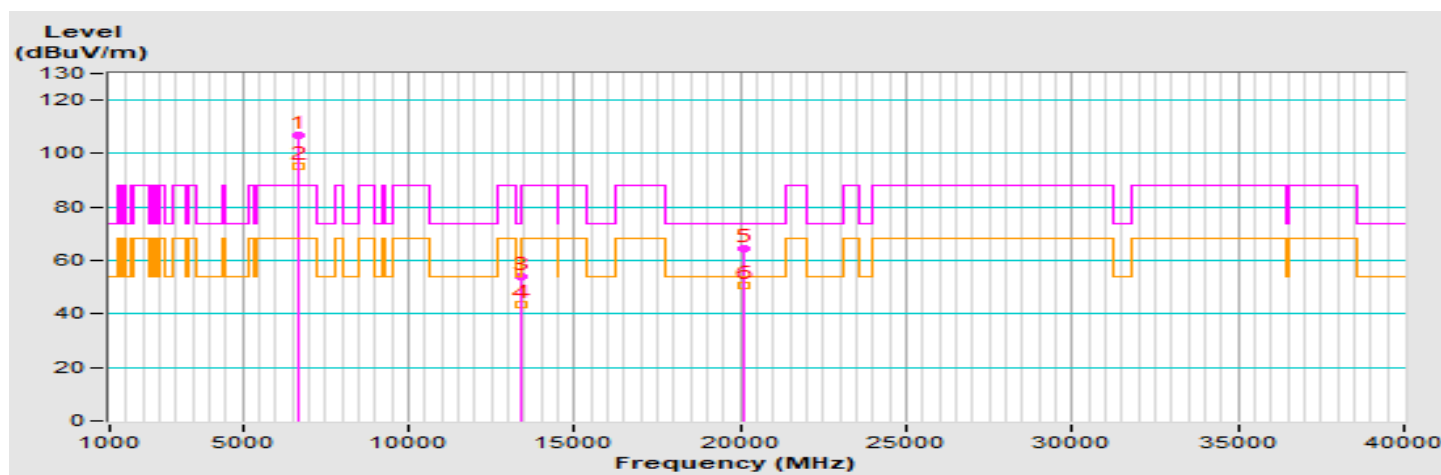


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6705.00	106.6 PK			2.95 V	70	97.8	8.8
2	*6705.00	95.4 AV			2.95 V	70	86.6	8.8
3	#13410.00	54.0 PK	88.2	-34.2	3.22 V	85	36.2	17.8
4	#13410.00	43.7 AV	68.2	-24.5	3.22 V	85	25.9	17.8
5	20115.00	64.2 PK	74.0	-9.8	3.17 V	99	67.9	-3.7
6	20115.00	50.8 AV	54.0	-3.2	3.17 V	99	54.5	-3.7

Remarks:

- Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
- " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	40

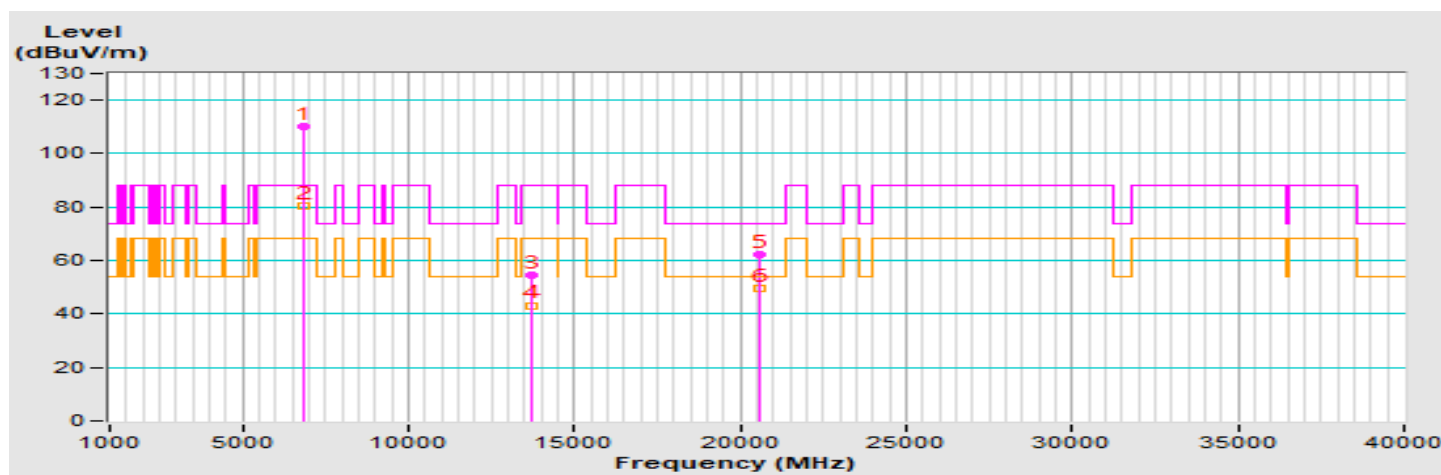


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6865.00	110.3 PK			2.13 H	292	101.1	9.2
2	*6865.00	80.6 AV			2.13 H	292	71.4	9.2
3	#13730.00	54.5 PK	88.2	-33.7	2.87 H	164	36.0	18.5
4	#13730.00	43.2 AV	68.2	-25.0	2.87 H	164	24.7	18.5
5	20595.00	62.4 PK	74.0	-11.6	2.65 H	247	65.7	-3.3
6	20595.00	49.5 AV	54.0	-4.5	2.65 H	247	52.8	-3.3

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	40

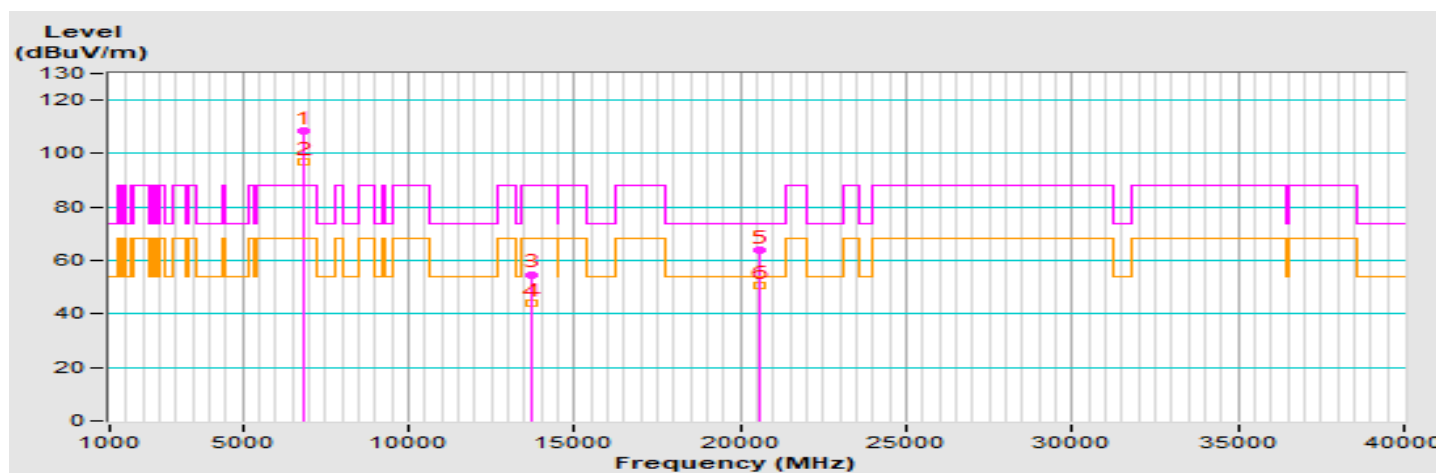


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	108.7 PK			3.04 V	119	99.5	9.2
2	*6865.00	97.1 AV			3.04 V	119	87.9	9.2
3	#13730.00	54.8 PK	88.2	-33.4	3.19 V	67	36.3	18.5
4	#13730.00	44.1 AV	68.2	-24.1	3.19 V	67	25.6	18.5
5	20595.00	63.7 PK	74.0	-10.3	3.11 V	138	67.0	-3.3
6	20595.00	50.6 AV	54.0	-3.4	3.11 V	138	53.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	42

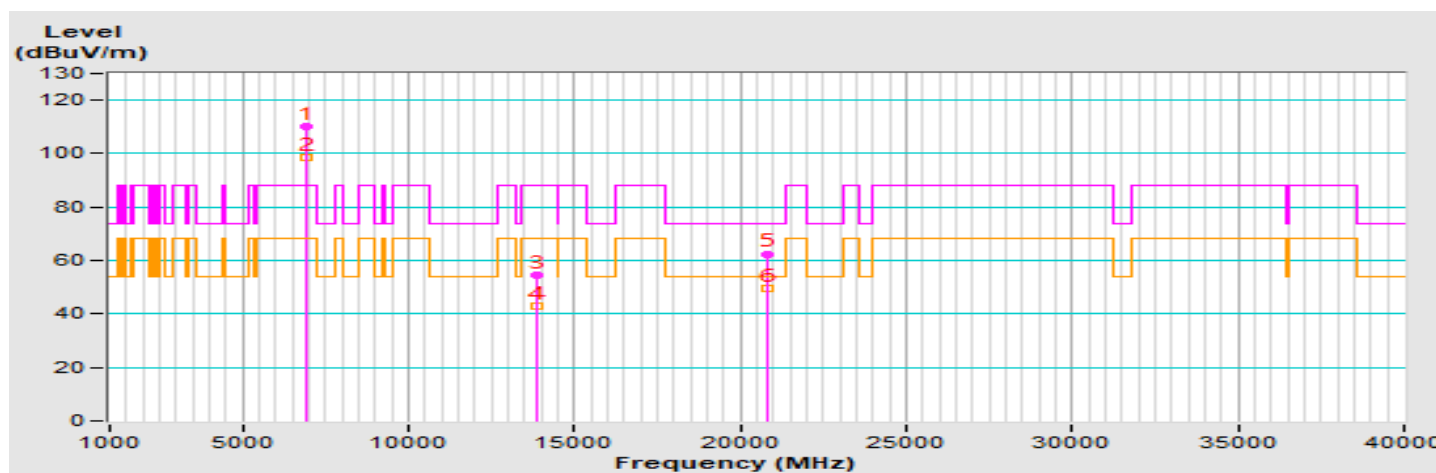


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	110.1 PK			2.18 H	249	100.1	10.0
2	*6945.00	98.4 AV			2.18 H	249	88.4	10.0
3	#13890.00	54.5 PK	88.2	-33.7	2.82 H	183	35.9	18.6
4	#13890.00	43.1 AV	68.2	-25.1	2.82 H	183	24.5	18.6
5	20835.00	62.5 PK	74.0	-11.5	2.65 H	247	65.2	-2.7
6	20835.00	49.7 AV	54.0	-4.3	2.65 H	247	52.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	42


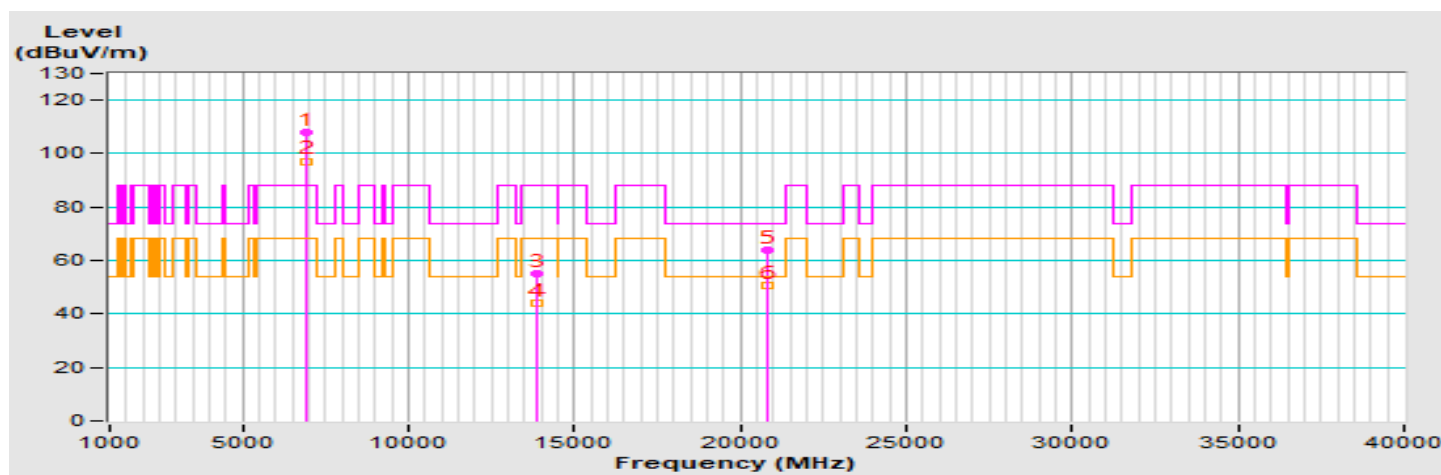


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	108.1 PK			3.36 V	120	98.1	10.0
2	*6945.00	97.2 AV			3.36 V	120	87.2	10.0
3	#13890.00	55.0 PK	88.2	-33.2	3.13 V	72	36.4	18.6
4	#13890.00	44.1 AV	68.2	-24.1	3.13 V	72	25.5	18.6
5	20835.00	64.1 PK	74.0	-9.9	3.15 V	105	66.8	-2.7
6	20835.00	50.6 AV	54.0	-3.4	3.15 V	105	53.3	-2.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	41

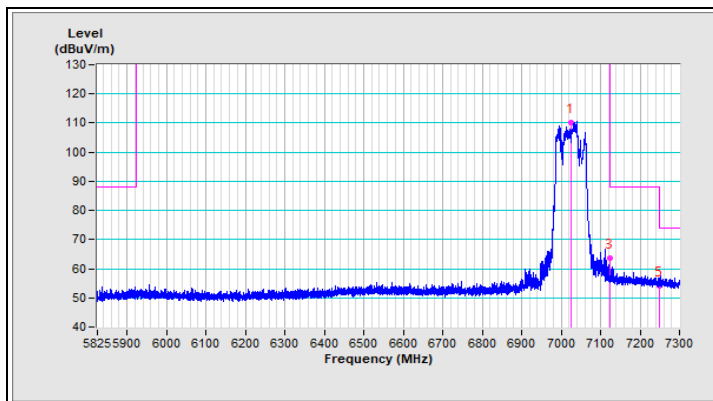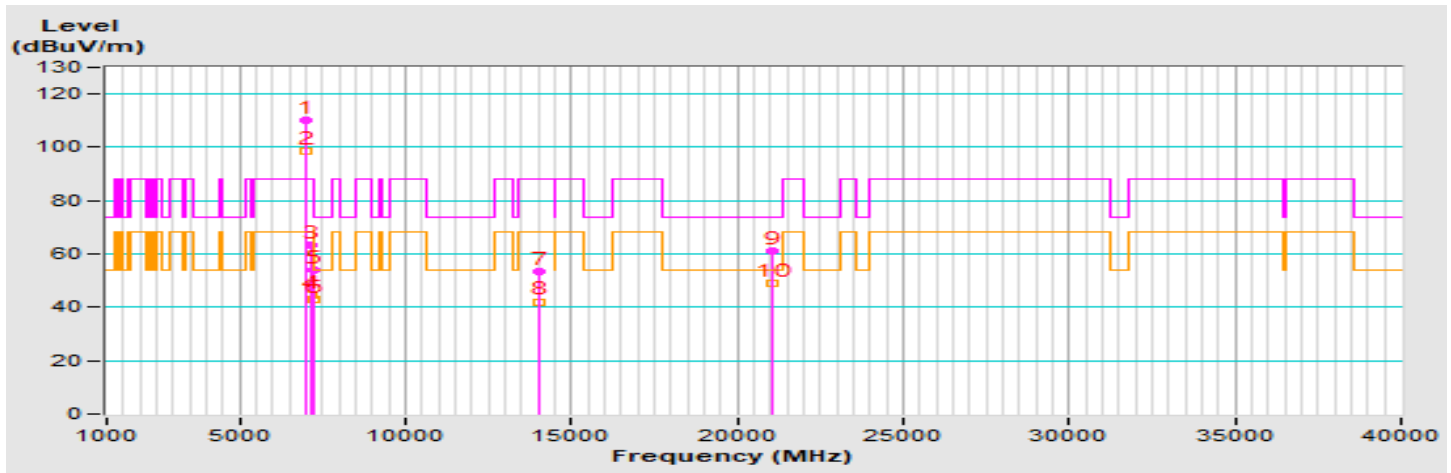

Horizontal (Peak)

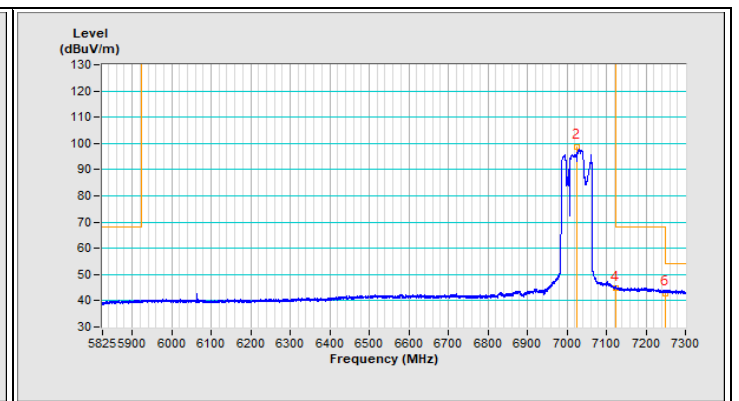



Horizontal (Average)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.1 PK			2.11 H	287	100.2	9.9
2	*7025.00	98.7 AV			2.11 H	287	88.8	9.9
3	#7125.00	63.5 PK	88.2	-24.7	2.11 H	287	52.6	10.9
4	#7125.00	44.7 AV	68.2	-23.5	2.11 H	287	33.8	10.9
5	7250.00	54.2 PK	74.0	-19.8	2.11 H	287	43.4	10.8
6	7250.00	42.8 AV	54.0	-11.2	2.11 H	287	32.0	10.8
7	#14050.00	53.5 PK	88.2	-34.7	2.87 H	174	34.5	19.0
8	#14050.00	42.1 AV	68.2	-26.1	2.87 H	174	23.1	19.0
9	21075.00	61.3 PK	74.0	-12.7	2.73 H	239	64.3	-3.0
10	21075.00	48.8 AV	54.0	-5.2	2.73 H	239	51.8	-3.0


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	41

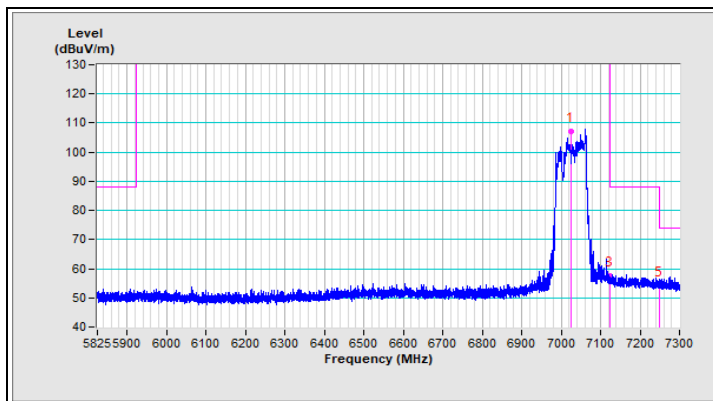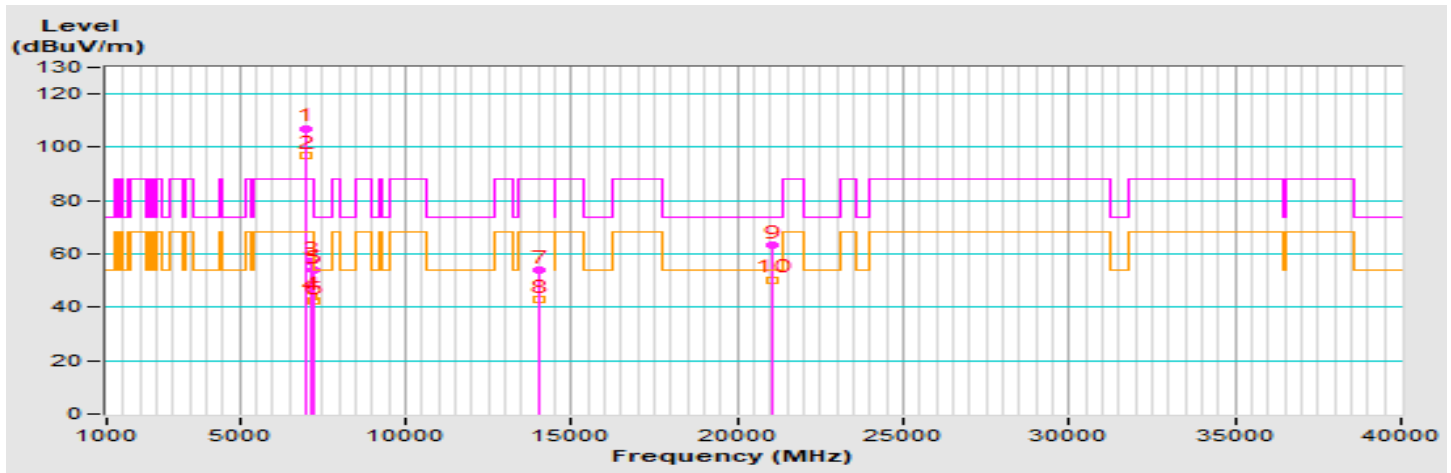

Vertical (Peak)

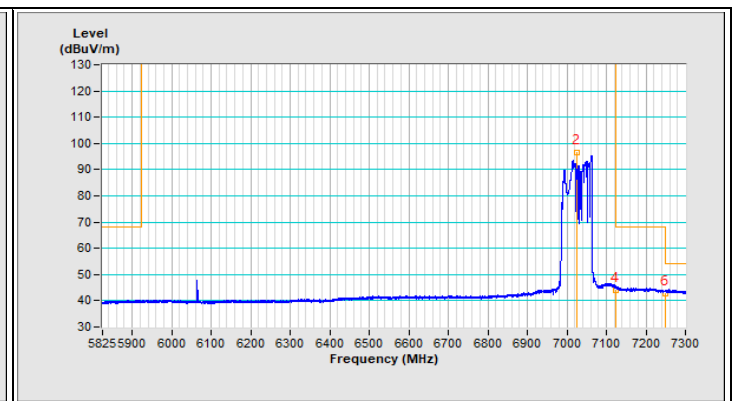



Vertical (Average)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	107.1 PK			3.16 V	109	97.2	9.9
2	*7025.00	96.7 AV			3.16 V	109	86.8	9.9
3	#7125.00	57.5 PK	88.2	-30.7	3.16 V	109	46.6	10.9
4	#7125.00	44.1 AV	68.2	-24.1	3.16 V	109	33.2	10.9
5	7250.00	54.1 PK	74.0	-19.9	3.16 V	109	43.3	10.8
6	7250.00	42.6 AV	54.0	-11.4	3.16 V	109	31.8	10.8
7	#14050.00	53.9 PK	88.2	-34.3	3.17 V	43	34.9	19.0
8	#14050.00	43.1 AV	68.2	-25.1	3.17 V	43	24.1	19.0
9	21075.00	63.3 PK	74.0	-10.7	3.03 V	121	66.3	-3.0
10	21075.00	50.4 AV	54.0	-3.6	3.03 V	121	53.4	-3.0


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	50

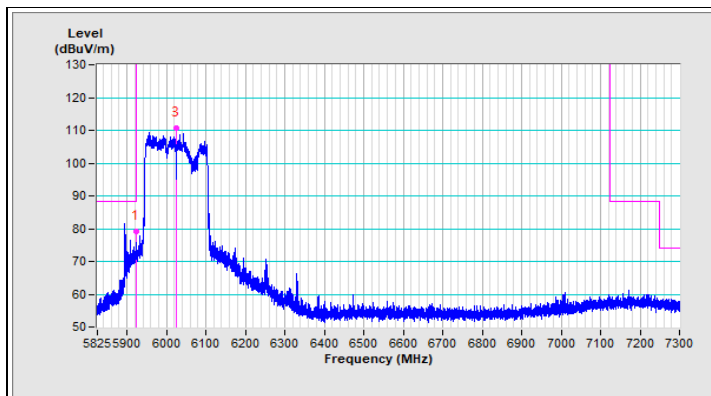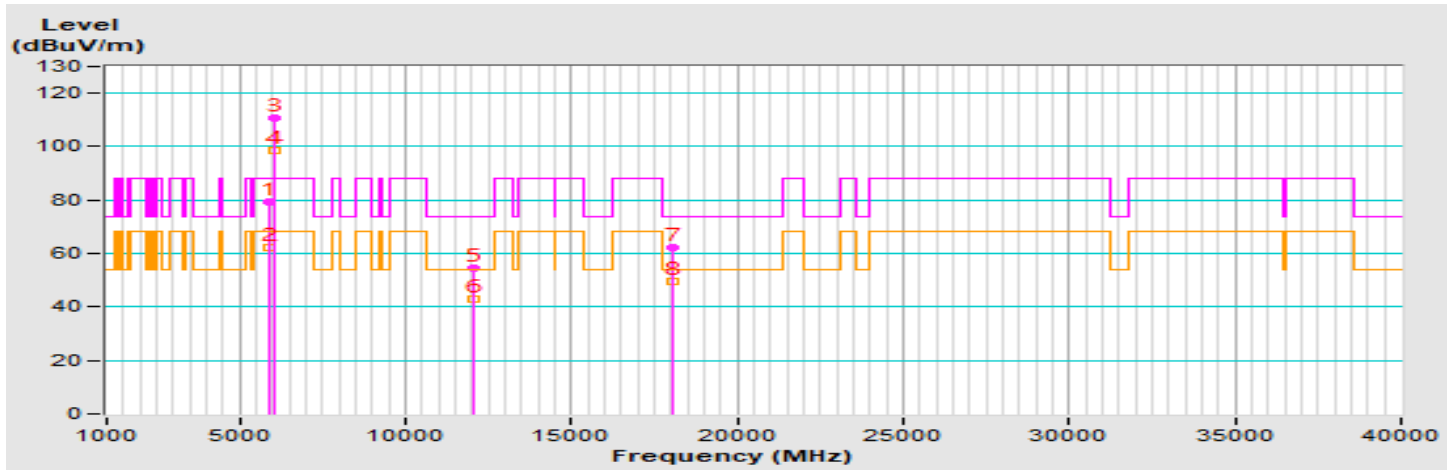

Horizontal (Peak)

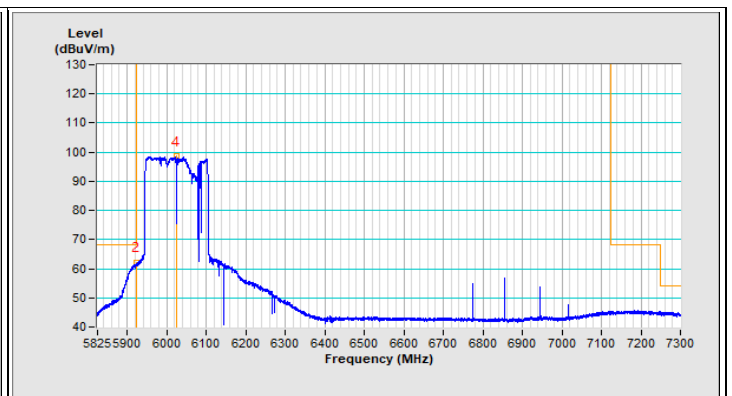



Horizontal (Average)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.1 PK	88.2	-9.1	2.28 H	301	72.8	6.3
2	#5925.00	62.3 AV	68.2	-5.9	2.28 H	301	56.0	6.3
3	*6025.00	110.7 PK			2.28 H	301	104.6	6.1
4	*6025.00	98.6 AV			2.28 H	301	92.5	6.1
5	12050.00	54.4 PK	74.0	-19.6	2.88 H	174	38.8	15.6
6	12050.00	42.8 AV	54.0	-11.2	2.88 H	174	27.2	15.6
7	18075.00	62.4 PK	74.0	-11.6	2.65 H	240	67.5	-5.1
8	18075.00	49.6 AV	54.0	-4.4	2.65 H	240	54.7	-5.1


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	50

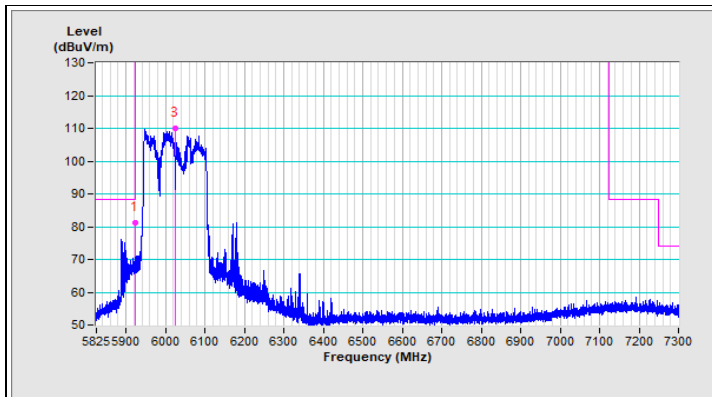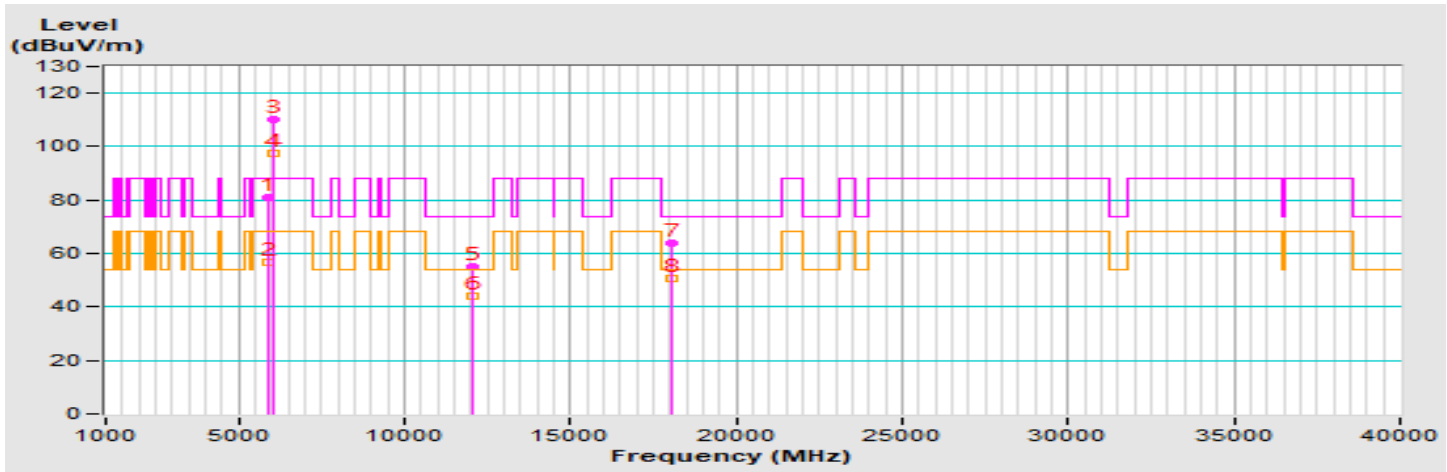

Vertical (Peak)

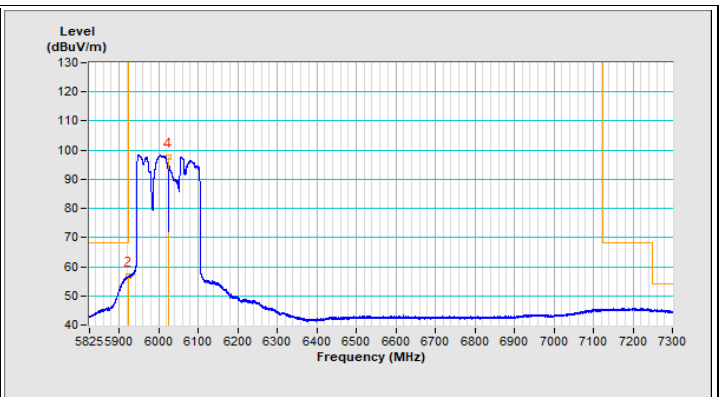


Vertical (Average)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.2 PK	88.2	-7.0	1.78 V	107	74.9	6.3
2	#5925.00	56.8 AV	68.2	-11.4	1.78 V	107	50.5	6.3
3	*6025.00	110.1 PK			1.78 V	107	104.0	6.1
4	*6025.00	97.7 AV			1.78 V	107	91.6	6.1
5	12050.00	54.9 PK	74.0	-19.1	3.17 V	59	39.3	15.6
6	12050.00	44.1 AV	54.0	-9.9	3.17 V	59	28.5	15.6
7	18075.00	63.9 PK	74.0	-10.1	3.11 V	94	69.0	-5.1
8	18075.00	50.9 AV	54.0	-3.1	3.11 V	94	56.0	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	50

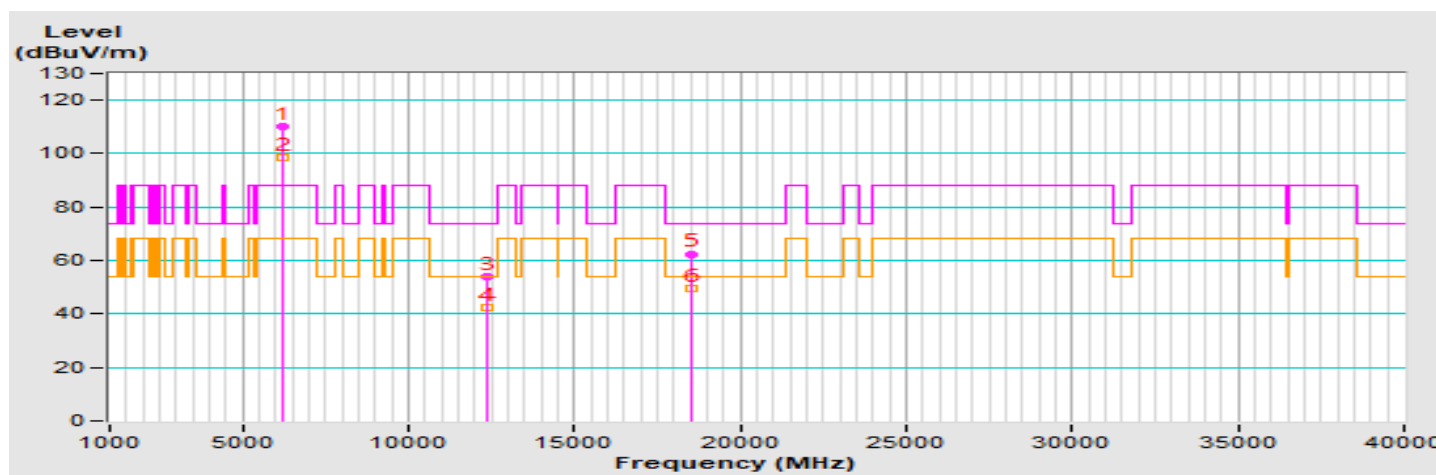


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6185.00	109.9 PK			2.26 H	305	103.1	6.8
2	*6185.00	98.5 AV			2.26 H	305	91.7	6.8
3	12370.00	53.9 PK	74.0	-20.1	2.92 H	185	38.9	15.0
4	12370.00	42.3 AV	54.0	-11.7	2.92 H	185	27.3	15.0
5	18555.00	62.5 PK	74.0	-11.5	2.60 H	249	67.4	-4.9
6	18555.00	49.7 AV	54.0	-4.3	2.60 H	249	54.6	-4.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	50

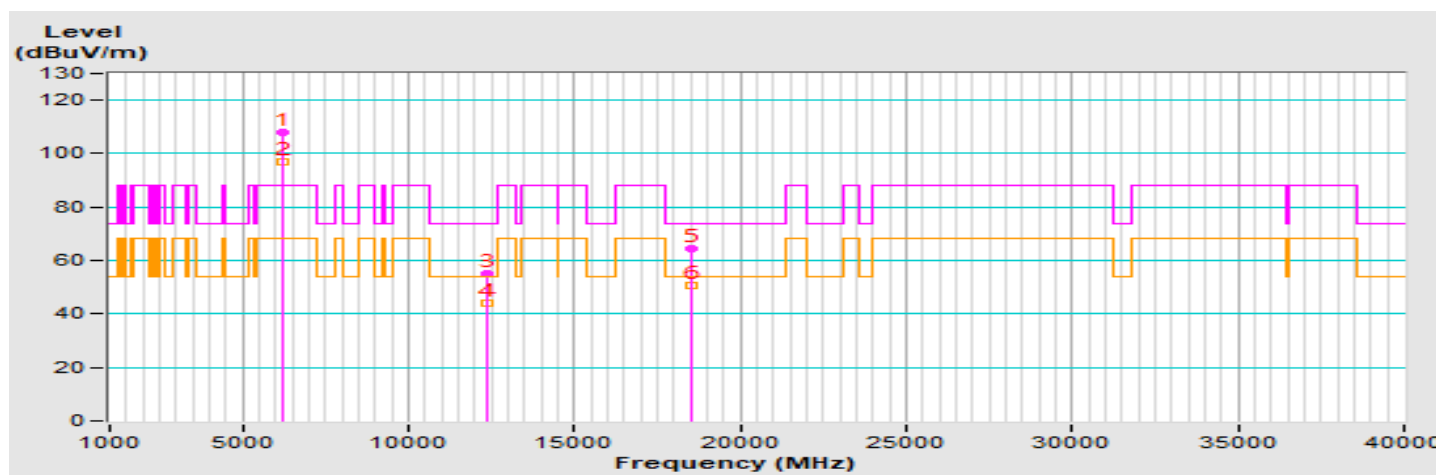


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	108.1 PK			1.76 V	122	101.3	6.8
2	*6185.00	96.9 AV			1.76 V	122	90.1	6.8
3	12370.00	55.2 PK	74.0	-18.8	3.06 V	52	40.2	15.0
4	12370.00	44.1 AV	54.0	-9.9	3.06 V	52	29.1	15.0
5	18555.00	64.3 PK	74.0	-9.7	3.14 V	93	69.2	-4.9
6	18555.00	50.9 AV	54.0	-3.1	3.14 V	93	55.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	47

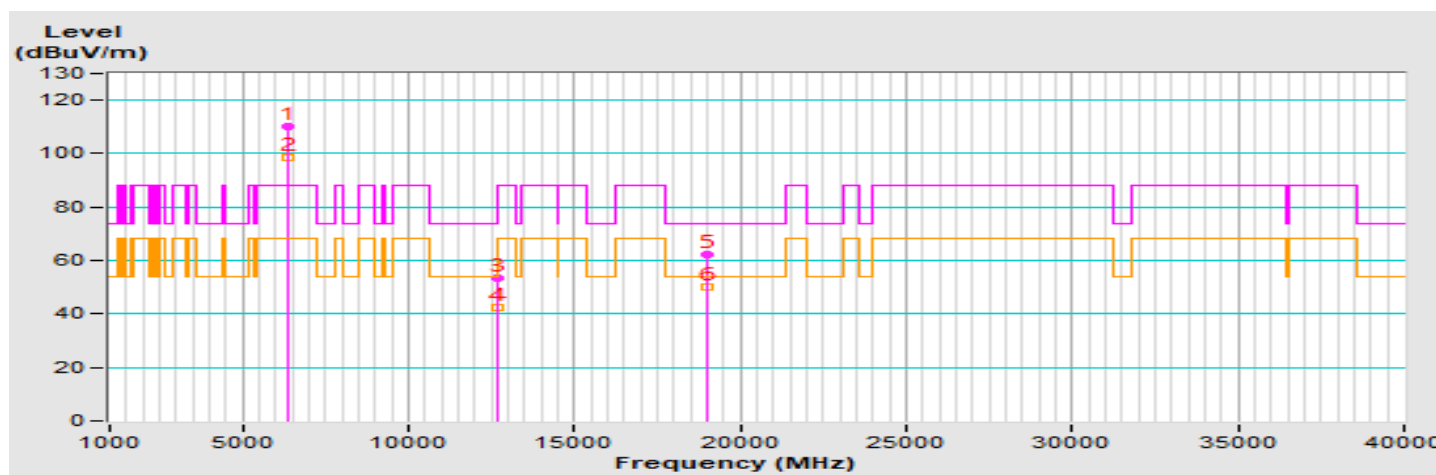


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.4 PK			2.42 H	291	103.0	7.4
2	*6345.00	98.8 AV			2.42 H	291	91.4	7.4
3	12690.00	53.5 PK	74.0	-20.5	2.97 H	189	38.6	14.9
4	12690.00	42.2 AV	54.0	-11.8	2.97 H	189	27.3	14.9
5	19035.00	62.2 PK	74.0	-11.8	2.66 H	239	66.9	-4.7
6	19035.00	49.9 AV	54.0	-4.1	2.66 H	239	54.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * ”: Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	47

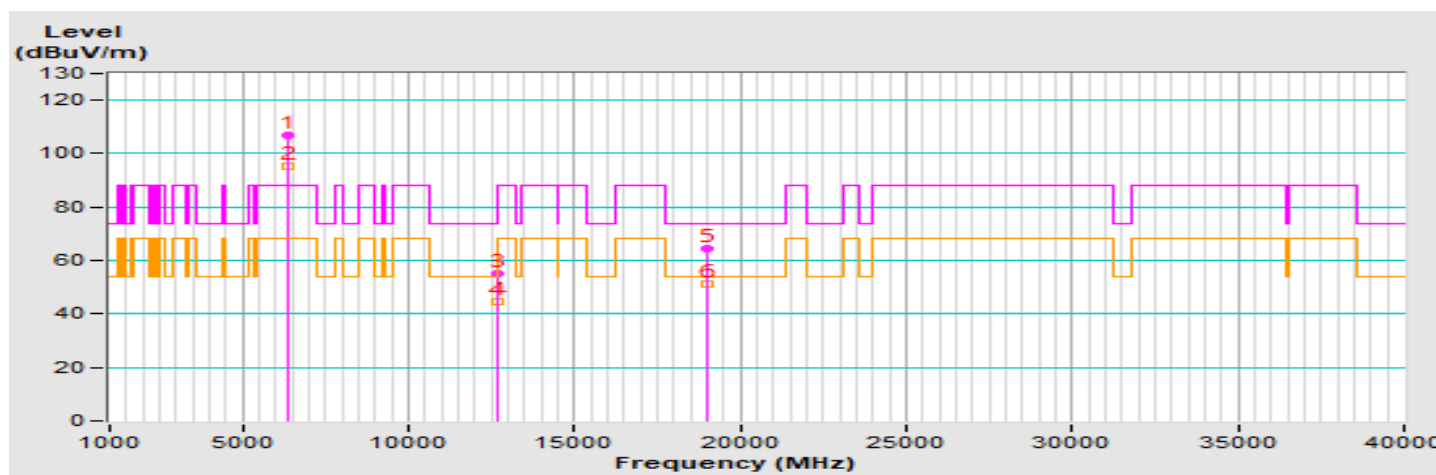


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.8 PK			1.77 V	115	99.4	7.4
2	*6345.00	95.1 AV			1.77 V	115	87.7	7.4
3	12690.00	55.2 PK	74.0	-18.8	3.07 V	66	40.3	14.9
4	12690.00	44.4 AV	54.0	-9.6	3.07 V	66	29.5	14.9
5	19035.00	64.3 PK	74.0	-9.7	3.05 V	104	69.0	-4.7
6	19035.00	51.1 AV	54.0	-2.9	3.05 V	104	55.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	44

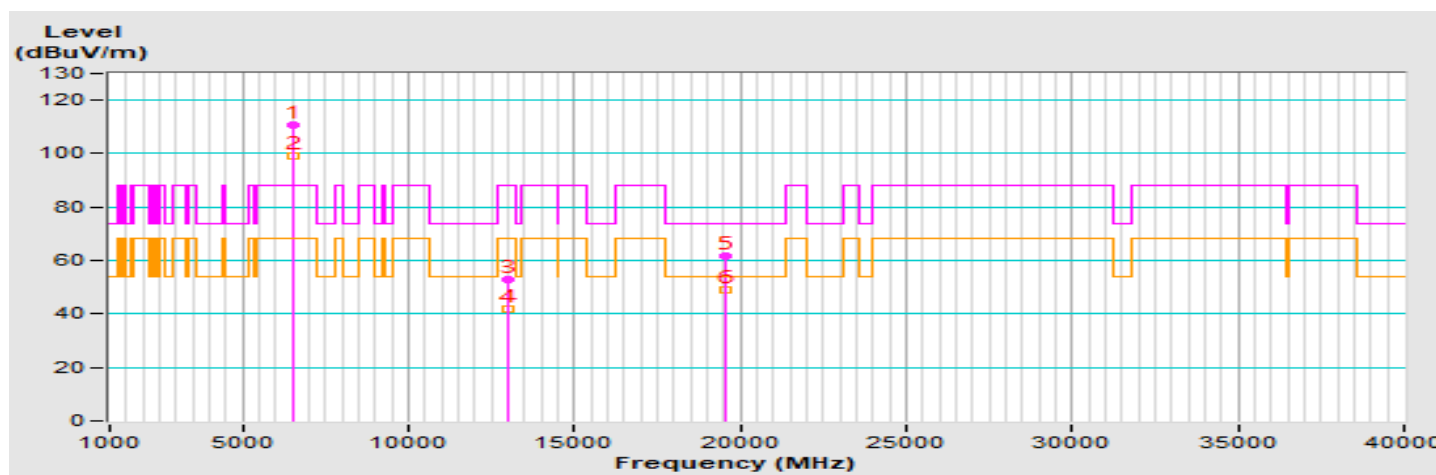


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.8 PK			2.17 H	293	102.6	8.2
2	*6505.00	98.9 AV			2.17 H	293	90.7	8.2
3	#13010.00	52.9 PK	88.2	-35.3	2.97 H	185	37.4	15.5
4	#13010.00	41.7 AV	68.2	-26.5	2.97 H	185	26.2	15.5
5	19515.00	61.7 PK	74.0	-12.3	2.61 H	270	64.9	-3.2
6	19515.00	49.1 AV	54.0	-4.9	2.61 H	270	52.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	44

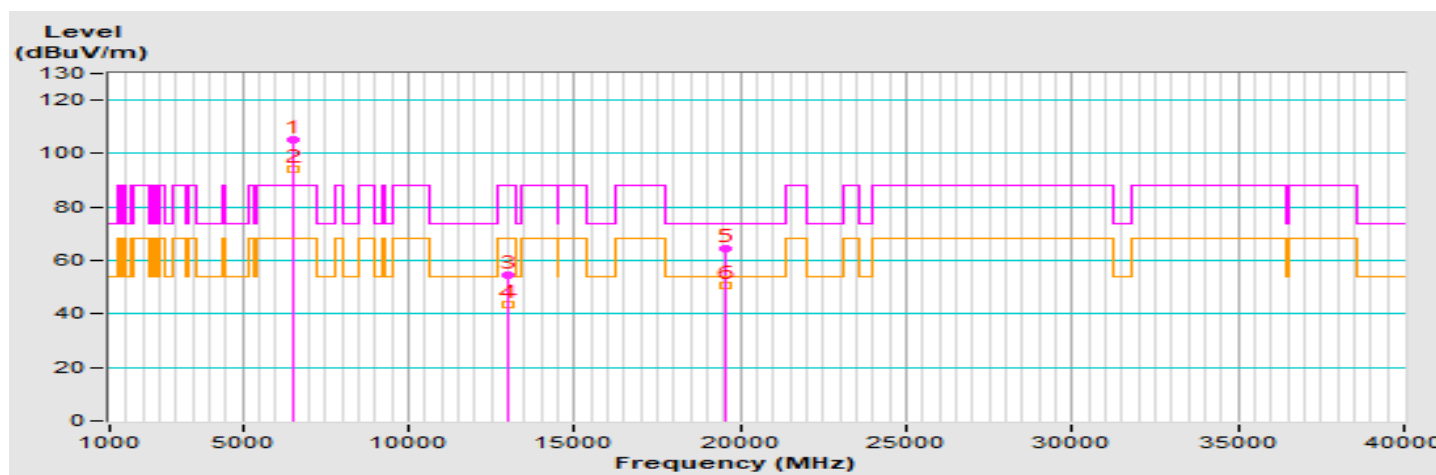


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.1 PK			2.50 V	119	96.9	8.2
2	*6505.00	94.1 AV			2.50 V	119	85.9	8.2
3	#13010.00	54.4 PK	88.2	-33.8	3.14 V	69	38.9	15.5
4	#13010.00	43.6 AV	68.2	-24.6	3.14 V	69	28.1	15.5
5	19515.00	64.2 PK	74.0	-9.8	3.13 V	97	67.4	-3.2
6	19515.00	50.7 AV	54.0	-3.3	3.13 V	97	53.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	45

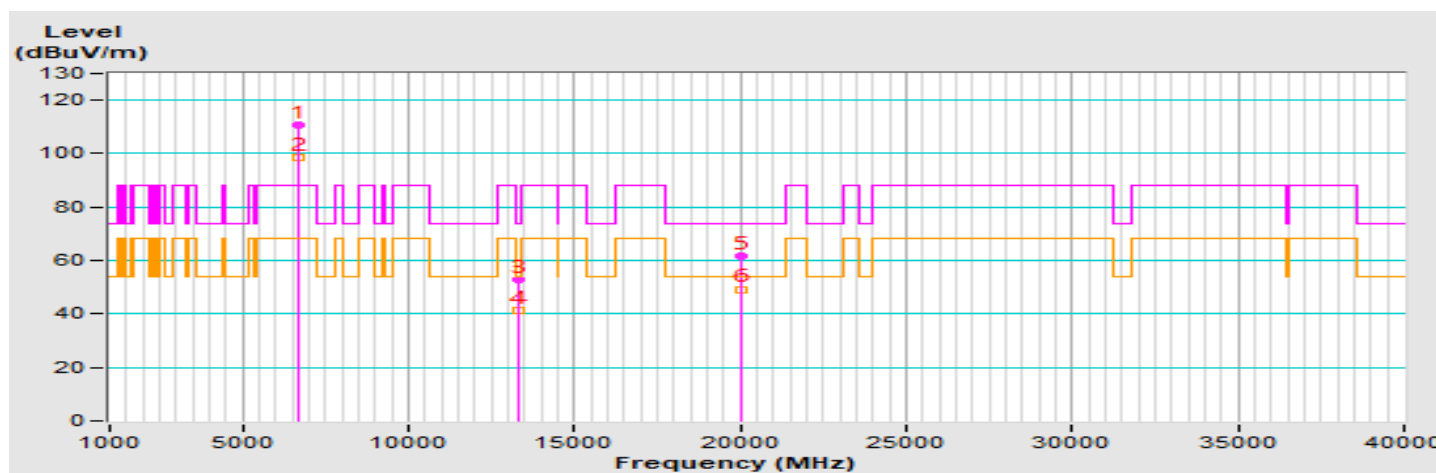


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.6 PK			2.11 H	303	101.7	8.9
2	*6665.00	98.7 AV			2.11 H	303	89.8	8.9
3	13330.00	52.7 PK	74.0	-21.3	2.90 H	200	35.3	17.4
4	13330.00	41.5 AV	54.0	-12.5	2.90 H	200	24.1	17.4
5	19995.00	61.8 PK	74.0	-12.2	2.60 H	262	65.9	-4.1
6	19995.00	49.3 AV	54.0	-4.7	2.60 H	262	53.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	45

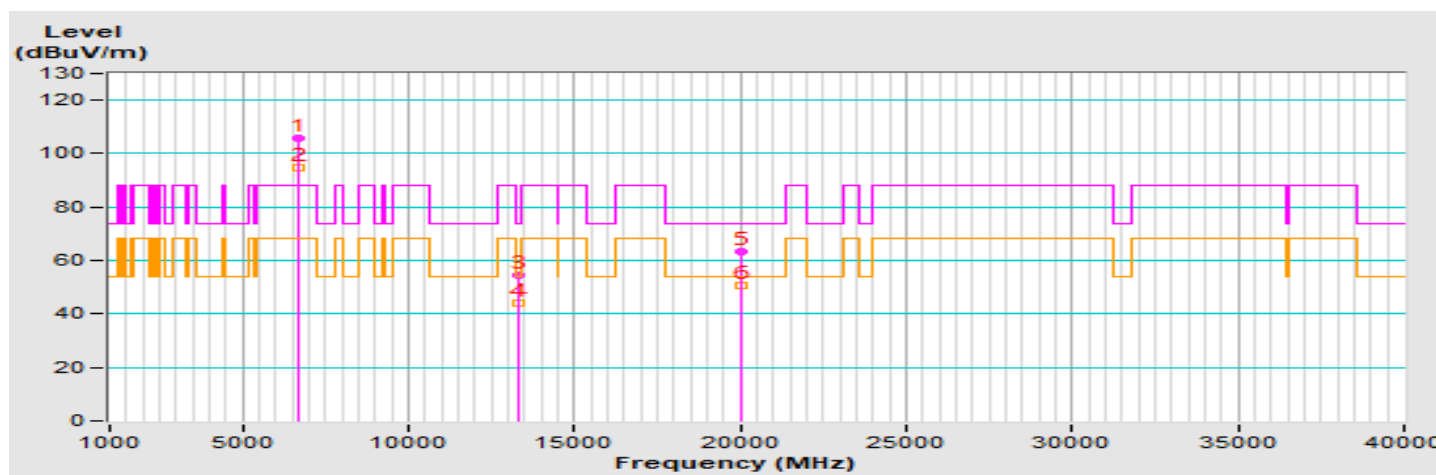


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.6 PK			3.43 V	198	96.7	8.9
2	*6665.00	94.9 AV			3.43 V	198	86.0	8.9
3	13330.00	54.4 PK	74.0	-19.6	3.06 V	67	37.0	17.4
4	13330.00	43.9 AV	54.0	-10.1	3.06 V	67	26.5	17.4
5	19995.00	63.4 PK	74.0	-10.6	3.14 V	85	67.5	-4.1
6	19995.00	50.5 AV	54.0	-3.5	3.14 V	85	54.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	46

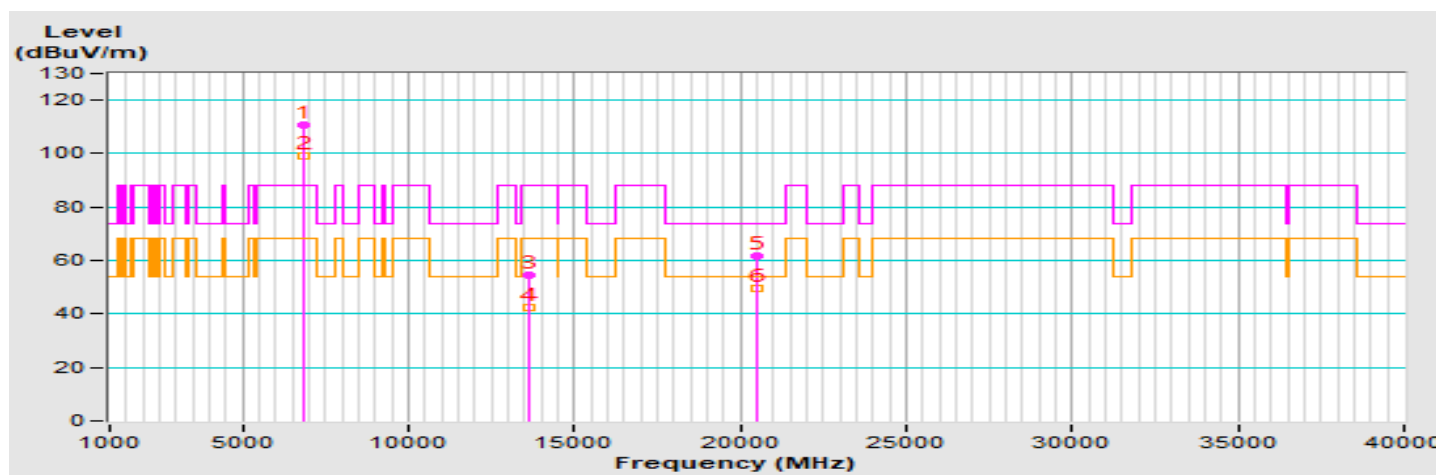


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6825.00	110.6 PK			2.12 H	302	101.6	9.0
2	*6825.00	98.9 AV			2.12 H	302	89.9	9.0
3	#13650.00	54.4 PK	88.2	-33.8	2.96 H	184	35.8	18.6
4	#13650.00	42.5 AV	68.2	-25.7	2.96 H	184	23.9	18.6
5	20475.00	61.9 PK	74.0	-12.1	2.65 H	261	64.9	-3.0
6	20475.00	49.6 AV	54.0	-4.4	2.65 H	261	52.6	-3.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	46


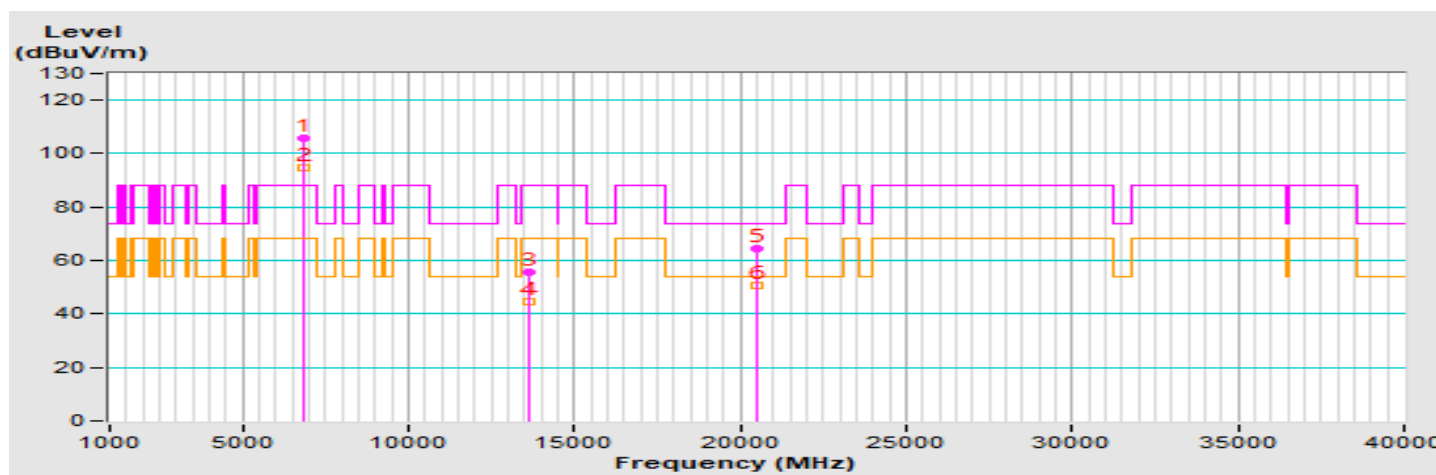


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.9 PK			1.52 V	127	96.9	9.0
2	*6825.00	94.6 AV			1.52 V	127	85.6	9.0
3	#13650.00	55.4 PK	88.2	-32.8	3.17 V	94	36.8	18.6
4	#13650.00	44.6 AV	68.2	-23.6	3.17 V	94	26.0	18.6
5	20475.00	64.2 PK	74.0	-9.8	3.00 V	82	67.2	-3.0
6	20475.00	50.6 AV	54.0	-3.4	3.00 V	82	53.6	-3.0


Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- * *: Fundamental frequency, the limit was restricted at the RF Output Power.
- # #: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	47

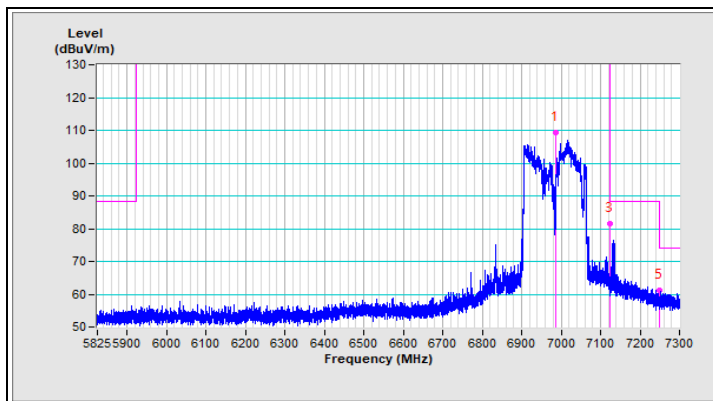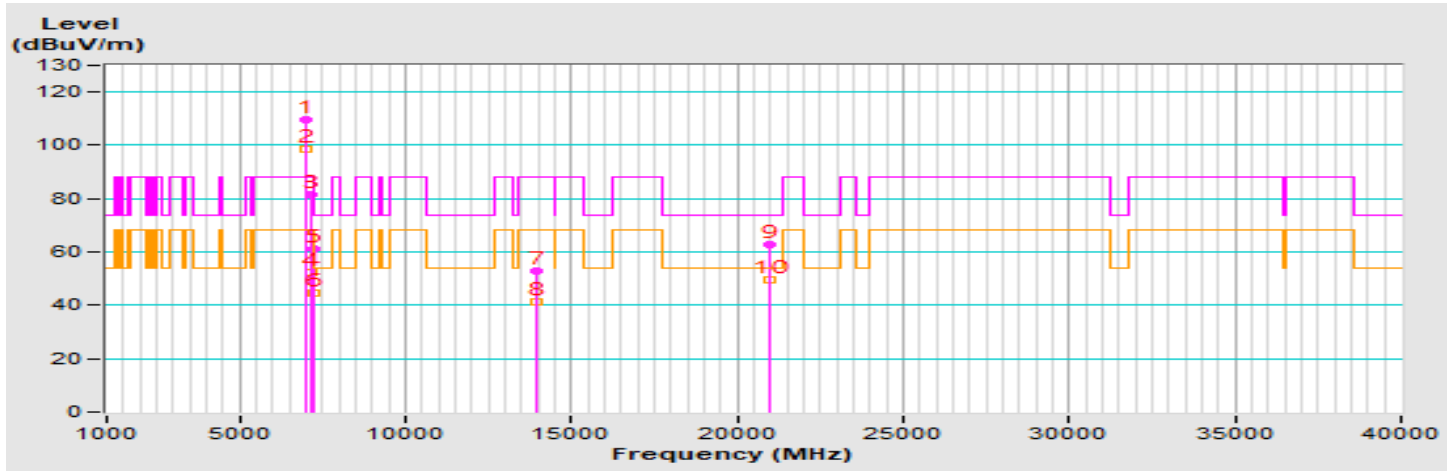

Horizontal (Peak)

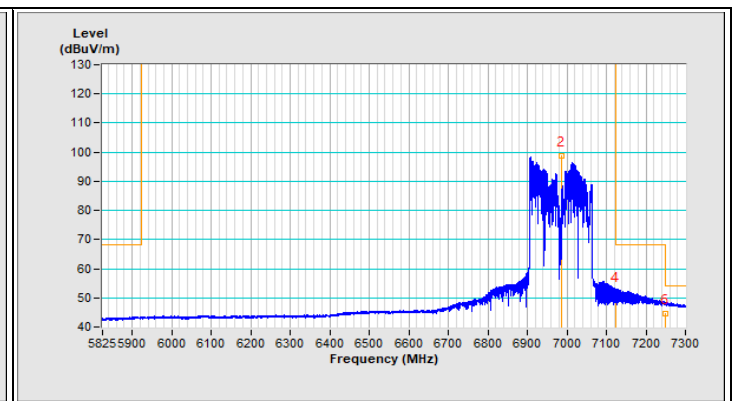



Horizontal (Average)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	109.4 PK			2.17 H	286	99.4	10.0
2	*6985.00	98.8 AV			2.17 H	286	88.8	10.0
3	#7125.00	81.6 PK	88.2	-6.6	2.17 H	286	70.7	10.9
4	#7125.00	52.3 AV	68.2	-15.9	2.17 H	286	41.4	10.9
5	7250.00	61.2 PK	74.0	-12.8	2.17 H	286	50.4	10.8
6	7250.00	44.7 AV	54.0	-9.3	2.17 H	286	33.9	10.8
7	#13970.00	52.9 PK	88.2	-35.3	2.91 H	177	33.9	19.0
8	#13970.00	41.2 AV	68.2	-27.0	2.91 H	177	22.2	19.0
9	20955.00	62.6 PK	74.0	-11.4	2.64 H	246	65.3	-2.7
10	20955.00	49.6 AV	54.0	-4.4	2.64 H	246	52.3	-2.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * ”: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # ”: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	47

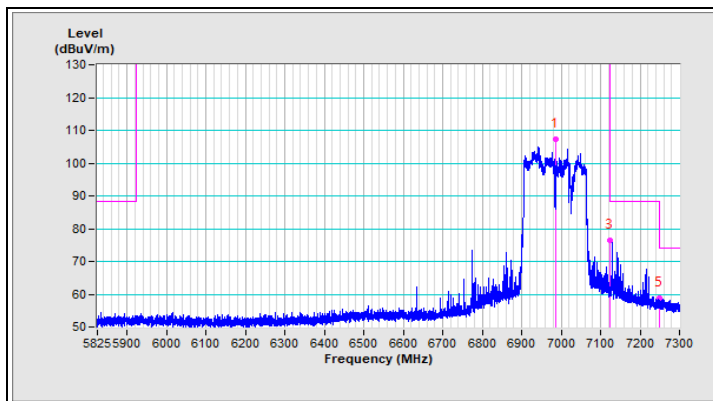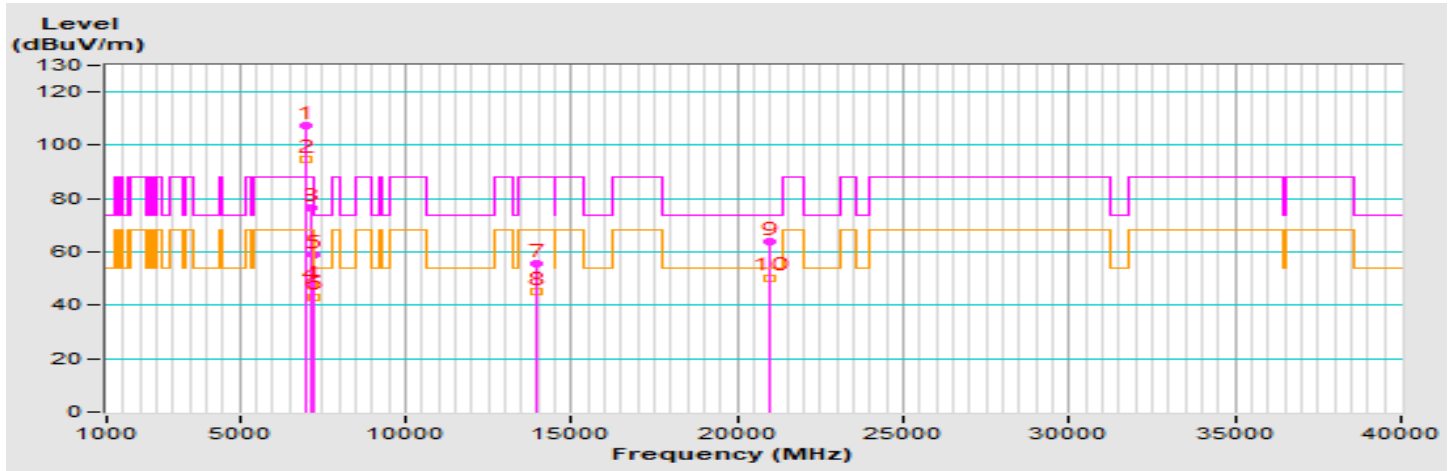

Vertical (Peak)

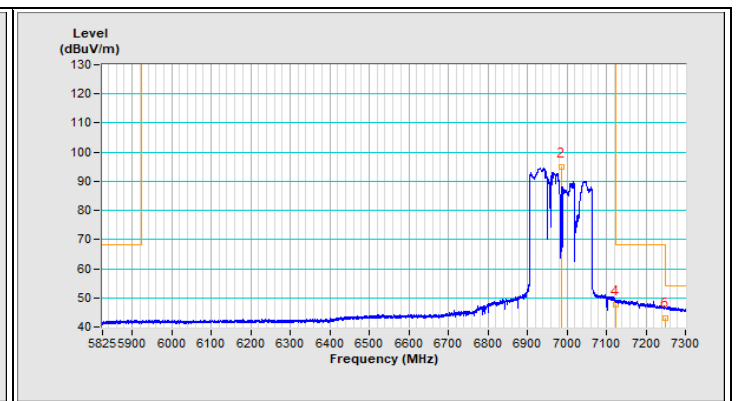



Vertical (Average)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.3 PK			1.49 V	195	97.3	10.0
2	*6985.00	94.9 AV			1.49 V	195	84.9	10.0
3	#7125.00	76.5 PK	88.2	-11.7	1.49 V	195	65.6	10.9
4	#7125.00	47.6 AV	68.2	-20.6	1.49 V	195	36.7	10.9
5	7250.00	58.8 PK	74.0	-15.2	1.49 V	195	48.0	10.8
6	7250.00	43.2 AV	54.0	-10.8	1.49 V	195	32.4	10.8
7	#13970.00	55.8 PK	88.2	-32.4	3.23 V	93	36.8	19.0
8	#13970.00	44.9 AV	68.2	-23.3	3.23 V	93	25.9	19.0
9	20955.00	64.1 PK	74.0	-9.9	3.05 V	77	66.8	-2.7
10	20955.00	50.4 AV	54.0	-3.6	3.05 V	77	53.1	-2.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * ”: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # ”: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	54

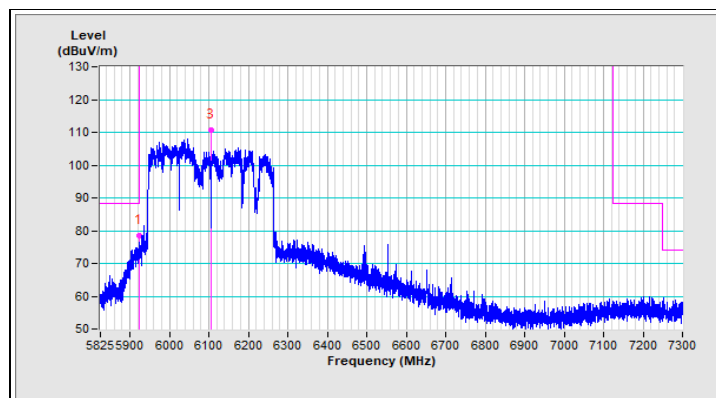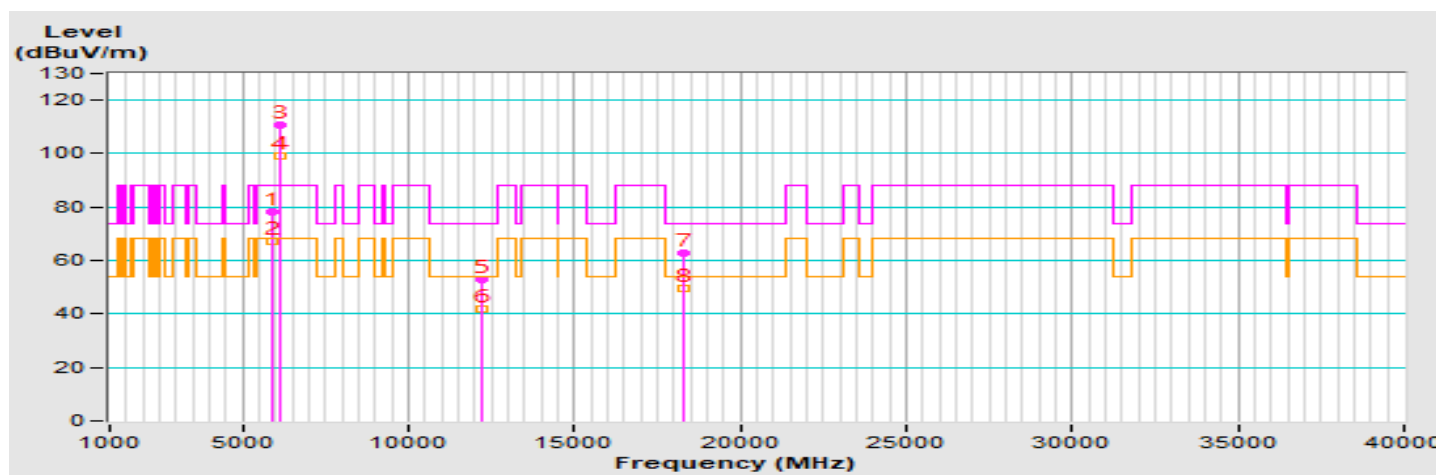

Horizontal (Peak)

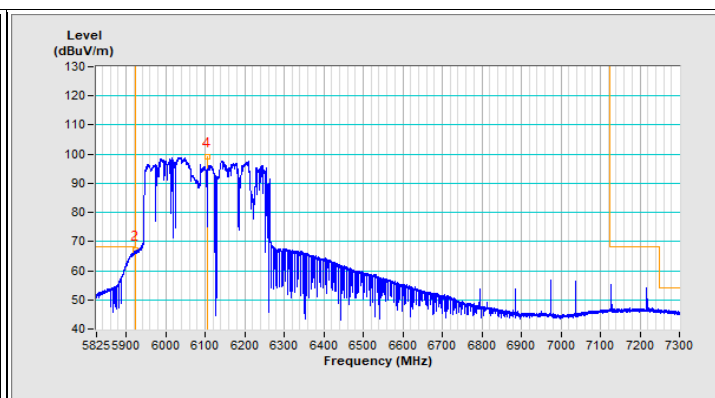



Horizontal (Average)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.4 PK	88.2	-9.8	2.22 H	291	72.1	6.3
2	#5925.00	67.1 AV	68.2	-1.1	2.22 H	291	60.8	6.3
3	*6105.00	110.8 PK			2.22 H	291	104.5	6.3
4	*6105.00	99.1 AV			2.22 H	291	92.8	6.3
5	12210.00	53.1 PK	74.0	-20.9	2.93 H	182	37.6	15.5
6	12210.00	41.6 AV	54.0	-12.4	2.93 H	182	26.1	15.5
7	18315.00	62.7 PK	74.0	-11.3	2.60 H	228	67.9	-5.2
8	18315.00	49.8 AV	54.0	-4.2	2.60 H	228	55.0	-5.2


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	54

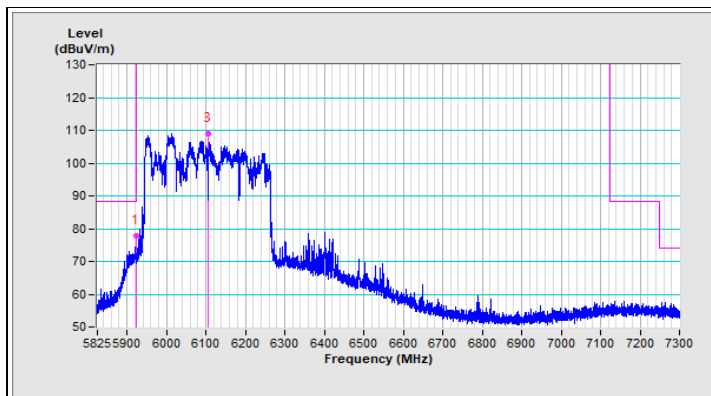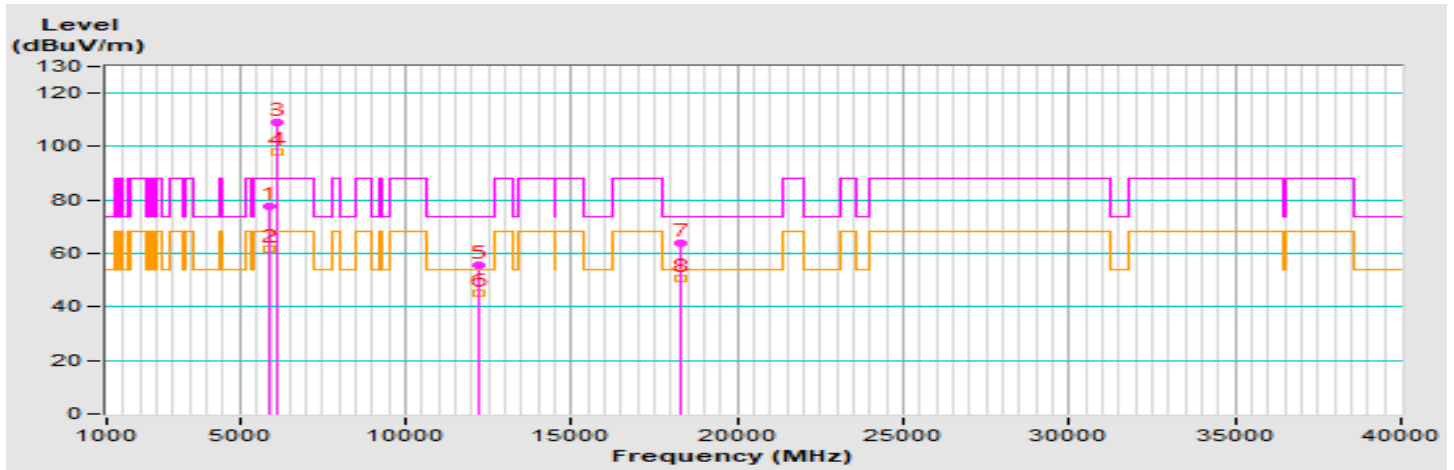

Vertical (Peak)

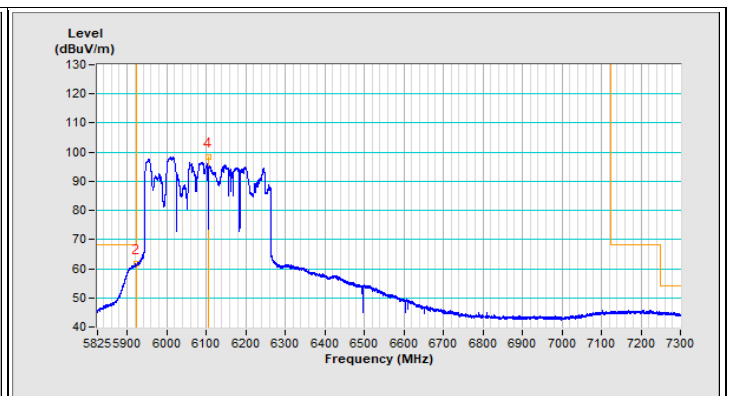


Vertical (Average)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.9 PK	88.2	-10.3	1.78 V	121	71.6	6.3
2	#5925.00	61.6 AV	68.2	-6.6	1.78 V	121	55.3	6.3
3	*6105.00	108.9 PK			1.78 V	121	102.6	6.3
4	*6105.00	98.2 AV			1.78 V	121	91.9	6.3
5	12210.00	55.6 PK	74.0	-18.4	3.08 V	88	40.1	15.5
6	12210.00	44.9 AV	54.0	-9.1	3.08 V	88	29.4	15.5
7	18315.00	64.1 PK	74.0	-9.9	3.11 V	69	69.3	-5.2
8	18315.00	50.8 AV	54.0	-3.2	3.11 V	69	56.0	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	52

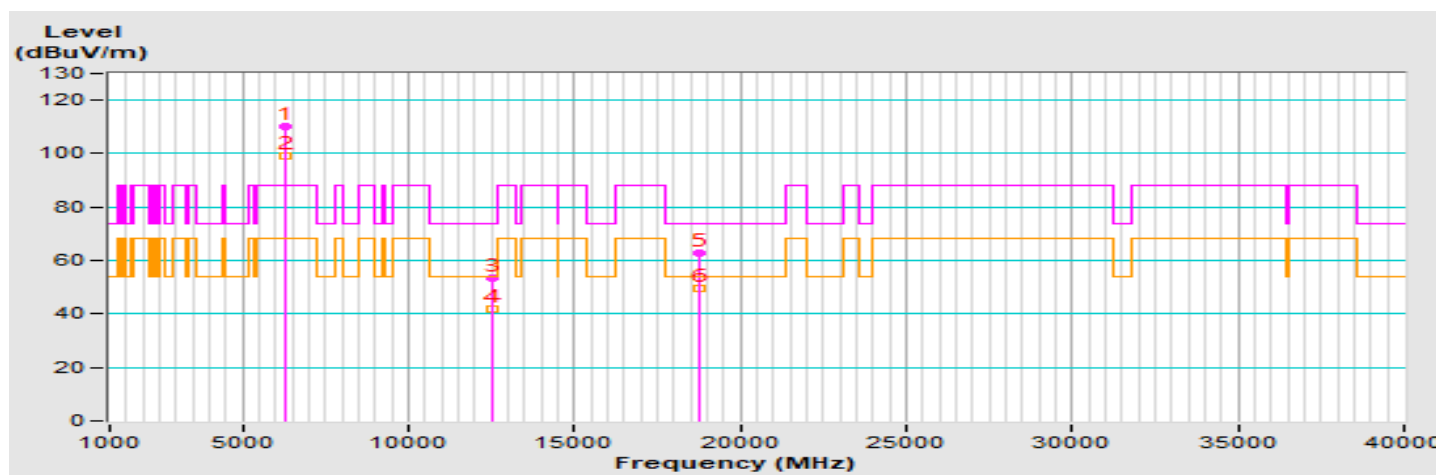


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6265.00	110.1 PK			2.19 H	293	103.0	7.1
2	*6265.00	99.3 AV			2.19 H	293	92.2	7.1
3	12530.00	53.2 PK	74.0	-20.8	2.96 H	164	38.5	14.7
4	12530.00	41.7 AV	54.0	-12.3	2.96 H	164	27.0	14.7
5	18795.00	62.9 PK	74.0	-11.1	2.66 H	216	67.7	-4.8
6	18795.00	49.6 AV	54.0	-4.4	2.66 H	216	54.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	52

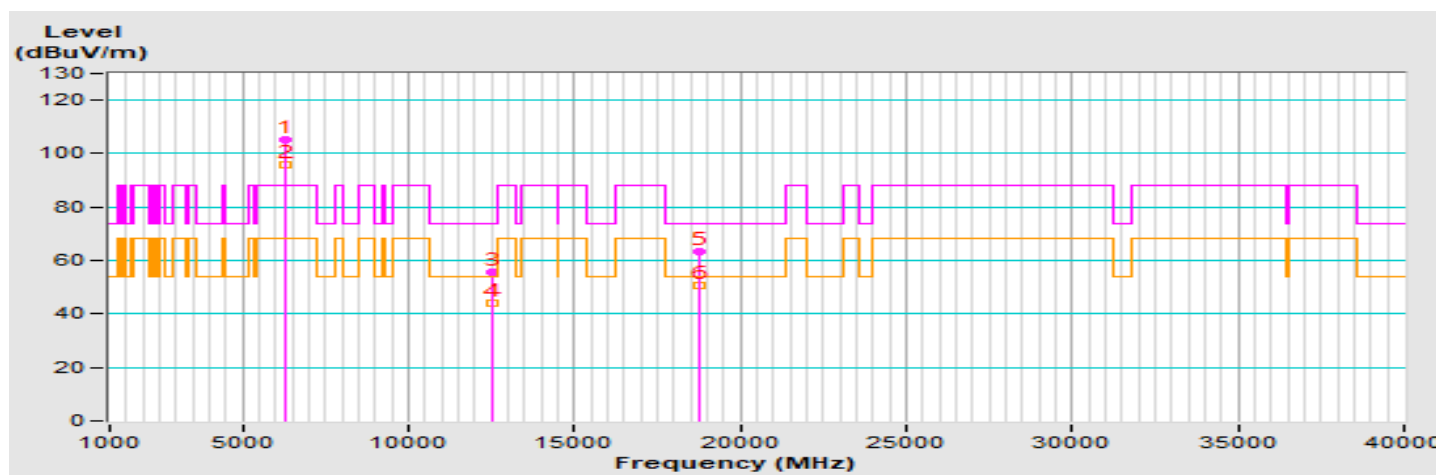


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	105.4 PK			1.83 V	112	98.3	7.1
2	*6265.00	95.7 AV			1.83 V	112	88.6	7.1
3	12530.00	55.4 PK	74.0	-18.6	3.03 V	66	40.7	14.7
4	12530.00	44.3 AV	54.0	-9.7	3.03 V	66	29.6	14.7
5	18795.00	63.3 PK	74.0	-10.7	3.10 V	101	68.1	-4.8
6	18795.00	50.6 AV	54.0	-3.4	3.10 V	101	55.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	52

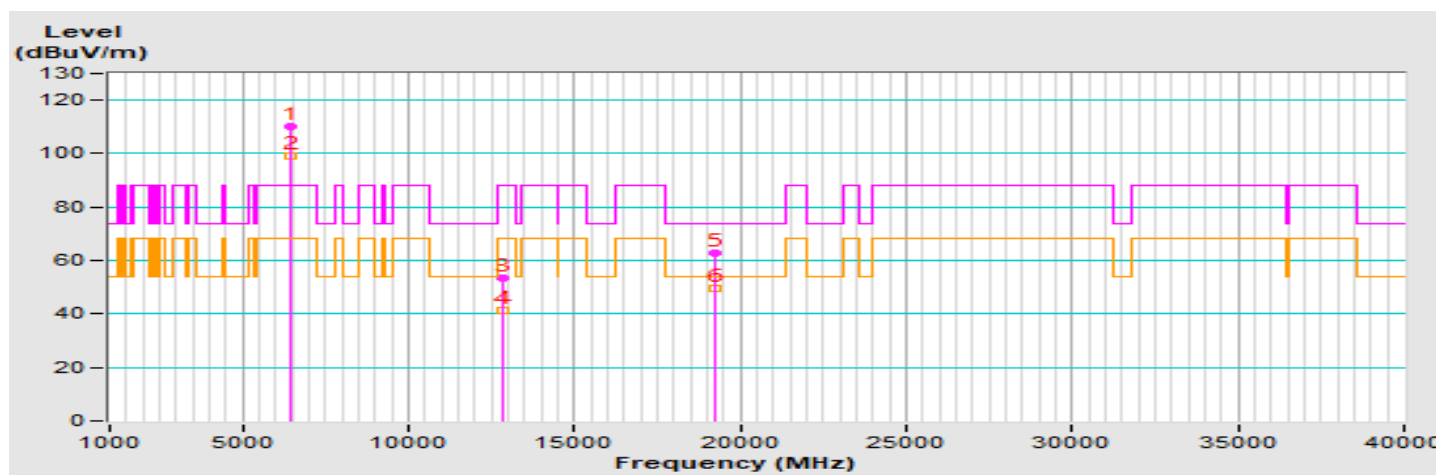


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6425.00	110.2 PK			2.25 H	301	102.5	7.7
2	*6425.00	99.3 AV			2.25 H	301	91.6	7.7
3	#12850.00	53.2 PK	88.2	-35.0	2.82 H	174	37.6	15.6
4	#12850.00	41.3 AV	68.2	-26.9	2.82 H	174	25.7	15.6
5	19275.00	63.0 PK	74.0	-11.0	2.60 H	212	67.2	-4.2
6	19275.00	49.6 AV	54.0	-4.4	2.60 H	212	53.8	-4.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	52

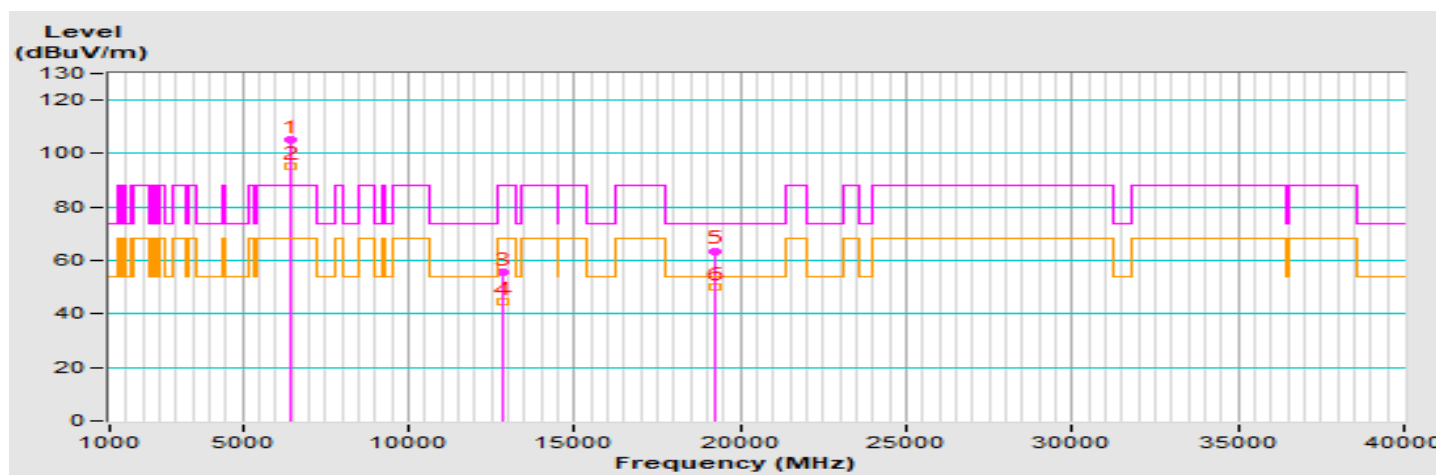


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	105.1 PK			1.82 V	115	97.4	7.7
2	*6425.00	95.2 AV			1.82 V	115	87.5	7.7
3	#12850.00	55.5 PK	88.2	-32.7	3.13 V	94	39.9	15.6
4	#12850.00	44.7 AV	68.2	-23.5	3.13 V	94	29.1	15.6
5	19275.00	63.6 PK	74.0	-10.4	3.03 V	44	67.8	-4.2
6	19275.00	50.1 AV	54.0	-3.9	3.03 V	44	54.3	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	52

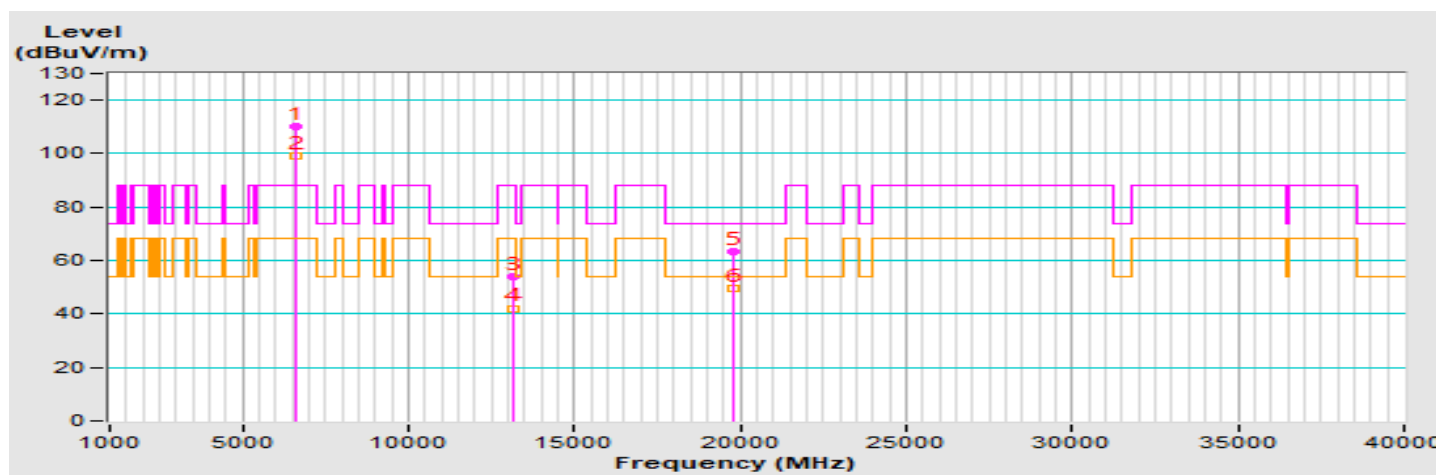


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6585.00	110.1 PK			2.22 H	303	101.4	8.7
2	*6585.00	99.1 AV			2.22 H	303	90.4	8.7
3	#13170.00	54.1 PK	88.2	-34.1	2.85 H	185	38.0	16.1
4	#13170.00	42.1 AV	68.2	-26.1	2.85 H	185	26.0	16.1
5	19755.00	63.2 PK	74.0	-10.8	2.65 H	216	67.2	-4.0
6	19755.00	49.6 AV	54.0	-4.4	2.65 H	216	53.6	-4.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	52

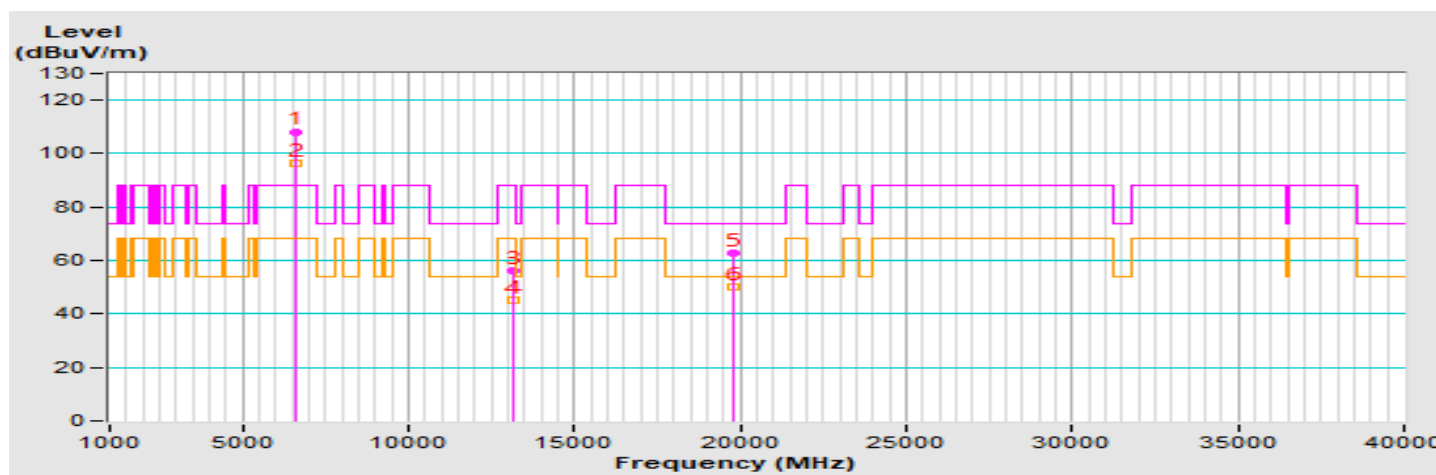


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	108.2 PK			3.13 V	73	99.5	8.7
2	*6585.00	96.4 AV			3.13 V	73	87.7	8.7
3	#13170.00	56.2 PK	88.2	-32.0	3.08 V	91	40.1	16.1
4	#13170.00	45.1 AV	68.2	-23.1	3.08 V	91	29.0	16.1
5	19755.00	62.8 PK	74.0	-11.2	3.14 V	103	66.8	-4.0
6	19755.00	50.1 AV	54.0	-3.9	3.14 V	103	54.1	-4.0

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- * *: Fundamental frequency, the limit was restricted at the RF Output Power.
- # #: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	51

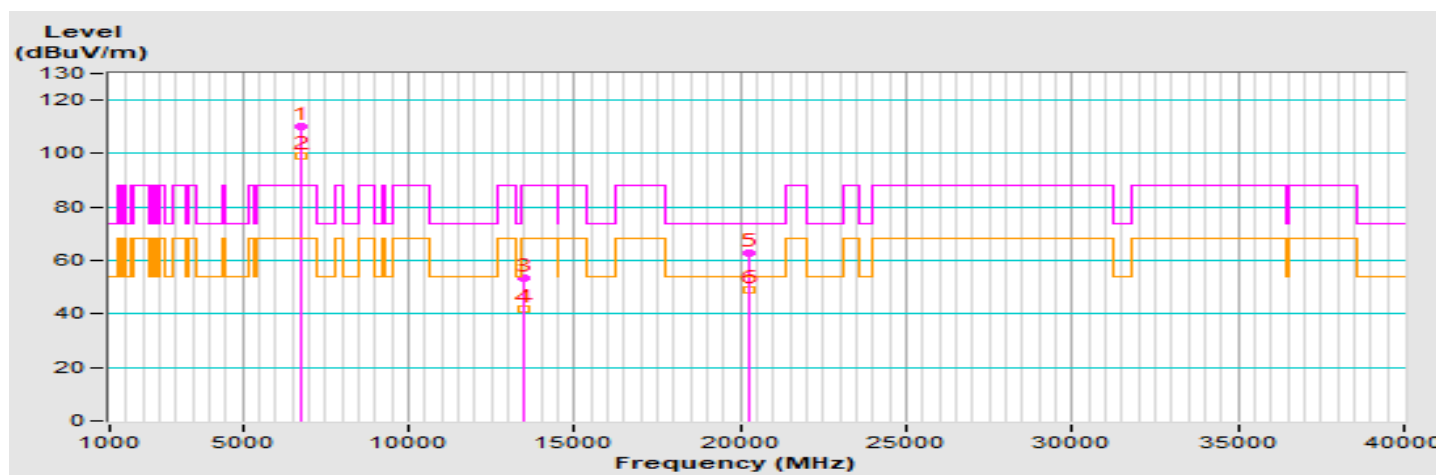


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.3 PK			2.16 H	302	101.5	8.8
2	*6745.00	99.1 AV			2.16 H	302	90.3	8.8
3	#13490.00	53.6 PK	88.2	-34.6	2.87 H	187	35.3	18.3
4	#13490.00	41.8 AV	68.2	-26.4	2.87 H	187	23.5	18.3
5	20235.00	62.8 PK	74.0	-11.2	2.60 H	199	66.1	-3.3
6	20235.00	49.2 AV	54.0	-4.8	2.60 H	199	52.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	51


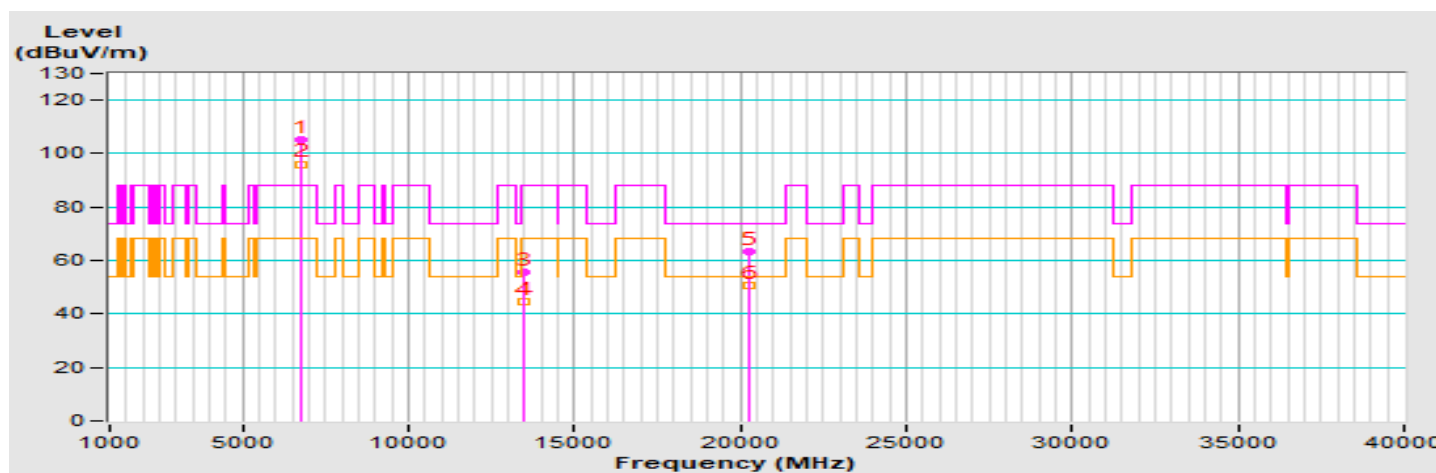


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	105.4 PK			3.24 V	66	96.6	8.8
2	*6745.00	96.1 AV			3.24 V	66	87.3	8.8
3	#13490.00	55.5 PK	88.2	-32.7	3.18 V	63	37.2	18.3
4	#13490.00	44.4 AV	68.2	-23.8	3.18 V	63	26.1	18.3
5	20235.00	63.5 PK	74.0	-10.5	3.15 V	85	66.8	-3.3
6	20235.00	50.7 AV	54.0	-3.3	3.15 V	85	54.0	-3.3


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * “: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # “: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	50

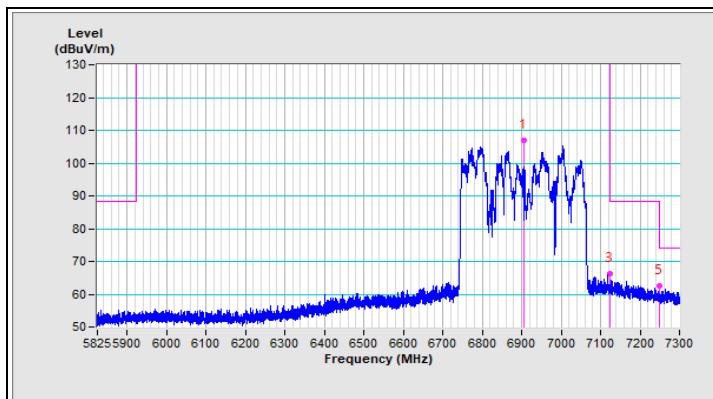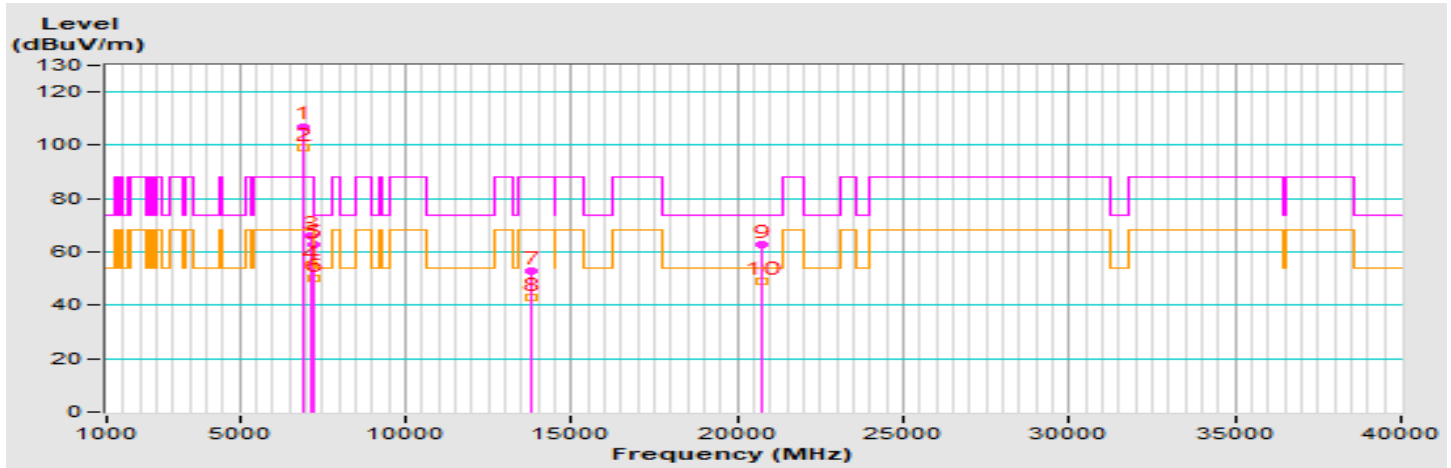

Horizontal (Peak)

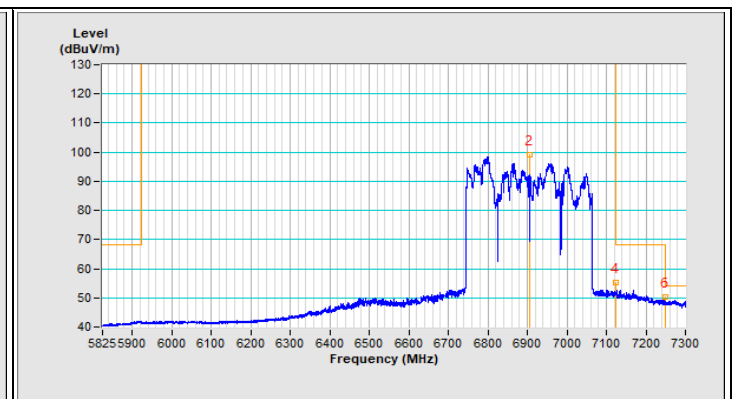



Horizontal (Average)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.1 PK			2.53 H	284	97.8	9.3
2	*6905.00	99.2 AV			2.53 H	284	89.9	9.3
3	#7125.00	66.3 PK	88.2	-21.9	2.53 H	284	55.4	10.9
4	#7125.00	55.1 AV	68.2	-13.1	2.53 H	284	44.2	10.9
5	7250.00	62.7 PK	74.0	-11.3	2.53 H	284	51.9	10.8
6	7250.00	50.3 AV	54.0	-3.7	2.53 H	284	39.5	10.8
7	#13810.00	52.9 PK	88.2	-35.3	2.94 H	219	34.5	18.4
8	#13810.00	42.8 AV	68.2	-25.4	2.94 H	219	24.4	18.4
9	20715.00	62.8 PK	74.0	-11.2	2.66 H	200	65.7	-2.9
10	20715.00	49.1 AV	54.0	-4.9	2.66 H	200	52.0	-2.9


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. “ * ”: Fundamental frequency, the limit was restricted at the RF Output Power.
6. “ # ”: The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu	Power Setting	50

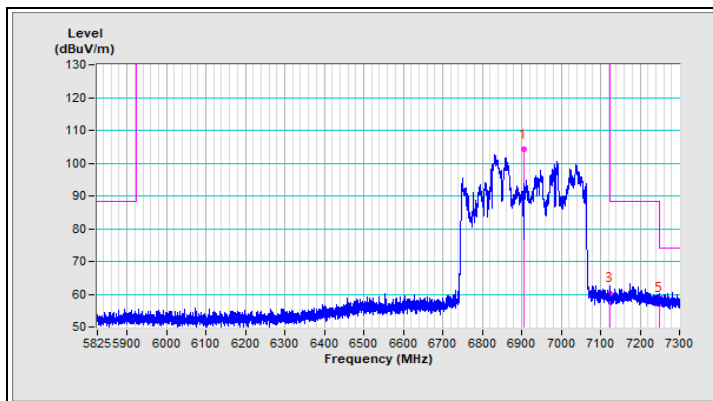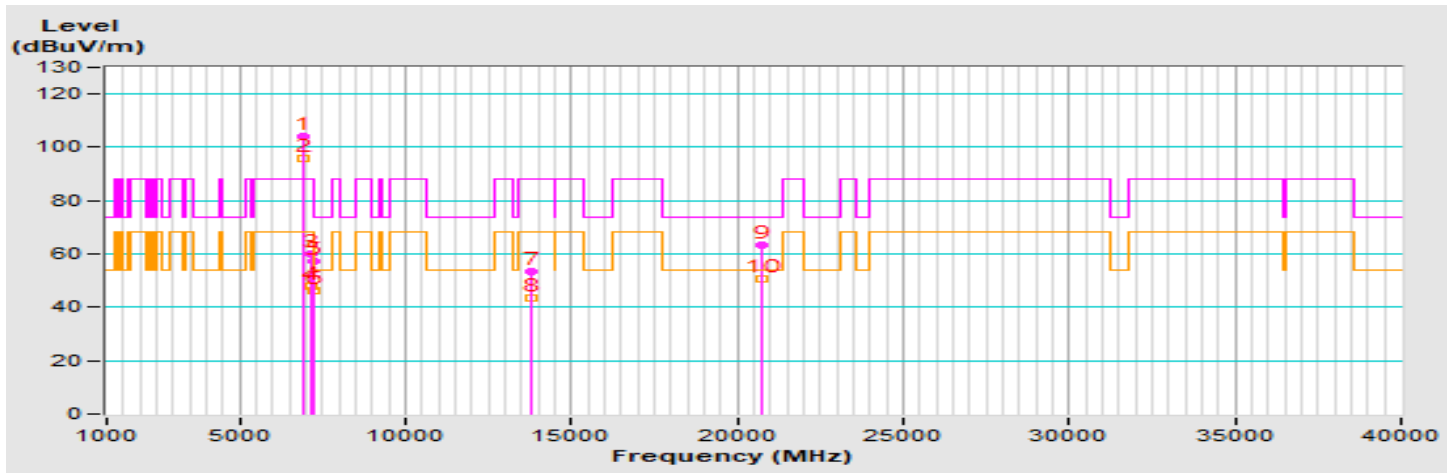

Vertical (Peak)

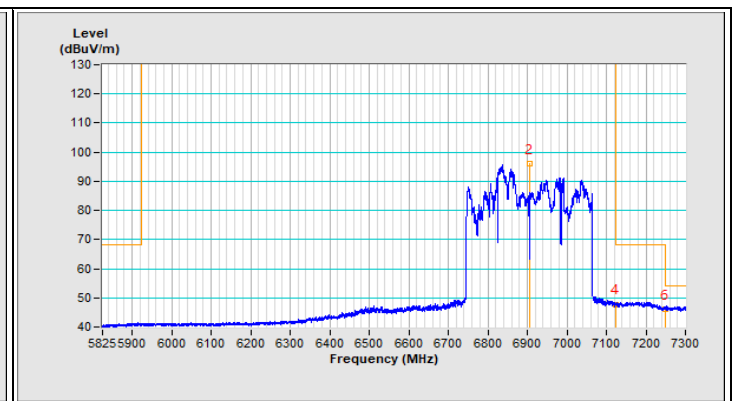

Vertical (Average)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	104.1 PK			3.99 V	202	94.8	9.3
2	*6905.00	95.9 AV			3.99 V	202	86.6	9.3
3	#7125.00	60.1 PK	88.2	-28.1	3.99 V	202	49.2	10.9
4	#7125.00	47.8 AV	68.2	-20.4	3.99 V	202	36.9	10.9
5	7250.00	57.1 PK	74.0	-16.9	3.99 V	202	46.3	10.8
6	7250.00	46.2 AV	54.0	-7.8	3.99 V	202	35.4	10.8
7	#13810.00	53.4 PK	88.2	-34.8	3.06 V	62	35.0	18.4
8	#13810.00	43.4 AV	68.2	-24.8	3.06 V	62	25.0	18.4
9	20715.00	63.5 PK	74.0	-10.5	3.12 V	121	66.4	-2.9
10	20715.00	50.5 AV	54.0	-3.5	3.12 V	121	53.4	-2.9


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Other Emission

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT20) Channel 209

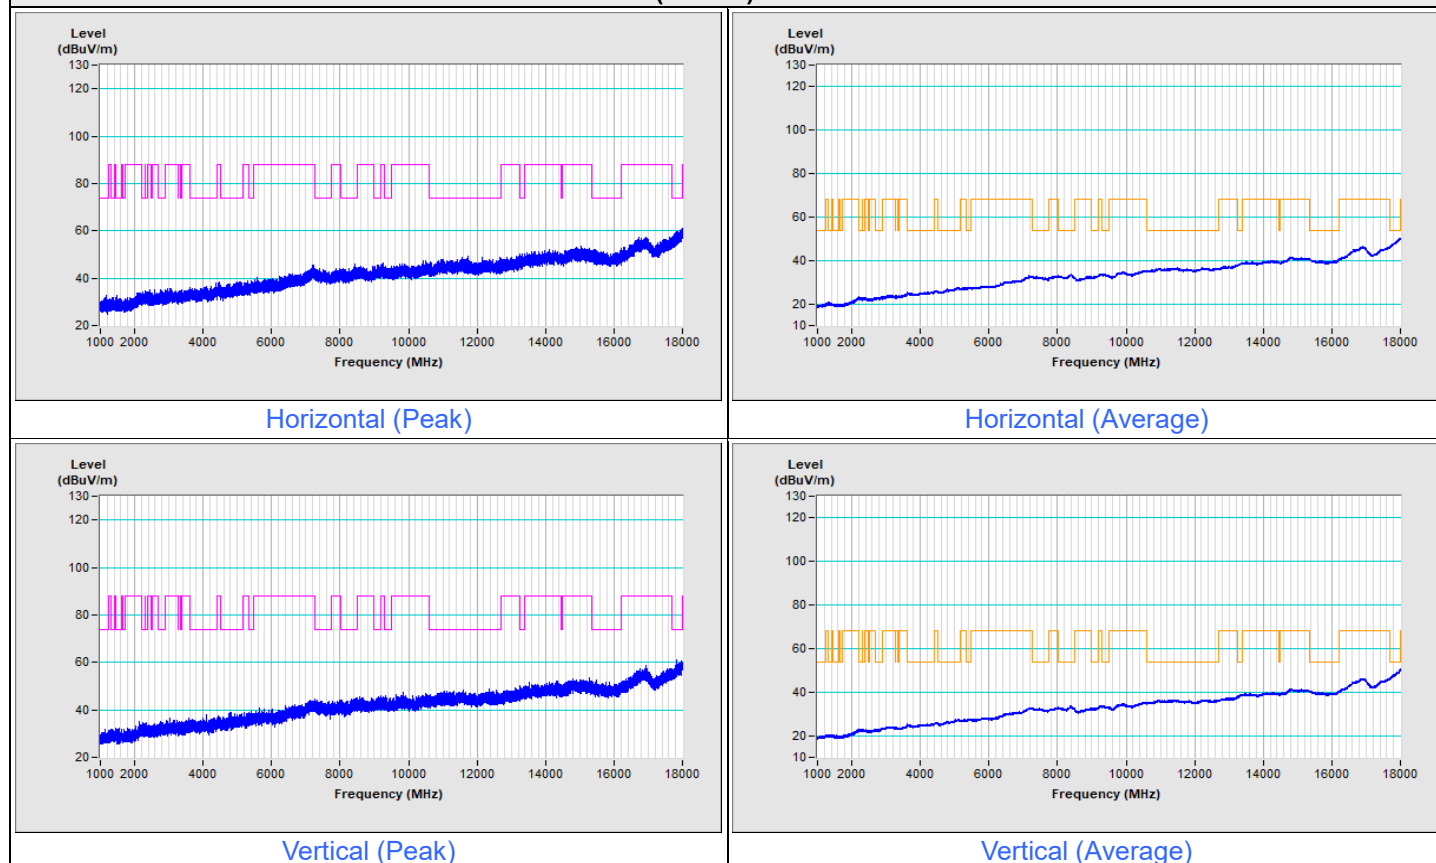


Notes:

- For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
- The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT40) Channel 107

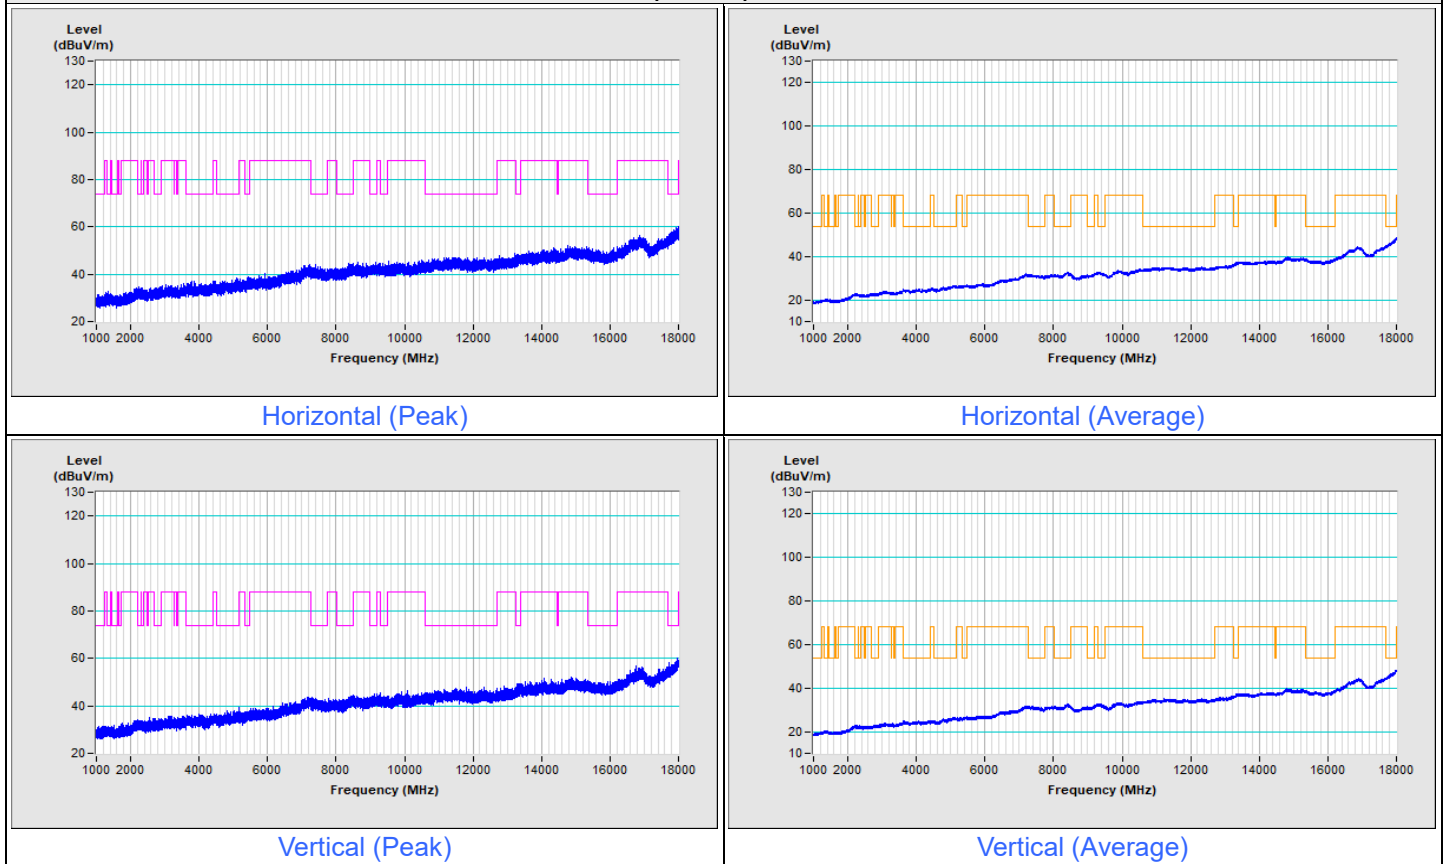


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT80) Channel 151

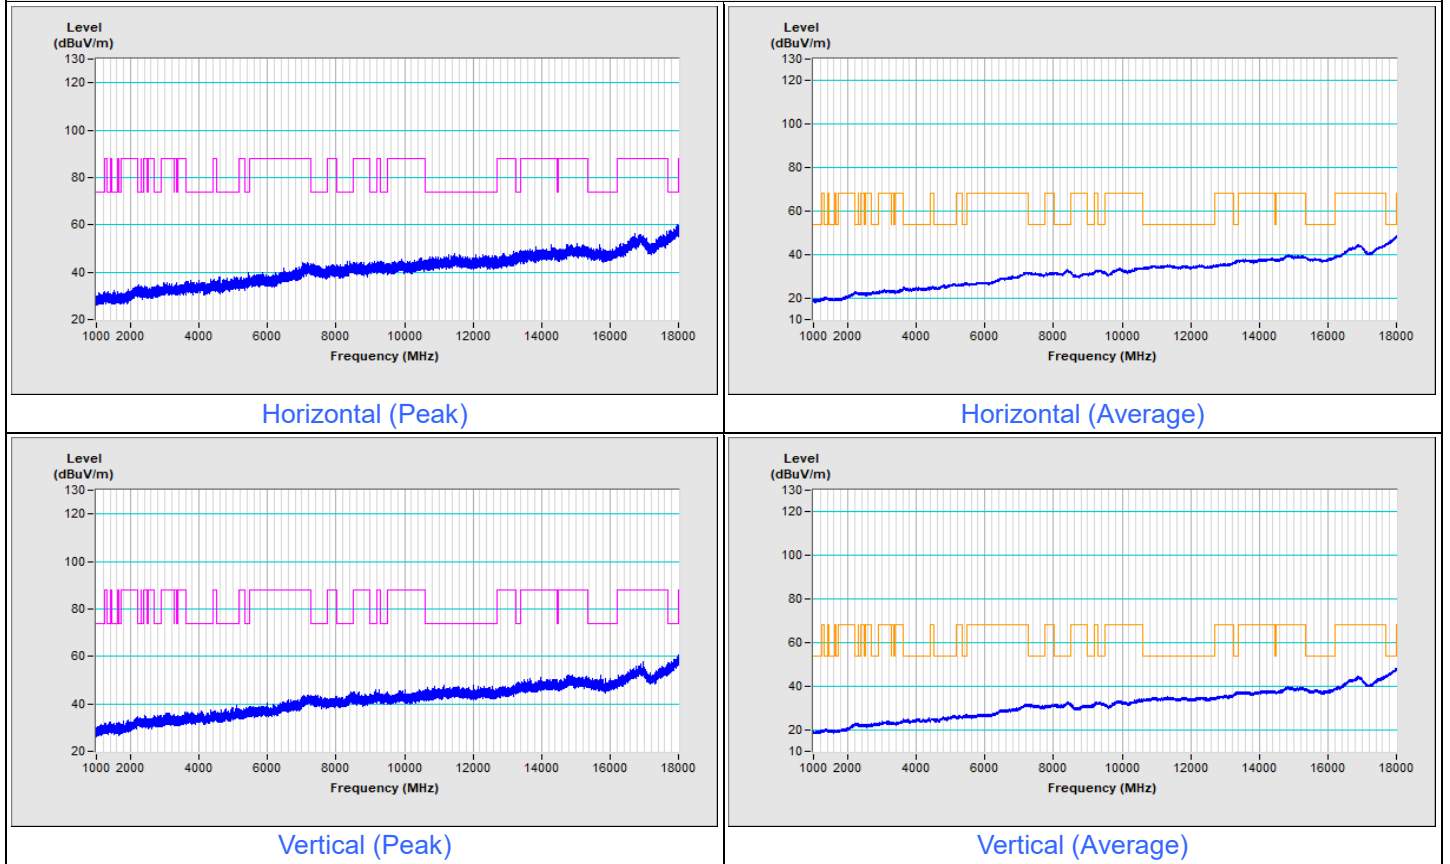


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT160) Channel 79

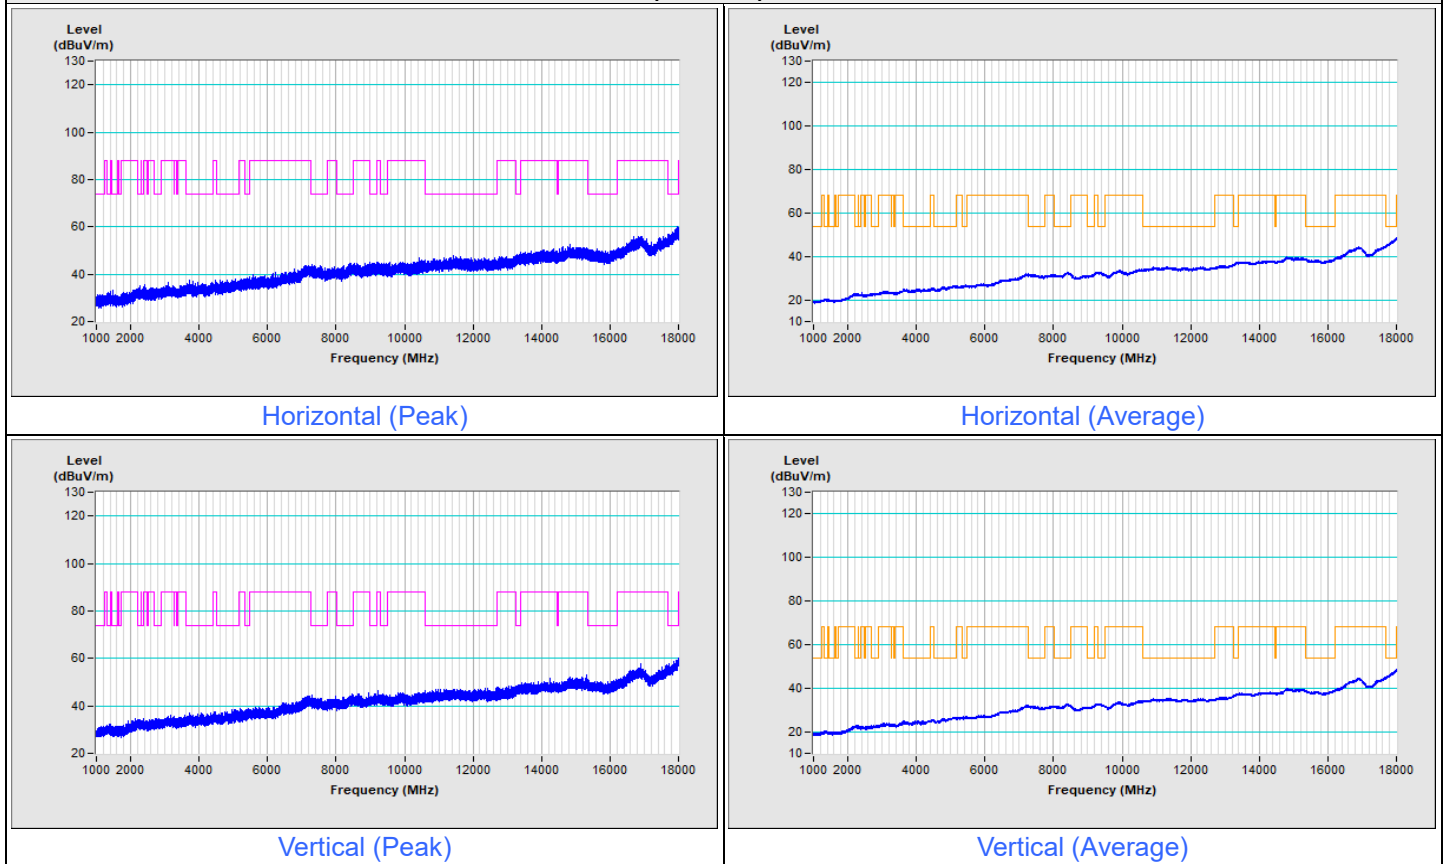


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT320) Channel 31

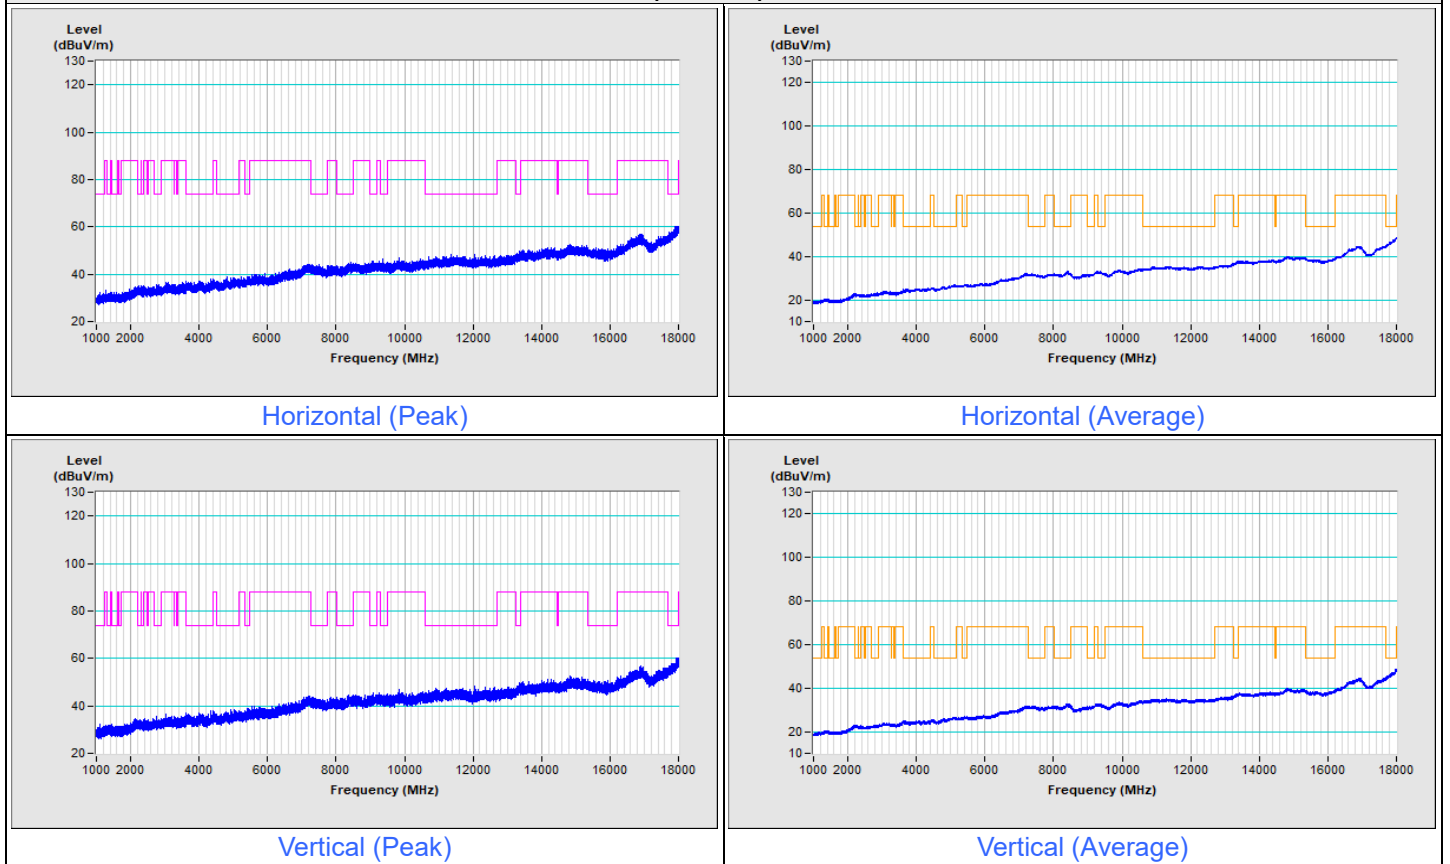

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---