

TEST REPORT

Part 15 Subpart C 15.249

Equipment under test Outdoor, Battery-Powered Camera

Model name SNW-R0130BW

FCC ID NLMSNWR0130BW

Applicant Hanwha Techwin Co., Ltd.

Manufacturer Hanwha Techwin(Tianjin) Co., Ltd

Date of test(s) 2017.02.09 ~ 2017.02.21

Date of issue 2017.02.22

Issued to

Hanwha Techwin Co., Ltd.

1204, Changwon-daero, Seongsan-gu Changwon-si,

Gyeongsangnam-do, South Korea

Tel: +82-70-7147-8361/ Fax: +82-31-8108-3717

Issued by


KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,

Gyeonggi-do, Korea

473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

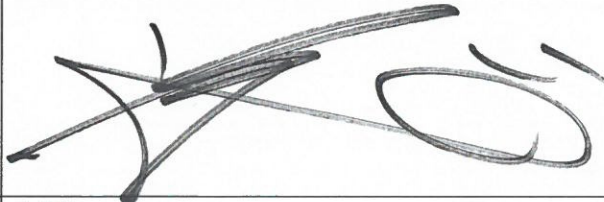Test and report completed by :	Report approval by :
	
Hyeon-su Jang Test engineer	Jeff Do Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-17T0021
Page (2) of (23)

Revision history

Revision	Date of issue	Test report No.	Description
-	2017.02.22	KES-RF-17T0021	Initial

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	4
1.2.	Test configuration	4
1.3.	Device modifications.....	4
1.4.	Information about derivative model	4
1.5.	Frequency/channel operations.....	5
1.6.	Accessory information	5
2.	Summary of tests	6
3.	Test results	7
3.1.	20 dB bandwidth	7
3.2.	Field strength of fundamental & Radiated spurious emission & Out-of-band emission.....	10
Appendix A.	Measurement equipment	22
Appendix B.	Test setup photos	23

1. General information

Applicant: Hanwha Techwin Co., Ltd.
Applicant address: 1204, Changwon-daero, Seongsan-gu, Changwon-si
Gyeongangnam-do, South Korea
Test site: KES Co., Ltd.
Test site address: C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea
473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea
FCC rule part(s): 15.249
FCC ID: NLMSNWR0130BW
Test device serial No.: ☒ Production ☐ Pre-production ☐ Engineering

1.1. EUT description

Equipment under test Outdoor, Battery-Powered Camera
Frequency range 2412 MHz ~ 2462 MHz(11b/g/n_HT20)
920.6 MHz ~ 922.0 MHz
Modulation technique DSSS, OFDM, FSK
Number of channels 2412 MHz ~ 2462 MHz(11b/g/n_HT20): 11ch
920.6 MHz ~ 922.0 MHz: 8ch
Antenna type 2.4GHz Single module: PCB antenna
900MHz module : Chip antenna
Antenna gain 2.4GHz Single module: 1.2 dBi
900MHz module : -1.7 dBi
Power source DC 6.0 V (Lithium Battery)

1.2. Test configuration

The **Hanwha Techwin Co., Ltd. Outdoor, Battery-Powered Camera FCC ID: NLMSNWR0130BW** was tested per the guidance of ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing.

1.3. Device modifications

N/A

1.4. Information about derivative model

N/A



1.5. Frequency/channel operations

Ch.	Frequency (MHz)
1	920.6
.	.
4	921.2
.	.
8	922.0

1.6. Accessory information

Applicant	Equipment	Manufacturer	Model	Power source
-	-	-	-	-



2. Summary of tests

Reference	Parameter	Test results
15.249(a)	Field strength of fundamental	Pass
15.205 15.209 15.249(d)	Radiated spurious emission, Out-of-band emission	Pass
15.215(c)	20 dB bandwidth	Pass

3. Test results

3.1. 20 dB bandwidth

Test procedure

ANSI C63.10-2013

Section 6.9.3

1. Use the following spectrum analyzer setting
2. Center frequency: Lowest, middle and highest channels
3. Span = approximately 2 to 3 times the 20dB bandwidth
4. RBW ≥ 1 % of the 20dB bandwidth
5. VBW $\geq 3 \times$ RBW
6. Sweep = auto
7. Detector function = peak
8. Trace = max hold
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Limit

Not applicable




Test results

Frequency(MHz)	20 dB bandwidth(MHz)	Limit(MHz)
920.6	0.079	-
921.2	0.079	
922.0	0.079	



20 dB bandwidth

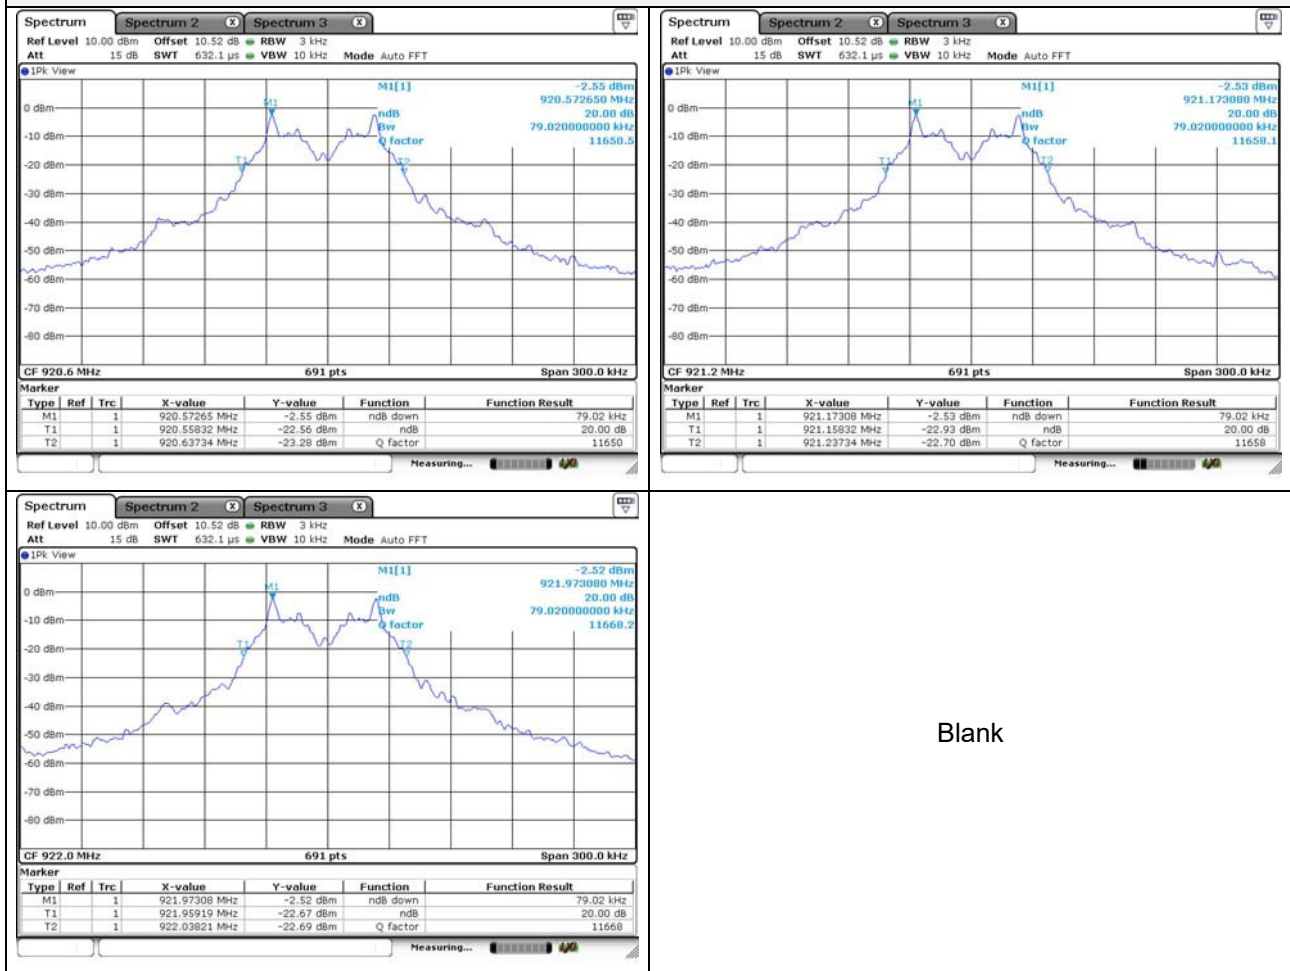


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.


3.2. Field strength of fundamental & Radiated spurious emission & Out-of-band emission

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

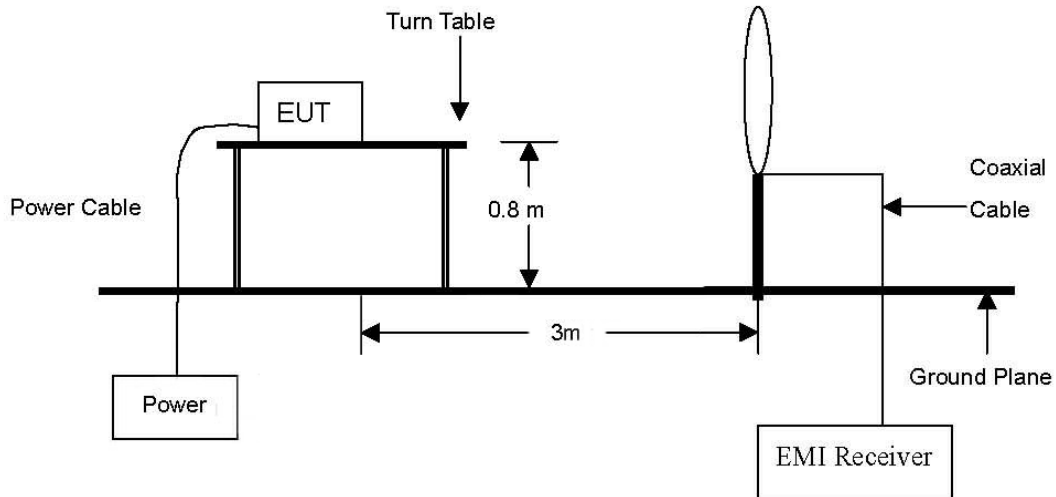

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

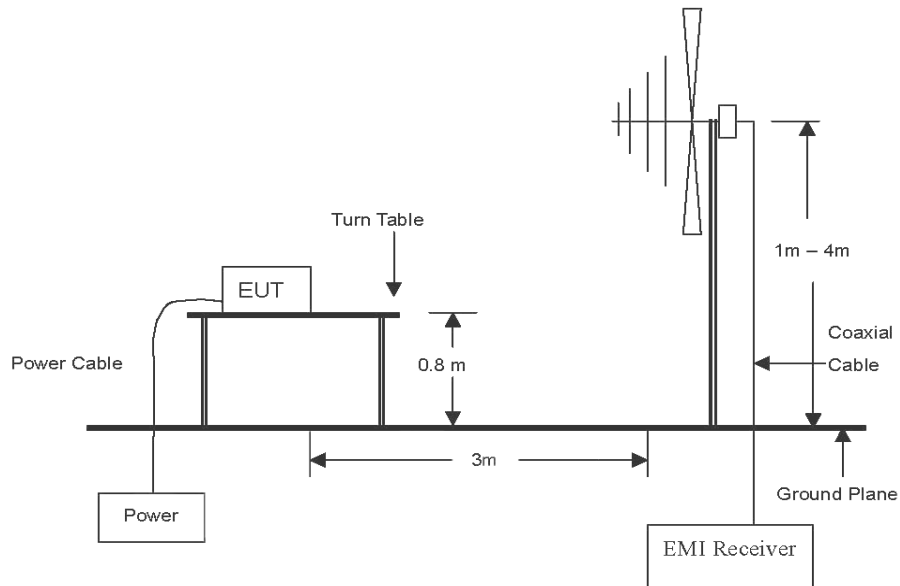

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

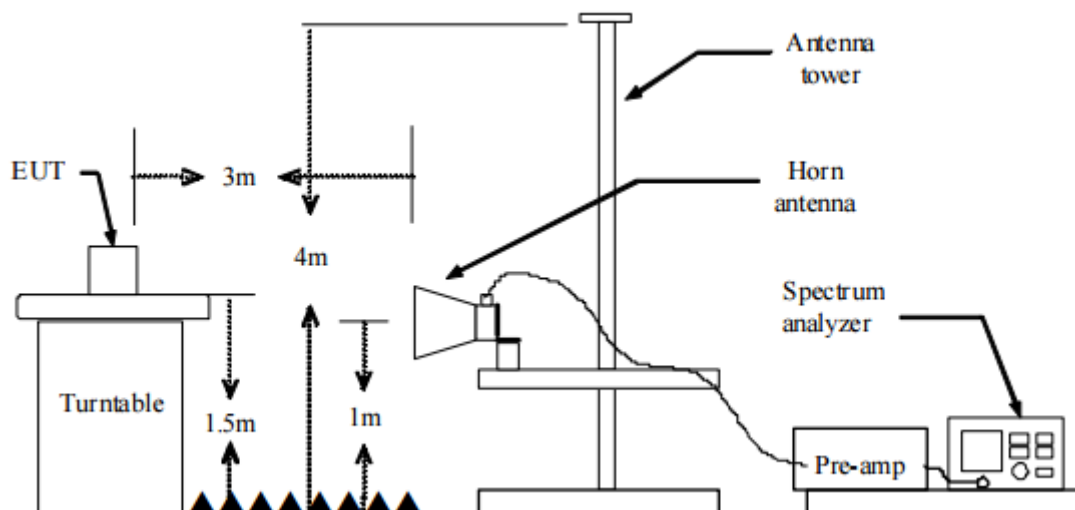

Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

Test procedure above 30 MHz

1. Spectrum analyzer settings for $f < 1$ GHz:
 - ① Span = wide enough to fully capture the emission being measured
 - ② RBW = 100 kHz
 - ③ VBW $\geq$ RBW
 - ④ Detector = quasi peak
 - ⑤ Sweep time = auto
 - ⑥ Trace = max hold
2. Spectrum analyzer settings for $f \geq 1$ GHz: Peak
 - ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
 - ② RBW = 1 MHz
 - ③ VBW $\geq$ 3 MHz
 - ④ Detector = peak
 - ⑤ Sweep time = auto
 - ⑥ Trace = max hold
 - ⑦ Trace was allowed to stabilize

3. Spectrum analyzer settings for $f \geq 1$ GHz: Average

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW $\geq 3 \times$ RBW
- ④ Detector = RMS, if span/(# of points in sweep) $\leq$ (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- ⑤ Averaging type = power(i.e., RMS)
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- ⑥ Sweep = auto
- ⑦ Trace = max hold
- ⑧ Perform a trace average of at least 100 traces.
- ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

Note.

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$
Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
3. CF(Correction factors(dB)) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
4. Field strength(dB μ V/m) = Level(dB μ V) + CF (dB) + or DCF(dB)
5. Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)
6. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **X orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **X orientation**.
8. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated ($\mu\text{V}/\text{m}$)
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to 15.249(a)

Fundamental frequency	Field strength of fundamental		Field strength of harmonics	
	mV/m	dBuV/m	uV/m	dBuV/m
902-928 MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25 GHz	250	108	2500	68

According to 15.249(d)

Emission radiated outside of the specified frequency bands, except harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated limit in FCC part 15C, Section 15.209, whichever is the lesser attenuation.



Test result (Fundamental)

Operating Frequency: 920.6 MHz

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
920.57	60.24	Peak	H	25.56	-	85.80	94.00	8.20
920.63	60.19	Peak	V	25.56	-	85.75	94.00	8.25

Operating Frequency: 921.2 MHz

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
921.23	60.05	Peak	H	25.56	-	85.61	94.00	8.39
921.18	60.10	Peak	V	25.56	-	85.66	94.00	8.34

Operating Frequency: 922.0 MHz

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
921.98	59.77	Peak	H	25.58	-	85.35	94.00	8.65
922.02	59.71	Peak	V	25.58	-	85.29	94.00	8.71




Test results (Below 30 MHz)

Distance of measurement: 3 meter

Channel: 1 (Worst case)

Frequency: 920.6 MHz

Frequency (MHz)	Level (dBμV)	Ant. Pol. (H/V)	CF (dB)	F _d (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
No spurious emissions were detected within 20 dB of the limit							

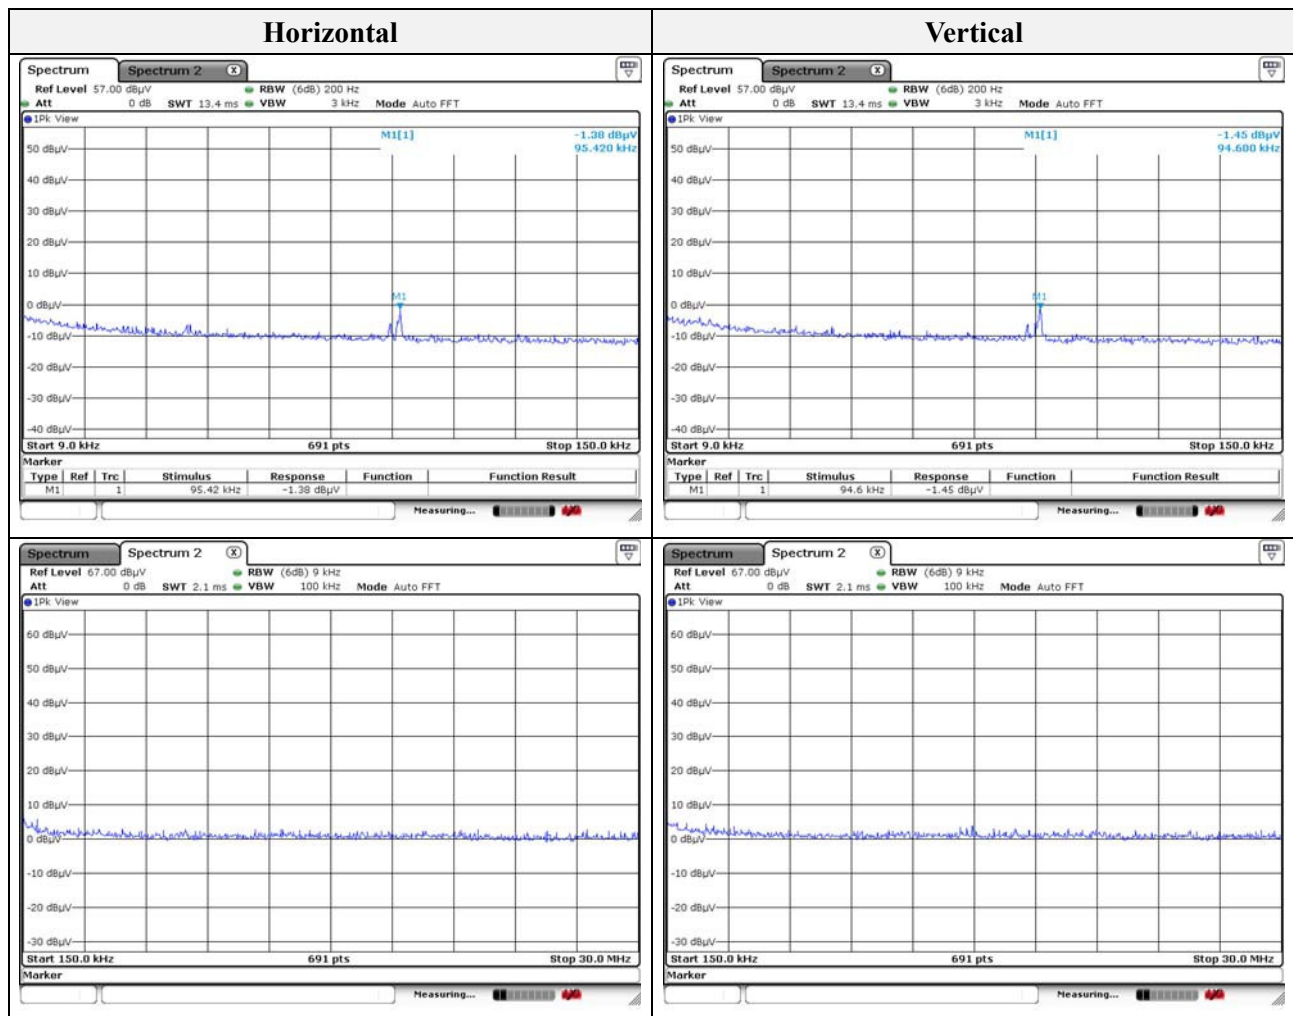




Test results (Below 1 000 MHz)

Distance of measurement: 3 meter

Channel: 1

Frequency: 920.6 MHz

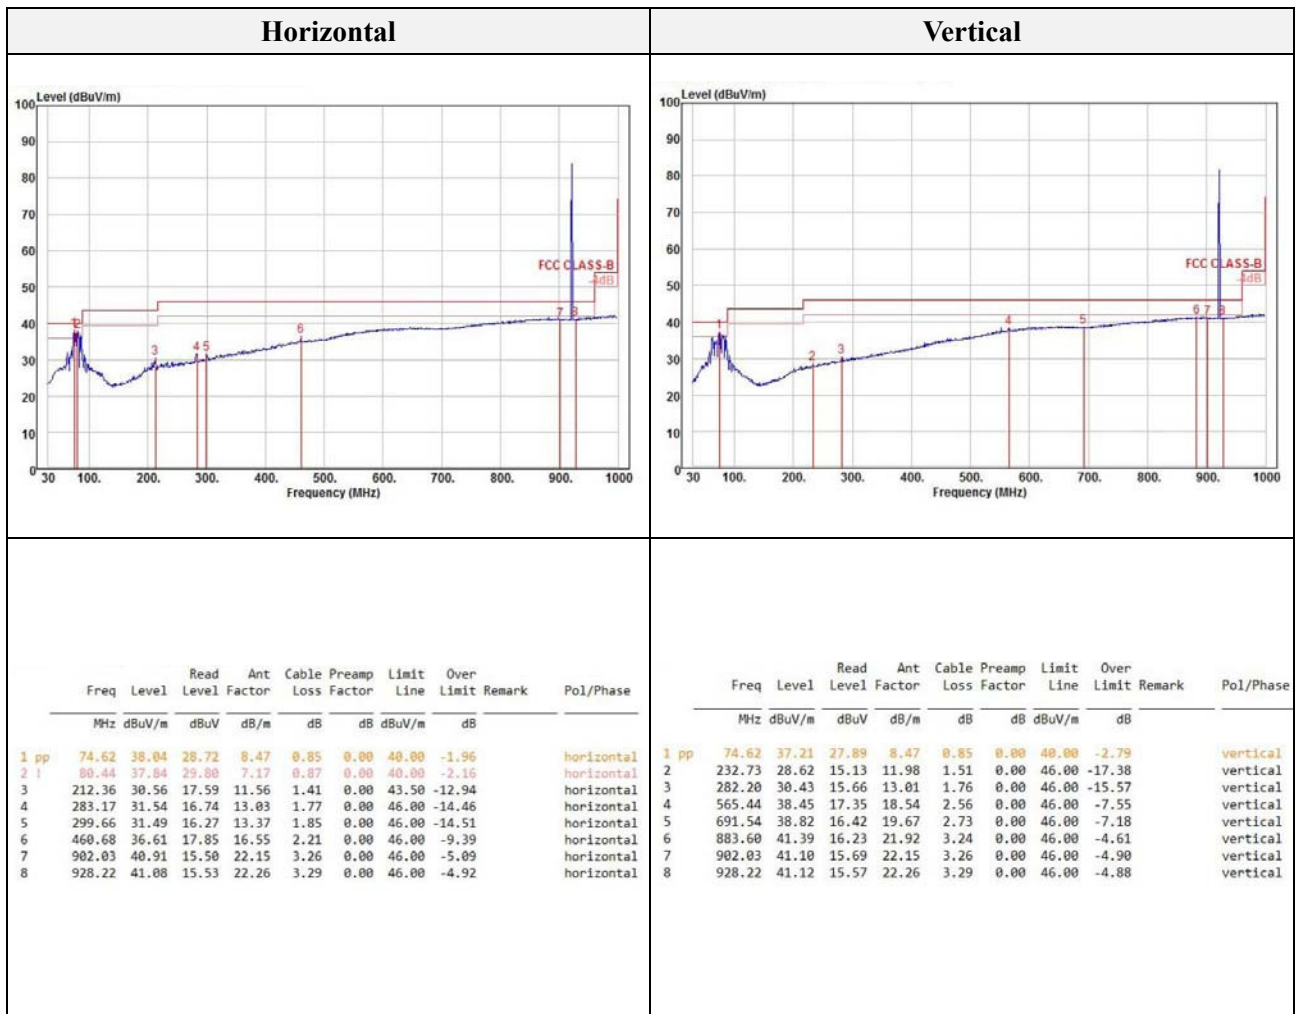


Note.

1. 902MHz, 928MHz – Band edge markers.




Distance of measurement: 3 meter
Channel: 4
Frequency: 921.2 MHz

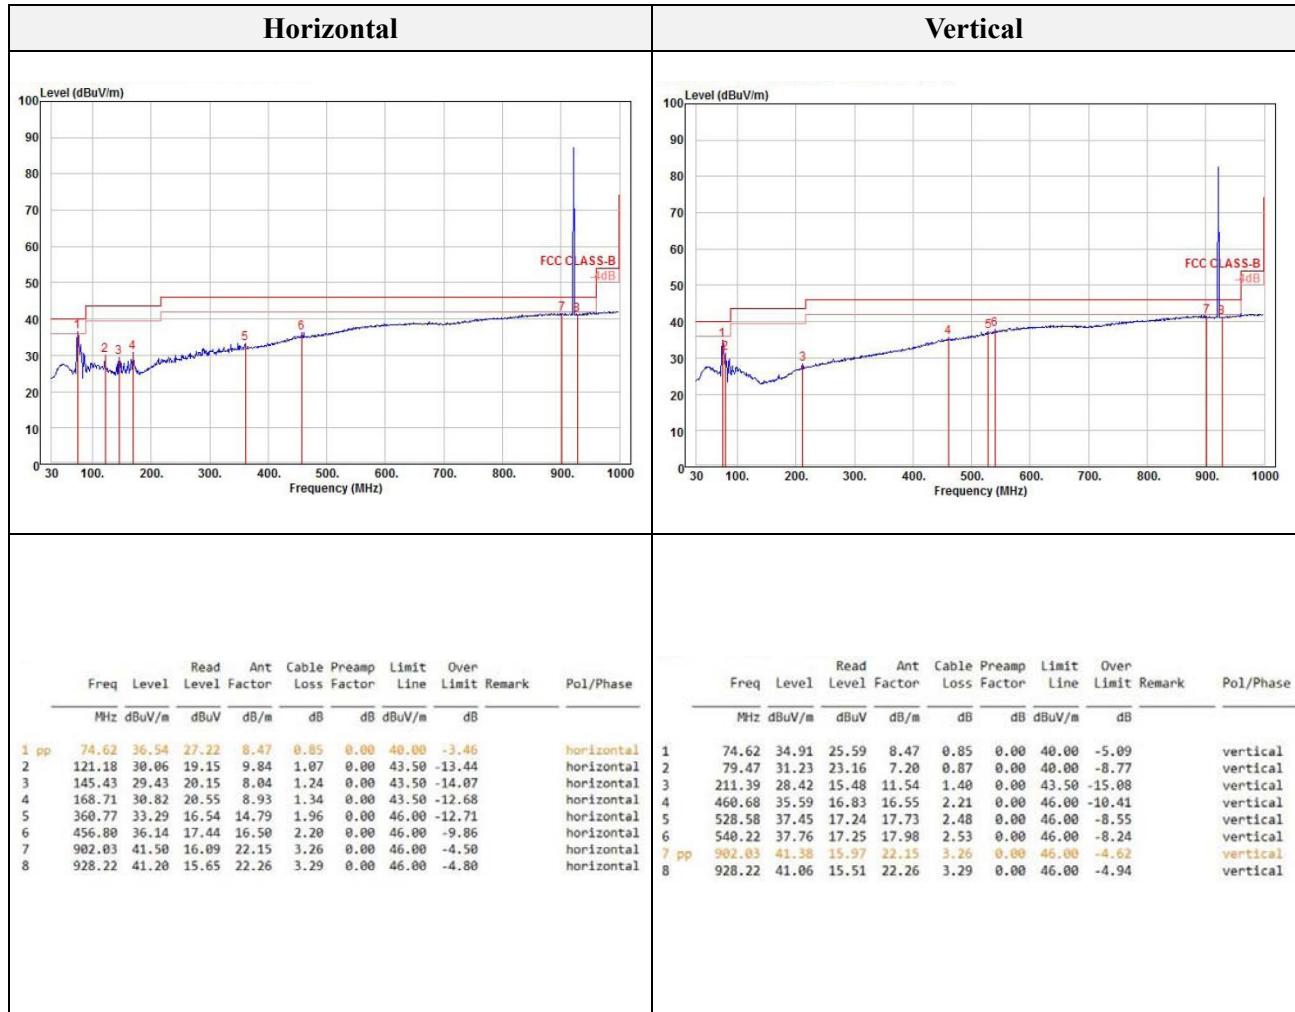

Note.
1. 902MHz, 928MHz – Band edge markers.



Distance of measurement: 3 meter
Channel: 8
Frequency: 922.0 MHz

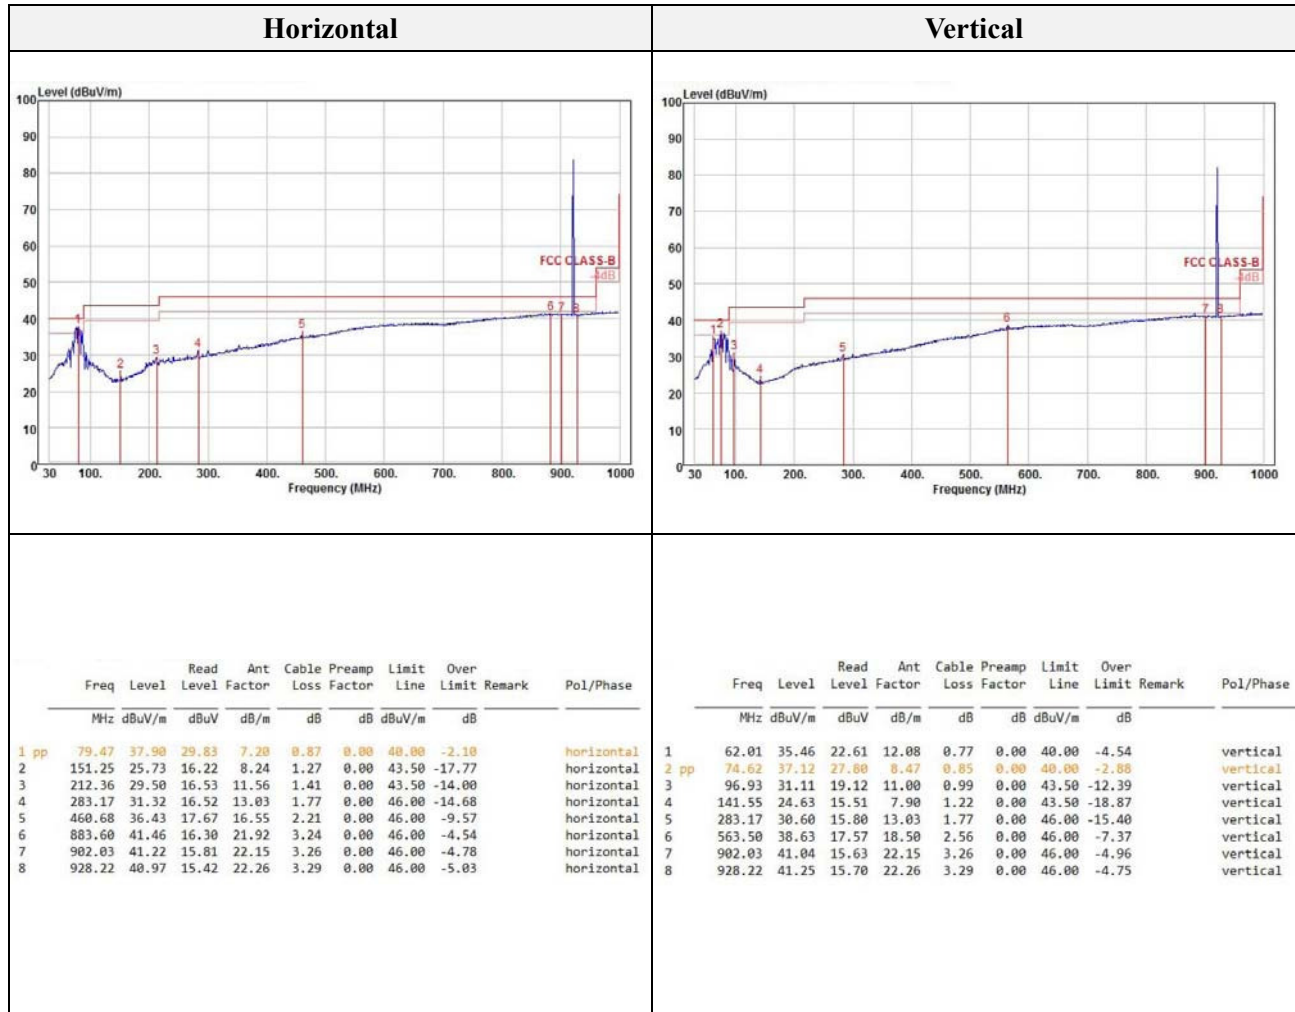

Note.

1. 902MHz, 928MHz – Band edge markers.




Test results (Above 1 000 MHz)

Distance of measurement: 3 meter

Channel: 1

Frequency: 920.6 MHz

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1840.00	54.95	Peak	H	-5.48	-	49.47	74.00	24.53
1840.00	53.02	Peak	V	-5.48	-	47.54	74.00	26.46

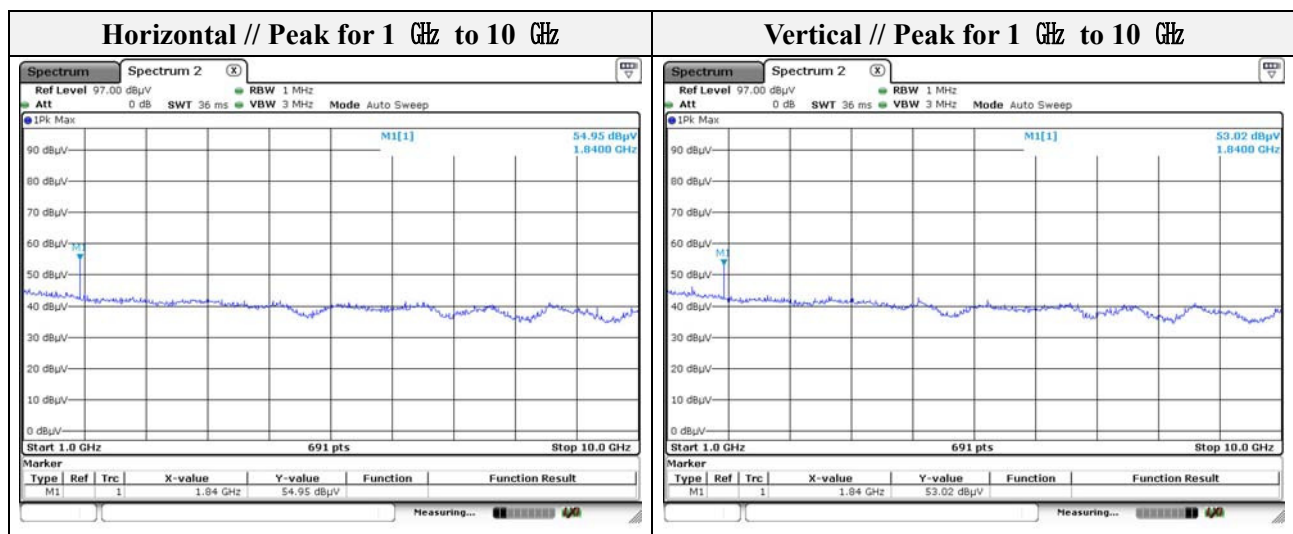


Note.

1. Average test would be performed if the peak result were greater than the average limit.



Distance of measurement: 3 meter
Channel: 4
Frequency: 921.2 MHz

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1840.00	48.01	Peak	H	-5.48	-	42.53	74.00	31.47
1840.00	46.85	Peak	V	-5.48	-	41.37	74.00	32.63

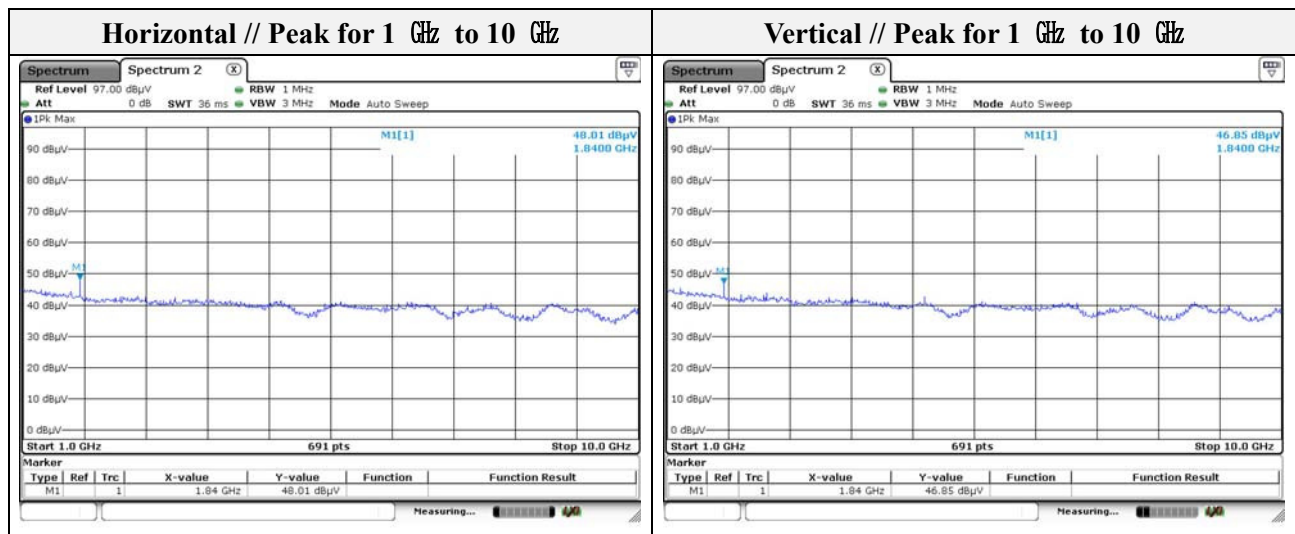

Note.

1. Average test would be performed if the peak result were greater than the average limit.




Distance of measurement: 3 meter

Channel: 8

Frequency: 922.0 MHz

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1842.00	48.97	Peak	H	-5.46	-	43.51	74.00	30.49
1842.00	47.06	Peak	V	-5.46	-	41.60	74.00	32.40

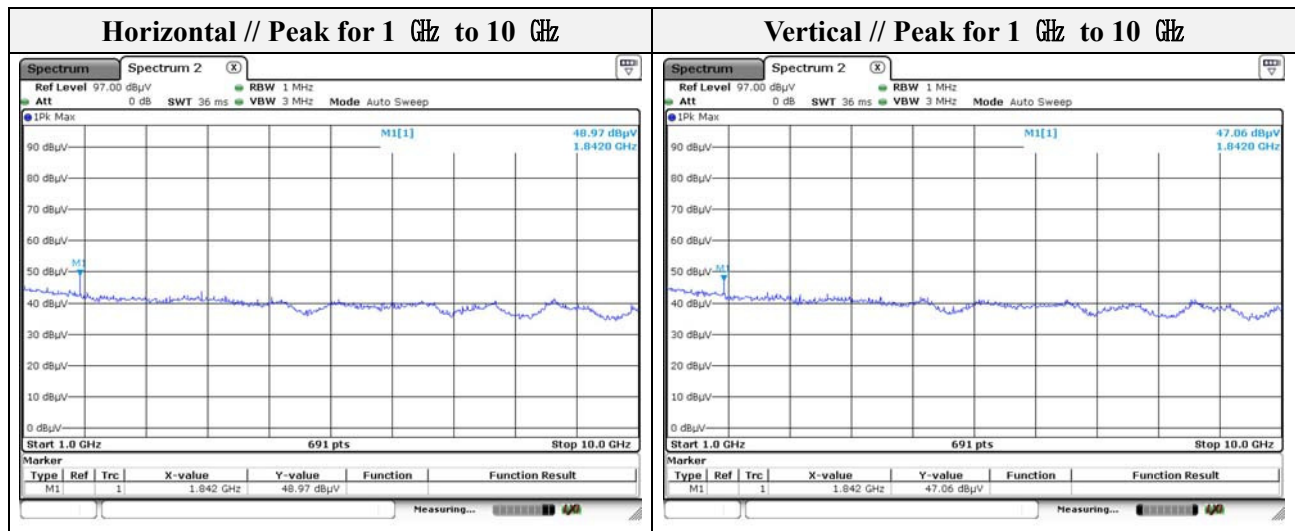

Note.

1. Average test would be performed if the peak result were greater than the average limit.



Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV30	100736	1 year	2017.07.06
Spectrum Analyzer	R&S	FSV40	101002	1 year	2017.07.06
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2018.01.23
Attenuator	Keysight	8493C	82506	1 year	2018.01.23
Loop Antenna	R&S	HFH2-Z2.335.4711.52	826532	2 years	2017.03.03
Trilog-broadband antenna	SCHWARZBECK	VULB 9163	9168-713	2 years	2017.05.15
Horn Antenna	E/L	3117	135889	2 years	2018.10.25
High Pass Filter	WAINWRIGHT INSTRUMENT	WHJS3000-10TT	1	1 year	2017.07.04
Low Pass Filter	WEINSCHL	WLK1.0/18G-10TT	1	1 year	2017.07.04
Preamplifier	HP	8449B	3008A00538	1 year	2017.07.05
Preamplifier	SCHWARZBECK	BBV-9718	9718-246	1 year	2017.10.14
EMI Test Receiver	R&S	ESR3	101781	1 year	2017.05.03
EMI Test Receiver	R&S	ESU26	100552	1 year	2017.04.24
EMI Test Receiver	R&S	ESR3	101783	1 year	2017.05.03

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	Samsung Electronics Co., Ltd.	NP-QX411L	HJV993BB905283V
Test Board	N/A	N/A	N/A