

FCC TEST REPORT

(PART 24)

REPORT NO.: RF130801C15-1

MODEL NO.: 0P3P700

FCC ID: NM80P3P700

RECEIVED: Aug. 01, 2013

TESTED: Aug. 16, 2013 ~ Aug. 21, 2013

ISSUED: Aug. 29, 2013

APPLICANT: HTC Corporation

ADDRESS: 23,Xinghua Rd.,Taoyuan 330,Taiwan,R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New
Taipei City, Taiwan (R.O.C.)

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by TAF or
any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 CERTIFICATION	5
2 SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY	6
2.2 TEST SITE AND INSTRUMENTS.....	7
3 GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 CONFIGURATION OF SYSTEM UNDER TEST	10
3.3 DESCRIPTION OF SUPPORT UNITS.....	11
3.4 TEST ITEM AND TEST CONFIGURATION	12
3.5 EUT OPERATING CONDITIONS.....	14
3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
4 TEST TYPES AND RESULTS.....	15
4.1 OUTPUT POWER MEASUREMENT	15
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	15
4.1.2 TEST PROCEDURES	15
4.1.3 TEST SETUP	16
4.1.4 TEST RESULTS	17
4.2 FREQUENCY STABILITY MEASUREMENT	24
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	24
4.2.2 TEST PROCEDURE.....	24
4.2.3 TEST SETUP	24
4.2.4 TEST RESULTS	25
4.3 OCCUPIED BANDWIDTH MEASUREMENT	26
4.3.1 TEST PROCEDURES	26
4.3.2 TEST SETUP	26
4.3.3 TEST RESULTS	27
4.4 PEAK TO AVERAGE RATIO	31
4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	31
4.4.2 TEST SETUP	31
4.4.3 TEST PROCEDURES	31
4.4.4 TEST RESULTS	32
4.5 BAND EDGE MEASUREMENT	36
4.5.1 LIMITS OF BAND EDGE MEASUREMENT	36
4.5.2 TEST SETUP	36
4.5.3 TEST PROCEDURES	37
4.5.4 TEST RESULTS	38
4.6 CONDUCTED SPURIOUS EMISSIONS.....	44
4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	44
4.6.2 TEST PROCEDURE.....	44
4.6.3 TEST SETUP	44
4.6.4 TEST RESULTS	45
4.7 RADIATED EMISSION MEASUREMENT	47
4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT	47
4.7.2 TEST PROCEDURES	47
4.7.3 DEVIATION FROM TEST STANDARD	47
4.7.4 TEST SETUP	48
4.7.5 TEST RESULTS	49
5 PHOTOGRAPHS OF THE TEST CONFIGURATION.....	63



A D T

6	INFORMATION ON THE TESTING LABORATORIES	64
7	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	65



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130801C15-1	Original release	Aug. 29, 2013



A D T

1 CERTIFICATION

PRODUCT: Smartphone

MODEL: OP3P700

BRAND: HTC

APPLICANT: HTC Corporation

TESTED: Aug. 16, 2013 ~ Aug. 21, 2013

TEST SAMPLE: Production Unit

STANDARDS: FCC Part 24, Subpart E

The above equipment (model: OP3P700) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Ivonne Wu , **DATE** : Aug. 29, 2013
Ivonne Wu / Senior Specialist

APPROVED BY : Sam Chen , **DATE** : Aug. 29, 2013
Sam Chen / Assistant Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 24.232	Equivalent isotropically radiated power	PASS	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.232(d)	Peak to average ratio	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -23.48dB at 40.53MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.2 TEST SITE AND INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100744	Apr. 15, 2013	Apr. 14, 2014
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 17, 2012	Dec. 16, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Mar. 25, 2013	Mar. 24, 2014
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Jan. 07, 2013	Jan. 06, 2014
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 25, 2012	Dec. 24, 2013
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier EMCI	EMC 012645	980115	Dec. 28, 2012	Dec. 27, 2013
Preamplifier EMCI	EMC 184045	980116	Dec. 28, 2012	Dec. 27, 2013
Preamplifier EMCI	EMC 330H	980112	Dec. 28, 2012	Dec. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4	Oct. 19, 2012	Oct. 18, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 19, 2012	Oct. 18, 2013
RF signal cable Worken	RG-213	NA	Dec. 29, 2012	Dec. 28, 2013
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Jul. 18, 2013	Jul. 17, 2014
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Communications Tester-Wireless	E5515C	MY52102544	Sep. 05, 2012	Sep. 04, 2013
Radio Communication Analyzer	MT8820C	6201300640	Aug. 01, 2013	Jul. 31, 2014

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 690701.
5. The IC Site Registration No. is IC 7450F-10.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Smartphone	
MODEL NO.	0P3P700	
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.8Vdc (battery)	
MODULATION TYPE	CDMA BC1	QPSK, OQPSK, HPSK
	LTE Band 25	QPSK, 16QAM
FREQUENCY RANGE	CDMA BC1	1851.3MHz ~ 1908.8MHz
	LTE Band 25 (Channel Bandwidth: 1.4MHz)	1850.7MHz ~ 1914.3MHz
	LTE Band 25 (Channel Bandwidth: 3MHz)	1851.5MHz ~ 1913.5MHz
	LTE Band 25 (Channel Bandwidth: 5MHz)	1852.5MHz ~ 1912.5MHz
	LTE Band 25 (Channel Bandwidth: 10MHz)	1855MHz ~ 1905MHz
	LTE Band 25 (Channel Bandwidth: 15MHz)	1857.5MHz ~ 1907.5MHz
	LTE Band 25 (Channel Bandwidth: 20MHz)	1860MHz ~ 1905MHz
MAX. EIRP POWER	CDMA BC1	158.27mW
	LTE Band 25 (Channel Bandwidth: 1.4MHz)	125.89mW
	LTE Band 25 (Channel Bandwidth: 3MHz)	121.90mW
	LTE Band 25 (Channel Bandwidth: 5MHz)	116.17mW
	LTE Band 25 (Channel Bandwidth: 10MHz)	130.02mW
	LTE Band 25 (Channel Bandwidth: 15MHz)	159.59mW
	LTE Band 25 (Channel Bandwidth: 20MHz)	153.11mW



A D T


EMISSION DESIGNATOR	CDMA	1M27F9W
	LTE Band 25 (Channel Bandwidth: 1.4MHz)	1M08G7D
	LTE Band 25 (Channel Bandwidth: 3MHz)	2M68G7D
	LTE Band 25 (Channel Bandwidth: 5MHz)	4M50W7D
	LTE Band 25 (Channel Bandwidth: 10MHz)	8M92G7D
	LTE Band 25 (Channel Bandwidth: 15MHz)	13M4G7D
	LTE Band 25 (Channel Bandwidth: 20MHz)	17M9G7D
ANTENNA TYPE	Fixed Internal Antenna	
I/O PORTS	Refer to users' manual	
DATA CABLE	Refer to NOTE as below	
ACCESSORY DEVICES	Refer to NOTE as below	

NOTE:


1. The EUT's accessories list refers to Ext. Pho.
2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

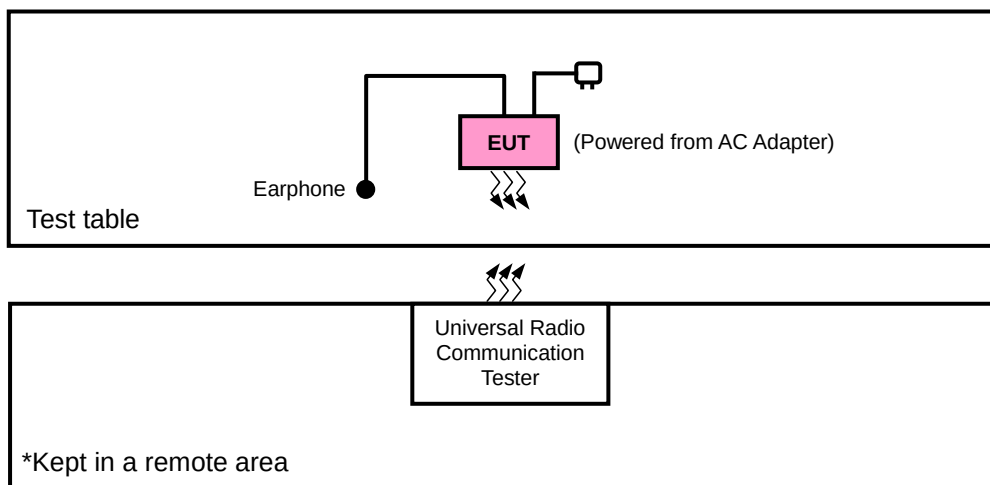

FOR E.I.R.P. TEST

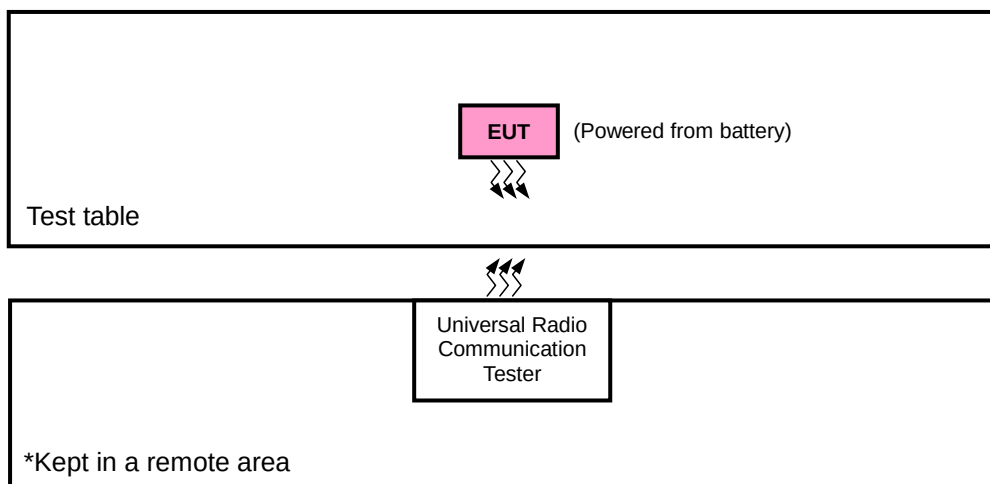



3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Earphone	Merry	Max-300	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.1m audio cable

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 was provided by manufacturer.

3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and Y-axis for CDMA and X-axis for LTE for radiated emission for antenna 0. Following channel(s) was (were) selected for the final test as listed below:

CDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
-	EIRP	25 to 1175	25, 600, 1175	1xRTT
-	FREQUENCY STABILITY	25 to 1175	600	1xRTT
-	OCCUPIED BANDWIDTH	25 to 1175	25, 600, 1175	1xRTT
-	PEAK TO AVERAGE RATIO	25 to 1175	25, 600, 1175	1xRTT
-	BAND EDGE	25 to 1175	25, 1175	1xRTT
-	CONDCUDED EMISSION	25 to 1175	600	1xRTT
-	RADIATED EMISSION	25 to 1175	600	1xRTT

LTE BAND 25 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
-	EIRP	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK / 16QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK / 16QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK / 16QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10MHz	QPSK / 16QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK / 16QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK / 16QAM	1 RB / 0 RB Offset
-	FREQUENCY STABILITY	26047 to 26683	26365	1.4MHz	QPSK	1 RB / 0 RB Offset
		26055 to 26675	26365	3MHz	QPSK	1 RB / 0 RB Offset
		26065 to 26665	26365	5MHz	QPSK	1 RB / 0 RB Offset
		26090 to 26640	26365	10MHz	QPSK	1 RB / 0 RB Offset
		26115 to 26615	26365	15MHz	QPSK	1 RB / 0 RB Offset
		26140 to 26590	26365	20MHz	QPSK	1 RB / 0 RB Offset
-	OCCUPIED BANDWIDTH	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK / 16QAM	6 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK / 16QAM	15 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK / 16QAM	25 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10MHz	QPSK / 16QAM	50 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK / 16QAM	75 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK / 16QAM	100 RB / 0 RB Offset

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
-	PEAK TO AVERAGE RATIO	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK / 16QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK / 16QAM	1 RB / 7 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK / 16QAM	1 RB / 12 RB Offset
		26090 to 26640	26090, 26365, 26640	10MHz	QPSK / 16QAM	1 RB / 24 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK / 16QAM	75 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK / 16QAM	100 RB / 0 RB Offset
-	BAND EDGE	26047 to 26683	26047	1.4MHz	QPSK	1 RB / 0 RB Offset
						6 RB / 0 RB Offset
			26683	1.4MHz	QPSK	1 RB / 5 RB Offset
						6 RB / 0 RB Offset
		26055 to 26675	26055	3MHz	QPSK	1 RB / 0 RB Offset
						1 RB / 0 RB Offset
			26675	3MHz	QPSK	1 RB / 14 RB Offset
						15 RB / 0 RB Offset
		26065 to 26665	26065	5MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
			26665	5MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
		26090 to 26640	26090	10MHz	QPSK	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
			26640	10MHz	QPSK	1 RB / 49 RB Offset
						50 RB / 0 RB Offset
-	CONDCUDED EMISSION	26047 to 26683	26365	1.4MHz	QPSK	1 RB / 5 RB Offset
		26055 to 26675	26365	3MHz	QPSK	1 RB / 7 RB Offset
		26065 to 26665	26365	5MHz	QPSK	1 RB / 12 RB Offset
		26090 to 26640	26365	10MHz	QPSK	1 RB / 24 RB Offset
		26115 to 26615	26365	15MHz	QPSK	1 RB / 0 RB Offset
		26140 to 26590	26365	20MHz	QPSK	1 RB / 0 RB Offset
-	RADIATED EMISSION	26047 to 26683	26365	1.4MHz	QPSK	1 RB / 0 RB Offset
		26055 to 26675	26365	3MHz	QPSK	1 RB / 0 RB Offset
		26065 to 26665	26365	5MHz	QPSK	1 RB / 0 RB Offset
		26090 to 26640	26365	10MHz	QPSK	1 RB / 0 RB Offset
		26115 to 26615	26365	15MHz	QPSK	1 RB / 0 RB Offset
		26140 to 26590	26365	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	26deg. C, 58%RH	3.8Vdc	Howard Kao
FREQUENCY STABILITY	26deg. C, 58%RH	3.8Vdc	Howard Kao
OCCUPIED BANDWIDTH	26deg. C, 58%RH	3.8Vdc	Howard Kao
BAND EDGE	26deg. C, 58%RH	3.8Vdc	Howard Kao
CONDCUDED EMISSION	26deg. C, 58%RH	3.8Vdc	Howard Kao
RADIATED EMISSION	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu

3.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP

4.1.2 TEST PROCEDURES

EIRP MEASUREMENT:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5MHz for CDMA and 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$

CONDUCTED POWER MEASUREMENT:


The EUT was set up for the maximum power with CDMA & LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TEST SETUP

EIRP / ERP MEASUREMENT:

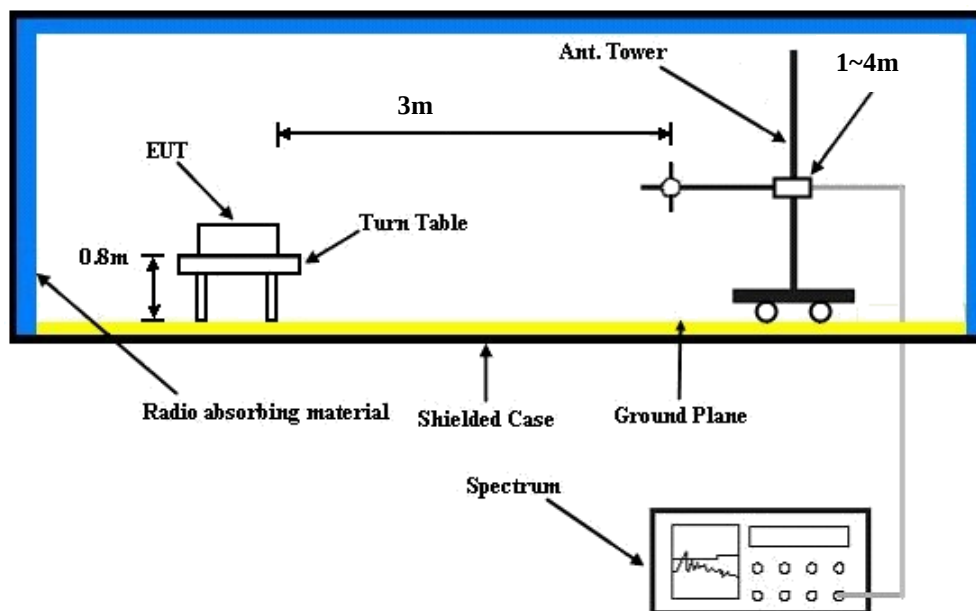

CONDUCTED POWER MEASUREMENT:



4.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

CDMA

Band	CDMA		
Channel	25	600	1175
Frequency (MHz)	1851.25	1880	1908.75
RC1+SO55	24.22	24.47	24.35
RC3+SO55	24.23	24.48	24.36
RC3+SO32(+ F-SCH)	24.19	24.44	24.32
RC3+SO32(+SCH)	24.20	24.45	24.33
RTAP 153.6	24.14	24.47	24.27
RETAP 4096	24.21	24.46	24.34

LTE Band 25

Band / BW	Modulation	RB Size	RB Offset	Low CH 26047	Mid CH 26365	High CH 26683	3PGG MPR (dB)
				Frequency 1850.7 MHz	Frequency 1882.5 MHz	Frequency 1914.3 MHz	
25 / 1.4M	QPSK	1	0	23.02	22.99	23.25	0
		1	2	23.00	23.02	23.21	0
		1	5	22.97	23.04	23.09	0
		3	0	22.93	22.85	23.05	0
		3	1	22.81	22.90	22.97	0
		3	3	22.85	22.99	22.96	0
		6	0	21.99	21.99	22.04	1
	16QAM	1	0	21.98	21.95	22.21	1
		1	2	21.96	21.98	22.17	1
		1	5	21.93	22.00	22.05	1
		3	0	21.89	21.84	22.01	1
		3	1	21.84	21.86	21.93	1
		3	3	21.85	21.95	21.92	1
		6	0	20.95	20.95	21.00	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 26055	Mid CH 26365	High CH 26675	3PGG MPR (dB)
				Frequency 1851.5 MHz	Frequency 1882.5 MHz	Frequency 1913.5 MHz	
25 / 3M	QPSK	1	0	23.04	23.01	23.27	0
		1	7	23.02	23.04	23.23	0
		1	14	22.99	23.06	23.11	0
		8	0	21.95	21.87	22.07	1
		8	3	21.83	21.92	21.99	1
		8	7	21.87	22.01	21.98	1
		15	0	22.01	22.01	22.06	1
	16QAM	1	0	22.00	21.97	22.23	1
		1	7	21.98	22.00	22.19	1
		1	14	21.95	22.02	22.07	1
		8	0	20.91	20.86	21.03	2
		8	3	20.86	20.88	20.95	2
		8	7	20.87	20.97	20.94	2
		15	0	20.97	20.97	21.02	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 26065	Mid CH 26365	High CH 26665	3PGG MPR (dB)
				Frequency 1852.5 MHz	Frequency 1882.5 MHz	Frequency 1912.5 MHz	
25 / 5M	QPSK	1	0	23.09	23.06	23.32	0
		1	12	23.07	23.09	23.28	0
		1	24	23.04	23.11	23.16	0
		12	0	22.00	21.92	22.12	1
		12	6	21.88	21.97	22.04	1
		12	13	21.92	22.06	22.03	1
		25	0	22.06	22.06	22.11	1
	16QAM	1	0	22.01	21.98	22.24	1
		1	12	21.99	22.01	22.20	1
		1	24	21.96	22.03	22.08	1
		12	0	20.92	20.87	21.04	2
		12	6	20.87	20.89	20.96	2
		12	13	20.88	20.98	20.95	2
		25	0	20.98	20.98	21.03	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 26090	Mid CH 26365	High CH 26640	3PGG MPR (dB)
				Frequency 1855.0 MHz	Frequency 1882.5 MHz	Frequency 1910.0 MHz	
25 / 10M	QPSK	1	0	23.17	23.14	23.40	0
		1	24	23.15	23.17	23.36	0
		1	49	23.12	23.19	23.24	0
		25	0	22.08	22.00	22.20	1
		25	12	21.96	22.05	22.12	1
		25	25	22.00	22.14	22.11	1
		50	0	22.14	22.14	22.19	1
	16QAM	1	0	22.02	21.99	22.25	1
		1	24	22.00	22.02	22.21	1
		1	49	21.97	22.04	22.09	1
		25	0	20.93	20.85	21.05	2
		25	12	20.81	20.90	20.97	2
		25	25	20.85	20.99	20.96	2
		50	0	20.99	20.99	21.04	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 26115	Mid CH 26365	High CH 26615	3PGG MPR (dB)
				Frequency 1857.5 MHz	Frequency 1882.5 MHz	Frequency 1907.5 MHz	
25 / 15M	QPSK	1	0	23.29	23.26	23.52	0
		1	37	23.27	23.29	23.48	0
		1	74	23.24	23.31	23.36	0
		36	0	22.20	22.12	22.32	1
		36	19	22.08	22.17	22.24	1
		36	39	22.12	22.26	22.23	1
		75	0	22.26	22.26	22.31	1
	16QAM	1	0	22.16	22.13	22.39	1
		1	37	22.14	22.16	22.35	1
		1	74	22.11	22.18	22.23	1
		36	0	21.07	20.99	21.19	2
		36	19	20.95	21.04	21.11	2
		36	39	20.99	21.13	21.10	2
		75	0	21.13	21.13	21.18	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 26140	Mid CH 26365	High CH 26590	3PGG MPR (dB)
				Frequency 1860.0 MHz	Frequency 1882.5 MHz	Frequency 1905.0 MHz	
25 / 20M	QPSK	1	0	23.55	23.52	23.78	0
		1	50	23.53	23.55	23.74	0
		1	99	23.50	23.57	23.62	0
		50	0	22.46	22.38	22.58	1
		50	25	22.34	22.43	22.50	1
		50	50	22.38	22.52	22.49	1
		100	0	22.52	22.52	22.57	1
	16QAM	1	0	22.50	22.47	22.73	1
		1	50	22.48	22.50	22.69	1
		1	99	22.45	22.52	22.57	1
		50	0	21.41	21.33	21.53	2
		50	25	21.29	21.38	21.45	2
		50	50	21.33	21.47	21.44	2
		100	0	21.47	21.47	21.52	2

EIRP POWER (dBm)

CDMA

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	25	1851.25	-15.17	36.57	21.40	138.10	H
	600	1880.00	-15.23	37.22	21.99	158.27	H
	1175	1908.75	-15.83	37.18	21.35	136.52	H
	25	1851.25	-17.64	37.65	20.01	100.25	V
	600	1880.00	-17.63	37.58	19.95	98.92	V
	1175	1908.75	-17.01	37.48	20.47	111.43	V

LTE Band 25

CHANNEL BANDWIDTH: 1.4MHz QPSK

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	26047	1850.7	-18.87	36.57	17.70	58.91	H
	26365	1882.5	-18.11	37.22	19.11	81.55	H
	26683	1914.3	-18.71	39.09	20.38	109.14	H
	26047	1850.7	-16.95	37.65	20.70	117.52	V
	26365	1882.5	-16.96	37.58	20.62	115.43	V
	26683	1914.3	-16.92	37.92	21.00	125.89	V

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	26047	1850.7	-19.96	36.57	16.61	45.84	H
	26365	1882.5	-19.17	37.22	18.05	63.89	H
	26683	1914.3	-19.54	39.09	19.55	90.16	H
	26047	1850.7	-17.68	37.65	19.97	99.33	V
	26365	1882.5	-17.65	37.58	19.93	98.47	V
	26683	1914.3	-17.23	37.92	20.69	117.22	V

CHANNEL BANDWIDTH: 3MHz QPSK

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	26055	1851.5	-18.89	36.57	17.68	58.64	H
	26365	1882.5	-18.14	37.22	19.08	80.98	H
	26675	1913.5	-18.88	39.11	20.23	105.44	H
	26055	1851.5	-17.05	37.65	20.60	114.84	V
	26365	1882.5	-17.01	37.58	20.57	114.10	V
	26675	1913.5	-17.07	37.93	20.86	121.90	V

CHANNEL BANDWIDTH: 3MHz 16QAM

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	26055	1851.5	-19.93	36.57	16.64	46.15	H
	26365	1882.5	-19.24	37.22	17.98	62.86	H
	26675	1913.5	-19.72	39.11	19.39	86.90	H
	26055	1851.5	-17.68	37.65	19.97	99.33	V
	26365	1882.5	-17.70	37.58	19.88	97.34	V
	26675	1913.5	-17.26	37.93	20.67	116.68	V

CHANNEL BANDWIDTH: 5MHz QPSK

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	26065	1852.5	-18.87	36.57	17.70	58.91	H
	26365	1882.5	-18.21	37.22	19.01	79.69	H
	26665	1912.5	-18.48	39.11	20.63	115.61	H
	26065	1852.5	-17.00	37.65	20.65	116.17	V
	26365	1882.5	-17.02	37.58	20.56	113.84	V
	26665	1912.5	-17.34	37.96	20.62	115.35	V

CHANNEL BANDWIDTH: 5MHz 16QAM

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	26065	1852.5	-19.92	36.57	16.65	46.26	H
	26365	1882.5	-19.22	37.22	18.00	63.15	H
	26665	1912.5	-19.55	39.11	19.56	90.36	H
	26065	1852.5	-17.60	37.65	20.05	101.18	V
	26365	1882.5	-17.57	37.58	20.01	100.30	V
	26665	1912.5	-17.68	37.96	20.28	106.66	V

CHANNEL BANDWIDTH: 10MHz QPSK

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	26090	1855	-18.88	36.57	17.69	58.78	H
	26365	1882.5	-18.93	37.22	18.29	67.51	H
	26640	1910	-18.47	39.19	20.72	118.03	H
	26090	1855	-16.95	37.65	20.70	117.52	V
	26365	1882.5	-16.89	37.58	20.69	117.30	V
	26640	1910	-17.01	38.15	21.14	130.02	V

CHANNEL BANDWIDTH: 10MHz 16QAM

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	26090	1855	-19.90	36.57	16.67	46.47	H
	26365	1882.5	-19.58	37.22	17.64	58.13	H
	26640	1910	-19.34	39.19	19.85	96.61	H
	26090	1855	-17.58	37.65	20.07	101.65	V
	26365	1882.5	-17.90	37.58	19.68	92.96	V
	26640	1910	-17.35	38.15	20.80	120.23	V

CHANNEL BANDWIDTH: 15MHz QPSK

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	26115	1857.5	-18.85	36.57	17.72	59.18	H
	26365	1882.5	-18.56	37.22	18.66	73.52	H
	26615	1907.5	-18.17	39.23	21.06	127.64	H
	26115	1857.5	-16.97	37.65	20.68	116.98	V
	26365	1882.5	-16.44	37.58	21.14	130.11	V
	26615	1907.5	-16.19	38.22	22.03	159.59	V

CHANNEL BANDWIDTH: 15MHz 16QAM

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	26115	1857.5	-19.99	36.57	16.58	45.52	H
	26365	1882.5	-19.16	37.22	18.06	64.03	H
	26615	1907.5	-19.19	39.23	20.04	100.93	H
	26115	1857.5	-17.57	37.65	20.08	101.88	V
	26365	1882.5	-17.47	37.58	20.11	102.64	V
	26615	1907.5	-17.95	38.22	20.27	106.41	V

CHANNEL BANDWIDTH: 20MHz QPSK

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	26140	1860	-17.89	36.57	18.68	73.82	H
	26365	1882.5	-17.93	37.22	19.29	85.00	H
	26590	1905	-17.67	38.72	21.05	127.35	H
	26140	1860	-15.93	37.65	21.72	148.63	V
	26365	1882.5	-15.85	37.58	21.73	149.04	V
	26590	1905	-15.71	37.56	21.85	153.11	V

CHANNEL BANDWIDTH: 20MHz 16QAM

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
Y	26140	1860	-19.99	36.57	16.58	45.52	H
	26365	1882.5	-19.43	37.22	17.79	60.17	H
	26590	1905	-19.71	38.72	19.01	79.62	H
	26140	1860	-16.63	37.65	21.02	126.50	V
	26365	1882.5	-16.81	37.58	20.77	119.48	V
	26590	1905	-17.11	37.56	20.45	110.92	V

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

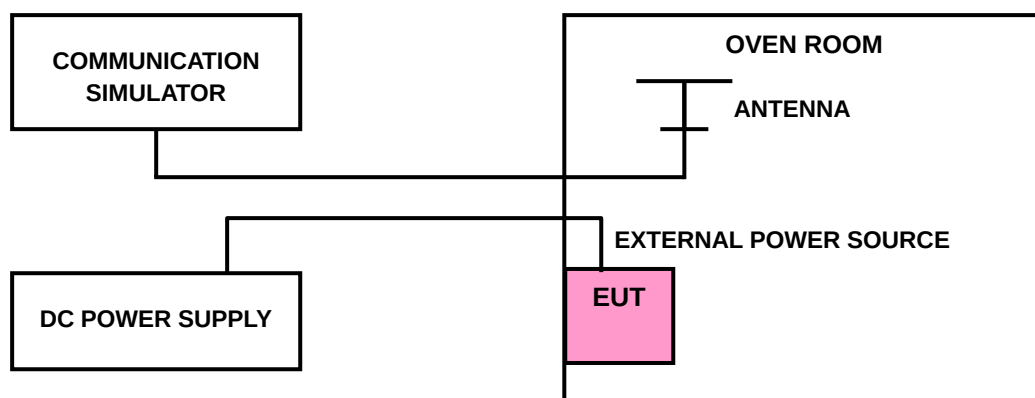

4.2.4 TEST RESULTS

FREQUENCY ERROR vs. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)							LIMIT (ppm)
	CDMA	LTE Band 25						
		1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
3.8	0.003	0.004	-0.005	-0.002	-0.001	-0.003	0.006	2.5
3.55	0.003	0.003	-0.006	0.002	-0.005	-0.001	0.003	2.5
4.35	0.004	0.003	-0.006	-0.005	-0.003	-0.001	0.002	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.55Vdc to 4.35Vdc.

FREQUENCY ERROR vs. TEMPERATURE


TEMP. (°C)	FREQUENCY ERROR (ppm)							LIMIT (ppm)
	GSM	LTE Band 25						
		1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
-30	0.0036	-0.0004	-0.0042	-0.0008	-0.0018	0.0025	-0.0042	2.5
-20	0.0035	0.0016	-0.0092	-0.0058	-0.0042	0.0067	-0.0067	2.5
-10	0.0039	0.0014	-0.0008	-0.0042	0.0028	0.0024	0.0063	2.5
0	0.0030	0.0039	-0.0043	0.0039	0.0055	0.0043	0.0034	2.5
10	0.0034	0.0055	-0.0051	-0.0014	0.0027	0.0037	0.0056	2.5
20	0.0038	0.0065	0.0031	0.0047	0.0021	0.0021	0.0043	2.5
30	0.0047	0.0063	-0.0028	0.0023	0.0036	0.0039	0.0059	2.5
40	0.0042	0.0023	0.0018	0.0078	-0.0052	0.0028	0.0030	2.5
50	0.0043	0.0051	-0.0049	-0.0032	-0.0040	0.0022	0.0054	2.5
60	0.0033	0.0039	-0.0073	-0.0016	-0.0046	0.0013	0.0079	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 TEST PROCEDURES


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 TEST SETUP

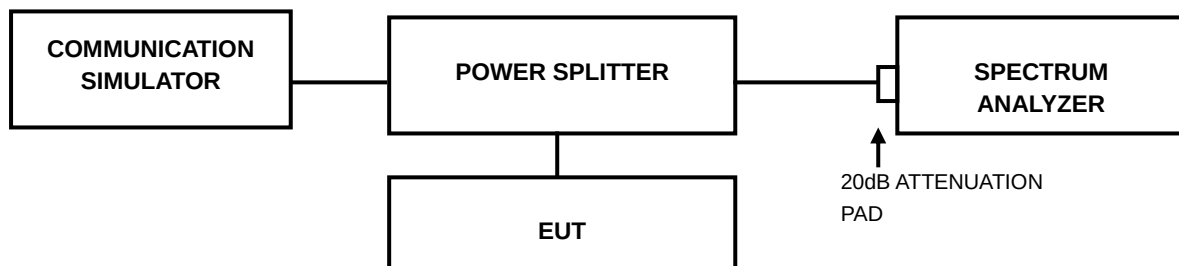

4.3.3 TEST RESULTS


CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (kHz)
		CDMA
25	1851.25	1.2692
600	1880.00	1.2708
1175	1908.75	1.2694

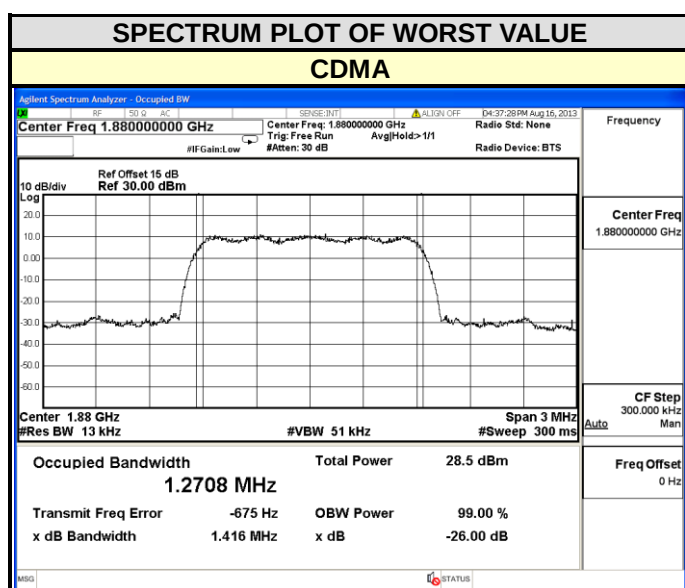



A D T


LTE BAND 25							
CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
26047	1850.7	1.0796	1.0767	26055	1851.5	2.6810	2.6785
26365	1882.5	1.0794	1.0772	26365	1882.5	2.6782	2.6818
26683	1914.3	1.0789	1.0782	26675	1913.5	2.6826	2.6818

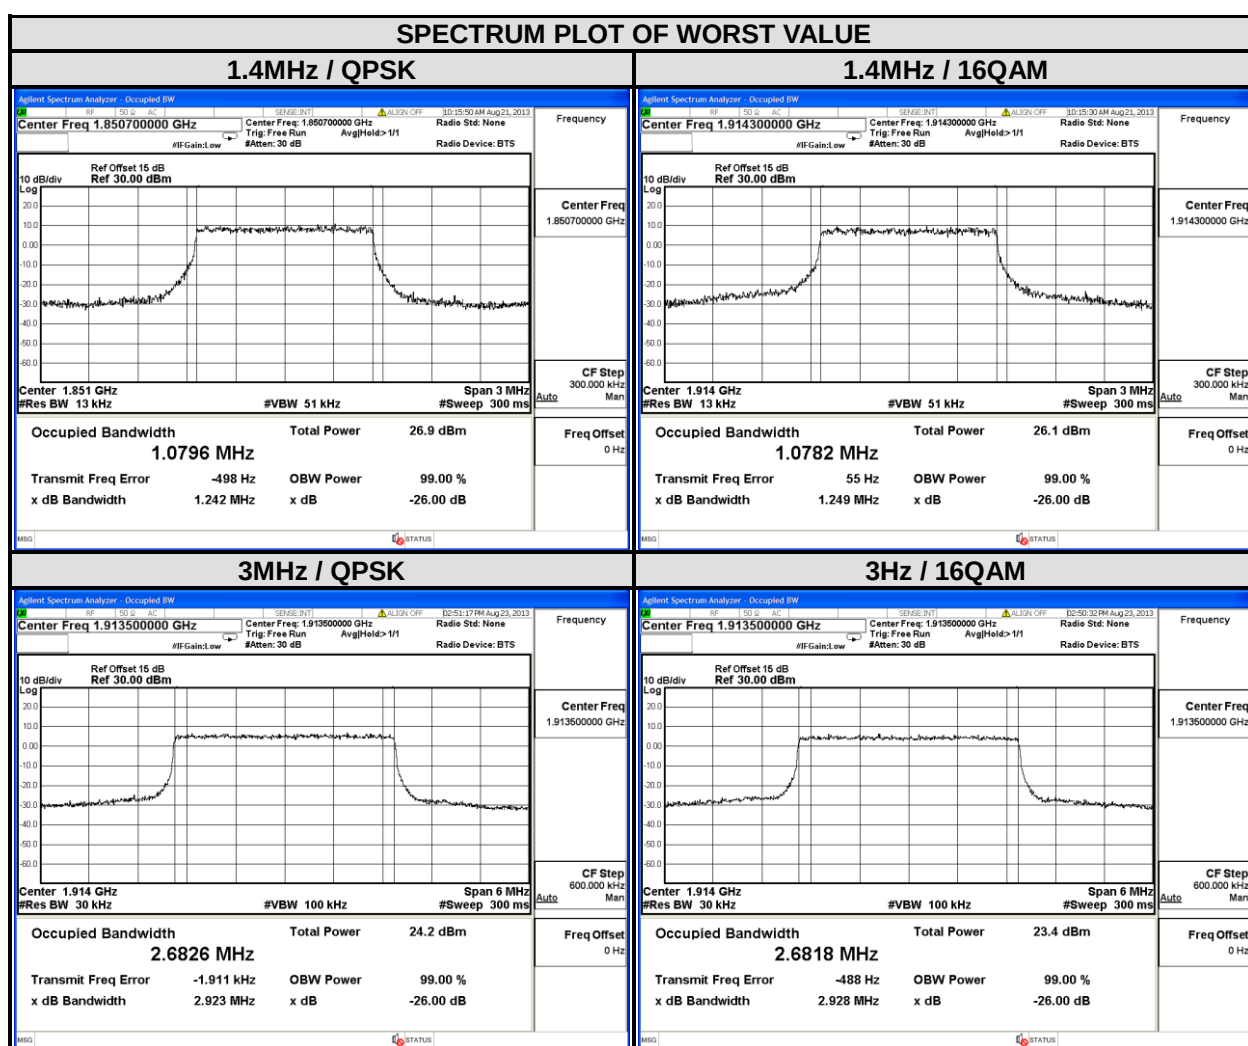



A D T


LTE BAND 25							
CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
26065	1852.5	4.4864	4.4865	26090	1855.0	8.9163	8.9189
26365	1882.5	4.4862	4.4850	26365	1882.5	8.9120	8.9072
26665	1912.5	4.4891	4.4968	26640	1910.0	8.9207	8.9198

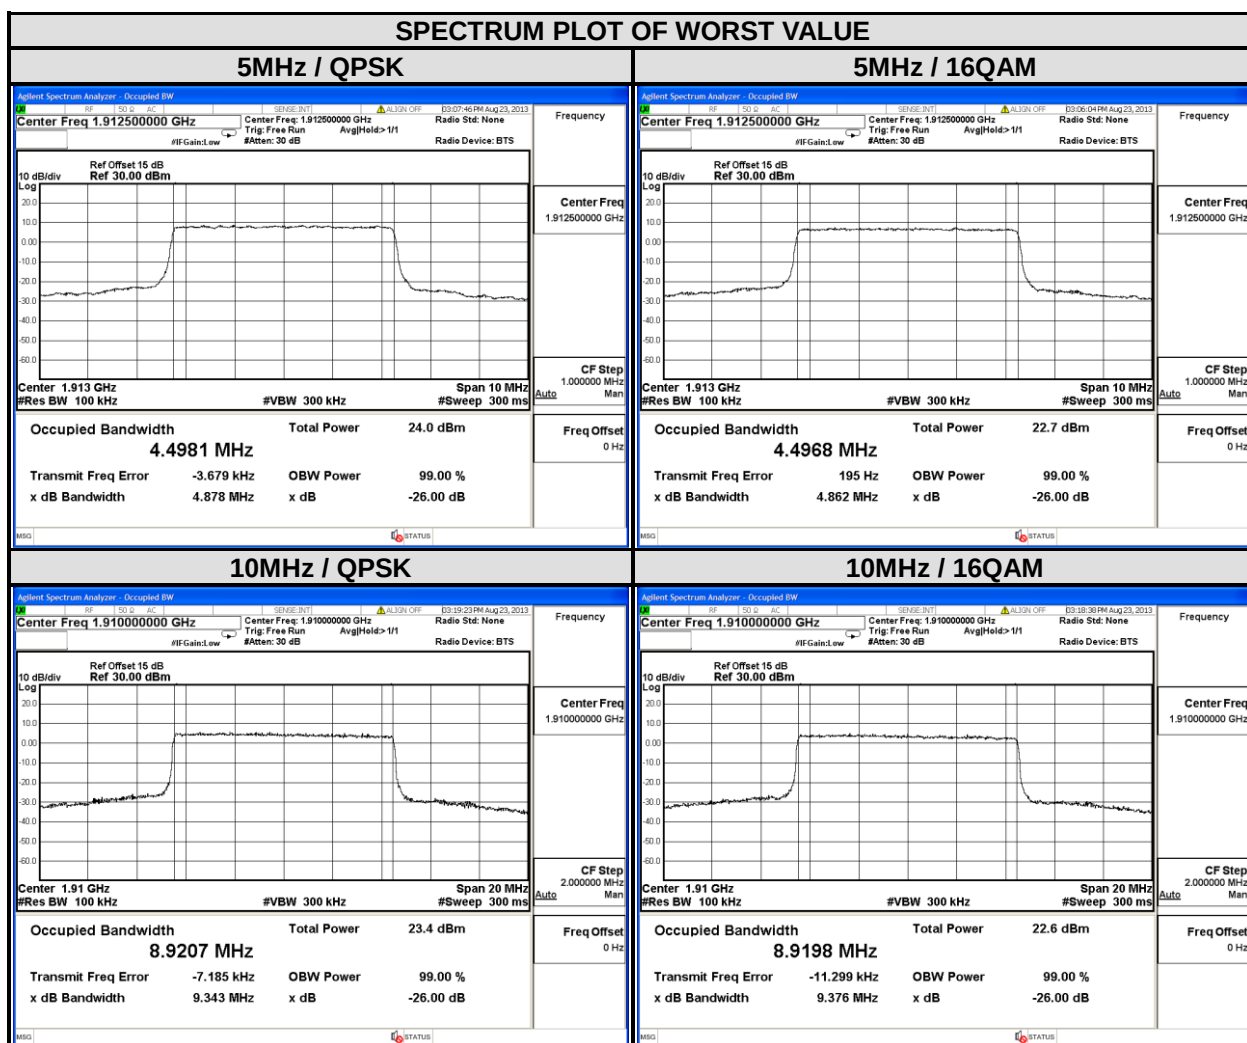



A D T

LTE BAND 25							
CHANNEL BANDWIDTH: 15MHz				CHANNEL BANDWIDTH: 20MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
26115	1857.5	13.380	13.379	26140	1860	17.851	17.846
26365	1882.5	13.355	13.357	26365	1882.5	17.803	17.796
26615	1907.5	13.373	13.365	26590	1905	17.800	17.800

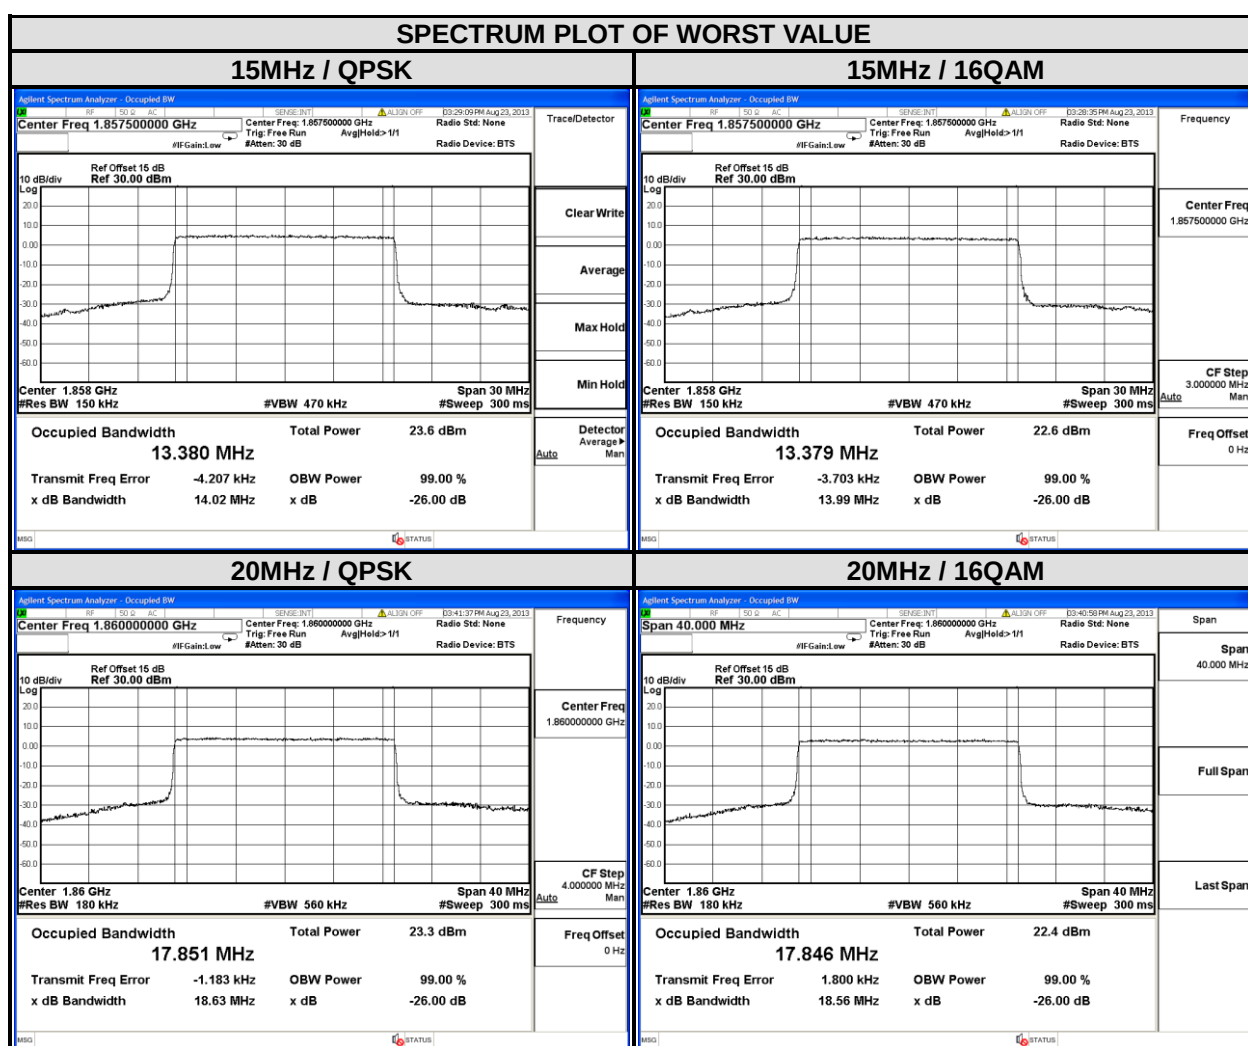


4.4 PEAK TO AVERAGE RATIO

4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.4.2 TEST SETUP

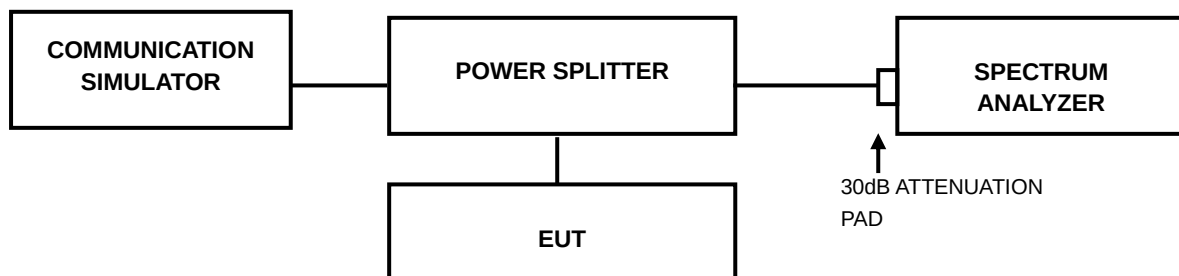


4.4.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.4.4 TEST RESULTS


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
		CDMA
25	1851.25	3.46
600	1880.00	3.46
1175	1908.75	3.59

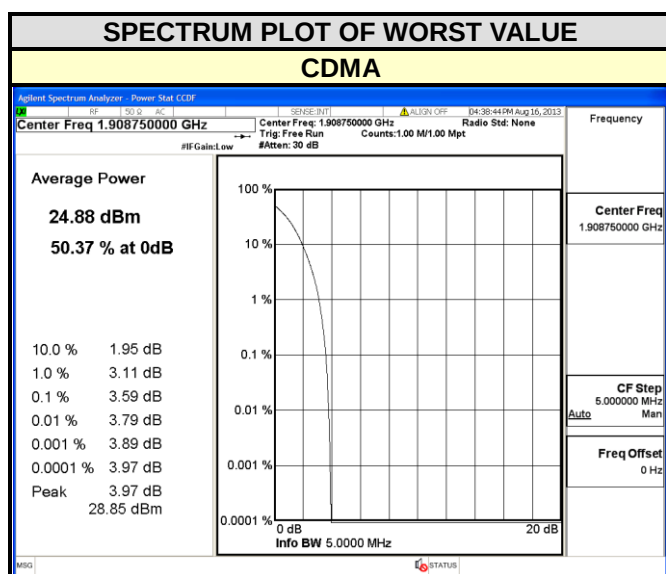



A D T


LTE BAND 25							
CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
26047	1850.7	4.33	5.56	26055	1851.5	4.26	5.44
26365	1882.5	4.53	5.04	26365	1882.5	4.44	5.04
26683	1914.3	4.87	6.07	26675	1913.5	4.89	6.15

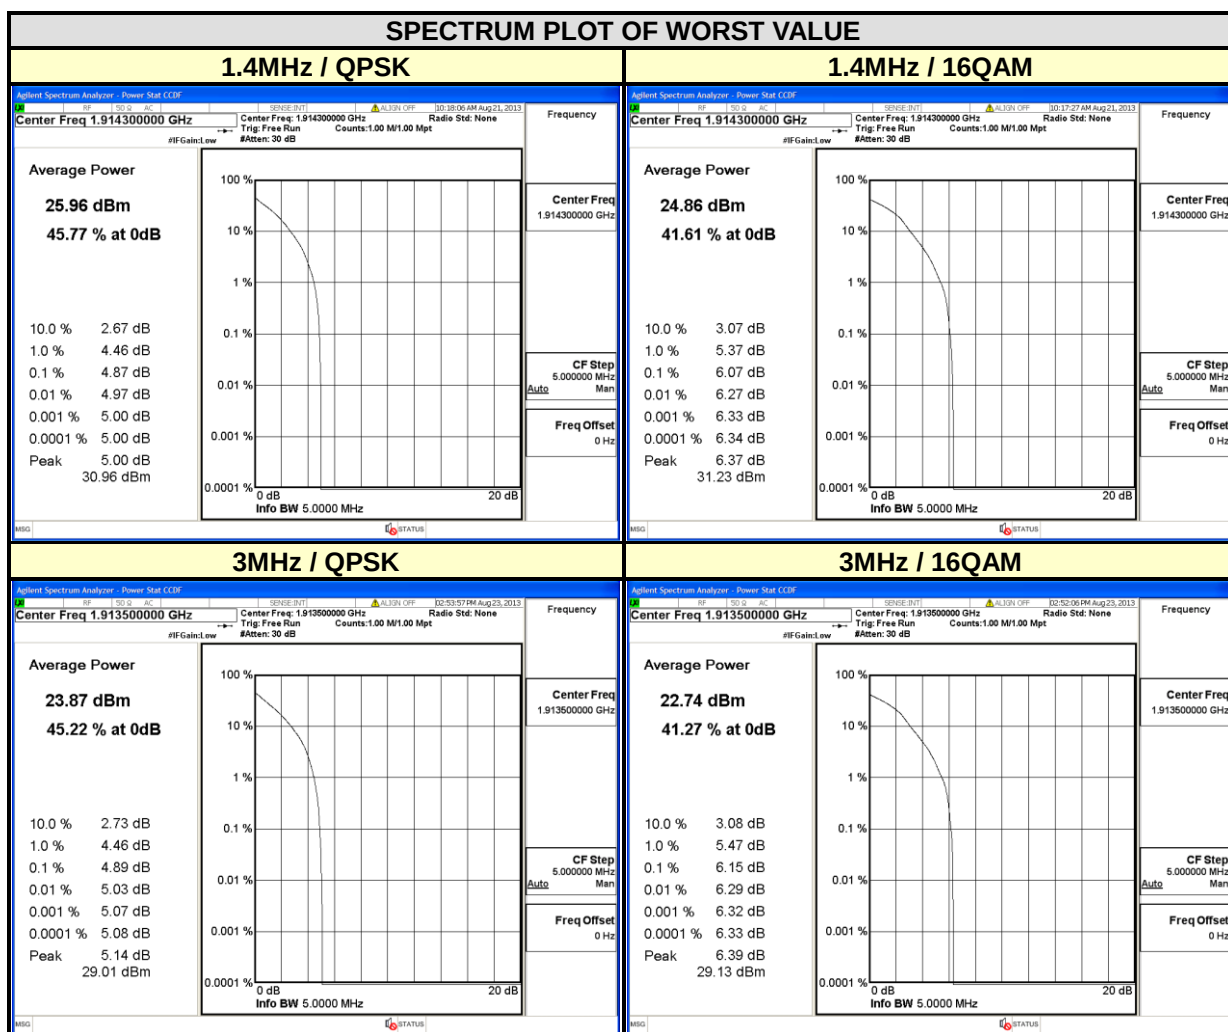



A D T


LTE BAND 25							
CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
26065	1852.5	4.18	5.36	26090	1855.0	4.15	5.25
26365	1882.5	4.29	4.95	26365	1882.5	4.28	4.94
26665	1912.5	4.81	5.99	26640	1910.0	4.34	5.56

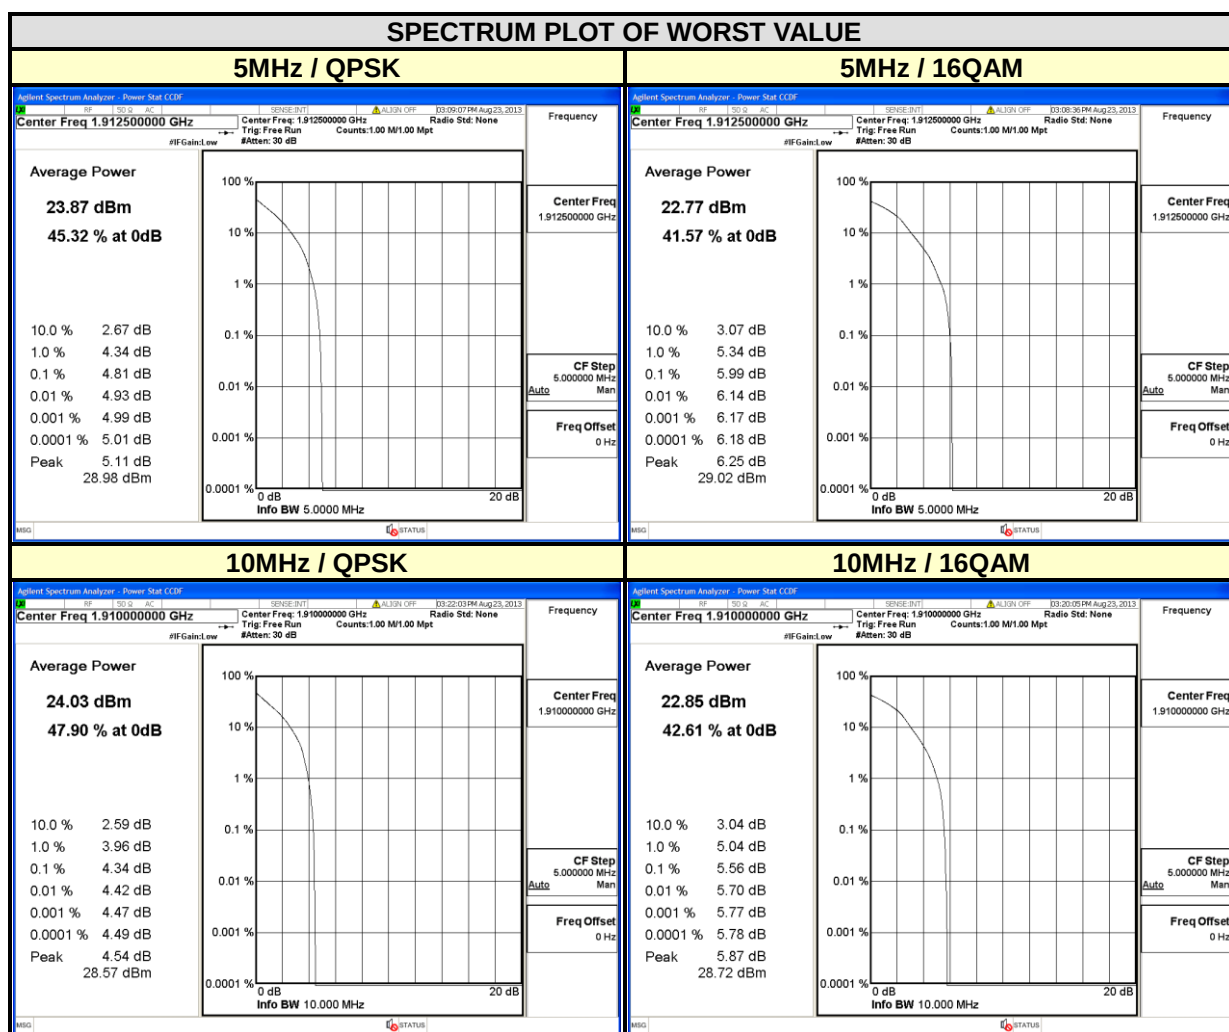



A D T

LTE BAND 25							
CHANNEL BANDWIDTH: 15MHz				CHANNEL BANDWIDTH: 20MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
26115	1857.5	4.10	5.29	26140	1860	4.07	5.24
26365	1882.5	4.37	5.37	26365	1882.5	4.57	5.17
26615	1907.5	4.59	5.67	26590	1905	5.15	6.14

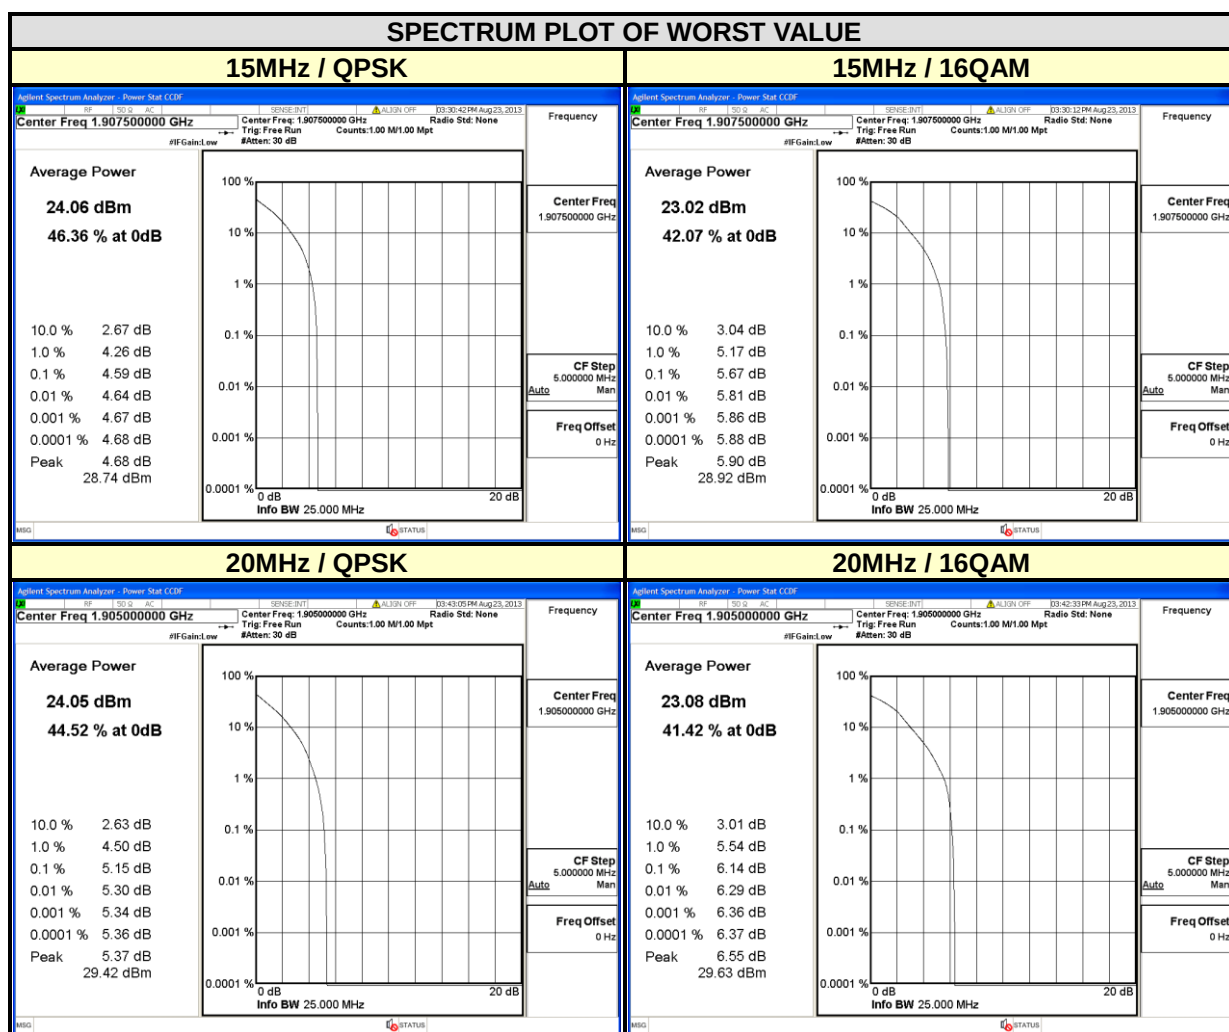


4.5 BAND EDGE MEASUREMENT

4.5.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.5.2 TEST SETUP

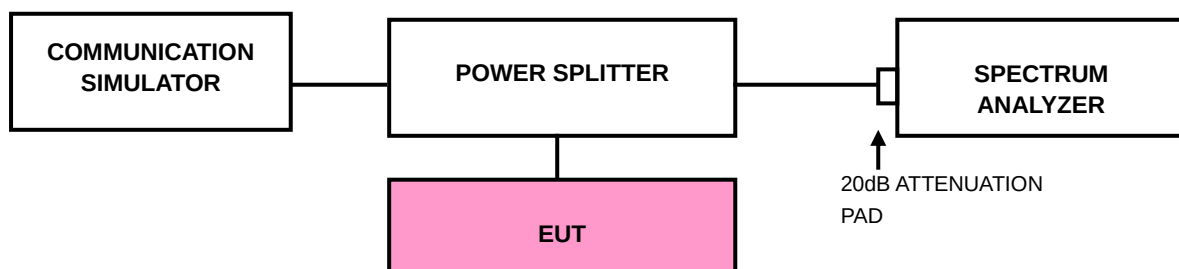


4.5.3 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 13kHz and VB of the spectrum is 51kHz (CDMA / LTE Channel Bandwidth 1.4MHz).
- c. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz (LTE Channel Bandwidth 3MHz).
- d. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 91kHz and VB of the spectrum is 300kHz (LTE Channel Bandwidth 5MHz).
- e. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (LTE Channel Bandwidth 10MHz).
- f. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 150kHz and VB of the spectrum is 470kHz (LTE Channel Bandwidth 15MHz).
- g. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 180kHz and VB of the spectrum is 560kHz (LTE Channel Bandwidth 20MHz).
- h. Record the max trace plot into the test report.



A D T

4.5.4 TEST RESULTS

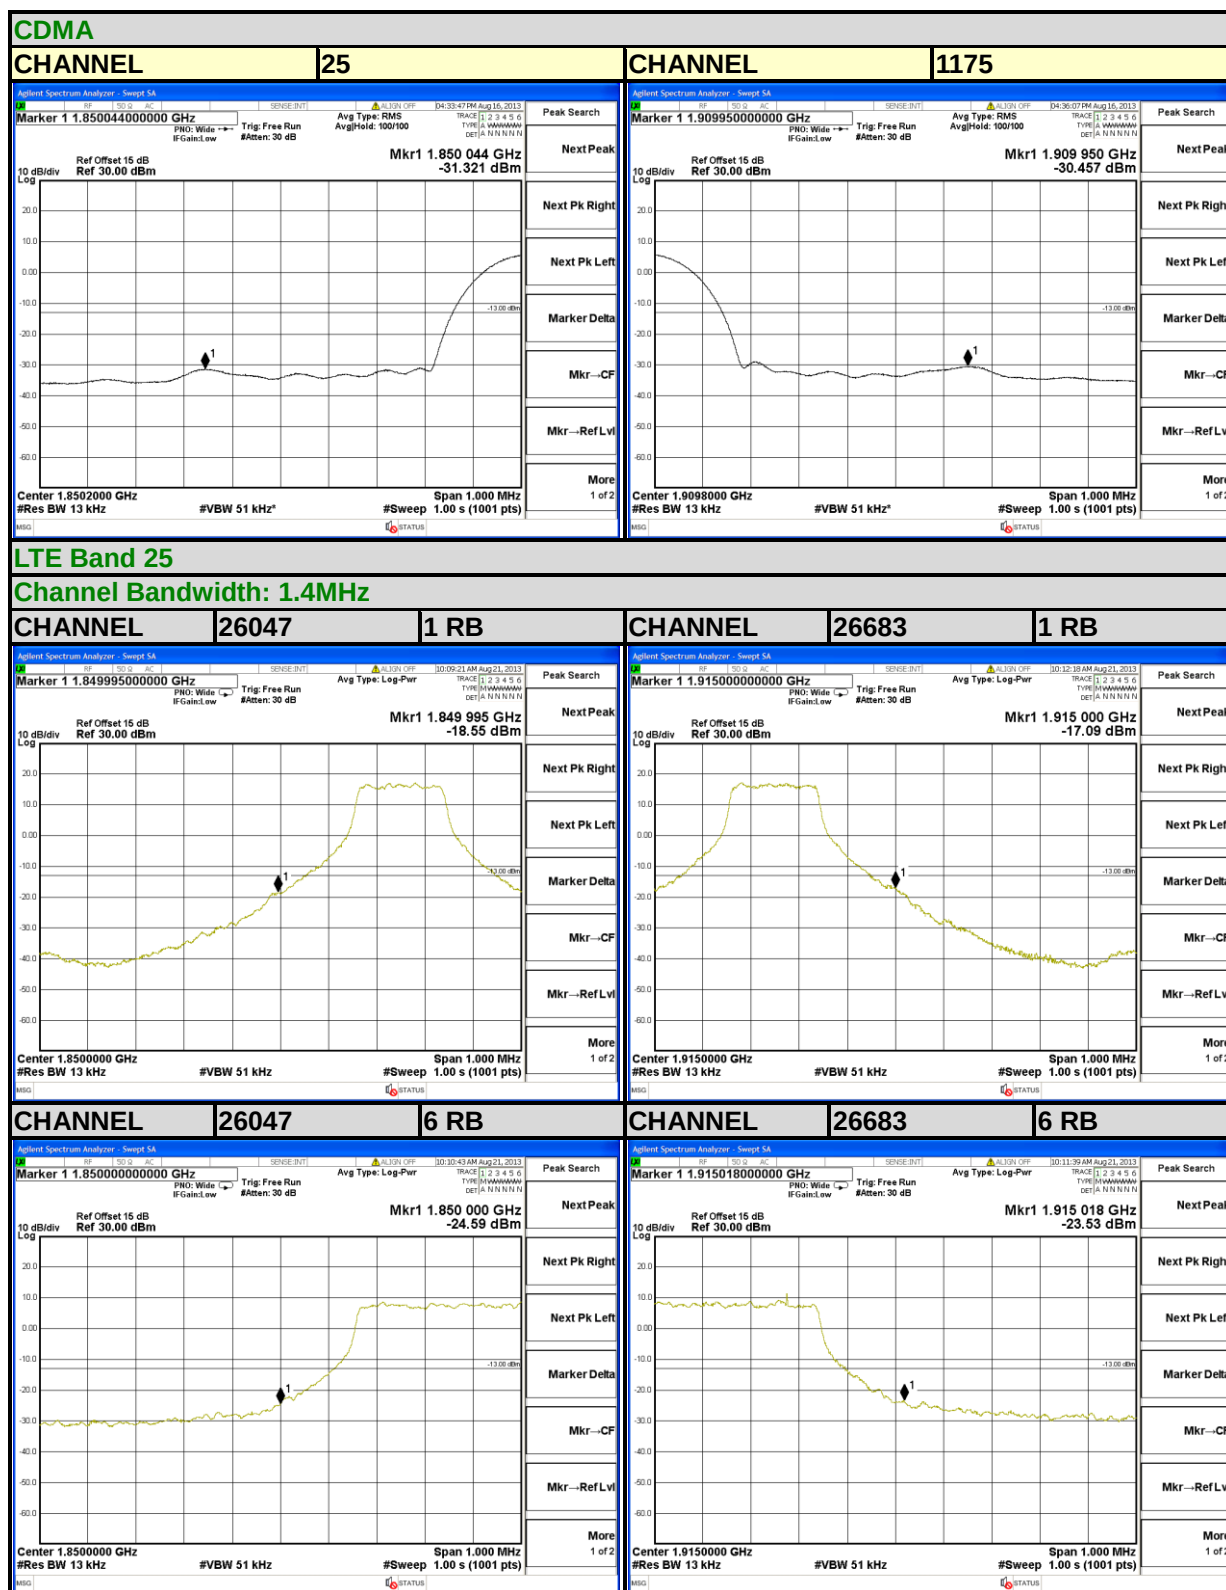




A D T

LTE Band 25

Channel Bandwidth: 3MHz

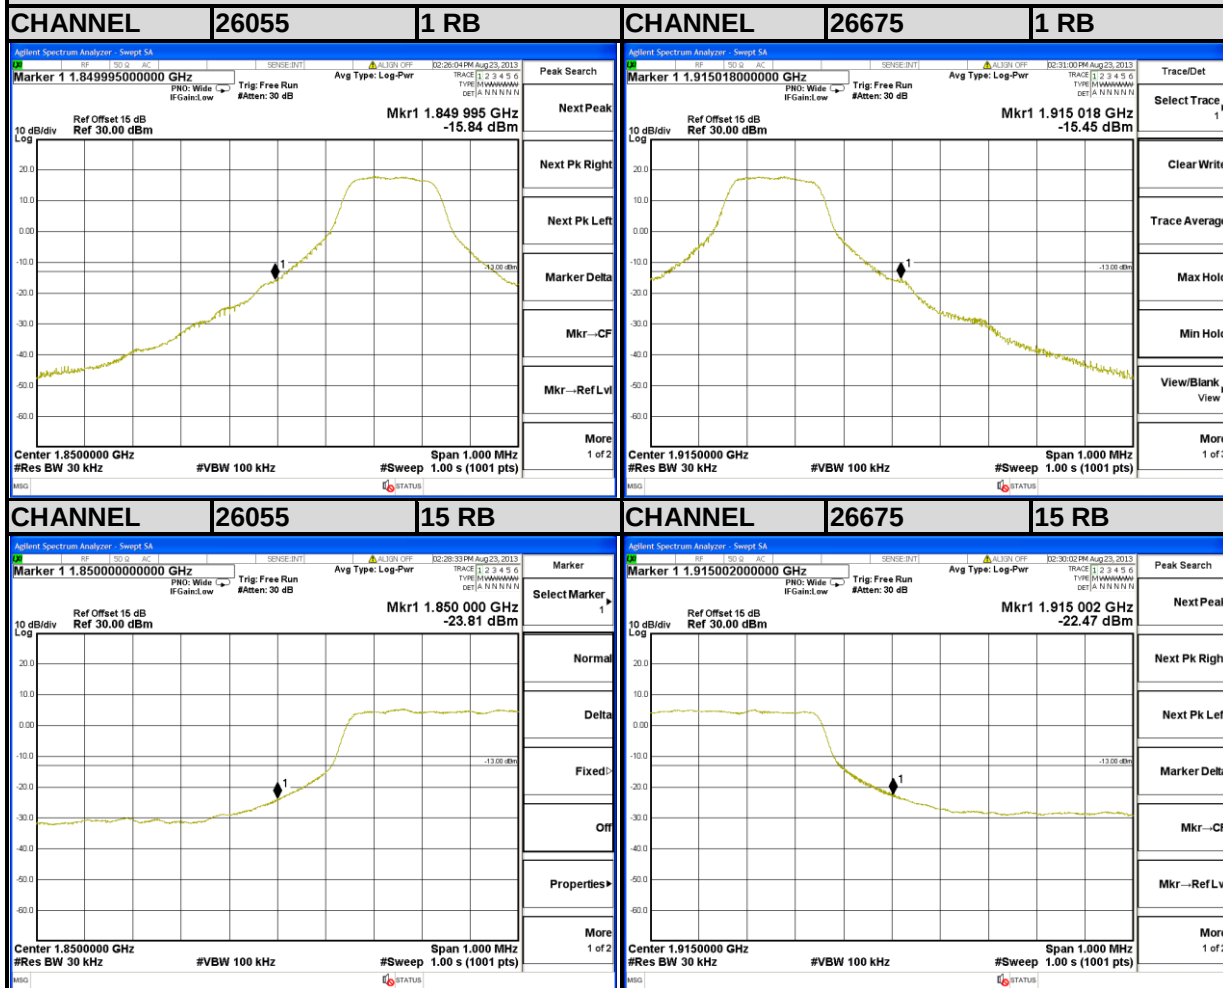




A D T

LTE Band 25

Channel Bandwidth: 5MHz

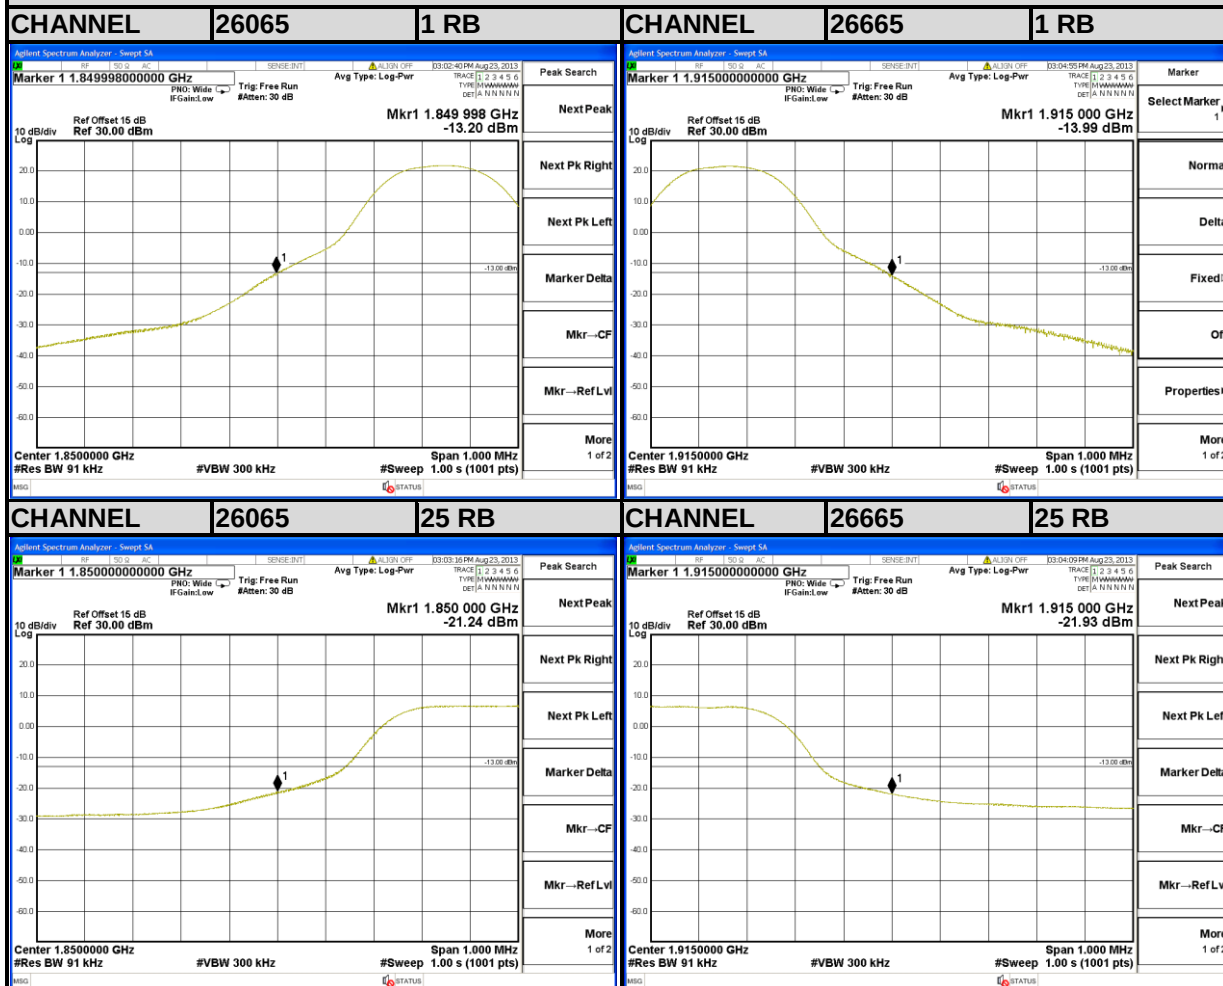




A D T

LTE Band 25

Channel Bandwidth: 10MHz

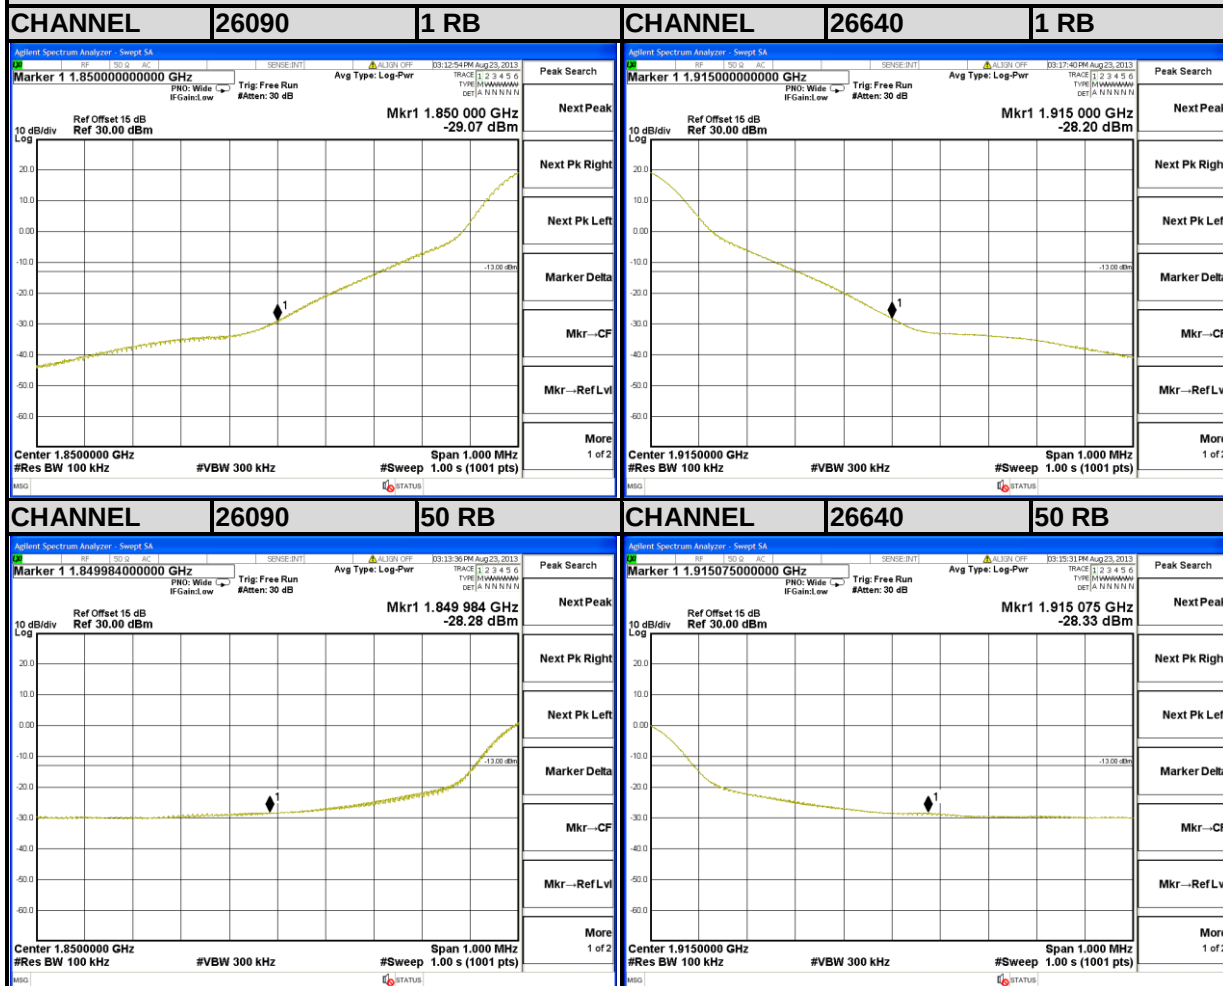




A D T

LTE Band 25

Channel Bandwidth: 15MHz

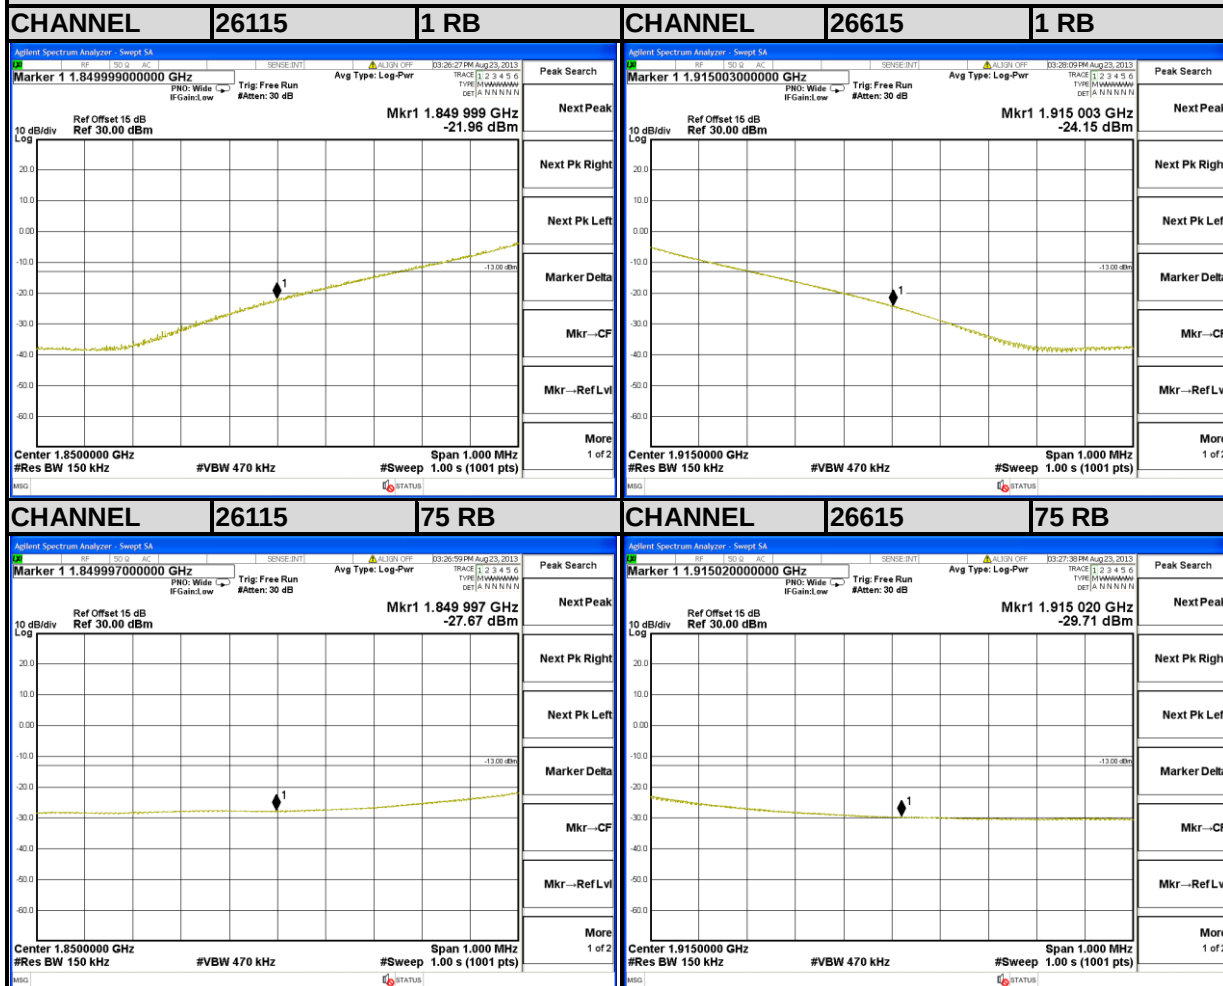




A D T

LTE Band 25

Channel Bandwidth: 20MHz

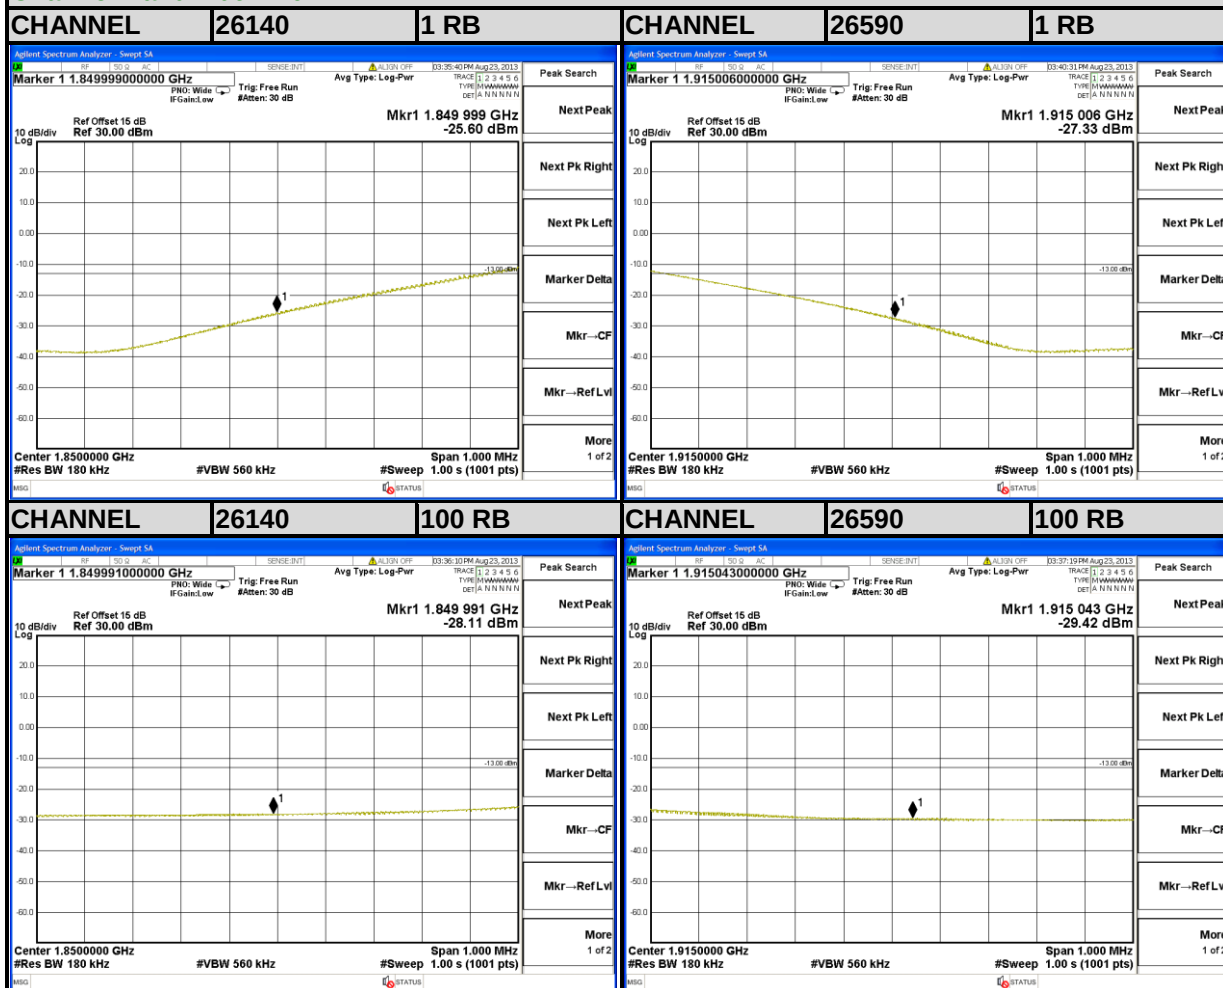

4.6 CONDUCTED SPURIOUS EMISSIONS


4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .






4.6.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 19.1GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.6.3 TEST SETUP

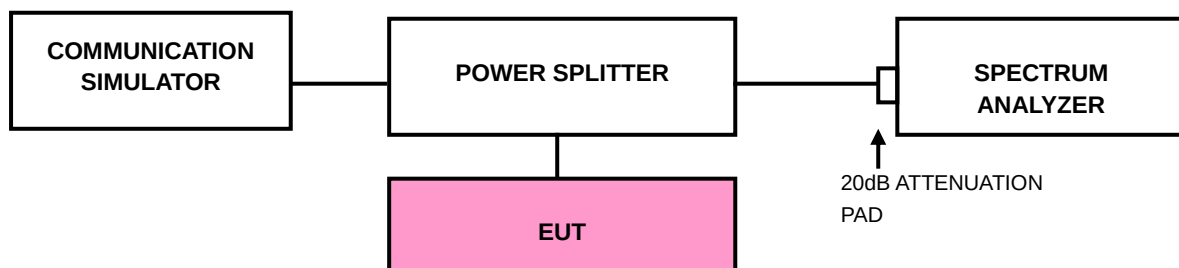


4.6.4 TEST RESULTS

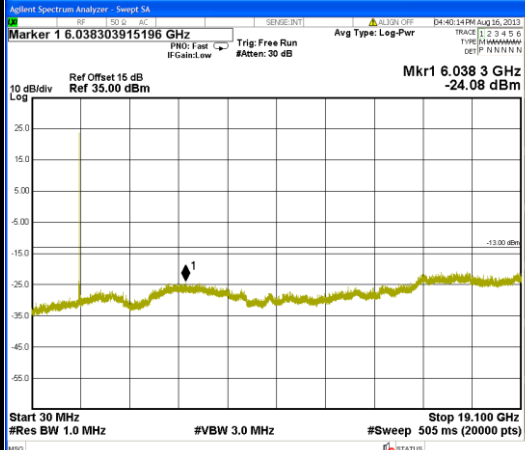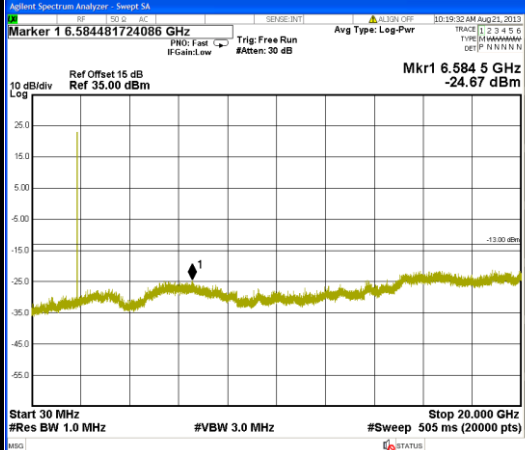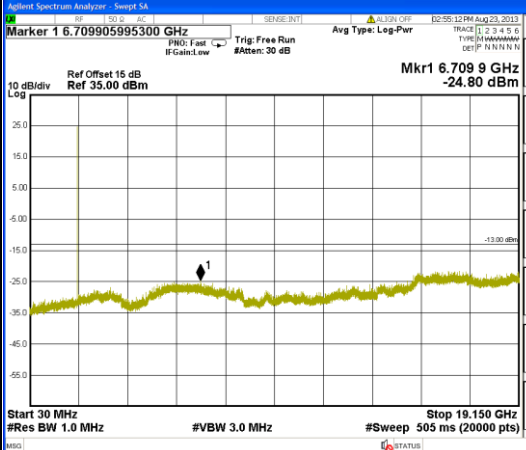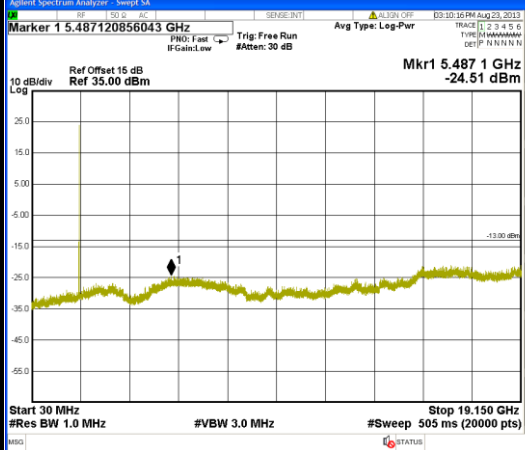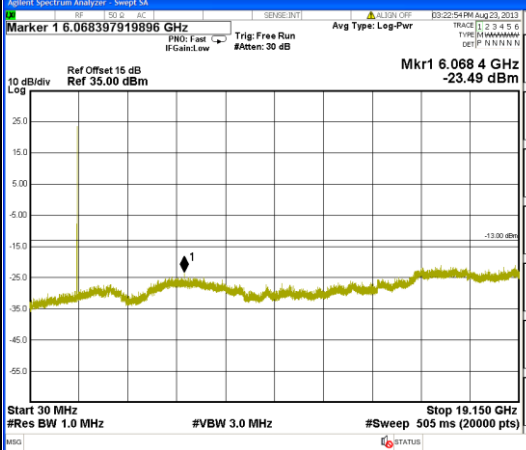CDMA	
CHANNEL 600	
FREQUENCY RANGE : 30MHz~19.1GHz	
 Marker 1 6.03830915196 GHz Mkr1 6.038 3 GHz -24.08 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz #Sweep 505 ms (20000 pts)	Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2
LTE Band 25 (Channel Bandwidth: 1.4MHz)	
CHANNEL 26365	
FREQUENCY RANGE : 30MHz~20.00GHz	
 Marker 1 6.584481724086 GHz Mkr1 6.584 5 GHz -24.67 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz #Sweep 505 ms (20000 pts)	Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2
LTE Band 25 (Channel Bandwidth: 3MHz)	
CHANNEL 26365	
FREQUENCY RANGE : 30MHz~19.15GHz	
 Marker 1 6.709905995300 GHz Mkr1 6.709 9 GHz -24.80 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz #Sweep 505 ms (20000 pts)	Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2
LTE Band 25 (Channel Bandwidth: 5MHz)	
CHANNEL 26365	
FREQUENCY RANGE : 30MHz~19.15GHz	
 Marker 1 5.487120856043 GHz Mkr1 5.487 1 GHz -24.51 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz #Sweep 505 ms (20000 pts)	Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2
LTE Band 25 (Channel Bandwidth: 10MHz)	
CHANNEL 26365	
FREQUENCY RANGE : 30MHz~19.15GHz	
 Marker 1 6.068397919896 GHz Mkr1 6.068 4 GHz -23.49 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz #Sweep 505 ms (20000 pts)	Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2



A D T

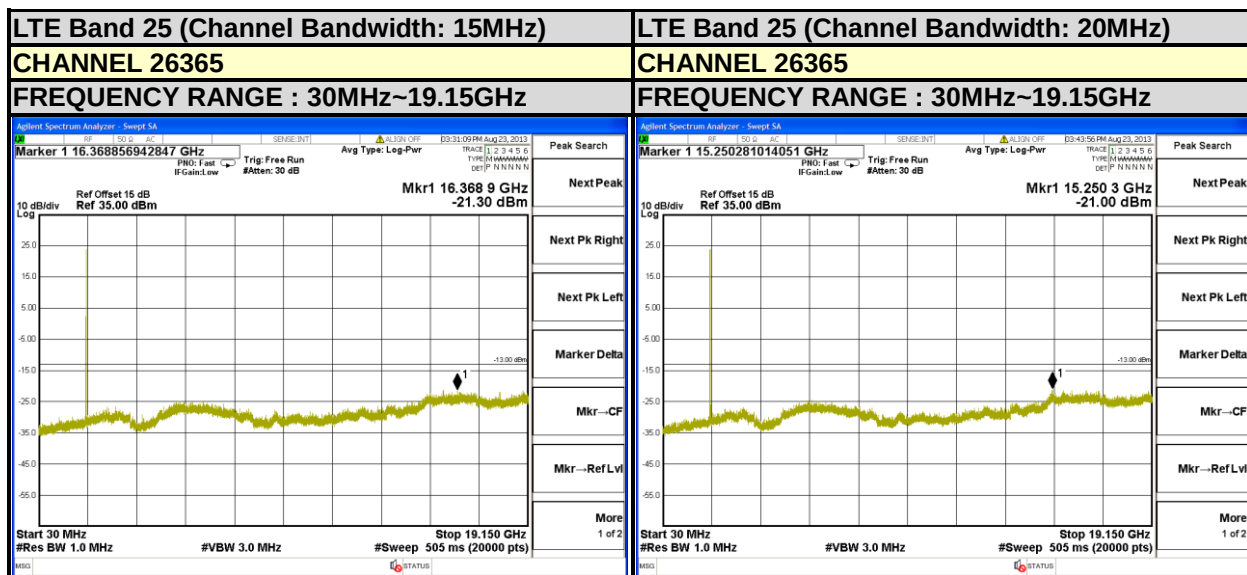

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.7.2 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $\text{E.R.P power} = \text{E.I.R.P power} - 2.15\text{dBi}.$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.7.3 DEVIATION FROM TEST STANDARD

No deviation

4.7.4 TEST SETUP

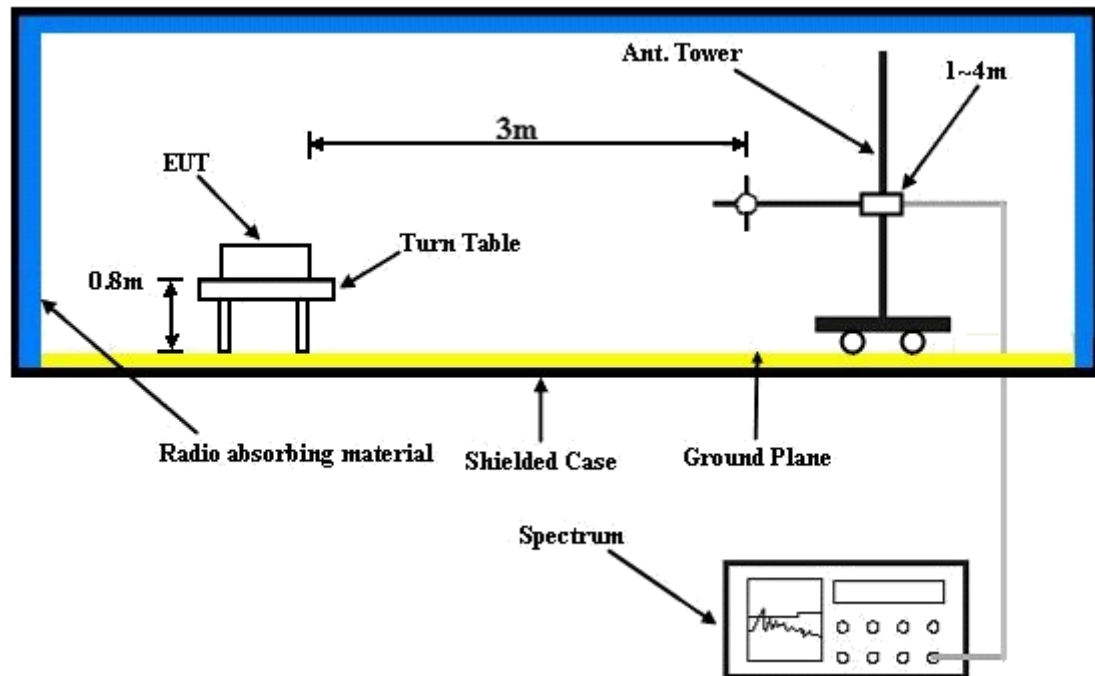

For the actual test configuration, please refer to the attached file (Test Setup Photo).



A D T

4.7.5 TEST RESULTS


CDMA:



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

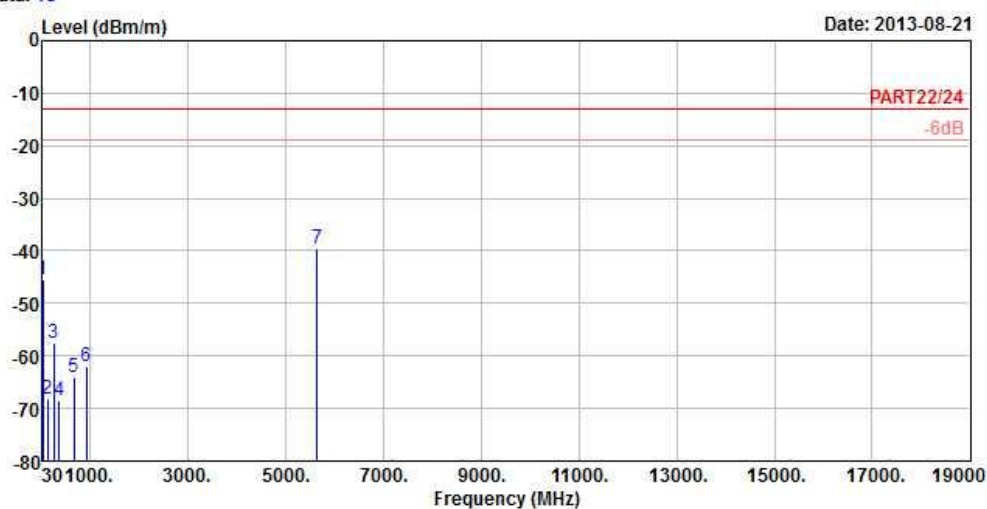

Site : 966 Chamber 5
Condition : PART22/24 3m HORIZONTAL
Brand/Model: OP3P700
Remark : 1xRTT1900Link
Tested by : David Huang
Temperature : 25°C
Humidity : 65%
Plane : Y
Ant : 0

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	41.88	-45.37	-43.98	-13.00	-32.37	-1.39	Peak
2	133.68	-68.30	-61.08	-13.00	-55.30	-7.22	Peak
3	263.55	-57.61	-51.74	-13.00	-44.61	-5.87	Peak
4	373.50	-68.51	-62.68	-13.00	-55.51	-5.83	Peak
5	671.70	-64.16	-65.10	-13.00	-51.16	0.94	Peak
6	931.40	-61.98	-65.29	-13.00	-48.98	3.31	Peak
7 pp	5640.00	-39.46	-37.56	-13.00	-26.46	-1.90	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

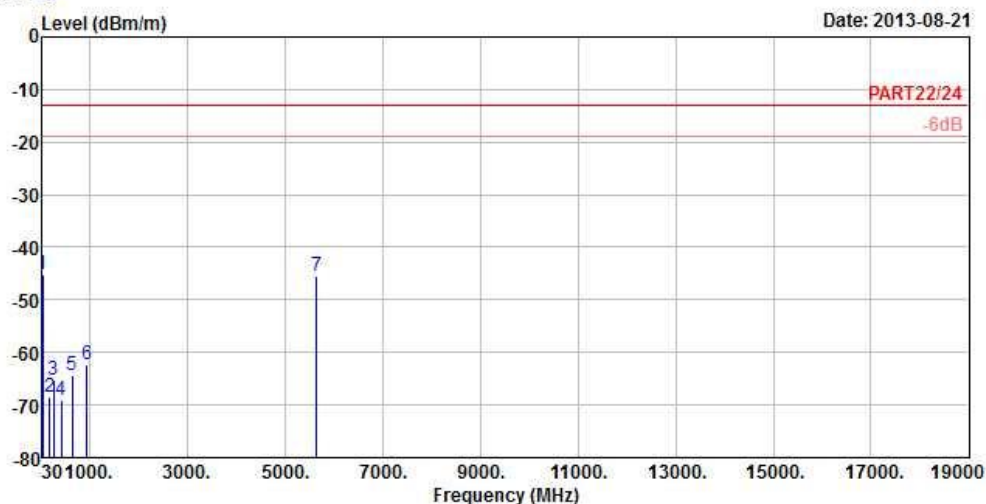

Site : 966 Chamber 5
Condition : PART22/24 3m VERTICAL
Brand/Model: OP3P700
Remark : 1xRTT1900Link
Tested by : David Huang
Temperature : 25°C
Humidity : 65%
Plane : Y
Ant : 0

	Freq	Level	Read	Limit	Over		
	MHz	dBm/m	Level	Line	Limit	Factor	Remark
			dBm	dBm/m	dB	dB/m	
1 pp	38.37	-45.06	-43.32	-13.00	-32.06	-1.74	Peak
2	179.31	-68.55	-62.69	-13.00	-55.55	-5.86	Peak
3	265.17	-65.18	-59.29	-13.00	-52.18	-5.89	Peak
4	409.90	-68.95	-63.58	-13.00	-55.95	-5.37	Peak
5	640.90	-64.45	-64.83	-13.00	-51.45	0.38	Peak
6	948.20	-62.14	-65.80	-13.00	-49.14	3.66	Peak
7	5640.00	-45.55	-43.65	-13.00	-32.55	-1.90	Peak



A D T

LTE BAND 25


CHANNEL BANDWIDTH: 1.4MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

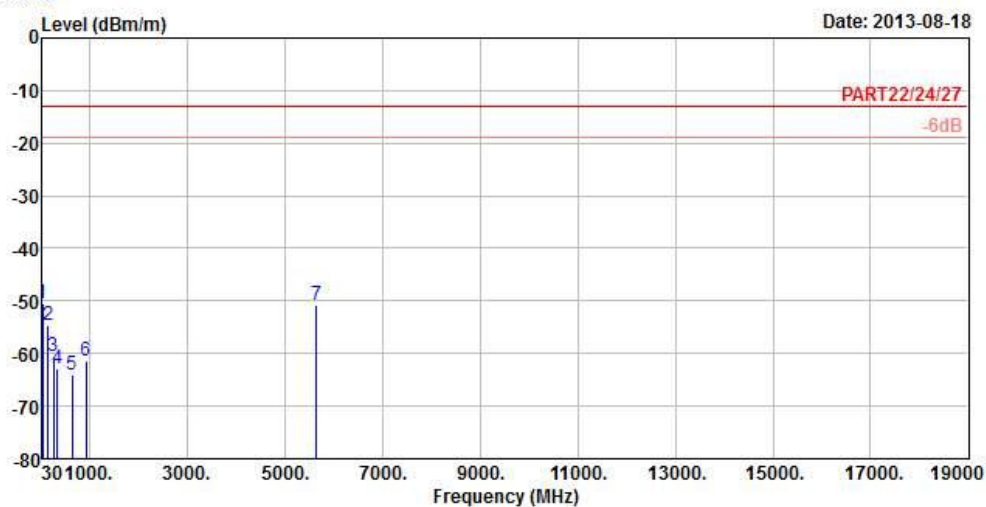

Site : 966 Chamber 5
Condition : PART22/24/27 3m HORIZONTAL
Brand/Model: OP3P700
Remark : LTE Band 25_1.4M_QPSK(1,0) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : X

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Factor	A/Pos	T/Pos	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	cm	deg	
1 pp	41.88	-50.34	-48.95	-13.00	-37.34	-1.39	200	0	Peak
2	145.29	-54.54	-48.49	-13.00	-41.54	-6.05	200	0	Peak
3	260.04	-60.41	-54.59	-13.00	-47.41	-5.82	200	0	Peak
4	341.30	-62.94	-56.87	-13.00	-49.94	-6.07	100	0	Peak
5	646.50	-63.99	-64.48	-13.00	-50.99	0.49	100	0	Peak
6	923.00	-61.34	-64.50	-13.00	-48.34	3.16	100	0	Peak
7	5646.15	-50.71	-48.81	-13.00	-37.71	-1.90	199	0	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

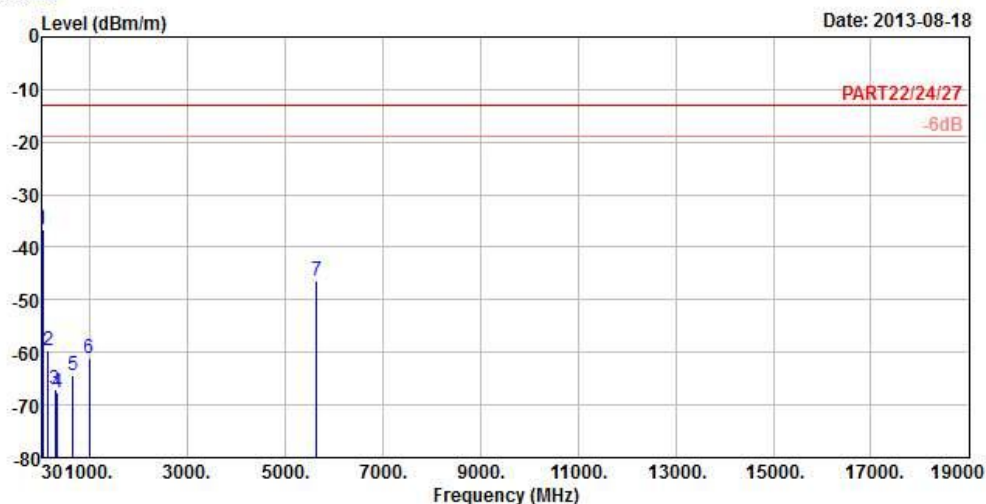

Site : 966 Chamber 5
Condition : PART22/24/27 3m VERTICAL
Brand/Model: OP3P700
Remark : LTE Band 25_1.4M_QPSK(1,0) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : X

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Factor	A/Pos	T/Pos	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	cm	deg	
1 pp	40.53	-36.48	-35.02	-13.00	-23.48	-1.46	200	0	Peak
2	152.31	-59.56	-53.17	-13.00	-46.56	-6.39	200	0	Peak
3	293.25	-67.11	-60.83	-13.00	-54.11	-6.28	200	0	Peak
4	336.40	-67.46	-61.35	-13.00	-54.46	-6.11	100	0	Peak
5	647.90	-64.24	-64.75	-13.00	-51.24	0.51	100	0	Peak
6	985.30	-61.19	-65.57	-13.00	-48.19	4.38	100	0	Peak
7	5646.15	-46.41	-44.51	-13.00	-33.41	-1.90	199	0	Peak



A D T

LTE BAND 25


CHANNEL BANDWIDTH: 3MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 11

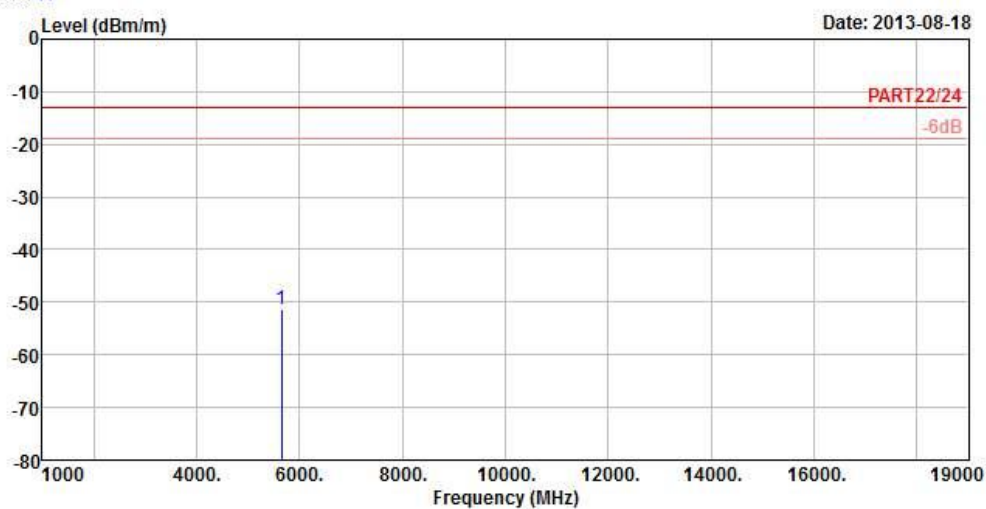

Site : 966 Chamber 5
Condition : PART22/24 3m HORIZONTAL
Brand/Model: OP3P700
Remark : LTE Band 25_3M_QPSK(1,0) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : X

			Read	Limit	OverAntenna	A/Pos	T/Pos	
	Freq	Level	Level	Line	Limit	Factor		Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	cm	deg
1 pp	5643.90	-51.38	-49.48	-13.00	-38.38	-1.90	199	0 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 12

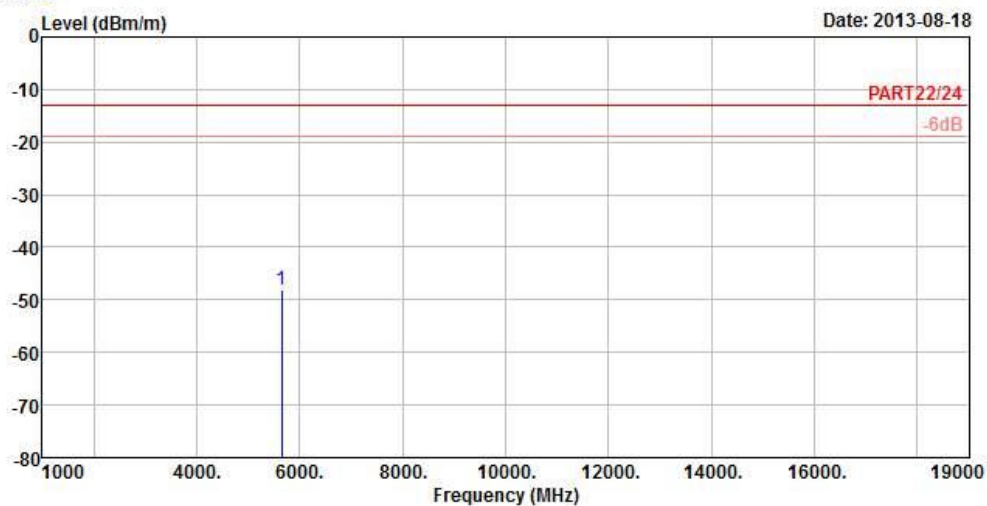

Site : 966 Chamber 5
Condition : PART22/24 3m VERTICAL
Brand/Model: OP3P700
Remark : LTE Band 25_3M_QPSK(1,0) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : X

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Factor	A/Pos	T/Pos	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	cm	deg	
1 pp	5643.90	-48.02	-46.12	-13.00	-35.02	-1.90	199		0 Peak



A D T

LTE BAND 25


CHANNEL BANDWIDTH: 5MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 11

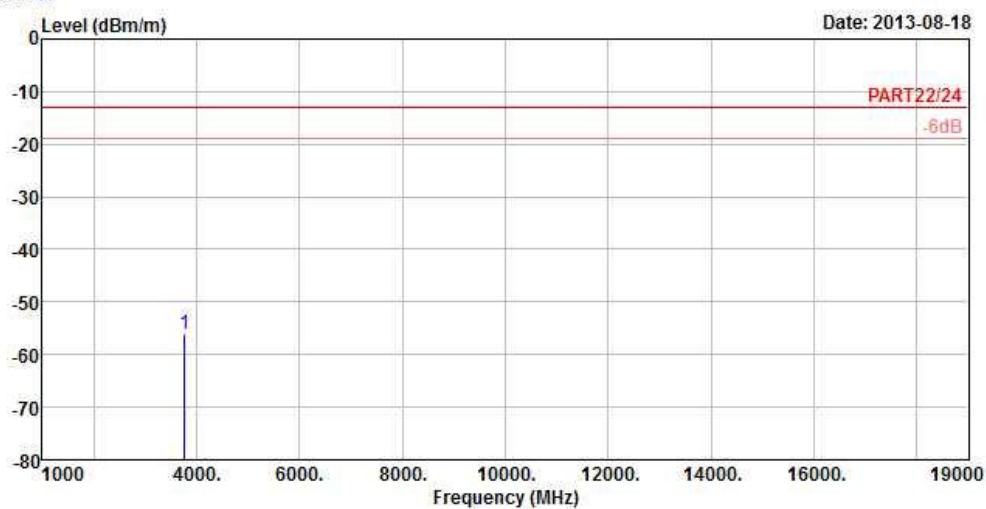

Site : 966 Chamber 5
Condition : PART22/24 3m HORIZONTAL
Brand/Model: OP3P700
Remark : LTE Band 25_5M_QPSK(1,0) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : X

	Freq	Level	Read Level	Limit Line	OverAntenna Limit Factor	A/Pos	T/Pos	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	cm	deg
1 pp	3760.60	-56.10	-47.80	-13.00	-43.10	-8.30	199	0 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 12

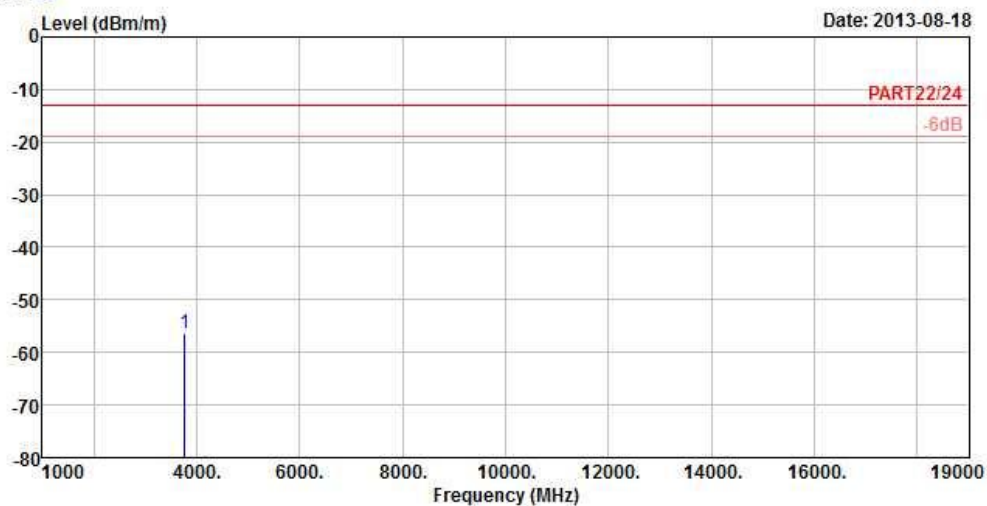

Site : 966 Chamber 5
Condition : PART22/24 3m VERTICAL
Brand/Model: OP3P700
Remark : LTE Band 25_5M_QPSK(1,0) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : X

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Factor	A/Pos	T/Pos	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	cm	deg	
1 pp	3760.60	-56.24	-47.94	-13.00	-43.24	-8.30	199		0 Peak



A D T

LTE BAND 25


CHANNEL BANDWIDTH: 10MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 11

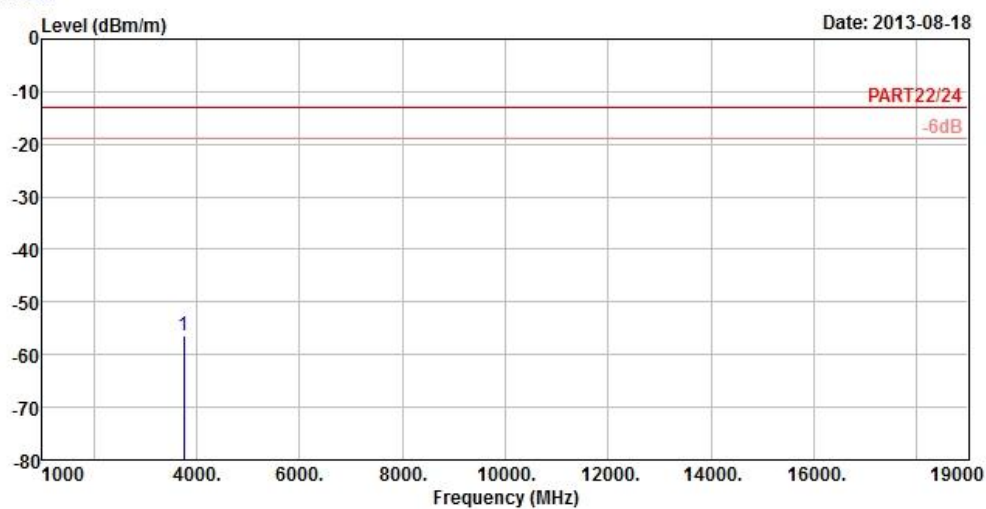

Site : 966 Chamber 5
Condition : PART22/24 3m HORIZONTAL
Brand/Model: OP3P700
Remark : LTE Band 25_10M_QPSK(1,0) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : X

Freq	Level	Read	Limit	Over	Factor	Remark
		Level	Line	Limit		
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1 pp 3756.20	-56.44	-48.14	-13.00	-43.44	-8.30	Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 12

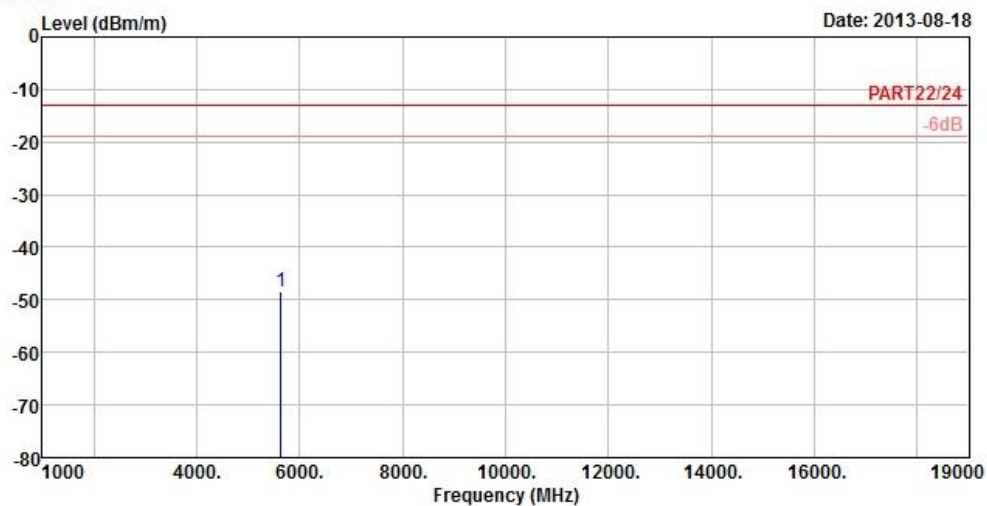

Site : 966 Chamber 5
Condition : PART22/24 3m VERTICAL
Brand/Model: OP3P700
Remark : LTE Band 25_10M_QPSK(1,0) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : X

Freq	Level	Read	Limit	Over	Factor	Remark
		Level	Line	Limit		
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1 pp 5634.30	-48.40	-46.50	-13.00	-35.40	-1.90	Peak



A D T

LTE BAND 25


CHANNEL BANDWIDTH: 15MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 11

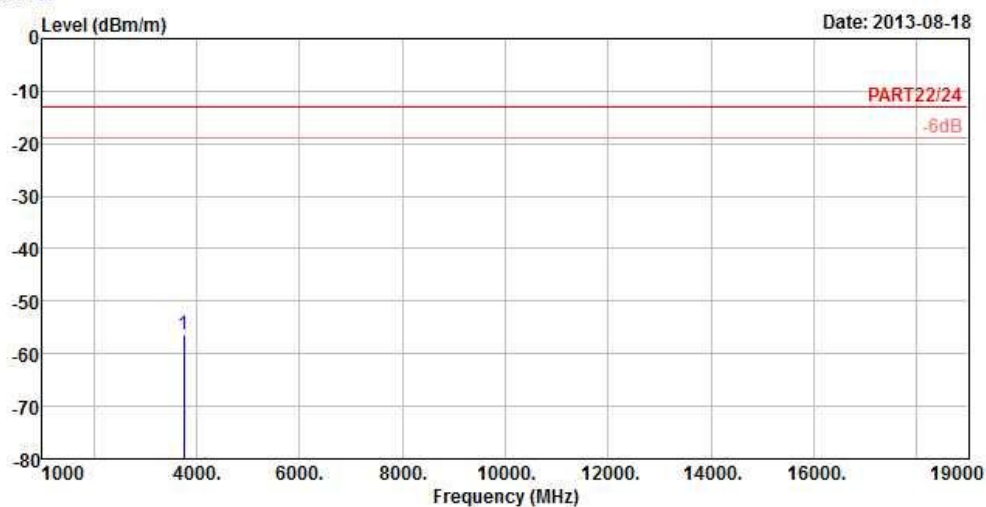

Site : 966 Chamber 5
Condition : PART22/24 3m HORIZONTAL
Brand/Model: OP3P700
Remark : LTE Band 25_15M_QPSK(1,0) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : X

		Read	Limit	OverAntenna	A/Pos	T/Pos	
	Freq	Level	Level	Limit	Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	cm
1	pp	3751.80	-56.27	-47.97	-13.00	-43.27	-8.30
							199
							0 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 12

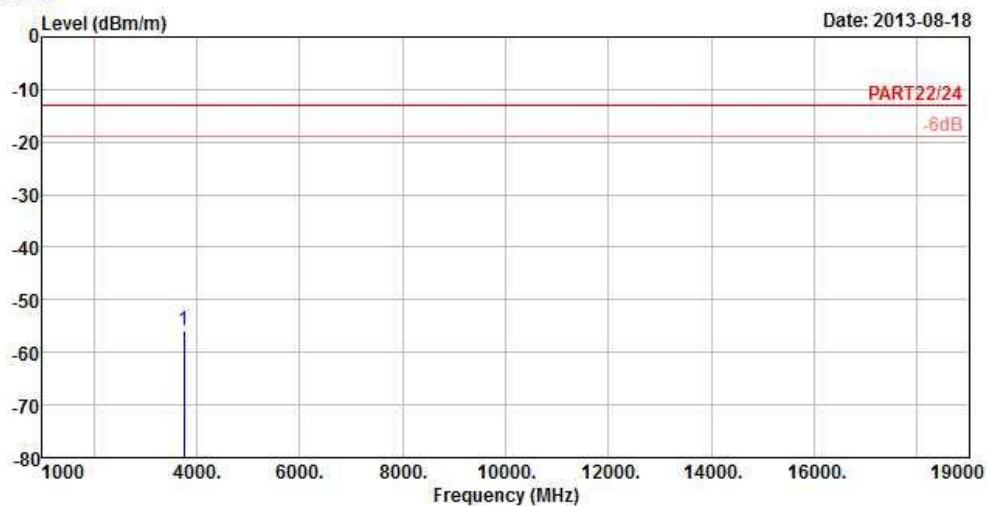

Site : 966 Chamber 5
Condition : PART22/24 3m VERTICAL
Brand/Model: OP3P700
Remark : LTE Band 25_15M_QPSK(1,0) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : X

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Factor	A/Pos	T/Pos	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	cm	deg	
1 pp	3751.80	-55.83	-47.53	-13.00	-42.83	-8.30	199		0 Peak



A D T

LTE BAND 25


CHANNEL BANDWIDTH: 20MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 11

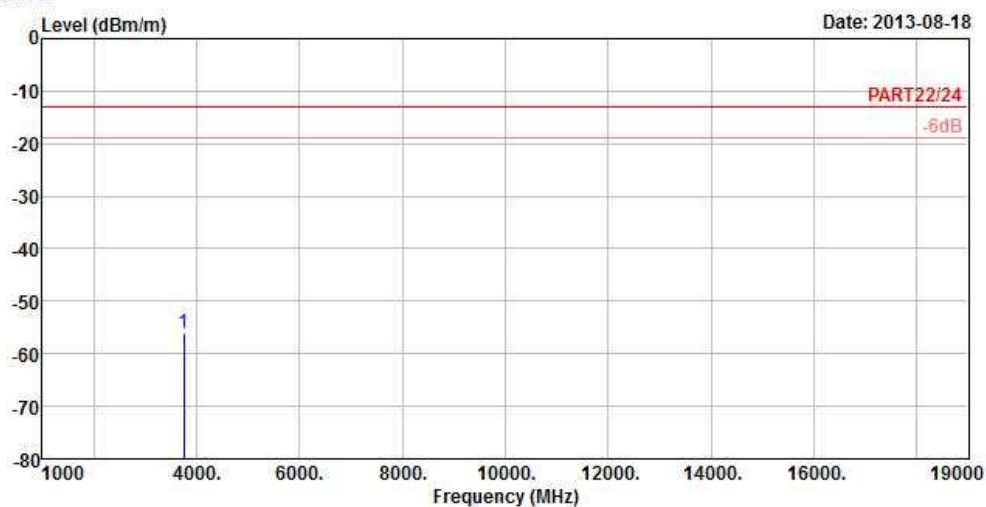

Site : 966 Chamber 5
Condition : PART22/24 3m HORIZONTAL
Brand/Model: OP3P700
Remark : LTE Band 25_20M_QPSK(1,0) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : X

		Read	Limit	OverAntenna	A/Pos	T/Pos	
	Freq	Level	Level	Limit	Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	cm
1	pp	3747.40	-56.06	-47.76	-13.00	-43.06	-8.30
							199
							0 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 12

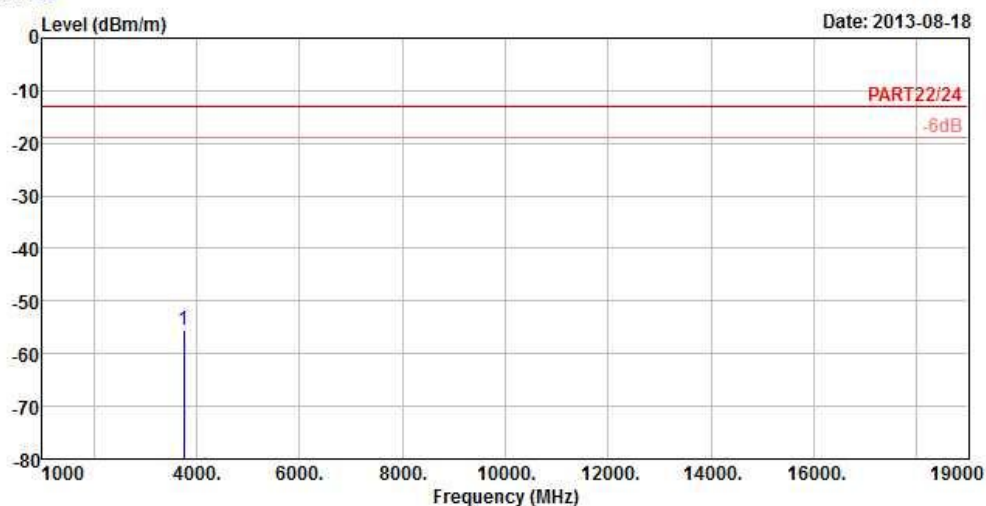

Site : 966 Chamber 5
Condition : PART22/24 3m VERTICAL
Brand/Model: OP3P700
Remark : LTE Band 25_20M_QPSK(1,0) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : X

	Freq	Level	Read Level	Limit Line	OverAntenna Limit	Factor	A/Pos	T/Pos	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	cm	deg	
1 pp	3747.40	-55.62	-47.32	-13.00	-42.62	-8.30	199		0 Peak

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---