

Test Laboratory: Compliance Certification Services Inc.

HAC_E_Dipole_-835MHz-(CW)

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1031

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1); Calibrated: 6/3/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

E Scan 10mm above CD 835 MHz/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = **171.2 V/m**

Probe Modulation Factor = 1.00


Reference Value = 107.5 V/m; Power Drift = -0.005 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
168.5	171.2	163.5
Grid 4	Grid 5	Grid 6
89.1	90.6	87.1
Grid 7	Grid 8	Grid 9
159.9	165.9	161.1

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

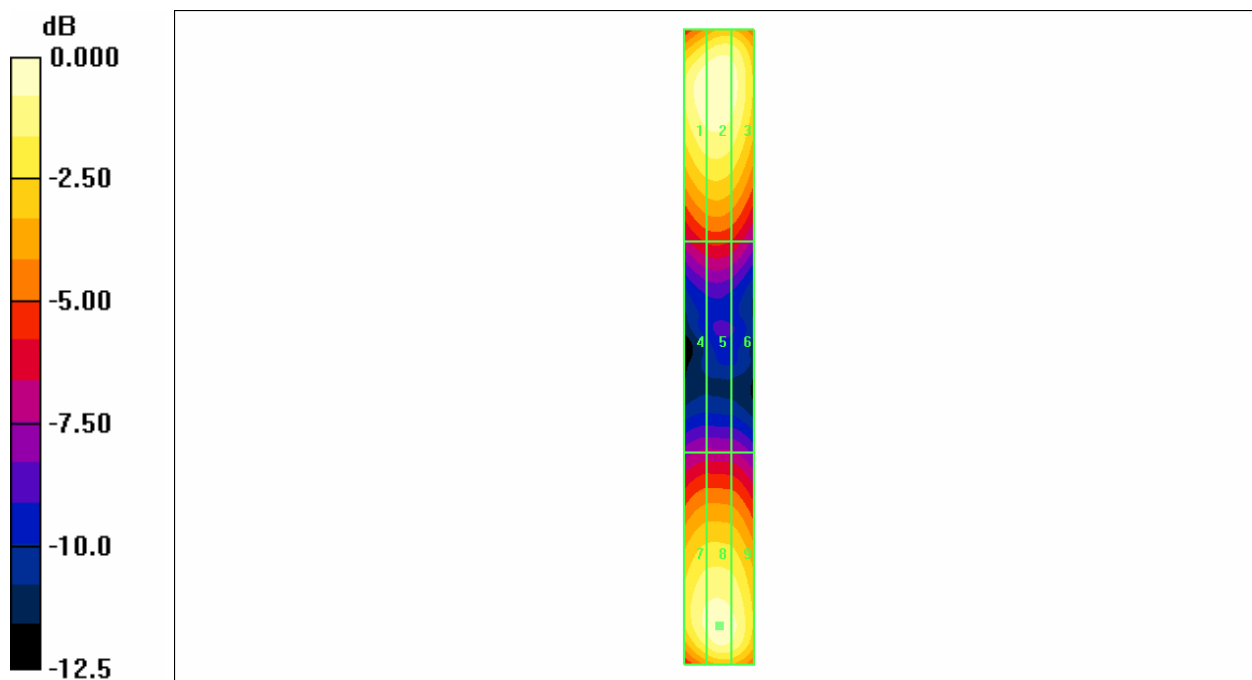

Test Laboratory: Compliance Certification Services Inc.

HAC_E_Dipole_-835MHz-(AM 80%)

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1031

Communication System: AM 80%; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1); Calibrated: 6/3/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

E Scan 10mm above CD 835 MHz/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = **106.6** V/m

Probe Modulation Factor = 1.00


Reference Value = 67.9 V/m; Power Drift = -0.039 dB

Hearing Aid Near-Field Category: M3 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
105.4	106.6	102.5
Grid 4	Grid 5	Grid 6
56.7	57.4	55.4
Grid 7	Grid 8	Grid 9
100.2	103.3	101.1

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

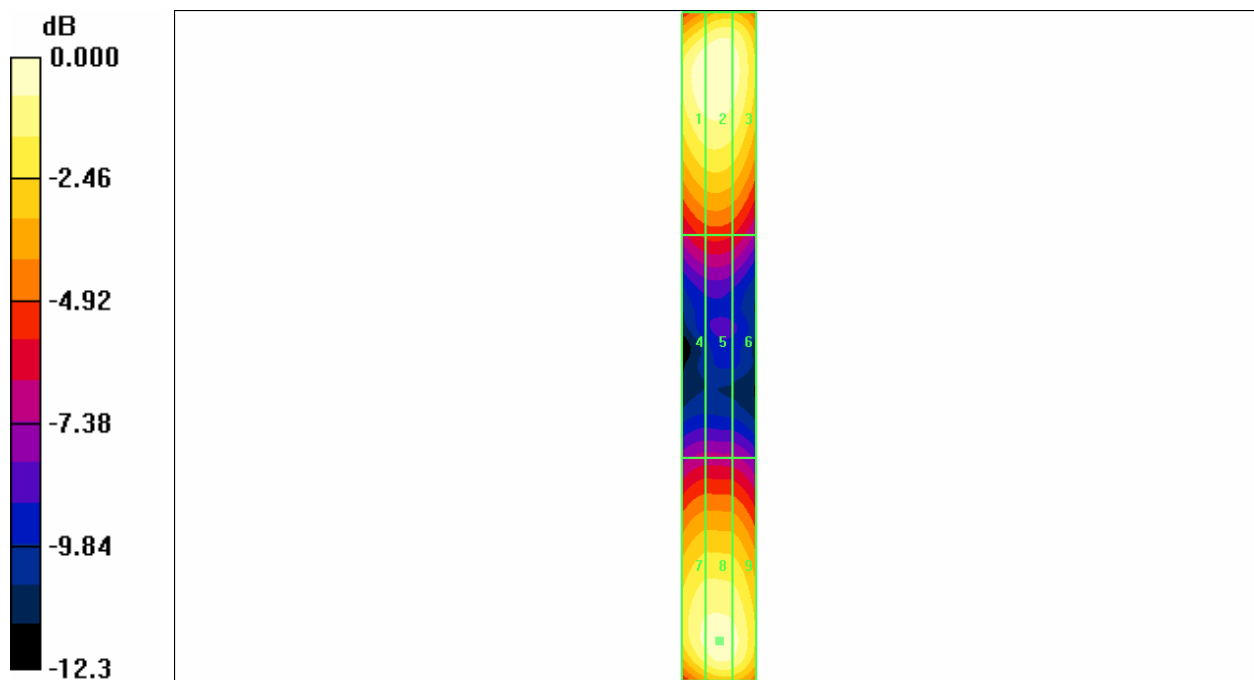

0 dB = 106.6V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_E_Dipole_-835MHz-(CDMA)

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1031

Communication System: CDMA ; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1); Calibrated: 6/3/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

E Scan 10mm above CD 835 MHz/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = **169.4** V/m

Probe Modulation Factor = 1.00


Reference Value = 105.5 V/m; Power Drift = 0.008 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
166.2	169.4	160.7
Grid 4	Grid 5	Grid 6
87.4	89.0	85.5
Grid 7	Grid 8	Grid 9
157.5	163.8	158.4

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

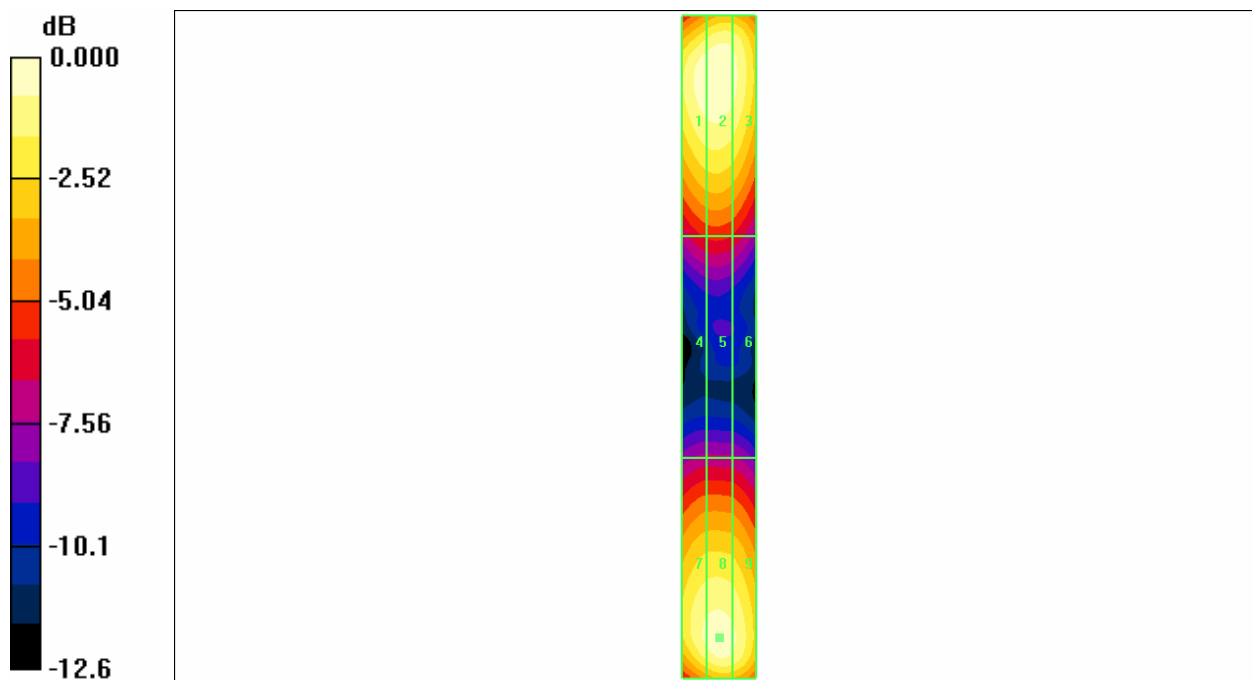

0 dB = 169.4V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_E_Dipole_-1880MHz-(CW)

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1024

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1); Calibrated: 6/3/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = **144.0** V/m

Probe Modulation Factor = 1.00



Reference Value = 163.8 V/m; Power Drift = 0.004 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
133.8	138.5	136.6
Grid 4	Grid 5	Grid 6
91.0	93.4	90.0
Grid 7	Grid 8	Grid 9
135.5	144.0	142.4

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

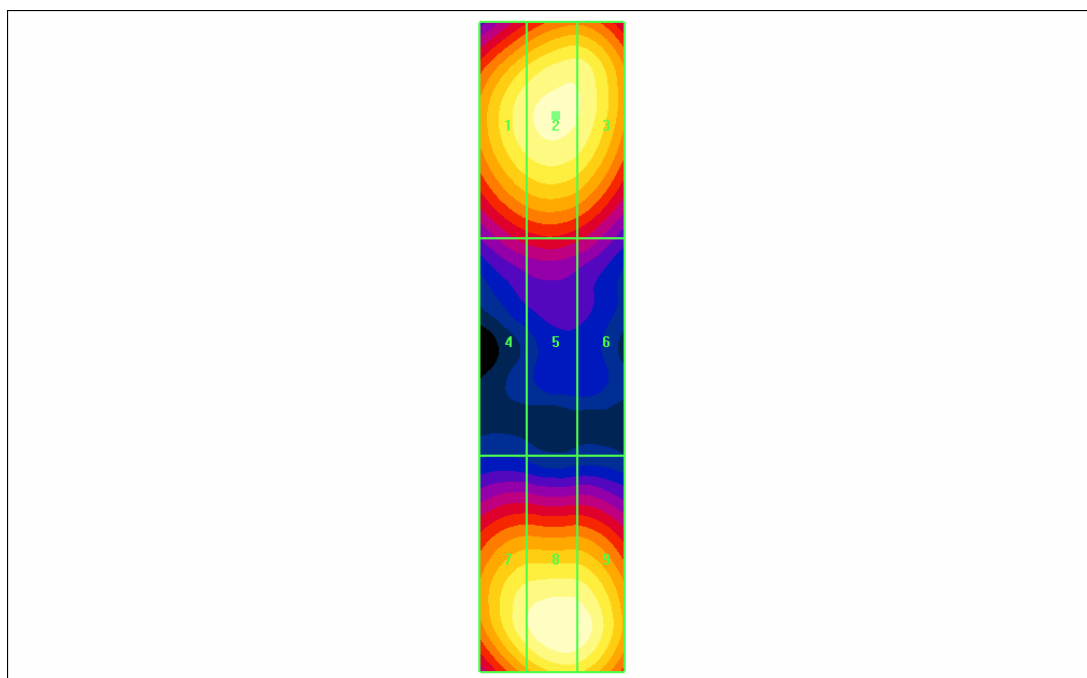

0 dB = 144.0V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_E_Dipole_-1880MHz-(AM 80%)

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1024

Communication System: AM 80%; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1); Calibrated: 6/3/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = **91.1** V/m

Probe Modulation Factor = 1.00



Reference Value = 103.3 V/m; Power Drift = 0.004 dB

Hearing Aid Near-Field Category: M3 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
85.1	87.8	87.0
Grid 4	Grid 5	Grid 6
58.5	59.8	57.8
Grid 7	Grid 8	Grid 9
86.2	91.1	90.4

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

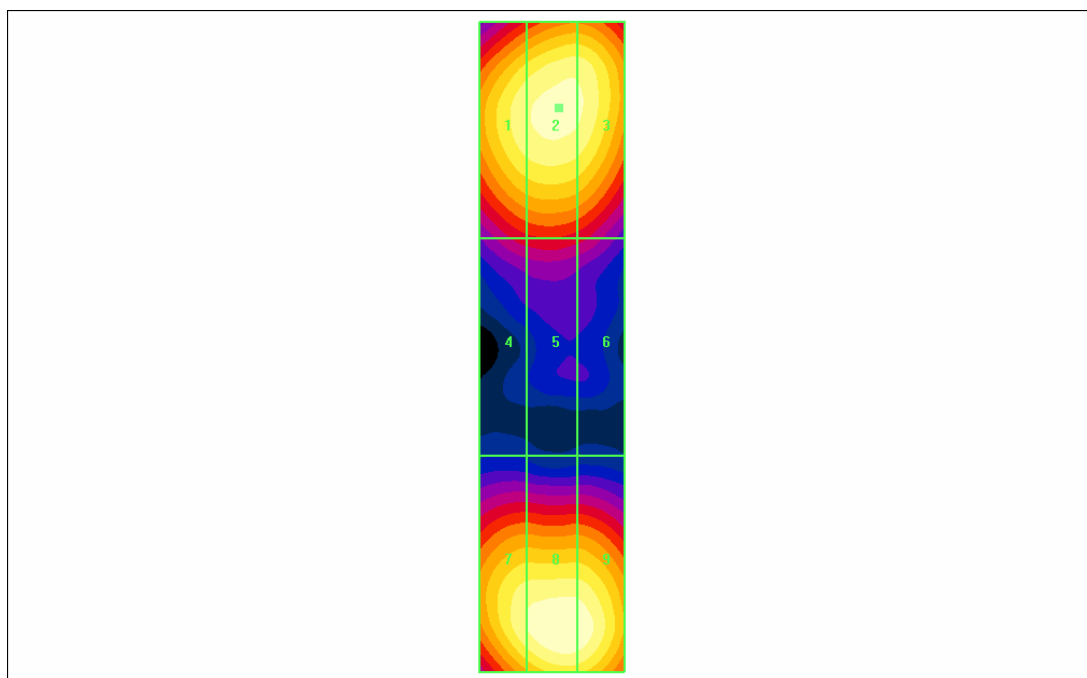

0 dB = 91.1V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_E_Dipole_-1880MHz-(CDMA)

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1024

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1); Calibrated: 6/3/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = **141.9** V/m

Probe Modulation Factor = 1.00



Reference Value = 162.5 V/m; Power Drift = -0.075 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
132.0	136.6	134.3
Grid 4	Grid 5	Grid 6
89.5	91.9	88.2
Grid 7	Grid 8	Grid 9
133.9	141.9	140.2

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

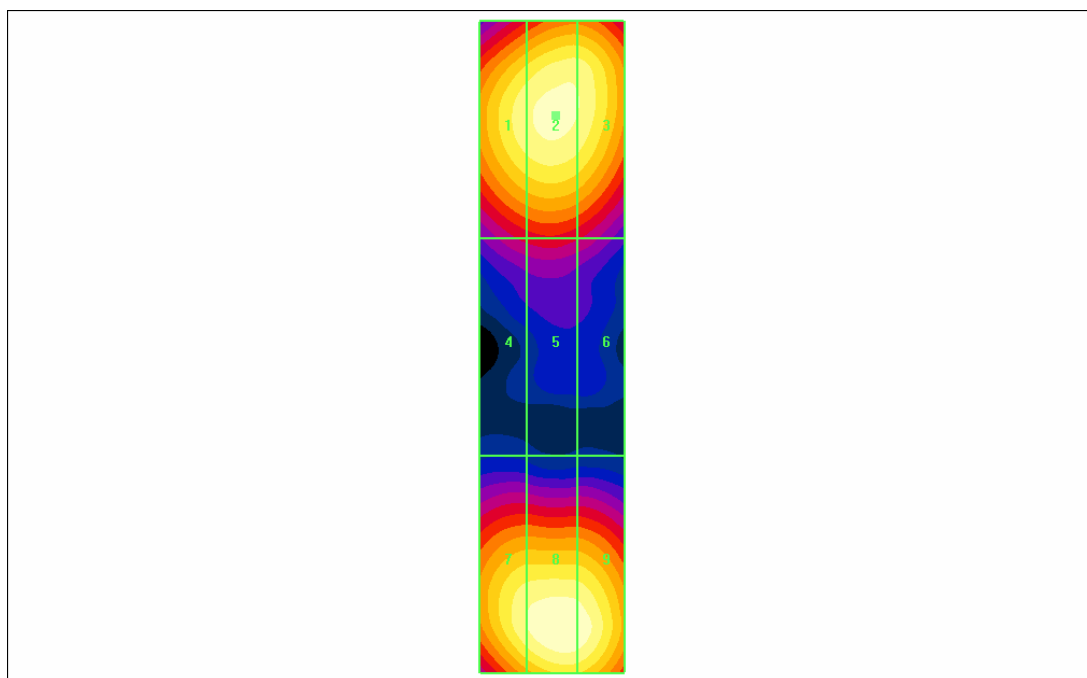

0 dB = 141.9V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_E_Dipole_-2450MHz-(CW)

DUT: HAC Dipole 2450 MHz; Type: CD2450V3; Serial: 1026

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1); Calibrated: 6/3/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

E Scan 10mm above CD 2450 MHz/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = **143.0** V/m

Probe Modulation Factor = 1.00



Reference Value = 91.5 V/m; Power Drift = -0.012 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
137.0	143.0	141.2
Grid 4	Grid 5	Grid 6
119.3	123.7	119.5
Grid 7	Grid 8	Grid 9
133.5	141.0	139.1

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

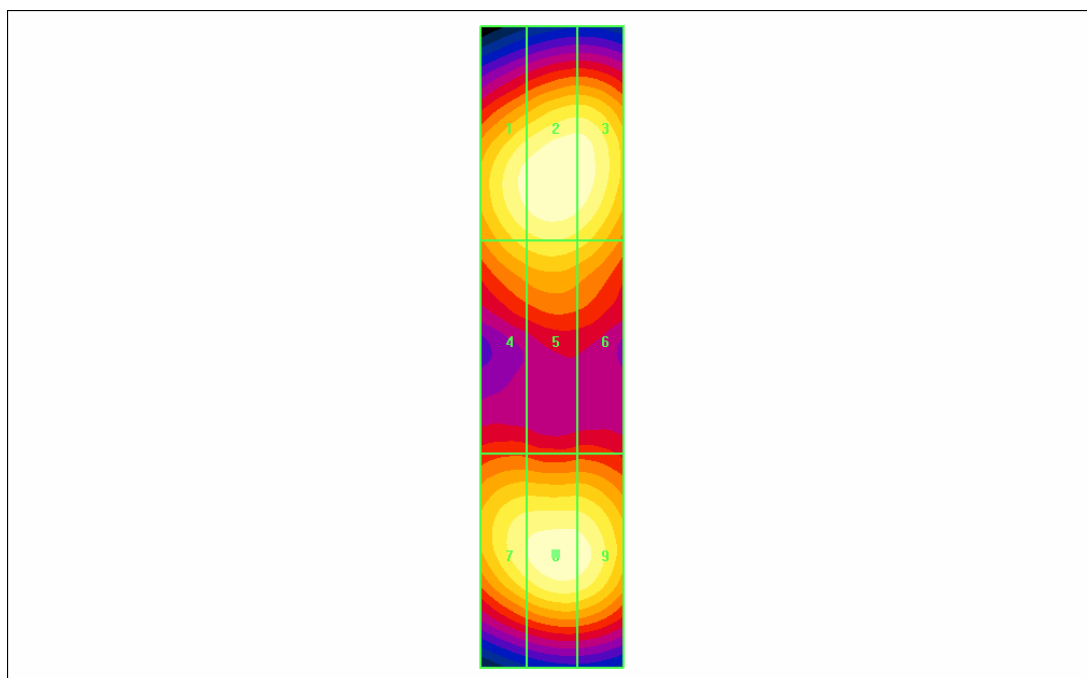

0 dB = 143.0V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_E_Dipole_-2450MHz-(AM 80%)

DUT: HAC Dipole 2450 MHz; Type: CD2450V3; Serial: 1026

Communication System: AM 80%; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1); Calibrated: 6/3/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

E Scan 10mm above CD 2450 MHz/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = **89.8** V/m

Probe Modulation Factor = 1.00


Reference Value = 58.7 V/m; Power Drift = 0.008 dB

Hearing Aid Near-Field Category: M3 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
87.0	89.8	88.6
Grid 4	Grid 5	Grid 6
76.6	78.5	75.7
Grid 7	Grid 8	Grid 9
82.9	87.9	87.4

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

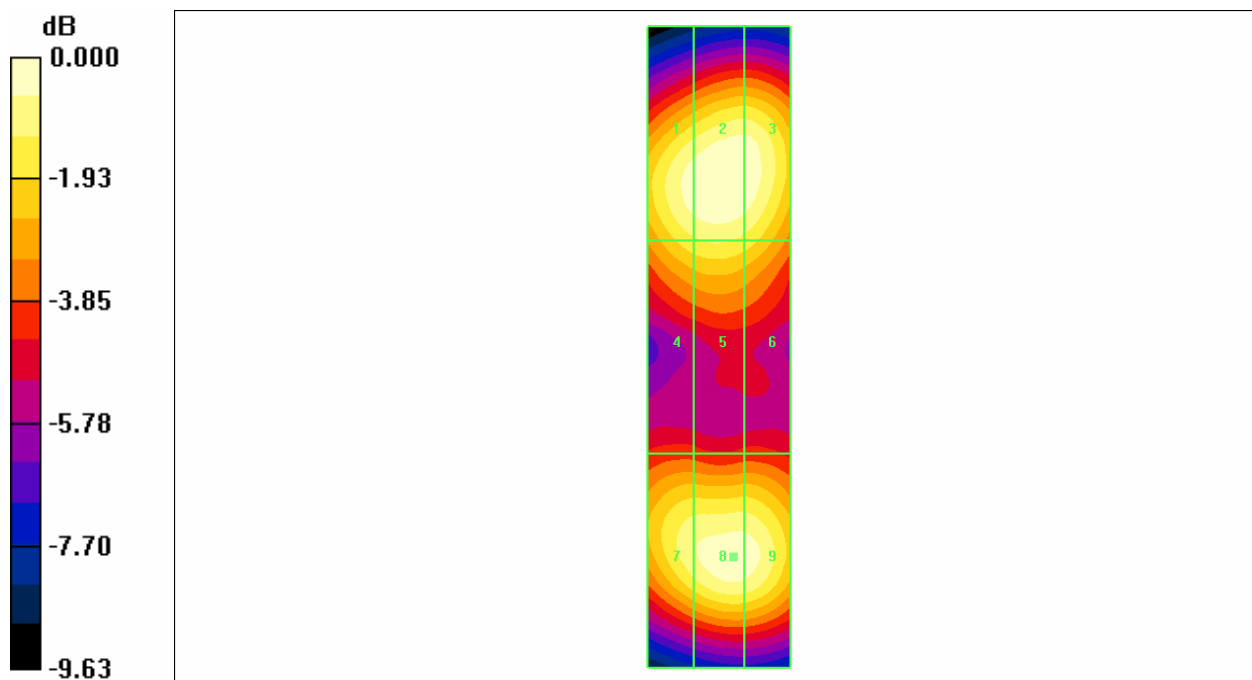

0 dB = 89.8V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_E_Dipole_-2450MHz-(DSSS)

DUT: HAC Dipole 2450 MHz; Type: CD2450V3; Serial: 1026

Communication System: 802.11b; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1); Calibrated: 6/3/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

E Scan 10mm above CD 2450 MHz/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = **322.8** V/m

Probe Modulation Factor = 1.00


Reference Value = 202.0 V/m; Power Drift = 0.007 dB

Hearing Aid Near-Field Category: M1 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
308.0	322.8	316.0
Grid 4	Grid 5	Grid 6
265.4	276.2	264.6
Grid 7	Grid 8	Grid 9
296.2	315.1	308.8

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

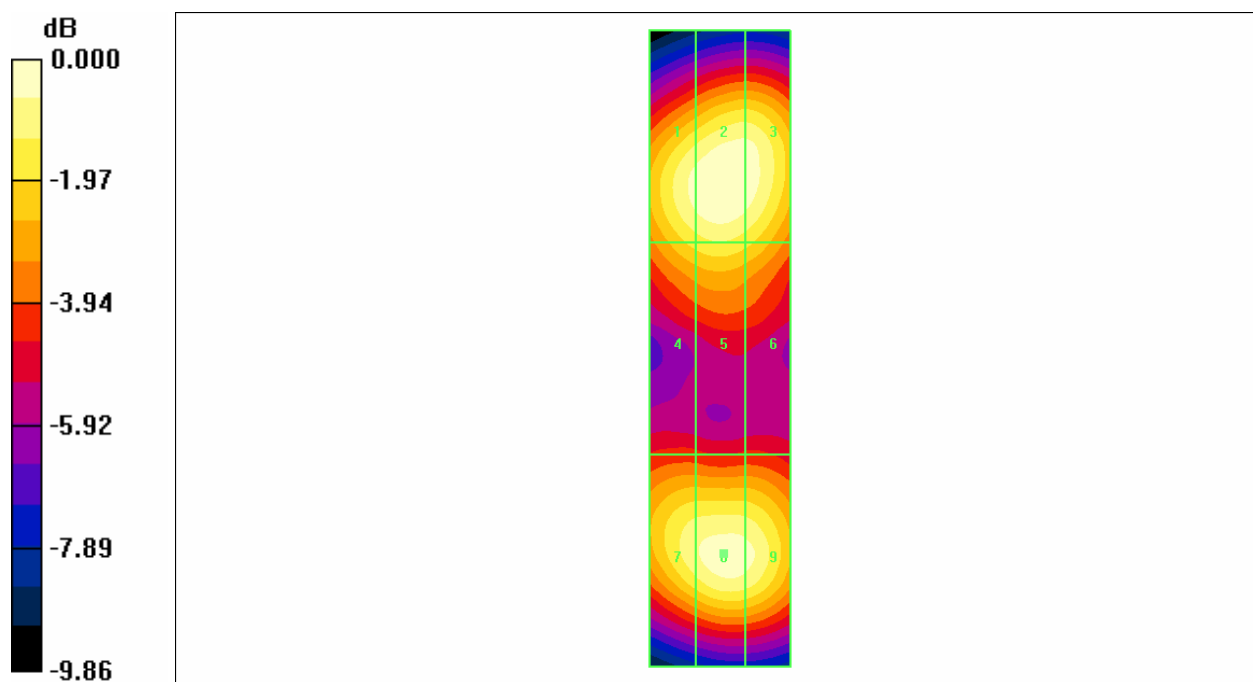

0 dB = 322.8V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_H_Dipole_835MHz-(CW)

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: 1031

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ; Calibrated: 4/27/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

H Scan 10mm above CD 835 MHz/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = **0.464** A/m

Probe Modulation Factor = 1.00


Reference Value = 0.491 A/m; Power Drift = 0.026 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.387	0.421	0.405
Grid 4	Grid 5	Grid 6
0.427	0.464	0.449
Grid 7	Grid 8	Grid 9
0.371	0.404	0.392

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

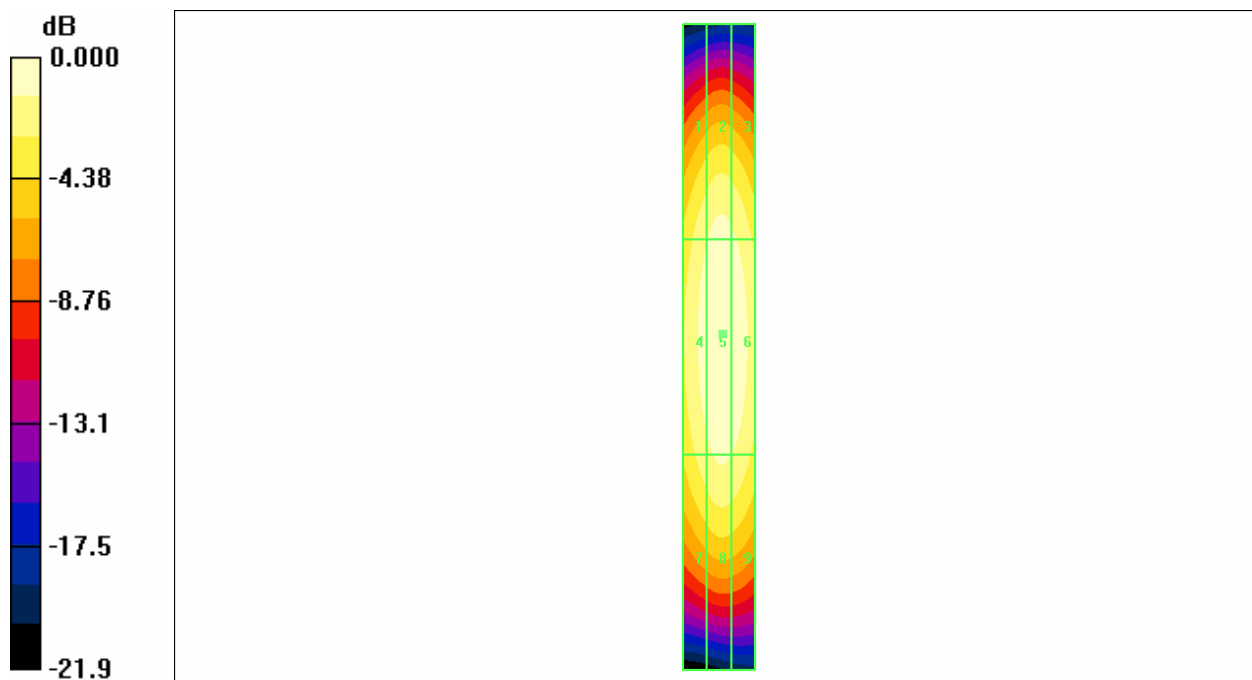

0 dB = 0.464A/m

Test Laboratory: Compliance Certification Services Inc.

HAC_H_Dipole_835MHz-(AM80%)

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: 1031

Communication System: AM 80%; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ; Calibrated: 4/27/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

H Scan 10mm above CD 835 MHz/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = **0.300** A/m

Probe Modulation Factor = 1.00


Reference Value = 0.319 A/m; Power Drift = -0.006 dB

Hearing Aid Near-Field Category: M3 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.250	0.272	0.262
Grid 4	Grid 5	Grid 6
0.277	0.300	0.291
Grid 7	Grid 8	Grid 9
0.241	0.261	0.253

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

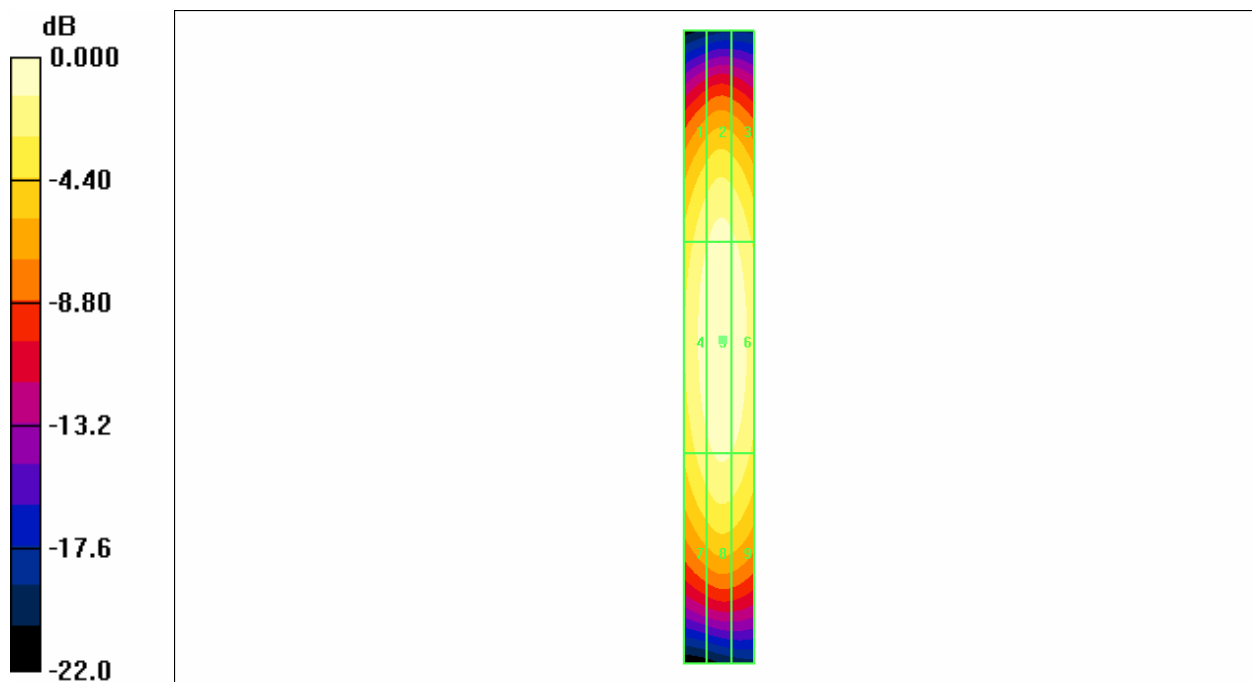

0 dB = 0.300A/m

Test Laboratory: Compliance Certification Services Inc.

HAC_H_Dipole_835MHz-(CDMA)

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1031

Communication System: CDMA; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ; Calibrated: 4/27/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

H Scan 10mm above CD 835 MHz 2/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = **0.460** A/m

Probe Modulation Factor = 1.00


Reference Value = 0.489 A/m; Power Drift = 0.016 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.381	0.417	0.400
Grid 4	Grid 5	Grid 6
0.422	0.460	0.444
Grid 7	Grid 8	Grid 9
0.366	0.398	0.386

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

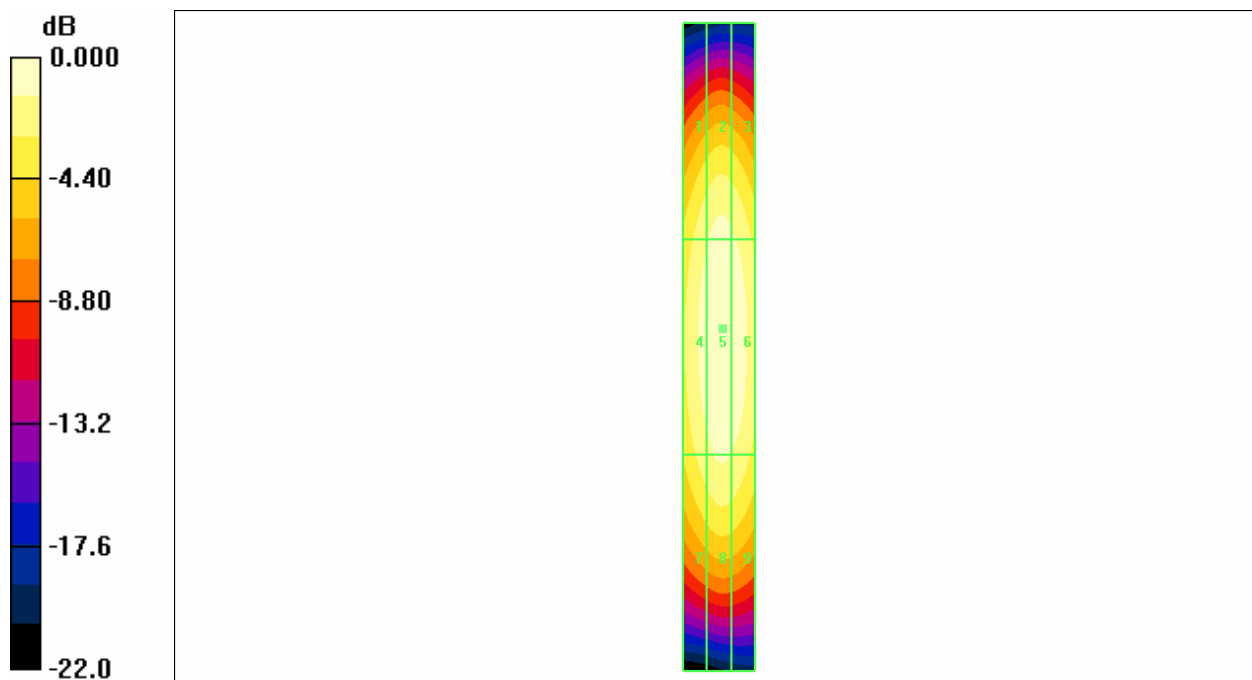

0 dB = 0.460A/m

Test Laboratory: Compliance Certification Services Inc.

HAC_H_Dipole_1880MHz-(CW)

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1024

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ; Calibrated: 4/27/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

H Scan - H3DV6 probe tip 10mm above Device Reference/Hearing Aid Compatibility

Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.464 A/m

Probe Modulation Factor = 1.00


Reference Value = 0.489 A/m; Power Drift = -0.015 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.404	0.437	0.424
Grid 4	Grid 5	Grid 6
0.431	0.464	0.453
Grid 7	Grid 8	Grid 9
0.386	0.418	0.411

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

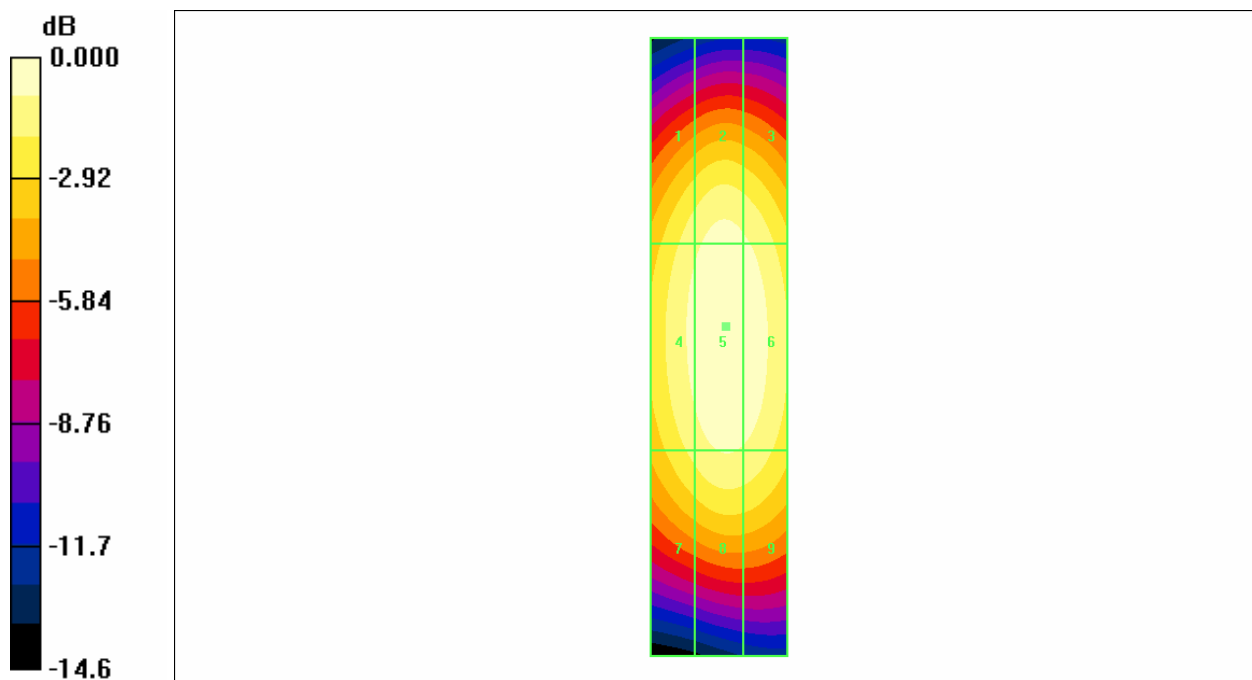

0 dB = 0.464A/m

Test Laboratory: Compliance Certification Services Inc.

HAC_H_Dipole_1880MHz-(AM80%)

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1024

Communication System: AM 80%; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ; Calibrated: 4/27/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

H Scan - H3DV6 probe tip 10mm above Device Reference/Hearing Aid Compatibility

Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.291 A/m

Probe Modulation Factor = 1.00


Reference Value = 0.306 A/m; Power Drift = 0.011 dB

Hearing Aid Near-Field Category: M3 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.252	0.274	0.266
Grid 4	Grid 5	Grid 6
0.270	0.291	0.285
Grid 7	Grid 8	Grid 9
0.242	0.263	0.258

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

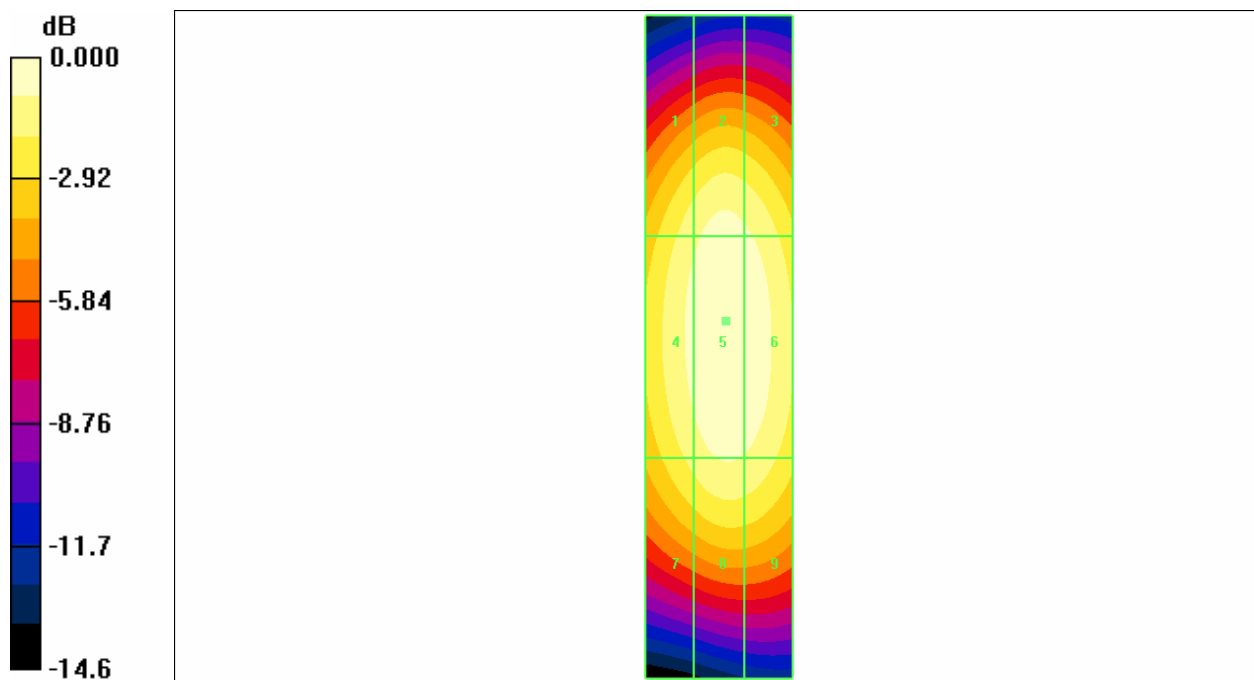

0 dB = 0.291A/m

Test Laboratory: Compliance Certification Services Inc.

HAC_H_Dipole_1880MHz-(CDMA)

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1024

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ; Calibrated: 4/27/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

H Scan - H3DV6 probe tip 10mm above Device Reference/Hearing Aid Compatibility

Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.462 A/m

Probe Modulation Factor = 1.00


Reference Value = 0.488 A/m; Power Drift = 0.004 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.394	0.433	0.417
Grid 4	Grid 5	Grid 6
0.423	0.462	0.447
Grid 7	Grid 8	Grid 9
0.376	0.414	0.403

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

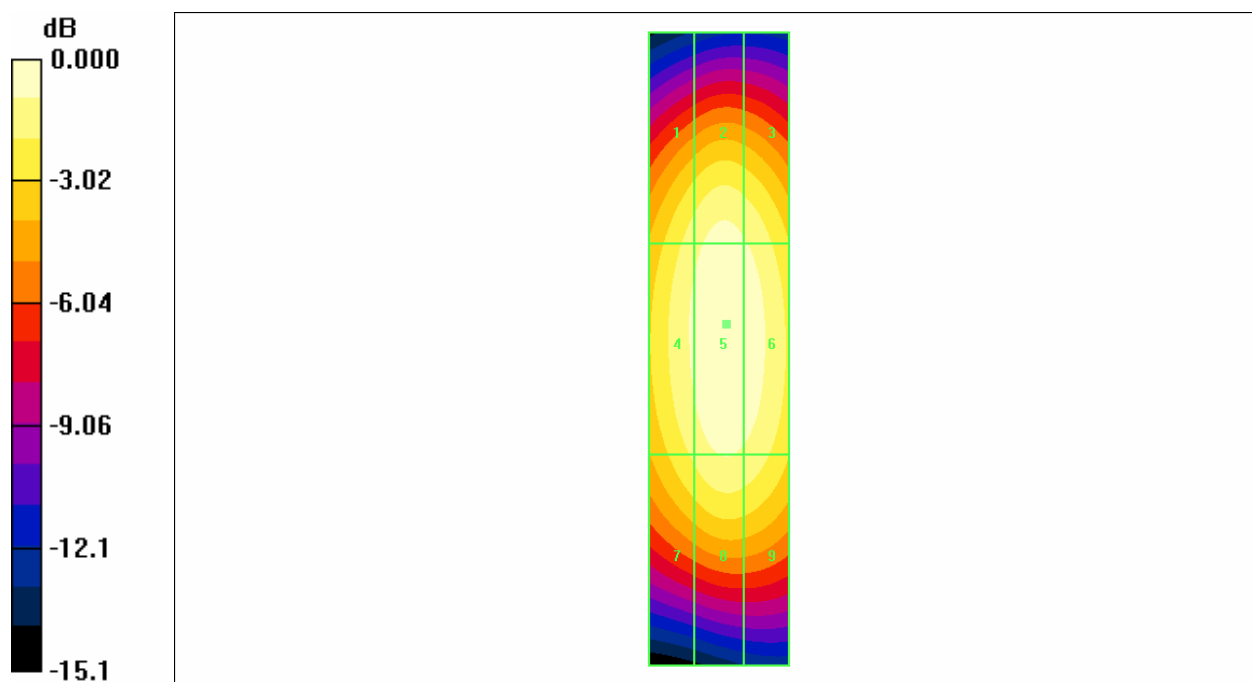

Test Laboratory: Compliance Certification Services Inc.

HAC_H_Dipole_2450MHz-(CW)

DUT: HAC Dipole 2450 MHz; Type: CD2450V3; Serial: 1026

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ; Calibrated: 4/27/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

H Scan - H3DV6 probe tip 10mm above Device Reference/Hearing Aid Compatibility

Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.486 A/m

Probe Modulation Factor = 1.00


Reference Value = 0.514 A/m; Power Drift = -0.013 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.375	0.409	0.399
Grid 4	Grid 5	Grid 6
0.451	0.486	0.476
Grid 7	Grid 8	Grid 9
0.372	0.401	0.395

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

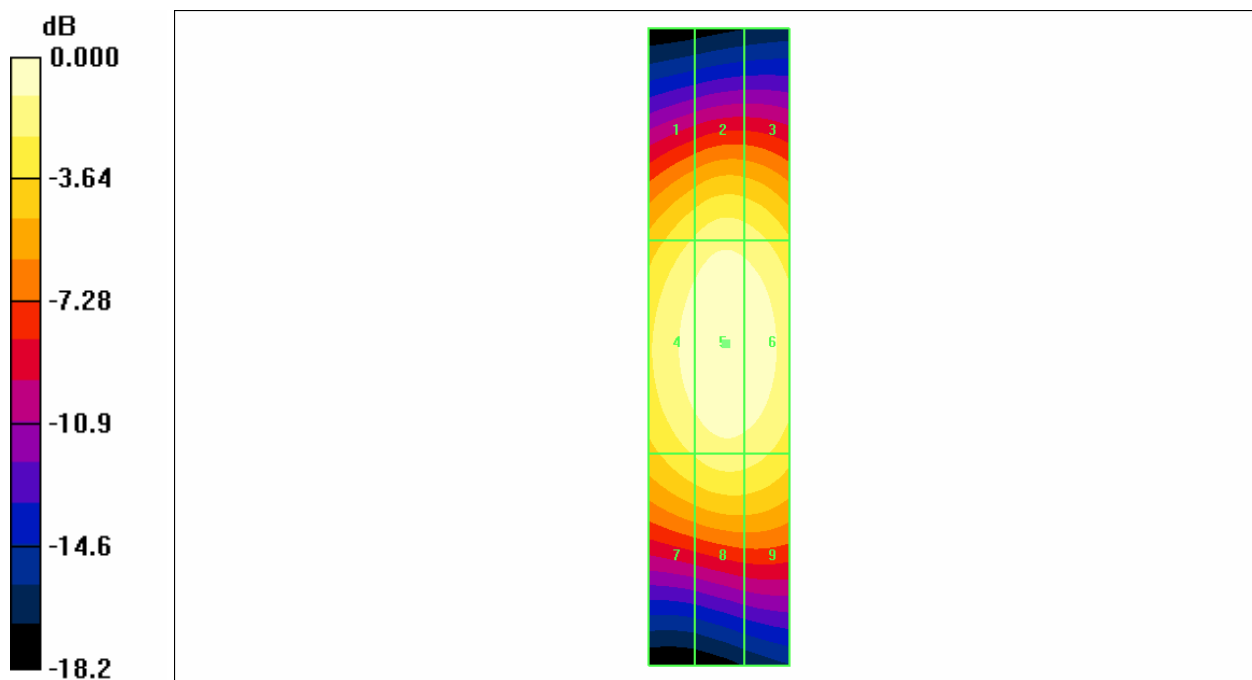

Test Laboratory: Compliance Certification Services Inc.

HAC_H_Dipole_2450MHz-(AM80%)

DUT: HAC Dipole 2450 MHz; Type: CD2450V3; Serial: 1026

Communication System: AM 80%; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ; Calibrated: 4/27/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

H Scan - H3DV6 probe tip 10mm above Device Reference/Hearing Aid Compatibility

Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.342 A/m

Probe Modulation Factor = 1.00


Reference Value = 0.364 A/m; Power Drift = -0.035 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.252	0.281	0.271
Grid 4	Grid 5	Grid 6
0.310	0.342	0.329
Grid 7	Grid 8	Grid 9
0.250	0.273	0.266

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

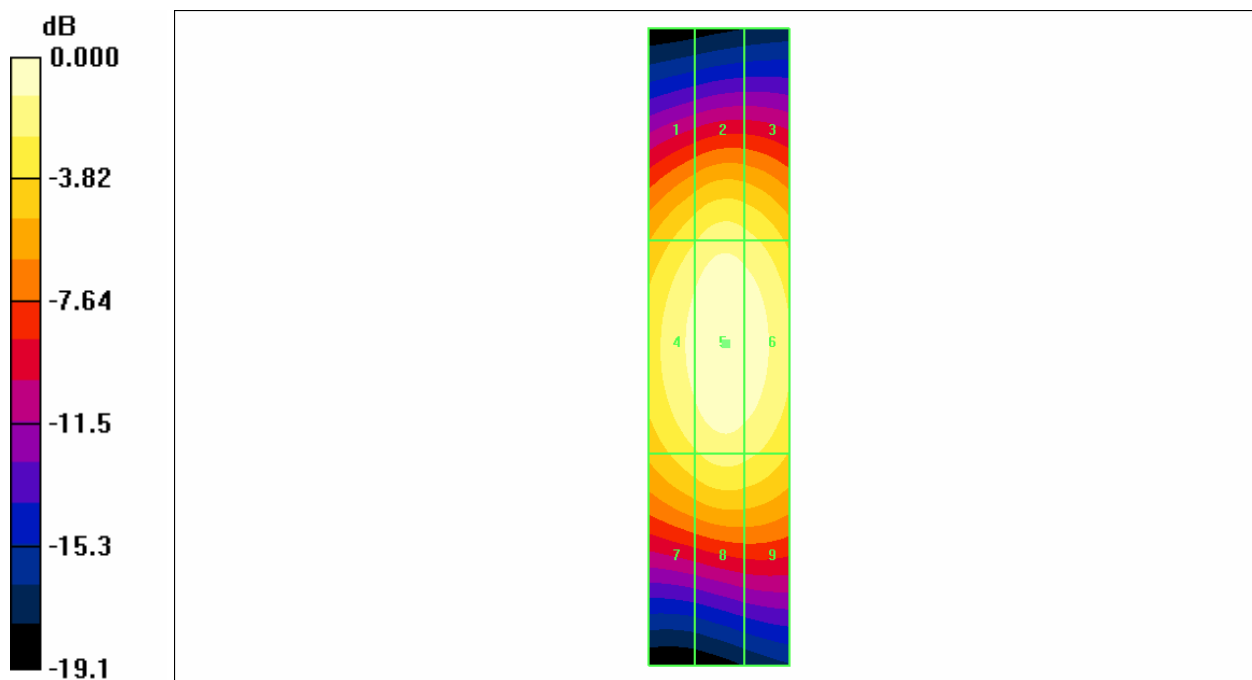

0 dB = 0.342A/m

Test Laboratory: Compliance Certification Services Inc.

HAC_H_Dipole_2450MHz-(DSSS)

DUT: HAC Dipole 2450 MHz; Type: CD2450V3; Serial: 1026

Communication System: 802.11b; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ; Calibrated: 4/27/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

H Scan - H3DV6 probe tip 10mm above Device Reference/Hearing Aid Compatibility

Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 1.08 A/m

Probe Modulation Factor = 1.00


Reference Value = 1.07 A/m; Power Drift = -0.001 dB

Hearing Aid Near-Field Category: No Category (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.851	0.936	0.905
Grid 4	Grid 5	Grid 6
1.00	1.08	1.07
Grid 7	Grid 8	Grid 9
0.829	0.908	0.894

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

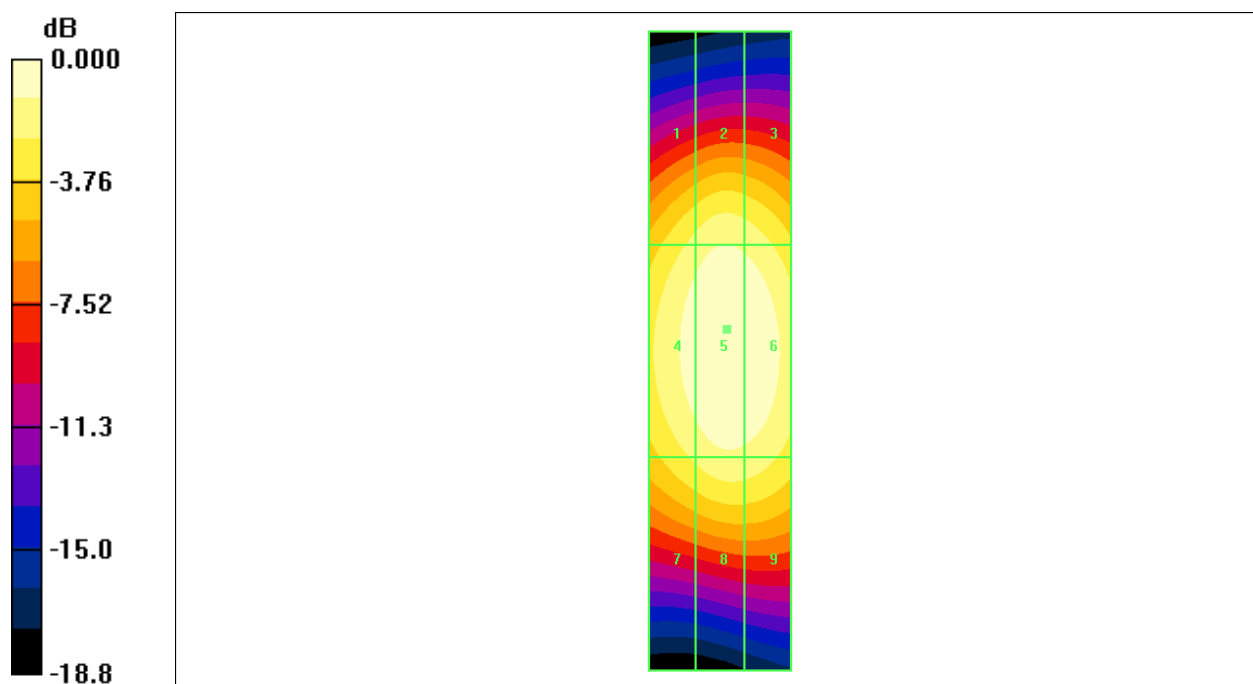

0 dB = 1.08A/m