



EXHIBIT L – Spurious Emissions @ Antenna Terminals

FCC ID# NMEAVTS1030


NORTHWEST EMC				EMISSIONS DATA SHEET				Rev BETA 01/30/01	
EUT: Alarm View				Work Order: DATC0007					
Serial Number: 102037				Date: 05/31/01					
Customer: Data Critical Corporation				Temperature: 75 degrees F					
Attendees: N/A		Tested by: Rod Peloquin		Humidity: 38% RH					
Customer Ref. No.: N/A		Power: N/A		Job Site: EV06					
TEST SPECIFICATIONS									
Specification: 47 CFR 2.1051 and 90.210(c)		Year: Most Current		Method: TIA/EIA-603		Year: 1993			
SAMPLE CALCULATIONS									
COMMENTS									
EUT OPERATING MODES									
Modulated at maximum data rate of 2400 baud									
DEVIATIONS FROM TEST STANDARD									
None									
REQUIREMENTS									
Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental									
RESULTS									
Pass									
SIGNATURE									
 Tested By: _____									
DESCRIPTION OF TEST									
Antenna Conducted Spurious Emissions - Low Channel 0MHz-1GHz									

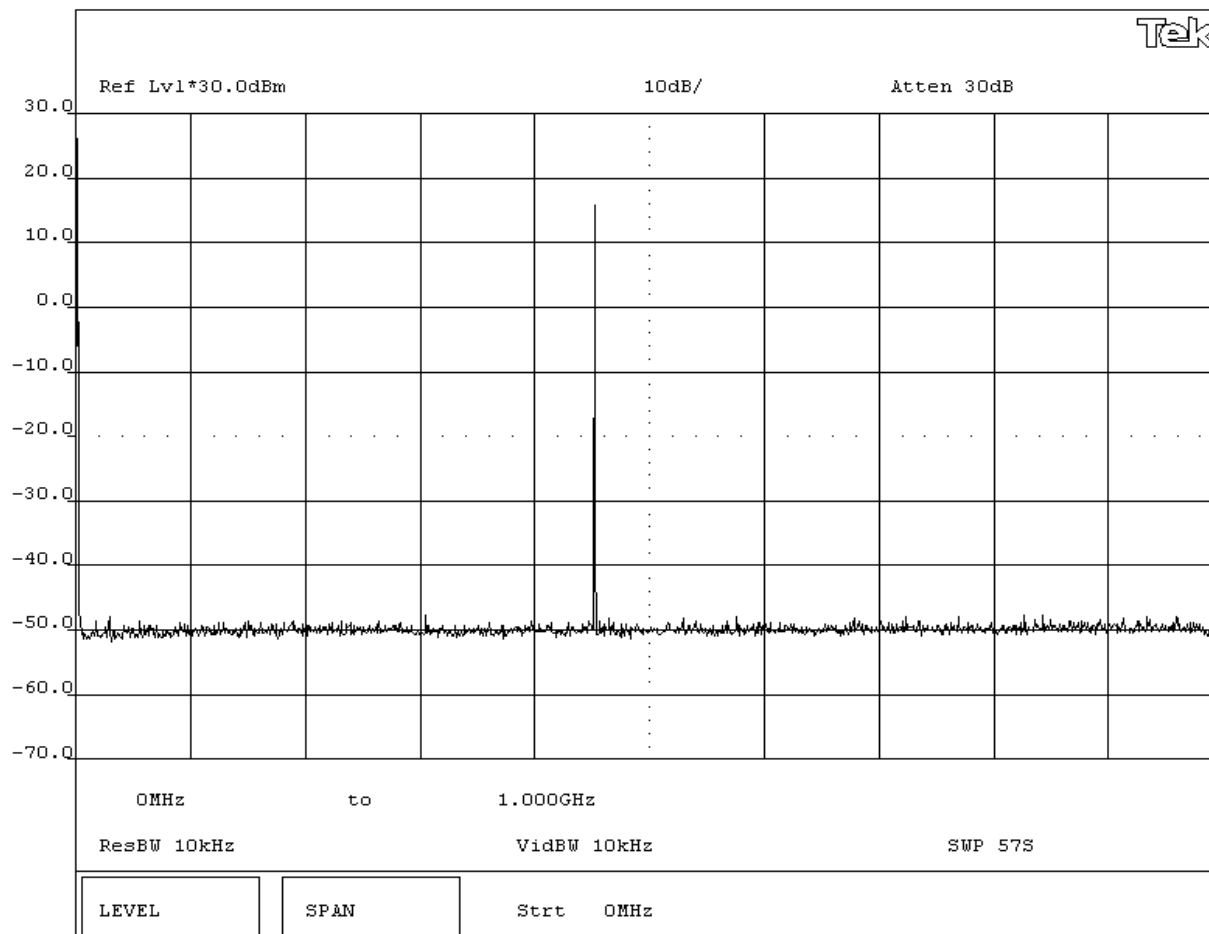


NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT:	Alarm View			Work Order:	DATC0007
Serial Number:	102037			Date:	05/31/01
Customer:	Data Critical Corporation			Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin	Humidity:	38% RH
Customer Ref. No.:	N/A	Power:	N/A	Job Site:	EV06
TEST SPECIFICATIONS					
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current	Method:	TIA/EIA-603
				Year:	1993
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated at maximum data rate of 2400 baud					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental					
RESULTS					
Pass					
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
Antenna Conducted Spurious Emissions - Low Channel 1GHz-3GHz					

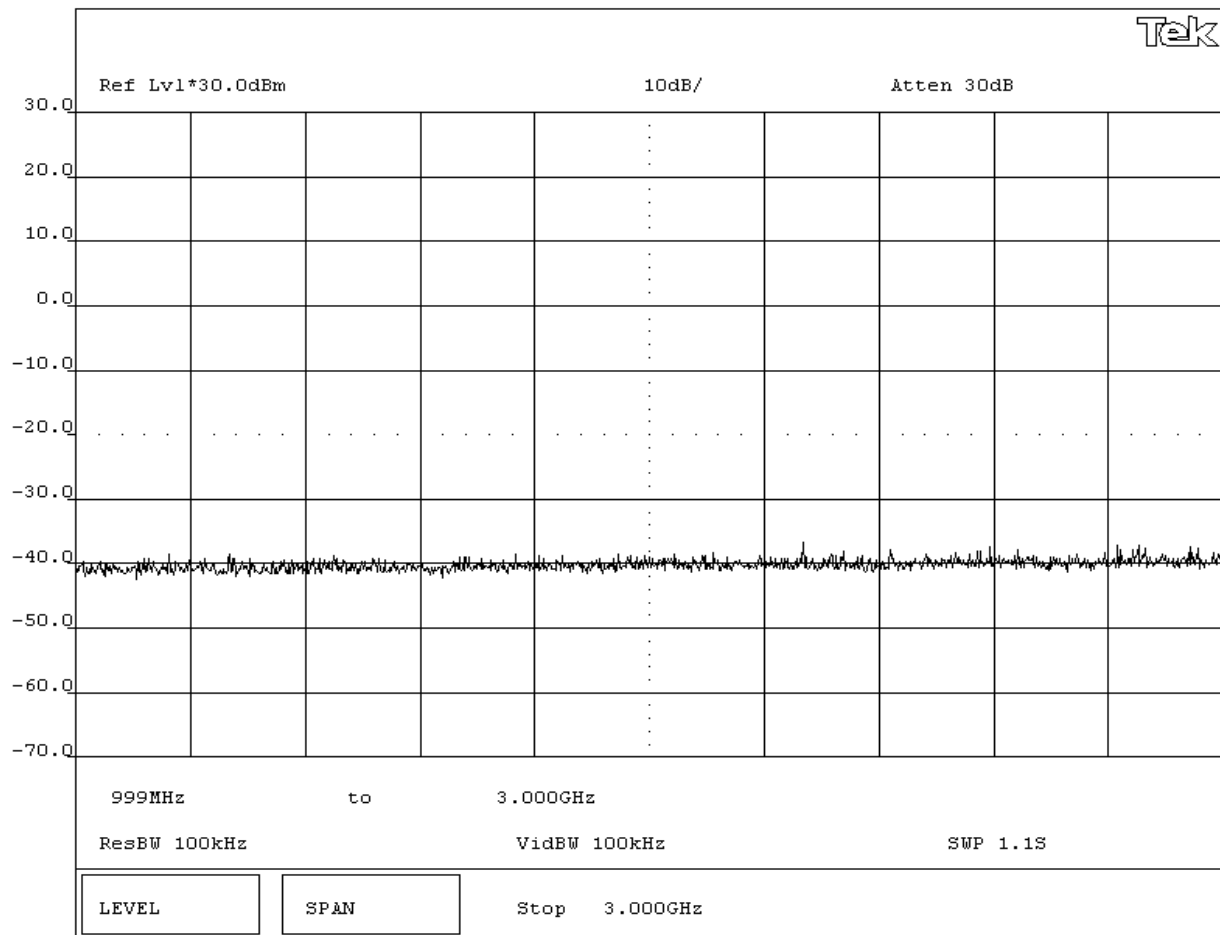


NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT:	Alarm View			Work Order:	DATC0007
Serial Number:	102037			Date:	05/31/01
Customer:	Data Critical Corporation			Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin	Humidity:	38% RH
Customer Ref. No.:	N/A	Power:	N/A	Job Site:	EV06
TEST SPECIFICATIONS					
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current	Method:	TIA/EIA-603
				Year:	1993
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated at maximum data rate of 2400 baud					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental					
RESULTS					
Pass					
SIGNATURE					
Tested By: _____					
DESCRIPTION OF TEST					
Antenna Conducted Spurious Emissions - Low Channel 3GHz-5GHz					

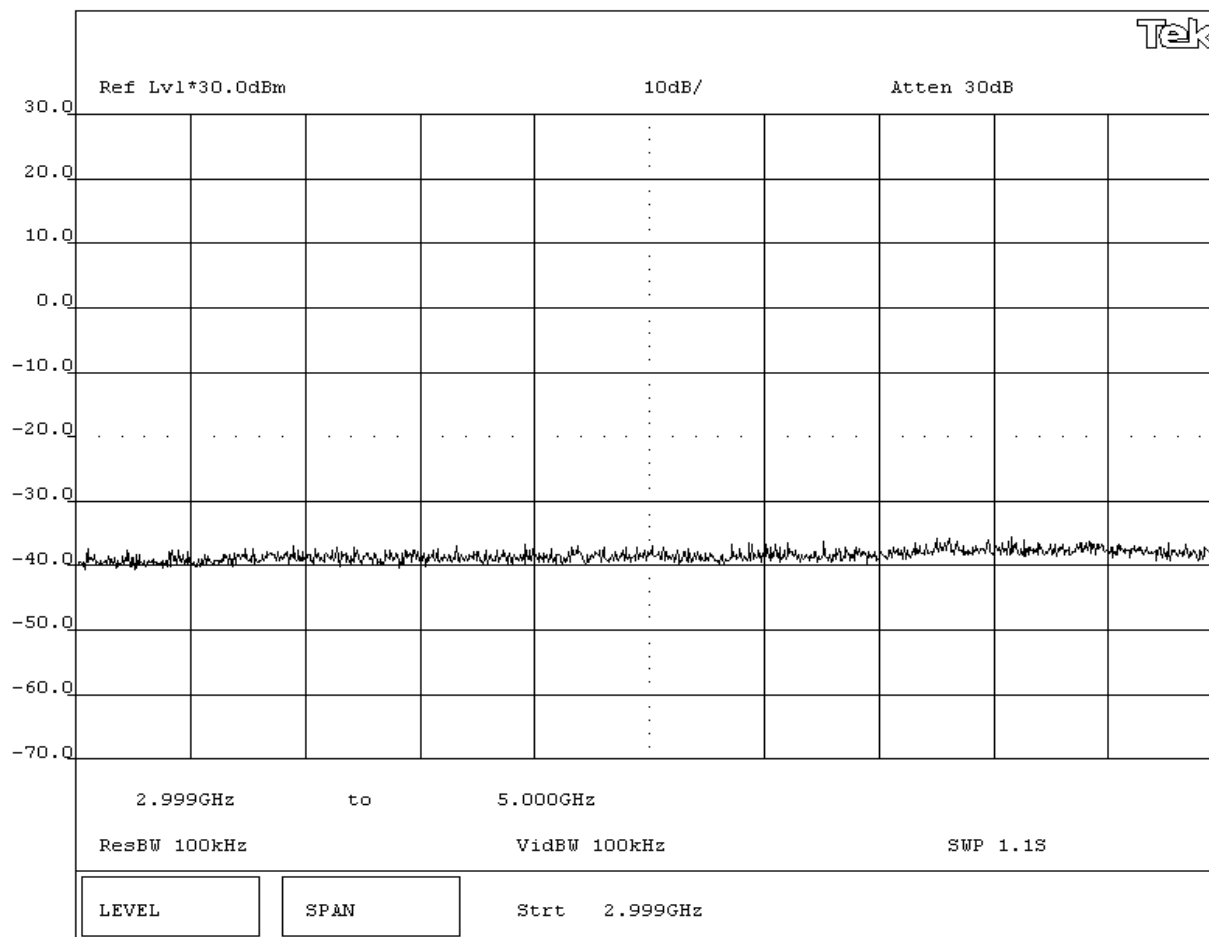

NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT:	Alarm View			Work Order:	DATC0007
Serial Number:	102037			Date:	05/31/01
Customer:	Data Critical Corporation			Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin	Humidity:	38% RH
Customer Ref. No.:	N/A	Power:	N/A	Job Site:	EV06
TEST SPECIFICATIONS					
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current	Method:	TIA/EIA-603
				Year:	1993
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated at maximum data rate of 2400 baud					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental					
RESULTS					
Pass					
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
Antenna Conducted Spurious Emissions - Mid Channel 0MHz-3GHz					

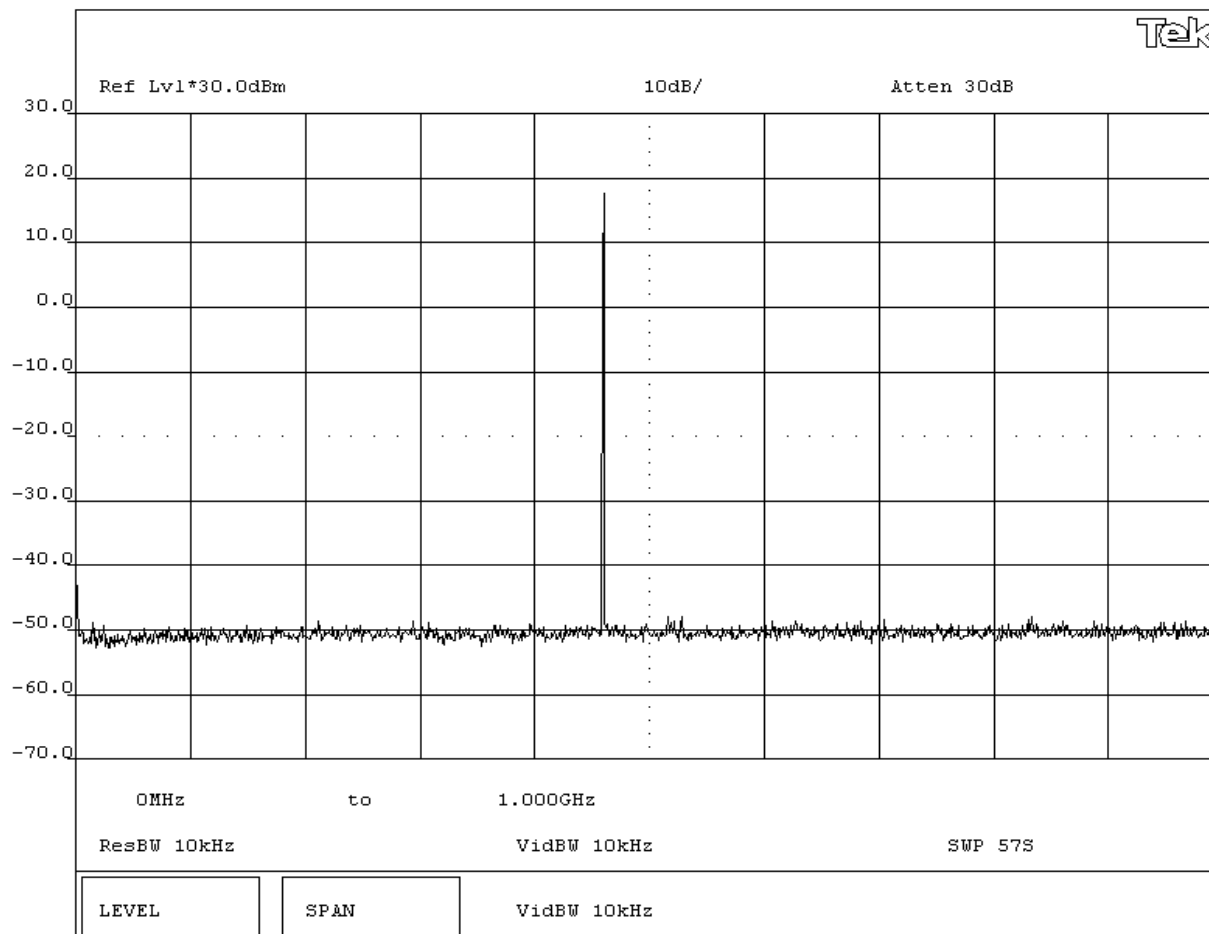

NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT:	Alarm View			Work Order:	DATC0007
Serial Number:	102037			Date:	05/31/01
Customer:	Data Critical Corporation			Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin	Humidity:	38% RH
Customer Ref. No.:	N/A	Power:	N/A	Job Site:	EV06
TEST SPECIFICATIONS					
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current	Method:	TIA/EIA-603
				Year:	1993
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated at maximum data rate of 2400 baud					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental					
RESULTS					
Pass					
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
Antenna Conducted Spurious Emissions - Mid Channel 1GHz-3GHz					

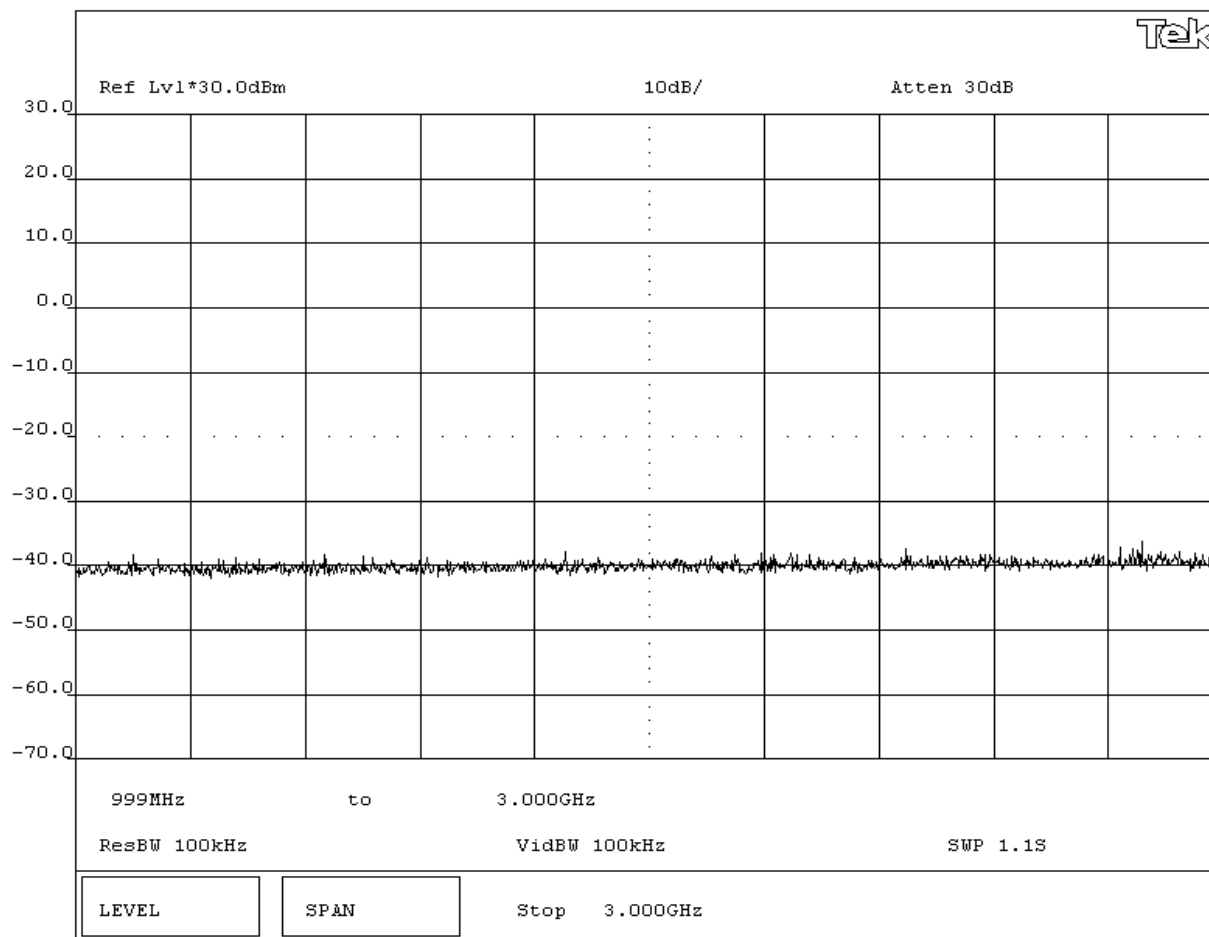

EUT:	Alarm View		Work Order:	DATC0007	
Serial Number:	102037		Date:	05/31/01	
Customer:	Data Critical Corporation		Temperature:	75 degrees F	
Attendees:	N/A	Tested by:	Rod Peloquin	Humidity:	38% RH
Customer Ref. No.:	N/A	Power:	N/A	Job Site:	EV06

TEST SPECIFICATIONS

Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current	Method:	TIA/EIA-603	Year:	1993
----------------	-----------------------------	-------	--------------	---------	-------------	-------	------

SAMPLE CALCULATIONS

NAME OF PRESENTATION	

COMMENTS

COMMENTS	

EUT OPERATING MODES

Modulated at maximum data rate of 2400 baud

DEVIATIONS FROM TEST STANDARD

DEVIATIONS FROM TEST STANDARD
None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental

RESULTS

Pass


SIGNATURE _____

SIGNATURE


Tested By: 

DESCRIPTION OF TEST


Antenna Conducted Spurious Emissions - Mid Channel 3GHz-5GHz

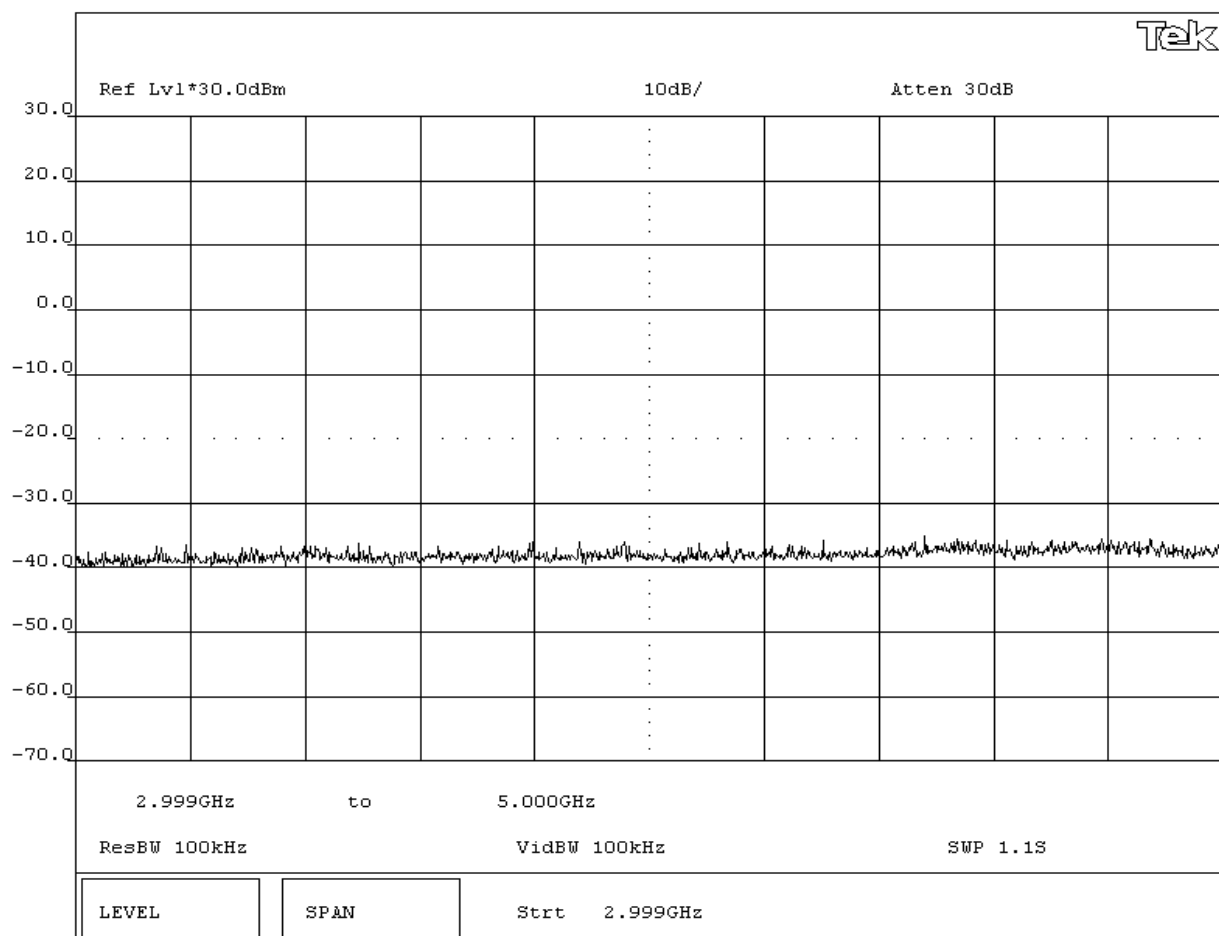

NORTHWEST EMC				EMISSIONS DATA SHEET				Rev BETA 01/30/01	
EUT: Alarm View				Work Order: DATC0007					
Serial Number: 102037				Date: 05/31/01					
Customer: Data Critical Corporation				Temperature: 75 degrees F					
Attendees: N/A		Tested by: Rod Peloquin		Humidity: 38% RH					
Customer Ref. No.: N/A		Power: N/A		Job Site: EV06					
TEST SPECIFICATIONS									
Specification: 47 CFR 2.1051 and 90.210(c)		Year: Most Current		Method: TIA/EIA-603		Year: 1993			
SAMPLE CALCULATIONS									
COMMENTS									
EUT OPERATING MODES									
Modulated at maximum data rate of 2400 baud									
DEVIATIONS FROM TEST STANDARD									
None									
REQUIREMENTS									
Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental									
RESULTS									
Pass									
SIGNATURE									
 Tested By: _____									
DESCRIPTION OF TEST									
Antenna Conducted Spurious Emissions - Mid Channel 0MHz-1GHz									

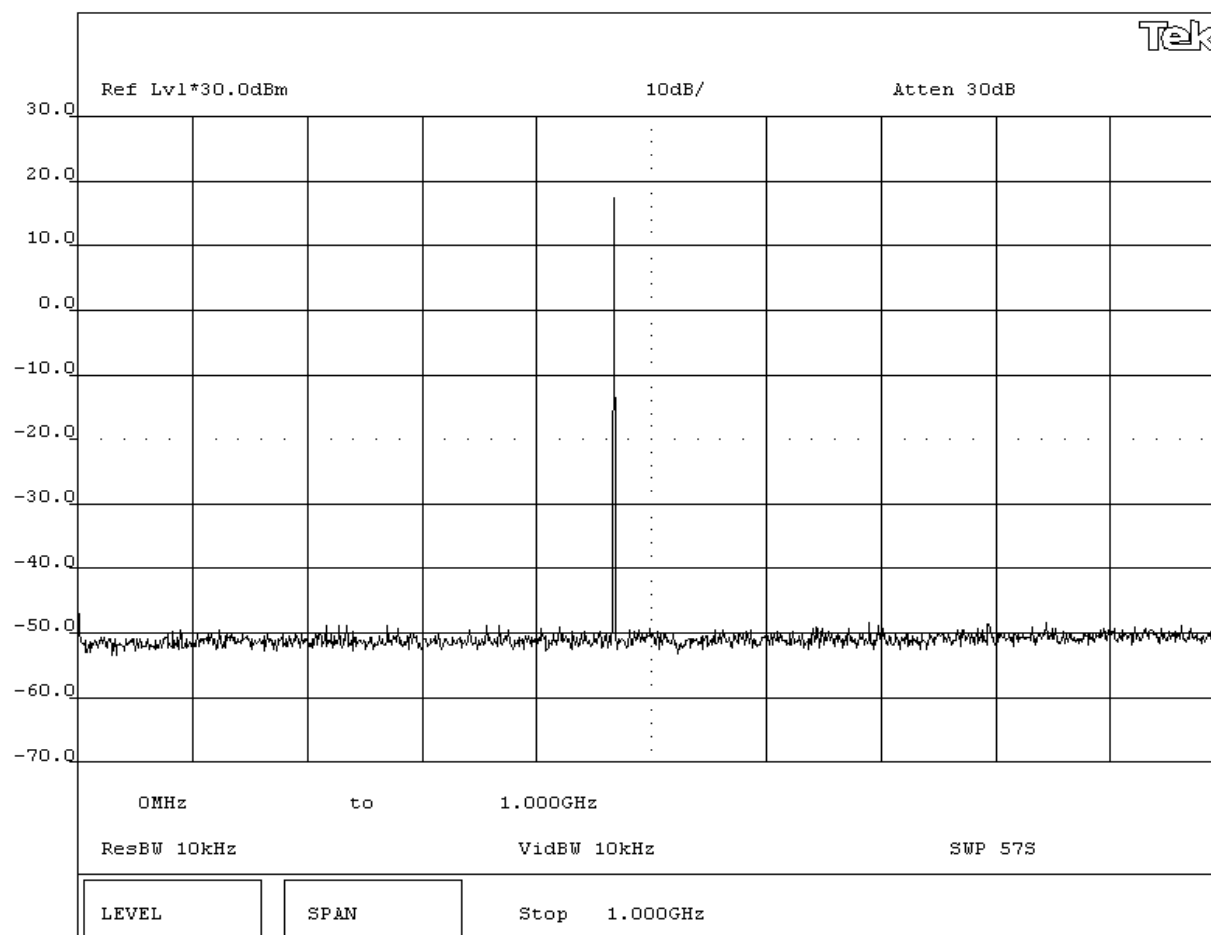

NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT:	Alarm View			Work Order:	DATC0007
Serial Number:	102037			Date:	05/31/01
Customer:	Data Critical Corporation			Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Rod Peloquin	Humidity:	38% RH
Customer Ref. No.:	N/A	Power:	N/A	Job Site:	EV06
TEST SPECIFICATIONS					
Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current	Method:	TIA/EIA-603
				Year:	1993
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated at maximum data rate of 2400 baud					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental					
RESULTS					
Pass					
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
Antenna Conducted Spurious Emissions - Mid Channel 1GHz-3GHz					

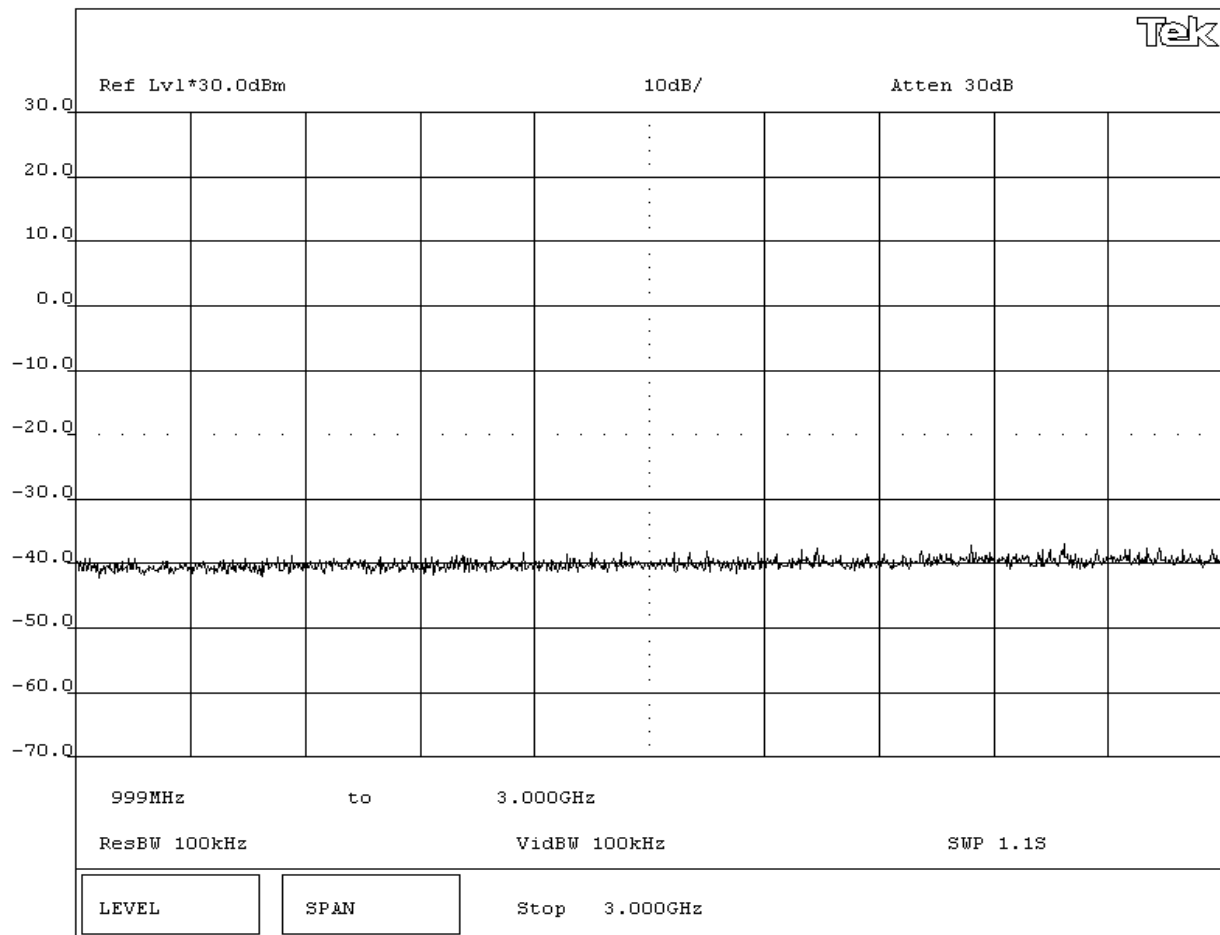

NORTHWEST

EMC**EMISSIONS DATA SHEET**Rev BETA
01/30/01

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	05/31/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Humidity:	38% RH
Customer Ref. No.:	N/A	Power:	N/A
		Job Site:	EV06

TEST SPECIFICATIONS

Specification:	47 CFR 2.1051 and 90.210(c)	Year:	Most Current	Method:	TIA/EIA-603	Year:	1993
----------------	-----------------------------	-------	--------------	---------	-------------	-------	------

SAMPLE CALCULATIONS**COMMENTS****EUT OPERATING MODES**

Modulated at maximum data rate of 2400 baud

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 37.7 dB down from the fundamental

RESULTS

Pass

SIGNATURETested By: **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - Mid Channel 3GHz-5GHz**