

EXHIBIT O – Transient Frequency Behaviour Data

FCC ID# NMEAVTS1030

NORTHWEST
EMC

EMISSIONS DATA SHEET

Rev BETA
01/30/01

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	06/18/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Tested by:	Greg Kiemel
Customer Ref. No.:	N/A	Power:	N/A
		Humidity:	38% RH
		Job Site:	EV06

TEST SPECIFICATIONS

Specification:	47 CFR 90.214	Year:	Most Current	Method:	TIA/EIA-603 2.2.19	Year:	1993
----------------	---------------	-------	--------------	---------	--------------------	-------	------

SAMPLE CALCULATIONS

COMMENTS

EUT OPERATING MODES

Modulated at 2400 Baud

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Transmitters operating the 421-512 MHz band must maintain transient frequencies within the maximum frequency difference limits.

RESULTS

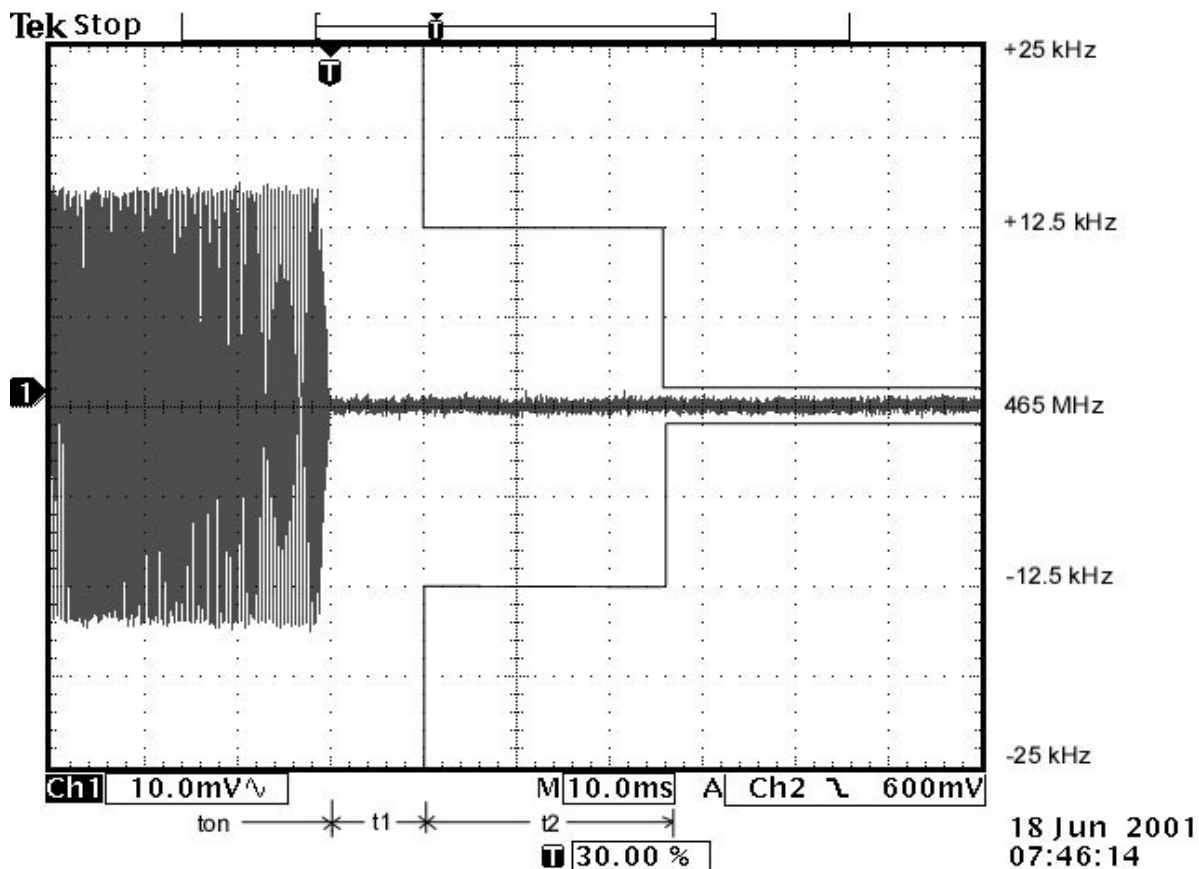
Pass

SIGNATURE

Tested By: 

DESCRIPTION OF TEST

Carrier ON Time



NORTHWEST

EMC**EMISSIONS DATA SHEET**Rev BETA
01/30/01

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	06/18/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Humidity:	38% RH
Customer Ref. No.:	N/A	Power:	N/A
		Job Site:	EV06

TEST SPECIFICATIONS

Specification:	47 CFR 90.214	Year:	Most Current	Method:	TIA/EIA-603 2.2.19	Year:	1993
----------------	---------------	-------	--------------	---------	--------------------	-------	------

SAMPLE CALCULATIONS**COMMENTS****EUT OPERATING MODES**

Modulated at 2400 Baud

DEVIATIONS FROM TEST STANDARD


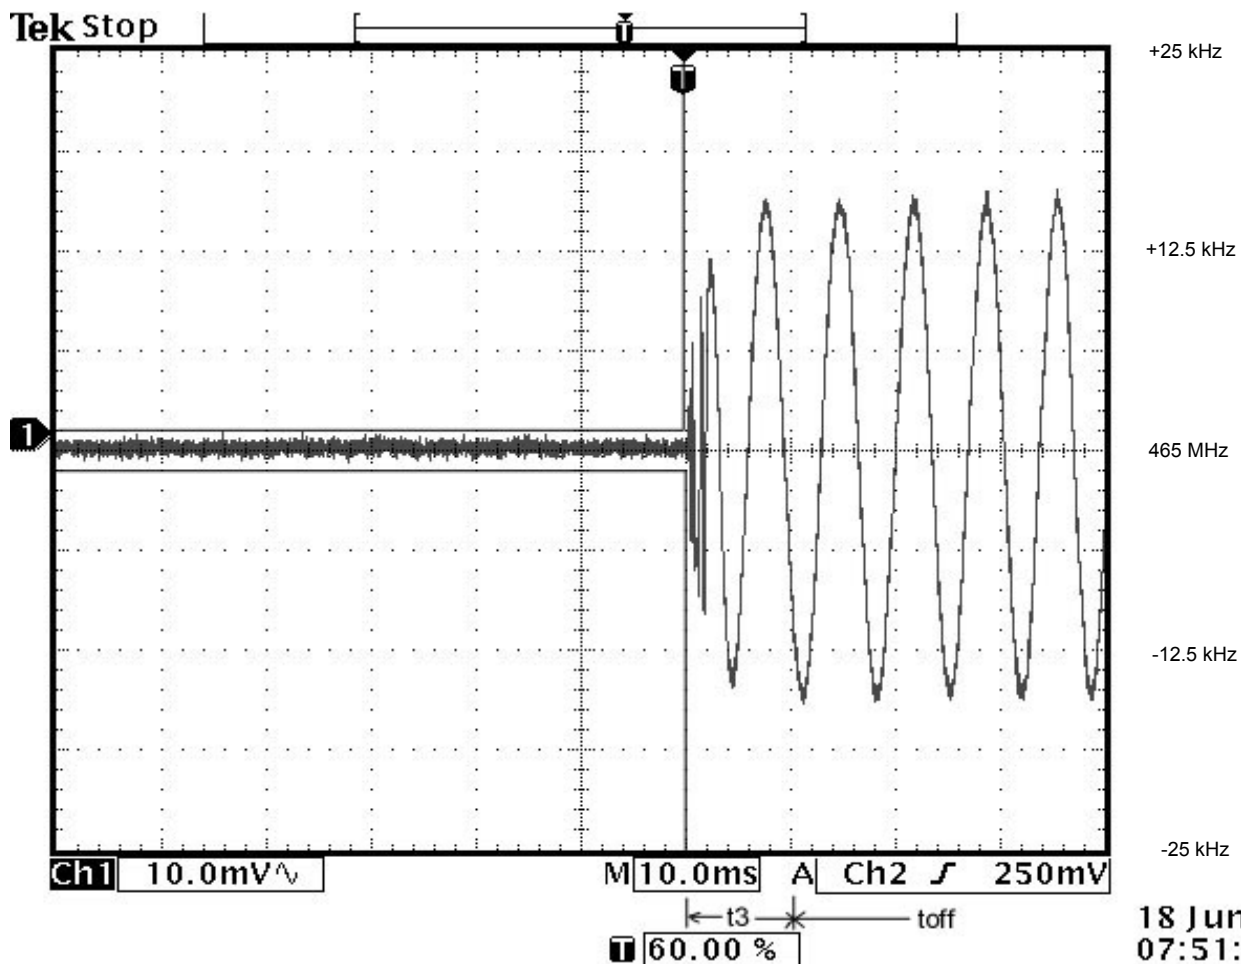
None

REQUIREMENTS

Transmitters operating the 421-512 MHz band must maintain transient frequencies within the maximum frequency difference limits.

RESULTS

Pass

SIGNATURETested By: **DESCRIPTION OF TEST****Carrier OFF Time**

NORTHWEST

EMC**EMISSIONS DATA SHEET**Rev BETA
01/30/01

EUT:	Alarm View	Work Order:	DATC0007
Serial Number:	102037	Date:	06/18/01
Customer:	Data Critical Corporation	Temperature:	75 degrees F
Attendees:	N/A	Humidity:	38% RH
Customer Ref. No.:	N/A	Power:	N/A
		Job Site:	EV06

TEST SPECIFICATIONS

Specification:	47 CFR 90.214	Year:	Most Current	Method:	TIA/EIA-603 2.2.19	Year:	1993
----------------	---------------	-------	--------------	---------	--------------------	-------	------

SAMPLE CALCULATIONS**COMMENTS****EUT OPERATING MODES**

Modulated at 2400 Baud

DEVIATIONS FROM TEST STANDARD


None

REQUIREMENTS

Transmitters operating the 421-512 MHz band must maintain transient frequencies within the maximum frequency difference limits.

RESULTS

Pass

SIGNATURETested By: **DESCRIPTION OF TEST****Carrier OFF Time**