

3. System Test Configuration

3-1. Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). The Lan Card was inserted to support equipment-personal computer. Peripherals of PC, such as monitor, keyboard, modem and printer were contained in this system in order to comply with the ANSI C63.4/CISPR22(1996) Rules requirement. A second PC workstation located at faraway side from test site was used as a support equipment to exercise the EUT to simulate data transmitting during the test. Both PC workstations operated in the default 640X480/31.5Khz VGA Graphic mode. This operating Condition was tested and used to collect the included data.

The RJ45 port (100Base-TX, category 5 UTP) was tested as the Rules requirement. The final qualification testing data were included in Table 5-1 and Table 5-2 shown.

3-2. EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disk, was inserted into driver A and is auto-starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is:

1. Read(write) from(to) mass storage device(Disk).
2. Read(write) from(to) remote station by EUT(Lan Card).
3. Send "H" pattern to video port device(Monitor).
4. Send " H " pattern to parallel port device(Printer).
5. Send " H " pattern to serial port device (Modem).
6. Repeated from 2 to 5 continuously.

As the Keyboard and mouse are strictly input devices, no data is transmitted to (from) them during test. They are, however, continuously scanned for data input activity.

3-3. Special Accessories

As shown in Figure 3-1, all interface cables used for compliance testing are shielded type except the power cord which marked as shielded. All cable connectors are integrated by metal hoods for shielding. This equipment is required to use a shielded video interface cable without a ferrite attached in order to comply with FCC requirements.

3-4. Equipment Modifications

In order to achieve in compliance with Class B levels, the following change(s) were made by NEUTRON test house during the compliance testing:

N/A

The above modifications will be implemented in all product models of this equipment.

Applicant Signature :

Armin Tseng
Armin Tseng

Date :

Oct. 15, 1998

Type/Printed Name :

Position :

R&D / Dept.

3.5 Configuration of Tested System

The configuration of tested system is described as the block diagram shown in next page Figure 3.1 and details information of I/O cable and power cord connection are tabulated as Table A and B. The monitor is powered from a floor mounted receptacle (referred to as the wall outlet in the previous described) was tested.

TABLE A - Test Equipment

Item	Equipment	Mfr.	Model/Type No.	I/O Port	FCC ID	Remark
E-1	LAN Card	NETRONIX	LCS-8038TX	PCI Slot	NOI9900-11210-001	EUT
E-2	PC	COMPAQ	PRESARIO7222		EJH3326	
E-3	Monitor	Optquest	4500DC-E	VGA Port	GWGMULTI82	
E-4	Mouse	Logitech	SERIES 2-7S	P/S 2 Port	DZL6QBS2	
E-5	Printer	HP	HP2225C+	Print Port	DSI6XU2225	
E-6	Modem	Datatronics	AT-1200CK	COM Port	E2O5OV1200CK	
E-7	Keyboard	Forward	FDA-102A	KB DIN Port	F4Z4K3FDA-102A	

Remark:

- (1) Unless otherwise denoted as EUT in 「Remark」 column, device(s) used in tested system is a support equipment.
- (2) Unless otherwise marked as ※ in 「Remark」 column, Neutron consigns the supporting equipment(s) to the tested system.


Table B. - Informations Cable Information

Item	I/O Cable	Device Connected	Shielded	Ferrite	Detachable/Permanently	Note
C-1	Video Cable	PC-Monitor	Yes	No	Permanently attached	
C-2	Centronics Cable	PC-Printer	Yes	No	Detachable type	
C-3	Keyboard Cable	PC-Keyboard	Yes	No	Permanently attached	
C-4	RS-232 Cable	PC-Modem	Yes	No	Detachable type	
C-5	Mouse Cable	PC-Mouse	Yes	No	Permanently attached	
C-6	UTP Data Cable	PC-Remote Station	No	No	Detachable type.	※

Note:

- (1) Unless otherwise marked as ※ in 「Remark」 column, Neutron consigns the supporting equipment(s) to the tested system.

Figure 3.1 Configuration of Tested System

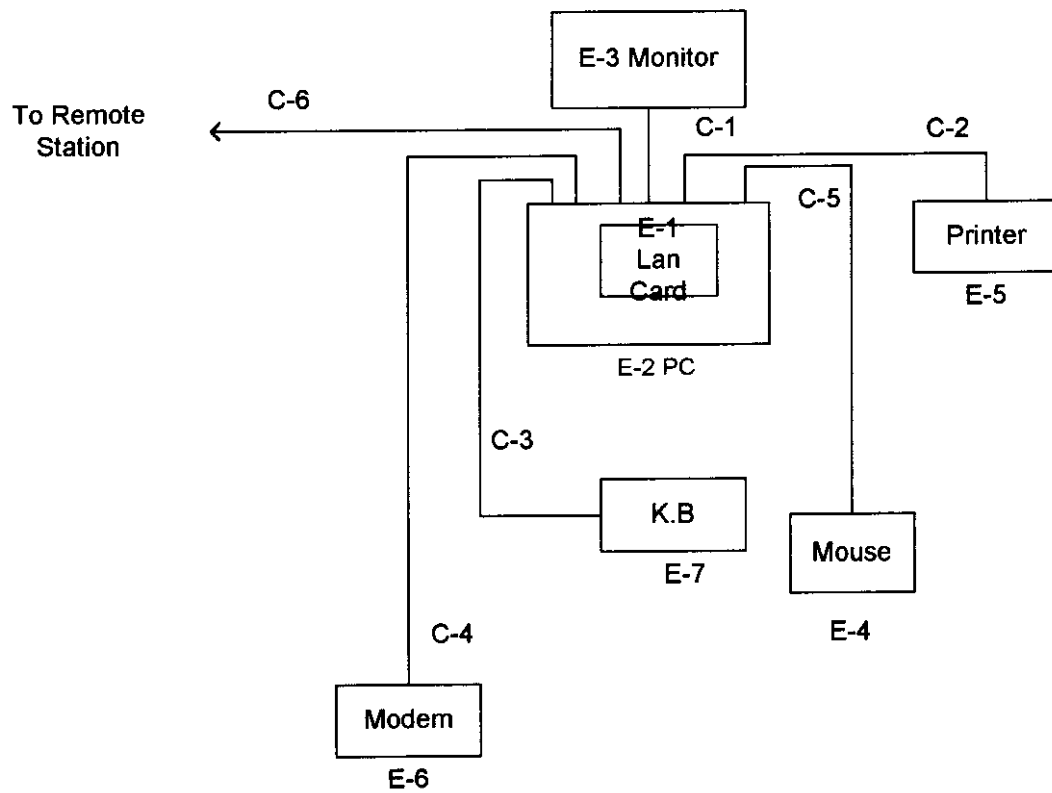

4. Block Diagram(s)

Figure 4.1 Block diagram of system

6. Conducted Emission Datas

- 6.1 The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.


Judgement: Passed by **-7.16 dB** in mode of **Line** terminal **0.23 MHz**

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe Margins (dBuV)	
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		Note
0.15	Line	51.27	*	66.00	56.00	-14.73	(QP)
0.23	Line	50.45	45.18	62.34	52.34	-7.16	(AV)
0.30	Line	43.87	*	60.16	50.16	-16.29	(QP)
0.44	Line	40.60	*	57.12	47.12	-16.52	(QP)
15.72	Line	48.66	34.28	60.00	50.00	-11.34	(QP)
0.15	Neutral	50.54	*	66.00	56.00	-15.46	(QP)
0.23	Neutral	50.24	*	62.31	52.31	-12.07	(QP)
0.30	Neutral	44.17	*	60.24	50.24	-16.07	(QP)
0.44	Neutral	40.33	*	57.12	47.12	-16.79	(QP)
15.72	Neutral	45.67	*	60.00	50.00	-14.33	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=100KHz, VBW =100KHz, Swp. Time = 0.3 sec./MHz ◦ Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz, VBW=10Hz, Swp. Time =0.3 sec./MHz ◦
- (2) All readings are QP Mode value unless otherwise stated AVG in colum of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemd to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform ◦ In this case, a " *" marked in AVG Mode colum of Interference Voltage Measured ◦
- (3) Measuring frequency range from 150KHz to 30MHz ◦

Review :



Test Personnel. :

Riker Hsu

Date:

Sep. 16, 1998

7. Radiated Emission Datas

- 7.1 The following data lists the significant emission frequency, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.


Judgement: Passed by **-2.66 dB** in polarity of **Vertical 34.63 MHz**

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
32.70	H	13.30	11.03	24.33	30.00	- 5.67	
34.63	V	16.50	10.84	27.34	30.00	- 2.66	
49.02	V	12.40	12.14	24.54	30.00	- 5.46	
57.90	H	14.20	10.15	24.35	30.00	- 5.65	
58.72	V	14.40	10.05	24.45	30.00	- 5.55	
150.70	H	10.70	13.08	23.78	30.00	- 6.22	
214.40	V	9.80	11.94	21.74	30.00	- 8.26	
215.20	H	8.20	11.91	20.11	30.00	- 9.89	
224.80	V	9.80	11.61	21.41	30.00	- 8.59	
228.00	H	7.70	11.85	19.55	30.00	- 10.45	
325.60	H	10.10	15.92	26.02	37.00	- 10.98	
347.20	V	11.40	16.52	27.92	37.00	- 9.08	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 'Note'. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

Review :



Test Personnel :

Riker 1/54

Date:

Sep. 18, 1998

7-2. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor (1)

CL = Cable Attenuation Factor (1)

AG = Amplifier Gain (1) (2)

Remark :

(1) The Correction Factor = AF + CL - AG, as shown in the data tables' Correction Factor column.

(2) AG is not available for Neutron's Open Site Facility

Example of Calculation:

Assume a Receiver Reading of 23.7 dBuV is obtained with an Antenna Factor of 7.2 dB and a Cable Factor of 1.1 dB. Then:

1. The Correction Factor will be calculated by

$$\text{Correction Factor} = AF + CL - AG = 7.2 + 1.1 - 0 = 8.3 \text{ (dB)}$$

as shown in the data tables' Correction Factor column.

2. The Field Strength will be calculated by

$$FS = RA + \text{Correction Factor} = 23.7 + 8.3 = 32 \text{ (dBuV/m)}.$$

FS is the value shown in the data tables' Corrected Reading column and RA is the value shown in the data tables' Receiver Reading column. The 32 dBuV/m value was mathematically converted to its corresponding level in uV/m as:

$$\text{Log}^{-1} \left[(32.0 \text{ dBuV/m}) / 20 \right] = 39.8 \text{ (uV/m)}$$

7-3. Correction Factor VS Frequency

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30.00	11.10	0.20
35.00	10.80	0.00
40.00	11.20	0.40
45.00	11.50	0.40
50.00	11.30	0.90
55.00	10.50	0.00
60.00	9.90	0.00
65.00	8.70	0.20
70.00	7.60	0.00
75.00	6.40	0.50
80.00	6.10	0.10
85.00	7.00	0.80
90.00	8.00	0.30
95.00	10.00	0.40
100.00	11.20	0.60
110.00	12.60	0.60
120.00	13.00	0.60
130.00	12.50	0.50
140.00	12.00	0.20
150.00	12.00	1.00
160.00	13.20	1.20
170.00	14.80	1.60
180.00	16.30	1.90
190.00	17.00	1.90
200.00	17.30	1.40
225.00	10.50	1.10
250.00	11.70	2.00
275.00	12.80	2.40
300.00	14.50	2.40
325.00	14.00	1.90
350.00	14.20	2.40
375.00	14.60	2.90
400.00	15.10	2.70
450.00	16.20	3.20
500.00	17.60	3.70
550.00	17.80	3.90
600.00	18.40	4.30
650.00	19.50	4.00
700.00	20.80	4.10
750.00	20.50	5.30
800.00	21.10	5.90
850.00	22.40	5.80
900.00	23.50	5.50
950.00	24.00	6.30
1000.00	24.80	5.20

8. Photos of Tested EUT:

The following photos are attached:

Photo # 1. Front View

Photo # 2. Rear View

Photo # 3. Side View

1-3. Tested System Details

The FCC IDs for all equipments, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Model No.	FCC ID	Equipment	Cable
LCS-8038TX	NOI9900-11210-001	LAN Card	Add-On Card , Cableless
PRESARIO7222	EJH3326	PC	Un-Shielded Power Cord.
4500DC-E	GWGMULTI82	Monitor	Shielded Data Cable ⁽²⁾ Un-Shielded Power Cord
SERIES 2-7S	DZL6QBS2	Mouse	Shielded Data Cable
HP2225C+	DSI6XU2225	Printer	Shielded Serial Data Cable Un-Shielded Power Cord
AT-1200CK	E2O5OV1200CK	Modem	Shielded Parallel Data Cable Un-Shielded Power Cord
FDA-102A	F4Z4K3FDA-102A	Keyboard	Shielded Data Cable

Notes:

(1) EUT submitted for grant.

(2) Monitor's attached video cable with ferrite core.

1-4. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (1992)/CISPR 22 (1996). Radiated testing was performed at an antenna to EUT distance 10 meters.

1-5. Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of No. 5, All 2, Lane 220, Kang Lo St., Nei Hwu, Taipei, Taiwan, R.O.C. of NEUTRON ENGINEERING INC. This site has been fully described in report dated Feb.4, 1998 Submitted to your office, and accepted in a letter dated March 28, 1998 (31040/SIT-1300F2).