


A M E N D	DATE	CODE	MEMO	SIGN
	2002.12.13		New Drawing	

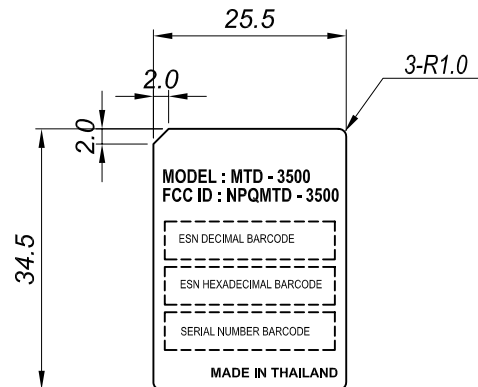


*NOTE : Unless otherwise specified.

1. Material : Silver polyester 50 μ m.
2. Laminated.
3. Color : Text : Black (Indelible).
4. Adhesive : Acrylic solvent type (Permanent).
Permanent pressure sensitive with Note 5. requirement.
- 5 All material must be suitable for temp service range of : -10 $^{\circ}$ C to 60 $^{\circ}$ C.
6. not printed.

TOLERANCE ($\pm$)		1-4	4-16	16-63	63-250	250-1000	ANGLE	SCALE			REV.	01		
	(A)	0.05	0.07	0.1	0.2	0.3	$\pm$							
	B	0.10	0.20	0.3	0.5	0.8		UNIT	M/M	DATE	2002.12.13			
	C	0.25	0.35	0.5	0.7	1.5								
DRAW & DESIGN			DET.CHE		APPROVAL		MODEL NAME		MTD - 3500					
J.H.Park					I.W.Nam		PART NAME		Label, Ratig Model					
Telian Corporation							DWG.NO							

A M E N D	DATE	CODE	MEMO	SIGN
	2002.12.13		New Drawing	

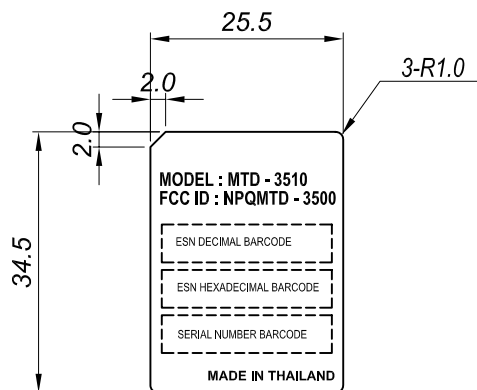

***NOTE : Unless otherwise specified.**

1. Material : Silver polyester 50μm.
2. Laminated.
3. Color : Text : Black (Indelible).
4. Adhesive : Acrylic solvent type (Permanent).
Permanent pressure sensitive with Note 5. requirement.
- 5 All material must be suitable for temp service range of : -10℃ to 60℃.
6. not printed.

TOLERANCE (±)		1—4	4—16	16—63	63—250	250—1000	ANGLE	SCALE			REV.	01
	(A)	0.05	0.07	0.1	0.2	0.3	±					
	B	0.10	0.20	0.3	0.5	0.8		UNIT	M/M	DATE	2002.12.13	
	C	0.25	0.35	0.5	0.7	1.5						
DRAW & DESIGN			DET.CHE		APPROVAL		MODEL NAME		MTD - 3500			
J.H.Park					I.W.Nam		PART NAME		Label, Ratig Model			
Telian  Telian Corporation							DWG.NO					