


LABEL POSITION INSTRUCTION

LABEL POSITION INSTRUCTION FOR COMCAST E4613421100 (XID PXD10ANI)

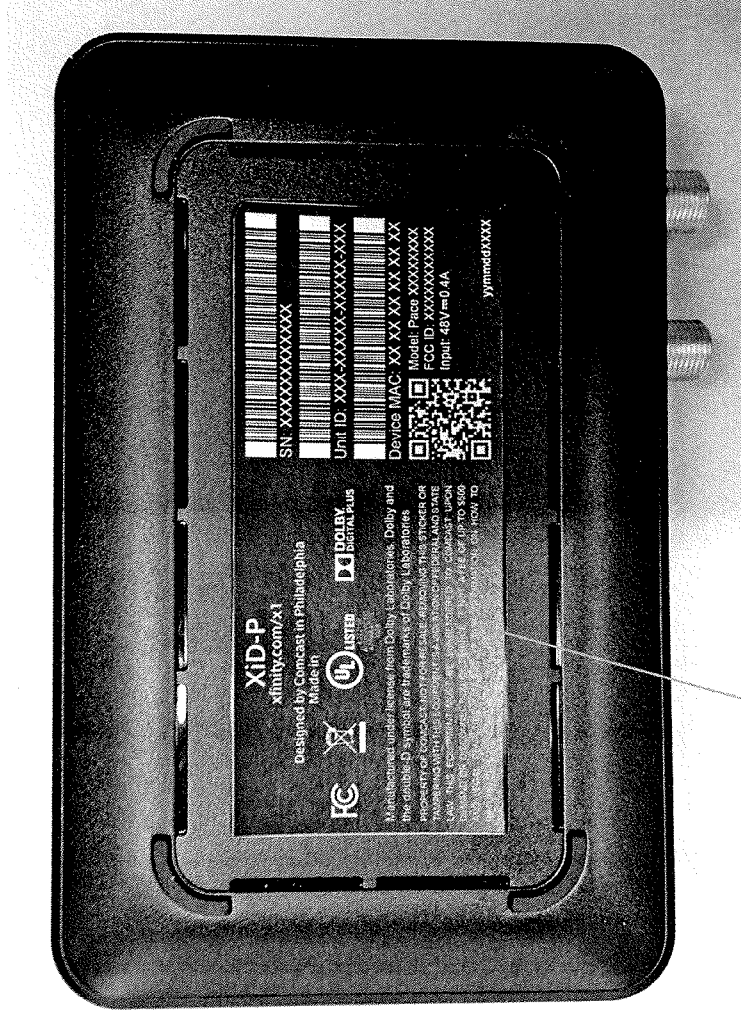

Position top section of PRODUCT label
E461-PXD10AN1-Product-Label-RevA as
squarely as possible in position shown.

Document Number	700-5340400
Drafted By	Nick Tonge
Date	2 April 2015
Sheet	1 of 3
Tech Pubs Approval	

First issue

Label with static, pre-printed text only



Label with example variable data.
Not for manufacture.



Notes:

- Barcodes shown are example, dummy barcodes for illustration only.
- The barcodes MUST have a minimum x-dimension of 5 mils (0.125mm). This can only be achieved by using a 600dpi printer.
- The barcodes must be as wide as possible across the width of the label, while still including enough quiet zone to the left and right of the barcode to ensure an accurate scan.
- Colons (:) and hyphens (-) are to be used only in human-readable serial numbers. Do not include these in the barcoded serial numbers.
- The barcodes are made up of a printed white "background", so the black label material forms the black bars of the barcodes.
- The QR Code to be printed white - no need to reverse print.
- The label system (label, ink and printing) shall be UL certified to UL 969.

Blank Label Part	STA-L000258	Ribbon	STA-CDNP001		E461-PXD10ANI-Product-Label-WHITE-PRINT					Rev
										A
Additional Notes				Model	PXD10ANI	Drafted By	Nick Tonge	Sheet 1 of 1		
				Model Part No	E4613421100	Date	05 Feb 2014			
First issue				Additional Graphics (if required)		Approved by		Signature	Date	
				DC Symbol.bmp		Tech Pubs	M Heron			
						Project Team	Jon Naylor			
						Approvals	Rob Turner			

LABEL POSITION INSTRUCTION

LABEL POSITION INSTRUCTION FOR COMCAST E4613421100 (XiD PXD10ANI)



Position PROPOSITION 65 label
298-3437200 as squarely as possible
in position shown.

Document Number 700-5340400

Sheet 3 of 3