

A RADIO TEST REPORT

FOR

PACE Plc

ON

**PXD01ANI (UHD DTA WITH MOCA)
MODEL: XiD-P**

DOCUMENT NO. TRA-025866-02-47-00A

HULL

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.

T +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com

www.tracglobal.com

TRaC Wireless Test Report : TRA-026457-45-00A

Applicant : Pace Plc

Apparatus : PXD01ANI (UHD DTA WITH MOCA)

Specification(s) : CFR47 Part 15.247

FCCID : NQ8PXD01ANI

Purpose of Test : Certification

Authorised by : **John Charters**
Digitally signed by John Charters
DN: cn=John Charters, o=TRAC
Global Ltd, ou=Radio Product
Manager,
email=john.charters@tracglobal.com,
c=GB
Date: 2015.05.12 15:23:01 +01'00'

: Radio Product Manager

Issue Date : 12th May 2015

Contents

Section 1:	Introduction	4
1.1	General	4
1.2	Tests Requested By	5
1.3	Manufacturer	5
1.4	Apparatus Assessed	5
1.5	Test Result Summary	6
1.6	Notes Relating To The Assessment	7
1.7	Deviations from Test Standards	7
Section 2:	Measurement Uncertainty	8
2.1	Measurement Uncertainty Values	8
Section 3:	Modifications	9
3.1	Modifications Performed During Assessment	9
Section 4	General Test Procedures	10
4.1	Radiated Test Setup and Procedures	10
4.2	AC Powerline Conducted Emissions Test Setup and Procedures	11
4.3	Antenna Port Conducted Emissions	11
4.4	Power Supply Variation	12
4.5	Thermal Variation	12
4.6	Time Domain Measurements	12
Appendix A:	Formal Emission Test Results	13
A1	6 dB Bandwidth	14
A2	Transmitter Peak Output Power	15
A3	Transmitter Power Spectral Density	16
A4	RF Antenna Conducted Spurious Emissions	17
A5	Radiated Electric Field Emissions within the Restricted Bands	20
A6	Antenna Gain	26
A7	Power Line Conducted Emissions	27
Appendix B:	Supporting Graphical Data	28
Appendix C:	Additional Test and Sample Details	66
Appendix D:	Additional Information	72
Appendix E:	Calculation of the duty cycle correction factor	73
Appendix F:	Photographs and Figures	74
Appendix G:	General SAR test reduction and exclusion guidance	77

Section 1:**Introduction****1.1 General**

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed at: TRaC Global [X]
Unit E
South Orbital Trading Park
Hedon Road
Hull, HU9 1NJ.
United Kingdom.

Telephone: +44 (0) 1482 801801
Fax: +44 (0) 1482 801806

TRaC Global []
Unit 1
Pendle Place
Skelmersdale
West Lancashire, WN8 9PN
United Kingdom

Telephone: +44 (0) 1695 556666
Fax: +44 (0) 1695 577077

Email: test@tracglobal.com
Web site: <http://www.tracglobal.com>

Tests performed by: A Longley

Report author: A Longley

This report must not be reproduced except in full without prior written permission from TRaC Global.

1.2 Tests Requested By

This testing in this report was requested by :

Pace Plc
Salts Mill
Victoria Road
Saltaire
West Yorkshire
BD18 3LF
United Kingdom

1.3 Manufacturer

As Above

1.4 Apparatus Assessed

The following apparatus was assessed between 18th March – 24th April 2015

PXD01ANI (UHD DTA WITH MOCA)

The above equipment contains a RFCE 2.4 GHz transmitter operating in the 2400 MHz - 2483.5 MHz band.

This report covers the Part 15 C transmitter requirements.

For emissions not related directly to the transmitter see TRaC test report TRA-026457-44-00A.

1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	Regulation	Measurement standard	Result
Radiated spurious emissions (Restricted bands)	Title 47 of the CFR: Part 15 Subpart C; 15.247	ANSI C63.10:2009 & KDB 558074	Pass
Conducted spurious emissions	Title 47 of the CFR: Part 15 Subpart C; 15.247	ANSI C63.10:2009 & KDB 558074	Pass
Occupied Bandwidth	Title 47 of the CFR : Part 15 Subpart C; 15.247(a)(2)	ANSI C63.10:2009& KDB 558074	Pass
Conducted Carrier Power	Title 47 of the CFR : Part 15 Subpart C; 15.247(b)	ANSI C63.10:2009 & KDB 558074	Pass
Power Spectral Density	Title 47 of the CFR : Part 15 Subpart C; 15.247(d)	ANSI C63.10:2009 & KDB 558074	Pass
AC Power conducted emissions	Title 47 of the CFR: Part 15 Subpart C; 15.207	ANSI C63.10:2009 & KDB 558074	Pass
Digital Modulation	Title 47 of the CFR: Part 15 Subpart C; 15.403	-	Pass
RF Safety	KDB 447498	-	Pass

KDB 558074 - 558074 D01 DTS Meas Guidance v03r02 June 14

Abbreviations used in the above table:

Mod	: Modification	ANSI	: American National Standards Institution
CFR	: Code of Federal Regulations	PLCE	: Power Line Conducted Emissions
REFE	: Radiated Electric Field Emissions		

1.6 Notes Relating To The Assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 17 to 23 °C
Humidity	: 45 to 75 %
Barometric Pressure	: 86 to 106 kPa

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

1.7 Deviations from Test Standards

There were no deviations from the standards tested to.

Section 2:**Measurement Uncertainty****2.1 Measurement Uncertainty Values**

For the test data recorded the following measurement uncertainty was calculated:

Parameter	Uncertainty
Radio frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	± 1.5 dB
Maximum frequency deviation: - within 300 Hz and 6 kHz of audio frequency - within 6 kHz and 25 kHz of audio frequency	± 5 % ± 3 dB
Adjacent channel power	± 3 dB
Conducted spurious emission of transmitter, valid up to 6 GHz	± 3 dB
Conducted emission of receivers	± 3 dB
Radiated emission of transmitter, valid up to 6 GHz	± 6 dB
Radiated emission of receiver, valid up to 6 GHz	± 6 dB
RF level uncertainty for a given BER	± 1.5 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	± 10 %

Section 3:

Modifications

3.1 Modifications Performed During Assessment

No modifications were performed during the assessment

Section 4

General Test Procedures

4.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst case determined for function, operation, orientation etc for both vertical and horizontal polarisations

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

For devices with intentional emissions below 30 MHz, a shielded loop antenna is used as the test antenna. It is placed at a 1 meter receive height and appropriate low frequency magnetic field extrapolation to the regulatory limit distance is employed. The EUT is rotated through 360° in the azimuth.

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360° in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Where regulations allow for direct measurement of field strength, power values measured on the test receiver / analyzer are converted to dBuV/m at the regulatory distance, using:

$$FS = PR + AF + CL - PA + KG + DC - CF \text{ (dBuV/m)}$$

Where:

PR is the power recorded on receiver / spectrum analyzer (dBuV),

AF is the test antenna factor in dB/m,

CL is the cable loss in dB,

PA is the pre-amplifier gain dB (when applicable),

DC is duty correction factor (when applicable) in dB, and

CF is a distance correction (employed only for measurements at alternate distance to limit) in dB.

This field strength value is then compared with the regulatory limit.

If effective radiated power (ERP) or effective isotropic radiated power (EIRP) is required, it is computed as per ANSI C63.10

$$P = \frac{(Ed)^2}{30G}$$

Where

P is the power, in W

E is the measured peak field strength, in V/m

d is the distance at which the measurement was made, in m

G is the numeric gain of the radiating element

If the gain of the radiating element is not known, then either the effective radiated power (ERP) or the effective isotropic radiated power (EIRP) may be calculated from the measured peak field strength, by using either $G = 1.64$ or $G = 1$, respectively.

4.2 AC Powerline Conducted Emissions Test Setup and Procedures

AC Powerline Conducted Emissions from the EUT are checked first by preview scans with Peak and average detectors covering both live and neutral lines. A spectrum analyser is used to determine if any periodic emissions are present. Preview scans are performed in standby or receive mode if the device is subject to these requirements. For transmit mode of operation the device is set to one of the following modes.

- Transmitting operating at full power (single mode device)
- Transmitting at freq / modulation that gives highest output power (multi mode device)
- Transmitter operating in normal TX mode (e.g. FHSS, TDMA etc)

Formal measurements using the correct detector(s) and bandwidth are made on frequencies identified from the preview scans.

Battery Power devices are not subject to power line conducted emissions measurements when it is powered solely by its internal battery.

4.3 Antenna Port Conducted Emissions

Antenna port conducted emissions can include, but are not limited to, Carrier power, Power Spectral Density, Occupied bandwidth and spurious emission.

Spurious Emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked to identify frequencies to perform formal measurements on.

Formal measurements are made on frequencies identified from the preview scans and fundamental emission(s). Measurements are made using the correct instrumentation (inc. power meter, receiver, spectrum analyser) that operate with the required detector(s) and bandwidth.

Care is taken to ensure the measurement instrument is not overloaded by the presence of the transmitted signal by use of external attenuation and filtering where required.

Measured levels are corrected for cables, attenuators, and filters. If applicable, for the specific measurement, antenna gain is also taken into account.

4.4 Power Supply Variation

Tests at extreme supply voltages are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

In the case the EUT is designed for operation from a lead-acid battery power source, the extreme test voltages are evaluated between 90% and 130% of the nominal battery voltage declared by the manufacturer.

For float charge applications using gel-cell type batteries, extreme test voltages are evaluated between 85% and 115% of the nominal battery voltage declared.

For all battery operated equipment, worst case intentional and spurious emissions are re-checked employing a new (fully charged) battery.

4.5 Thermal Variation

Tests at extreme temperatures are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

Tests are performed at the upper and lower extremes as required and typically at 10° steps between.

Before any temperature measurements are made, the equipment is allowed to reach a thermal balance in the test chamber.

4.6 Time Domain Measurements

Time domain measurements are made for (but not limited to) use in duty cycle correction, to ensure compliance with time restrictions on certain types of devices.

If measurements of a transmitter's on time are required these are performed with a spectrum analyser in the time domain or with an oscilloscope and RF detector. If time on a specific frequency is required (e.g. FHSS timing) the measurement can only be made with a spectrum analyser.

The triggering, timescale and amplitude settings are adjusted according to the signal to be measured on a case by case basis.

For devices with sharp rise/fall times measurements are made between RF reaching full power (T_{on}) and RF dropping to the measurement instrument noise floor (T_{off}). For longer rise times measurements are made for T_{on} and T_{off} at the RF level required by the occupied bandwidth measurement (e.g. 6 dB, 20 dB etc).

Appendix A:**Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
		ATS	: Alternative Test Site
EUT	: Equipment Under Test		
SE	: Support Equipment	Ref	: Reference
		Freq	: Frequency
L	: Live Power Line		
N	: Neutral Power Line	MD	: Measurement Distance
E	: Earth Power Line	SD	: Spec Distance
Pk	: Peak Detector	Pol	: Polarisation
QP	: Quasi-Peak Detector	H	: Horizontal Polarisation
Av	: Average Detector	V	: Vertical Polarisation
CDN	: Coupling & decoupling network		

A1 6 dB Bandwidth

Title 47 of the CFR: Part 15 Subpart (c) 15.247(a)(2) requires the measurement of the bandwidth of the transmission between the -6 dB points on the transmitted spectrum.

Test Details:	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) 15.247(a)(2)
Measurement standard	ANSI C63.10, KDB 558074
EUT sample number	S02
Modification state	0
SE in test environment	S04
SE isolated from EUT	TRA-025866S14
EUT set up	Refer to Appendix C
Temperature	25°C

Antenna 0			
Channel Frequency (MHz)	Measured 6 dB Bandwidth (kHz)	Limit	Result
2425.0 MHz	1655	> 500kHz	Pass
2450.0 MHz	1640	> 500kHz	Pass
2475.0 MHz	1651	> 500kHz	Pass

Antenna 1			
Channel Frequency (MHz)	Measured 6 dB Bandwidth (kHz)	Limit	Result
2425.0 MHz	1651	> 500kHz	Pass
2450.0 MHz	1591	> 500kHz	Pass
2475.0 MHz	1669	> 500kHz	Pass

Measurements made using guidance from 558074 D01 DTS Meas Guidance v03r02 June 14

Plots of the 6 dB bandwidth are contained in Appendix B of this test report.

Conducted measurements were performed with a temporary antenna connector provided by the client.

A2 Transmitter Peak Output Power

Carrier power was verified with the EUT transmitting on its lowest, centre and highest carrier frequency in turn.

Test Details:	
Regulation	Title 47 of the CFR: Part15 Subpart (c) 15.247(b)(3)
Measurement standard	ANSI C63.10, KDB 558074
EUT sample number	S02
Modification state	0
SE in test environment	S04
SE isolated from EUT	TRA-025866S14
EUT set up	Refer to Appendix C
Temperature	25 °C

Antenna 0				
Channel Frequency (MHz)	Conducted Peak Carrier Power (dBm)	Conducted Peak Carrier Power (W)	Limit (W)	Result
2425.0 MHz	2.0	0.0016	1	Pass
2450.0 MHz	1.9	0.0015	1	Pass
2475.0 MHz	1.7	0.0015	1	Pass

Antenna 1				
Channel Frequency (MHz)	Conducted Peak Carrier Power (dBm)	Conducted Peak Carrier Power (W)	Limit (W)	Result
2425.0 MHz	1.9	0.0015	1	Pass
2450.0 MHz	1.7	0.0015	1	Pass
2475.0 MHz	1.5	0.0014	1	Pass

Measurements made using guidance from 558074 D01 DTS Meas Guidance v03r02 June 14

Plots of the transmitter peak output power are contained in Appendix B of this test report.

Conducted measurements were performed with a temporary antenna connector provided by the client.

A3 Transmitter Power Spectral Density

Transmitter Power Spectral Density was verified with the EUT transmitting on its lowest, centre and highest carrier frequency in turn.

Test Details:	
Regulation	Title 47 of the CFR: Part15 Subpart (c) 15.247(b)(3)
Measurement standard	ANSI C63.10, KDB 558074
EUT sample number	S02
Modification state	0
SE in test environment	S04
SE isolated from EUT	TRA-025866S14
EUT set up	Refer to Appendix C
Temperature	25 °C

Antenna 0			
Channel Frequency (MHz)	Conducted Peak Power Spectral Density (dBm)	Limit (dBm/3kHz)	Result
2425.0 MHz	-1.27	8	Pass
2450.0 MHz	-1.52	8	Pass
2475.0 MHz	-1.68	8	Pass

Antenna 1			
Channel Frequency (MHz)	Conducted Peak Power Spectral Density (dBm)	Limit (dBm/3kHz)	Result
2425.0 MHz	-1.48	8	Pass
2450.0 MHz	-1.66	8	Pass
2475.0 MHz	-1.78	8	Pass

Measurements made using guidance from 558074 D01 DTS Meas Guidance v03r02 June 14

Plots of the power spectral density are contained in Appendix B of this test report.

Conducted measurements were performed with a temporary antenna connector provided by the client.

A4 RF Antenna Conducted Spurious Emissions

Measurement of conducted spurious emissions at the antenna port was performed using a peak detector with the RBW set to 100kHz and the VBW>RBW. Frequencies were scanned up through to the 10th harmonic with the EUT transmitting on its lowest, centre and highest carrier frequency in turn.

Test Details: Antenna 0	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.247(d)
Measurement standard	ANSI C63.10, KDB 558074
Frequency range	9 kHz to 25 GHz
EUT sample number	S02
Modification state	0
SE in test environment	S04
SE isolated from EUT	TRA-025866S14
EUT set up	Refer to Appendix C
Temperature	25 °C

The worst case conducted emission measurements at the antenna port are listed below:

Antenna 0						
Ref No.	Measured Freq (MHz)	Det.	Is measured Frequency within the Restricted bands (Y/N)	Measured Peak Conducted power (RBW =100kHz) (dBuV)	15.247(d) Limit (dBuV)	Summary
2425.0 MHz						
No Significant Emissions Within 20 dB of Limit						
2450.0 MHz						
No Significant Emissions Within 20 dB of Limit						
2475.0 MHz						
No Significant Emissions Within 20 dB of Limit						

Measurements made using guidance from 558074 D01 DTS Meas Guidance v03r02 June 14

Plots of the conducted spurious emissions are contained in Appendix B of this test report.

Conducted measurements were performed with a temporary antenna connector provided by the client.

Test Details: Antenna 1	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.247(d)
Measurement standard	ANSI C63.10, KDB 558074
Frequency range	9 kHz to 25 GHz
EUT sample number	S02
Modification state	0
SE in test environment	S04
SE isolated from EUT	TRA-025866S14
EUT set up	Refer to Appendix C
Temperature	25 °C

The worst case conducted emission measurements at the antenna port are listed below:

Antenna 1						
Ref No.	Measured Freq (MHz)	Det.	Is measured Frequency within the Restricted bands (Y/N)	Measured Peak Conducted power (RBW =100kHz) (dBuV)	15.247(d) Limit (dBuV)	Summary
2425.0 MHz						
No Significant Emissions Within 20 dB of Limit						
2450.0 MHz						
No Significant Emissions Within 20 dB of Limit						
2475.0 MHz						
No Significant Emissions Within 20 dB of Limit						

Measurements made using guidance from 558074 D01 DTS Meas Guidance v03r02 June 14

Plots of the conducted spurious emissions are contained in Appendix B of this test report.

Conducted measurements were performed with a temporary antenna connector provided by the client.

Notes:

1. The conducted emission limit are defined in 47CFR15.205(a) are based on a transmitted carrier level of 15.247(b). With the EUT transmitting on its lowest, centre and highest carrier frequencies in turn, emissions from the EUT are required to be 20 dB below the level of the highest fundamental as measured within a 100 kHz RBW in accordance with 15.247(d) using a peak detector.
2. The RBW = 100 kHz, Video bandwidth (VBW) > RBW and the radio spectrum was investigated up to the 10th harmonic in accordance 15.33 (a)(1).
3. The measurements at 2400 MHz and 2483.5 MHz were made to ensure band edge compliance.
4. The carrier level was measured whilst varying the supply voltage between 85% and 105% of the nominal supply voltage as required by 15.31(e). No variation in carrier level was observed.

The limit outside the restricted band in 100 kHz RBW is defined using the following formula in accordance with 15.247(d):

$$\text{The limit in 100 kHz RBW} = (\text{Maximum Peak Conducted Carrier}) - 20\text{dB}$$

Where:

The maximum peak conducted power was measured using a peak power meter. Please refer to section A1 of this test report.

A5 Radiated Electric Field Emissions within the Restricted Bands

Preliminary scans were performed using a peak detector with the RBW = 100kHz. The radiated electric field emission test applies to spurious emissions and harmonics that fall within the restricted bands listed in Section 15.205. The maximum permitted field strength is listed in Section 15.209. The EUT was set to transmit on its lowest, centre and highest carrier frequency.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site :

☐

3m alternative test site :

☒

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details: Antenna 0	
Regulation	Title 47 of the CFR, Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.10
Frequency range	30MHz – 25GHz
EUT sample number	S08, S03
Modification state	0
SE in test environment	TRA-025866: S17
SE isolated from EUT	S07, TRA-025866: S03, S04, S11, S14, S15, S19, S20, S22
EUT set up	Refer to Appendix C
Temperature	26 °C
Photographs (Appendix F)	1 & 2

The worst case radiated emission measurements for spurious emissions and harmonics that fall within the restricted bands are listed below:

Antenna 0									
DET	FREQ. (MHz)	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT F ACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACT (dB)	FIELD ST'GH (µV/m)	LIMIT (µV/m)
2425.0 MHz									
Pk	1483.513	68.30	3.7	25.9	34.74	63.2	-9.5	484.17	5000
Av	1483.513	60.00	3.7	25.9	34.74	54.9	-9.5	186.21	500
Pk	4450.529	58.09	7.9	32.2	34.73	63.5	-9.5	501.19	5000
Av	4450.529	49.06	7.9	32.2	34.73	54.4	-9.5	175.79	500
Pk	4848.962	56.81	7.8	33.1	34.70	63.0	-9.5	473.15	5000
Av	4848.962	49.00	7.8	33.1	34.70	55.2	-9.5	192.75	500
Pk	7273.417	54.73	10.4	36.5	34.93	66.7	-9.5	724.44	5000
Av	7273.417	46.12	10.4	36.5	34.93	58.1	-9.5	269.15	500
2450.0 MHz									
Pk	1483.449	68.61	3.7	25.9	34.74	63.5	-9.5	501.19	5000
Av	1483.449	61.43	3.7	25.9	34.74	56.3	-9.5	218.78	500
Pk	4450.433	58.64	7.9	32.2	34.73	64.0	-9.5	530.88	5000
Av	4450.433	49.77	7.9	32.2	34.73	55.1	-9.5	190.55	500
Pk	4898.978	56.08	8.2	33.3	34.69	62.9	-9.5	467.74	5000
Av	4898.978	48.32	8.2	33.3	34.69	55.1	-9.5	190.55	500
Pk	7348.401	53.11	10.5	36.7	34.95	65.4	-9.5	623.73	5000
Av	7348.401	43.69	10.5	36.7	34.95	55.9	-9.5	208.93	500
2475.0 MHz									
Pk	1483.529	68.63	3.7	25.9	34.74	63.5	-9.5	501.19	5000
Av	1483.529	61.55	3.7	25.9	34.74	56.4	-9.5	221.31	500
Pk	4450.529	58.71	7.9	32.2	34.73	64.1	-9.5	537.03	5000
Av	4450.529	49.47	7.9	32.2	34.73	54.8	-9.5	184.08	500
Pk	4948.910	61.28	8.3	33.4	34.69	68.3	-9.5	870.96	5000
Av	4948.910	54.27	8.3	33.4	34.69	61.3	-9.5	389.05	500
Pk	7423.481	50.71	10.4	36.8	34.96	62.6	-9.5	451.86	5000
Av	7423.481	49.47	10.4	36.8	34.96	51.6	-9.5	127.35	500

Measurements made using guidance from 558074 D01 DTS Meas Guidance v03r02 June 14
 For emissions not related directly to the transmitter see TRaC test report TRA-026457-44-00A.

Test Details: Antenna 1	
Regulation	Title 47 of the CFR, Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.10
Frequency range	30MHz – 25GHz
EUT sample number	S08, S03
Modification state	0
SE in test environment	TRA-025866: S17
SE isolated from EUT	S07, TRA-025866: S03, S04, S11, S14, S15, S19, S20, S22
EUT set up	Refer to Appendix C
Temperature	26 °C
Photographs (Appendix F)	1 & 2

The worst case radiated emission measurements for spurious emissions and harmonics that fall within the restricted bands are listed below:

Antenna 1									
DET	FREQ. (MHz)	MEAS Rx (dBμV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBμV/m)	EXTRAP FACT (dB)	FIELD ST'GH (μV/m)	LIMIT (μV/m)
2425.0 MHz									
Pk	1483.497	68.49	3.7	25.9	34.74	63.4	-9.5	495.45	5000
Av	1483.497	60.94	3.7	25.9	34.74	55.8	-9.5	206.54	500
Pk	4450.545	57.83	7.9	32.2	34.73	63.2	-9.5	484.17	5000
Av	4450.545	48.75	7.9	32.2	34.73	54.1	-9.5	169.82	500
Pk	4848.862	65.09	7.8	33.1	34.70	71.3	-9.5	1230.27	5000
Av	4848.862	65.09	7.8	33.1	34.70	45.3*	-9.5	61.67	500
Pk	7273.462	53.37	10.4	36.5	34.93	65.3	-9.5	616.60	5000
Av	7273.462	44.1	10.4	36.5	34.93	56.1	-9.5	213.80	500
2450.0 MHz									
Pk	1483.510	68.04	3.7	25.9	34.74	62.9	-9.5	467.74	5000
Av	1483.510	60.65	3.7	25.9	34.74	55.5	-9.5	199.53	500
Pk	4450.513	57.97	7.9	32.2	34.73	63.3	-9.5	489.78	5000
Av	4450.513	49.06	7.9	32.2	34.73	54.4	-9.5	175.79	500
Pk	4898.942	64.60	8.2	33.3	34.69	71.4	-9.5	1244.51	5000
Av	4898.942	64.60	8.2	33.3	34.69	45.4*	-9.5	62.37	500
Pk	7348.429	54.35	10.5	36.7	34.95	66.6	-9.5	716.14	5000
Av	7348.429	45.41	10.5	36.7	34.95	57.7	-9.5	257.04	500
2475.0 MHz									
Pk	1483.510	67.20	3.7	25.9	34.74	62.1	-9.5	426.58	5000
Av	1483.510	59.24	3.7	25.9	34.74	54.1	-9.5	169.82	500
Pk	4450.513	58.27	7.9	32.2	34.73	63.6	-9.5	506.99	5000
Av	4450.513	49.78	7.9	32.2	34.73	55.2	-9.5	192.75	500
Pk	4948.958	62.86	8.3	8.3	34.69	69.9	-9.5	1047.13	5000
Av	4948.958	62.86	8.3	8.3	34.69	43.9*	-9.5	52.48	500
Pk	7423.478	53.57	10.4	10.4	34.96	65.8	-9.5	653.13	5000
Av	7423.478	44.60	10.4	10.4	34.96	56.8	-9.5	231.74	500

* See note 4

Measurements made using guidance from 558074 D01 DTS Meas Guidance v03r02 June 14
For emissions not related directly to the transmitter see TRaC test report TRA-026457-44-00A.

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Measurements at 2400 & 2483.5 MHz were made to ensure band edge compliance.
- 4 Where noted a duty cycle correction of -26dB has been applied. In normal operation the radio transmitter will transmit a 5ms acknowledgement in response to a manual operation of the remote control, it has been assumed that there will be a maximum of one operation in any 100ms period giving a maximum duty cycle of 5% for the purposes of duty cycle correction.
- 5 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 6 For Frequencies below 1 GHz, RBW= 100 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:
 Peak RBW=VBW= 1MHz
 Average RBW=VBW= 1MHz

These settings as per ANSI C63.10

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 15 Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits (47 CFR Part 15: Clause 15.209) for emissions falling within the restricted bands defined in 15.205(a):

Frequency of emission (MHz)	Field strength $\mu\text{V/m}$	Measurement Distance m	Field strength $\text{dB}\mu\text{V/m}$
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

Notes:

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

The results displayed take into account applicable antenna factors and cable losses.

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels				✓
Effect of EUT internal configuration on emission levels		✓		
Effect of Position of EUT cables & samples on emission levels	✓			
(i) Parameter defined by standard and / or single possible, refer to Appendix C (ii) Parameter defined by client and / or single possible, refer to Appendix C (iii) Parameter had a negligible effect on emission levels, refer to Appendix C (iv) Worst case determined by initial measurement, refer to Appendix C				

A6 Antenna Gain

The maximum antenna gain for the antenna types to be used with the EUT, as declared by the client, is 2 dBi.

From: Stephen Cross [mailto:Stephen.Cross@pace.com]

Sent: 24 April 2015 15:19

To: Adam Longley

Cc: Robert Turner; Joseph Ryan; Gary Burns

Subject: RE: TRA-026457 XID info

Hi Adam.

Antenna gain is 2dBi for both antennas. The other information should be on the RF104 document returned to Martin Baker.

Regards

Steve

A7 Power Line Conducted Emissions

Preview power line conducted emission measurements were performed with a peak detector in a screened room. The effect of the EUT set-up on the measurements is summarised in note (b). Where applicable formal measurements of the emissions were performed with a peak, average and/or quasi peak detector. The EUT was set to transmit on its lowest, centre and highest carrier frequency in turn. The formal measurements are detailed below:

Test Details:	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.207
Measurement standard	ANSI C63.10
Frequency range	150kHz to 30MHz
EUT sample number	S08, S03
Modification state	0
SE in test environment	TRA-025866: S17
SE isolated from EUT	S07, TRA-025866: S03, S04, S11, S14, S15, S19, S20, S22
EUT set up	Refer to Appendix C

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	48.2	15000.0	0.200	GND	N	10.2	17.8	66.0
0.230000	43.7	15000.0	10.000	GND	L1	10.1	18.8	62.4
0.310000	42.8	15000.0	10.000	GND	L1	10.2	17.2	60.0
0.460000	40.0	15000.0	10.000	GND	N	10.1	16.7	56.7
1.680000	38.7	15000.0	10.000	GND	L1	10.1	17.3	56.0
10.165000	37.4	15000.0	10.000	GND	N	10.6	22.6	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	32.3	15000.0	10.000	GND	N	10.2	23.7	56.0
0.230000	33.7	15000.0	10.000	GND	L1	10.1	18.7	52.4
0.310000	30.1	15000.0	10.000	GND	L1	10.2	19.9	50.0
0.460000	31.9	15000.0	10.000	GND	N	10.1	14.8	46.7
1.680000	31.6	15000.0	10.000	GND	L1	10.1	14.4	46.0
10.165000	31.0	15000.0	10.000	GND	N	10.6	19.0	50.0


Appendix B:**Supporting Graphical Data**

This appendix contains graphical data obtained during testing.


Notes:

- (a) The radiated electric field emissions and conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.


6dB Bandwidth

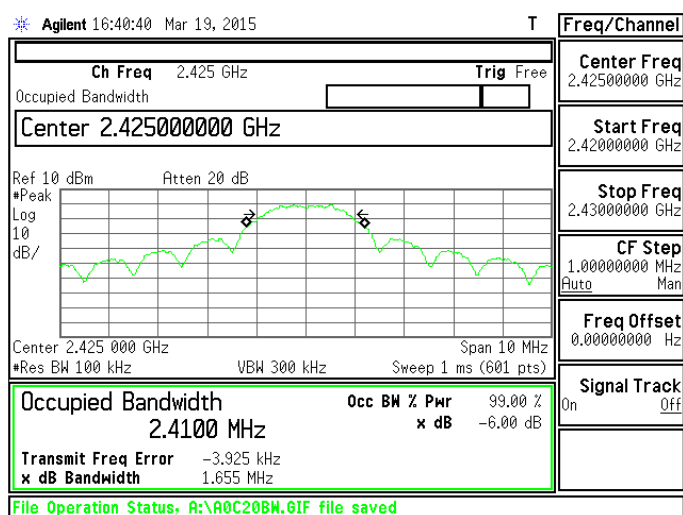


Antenna 0 2425.0 MHz

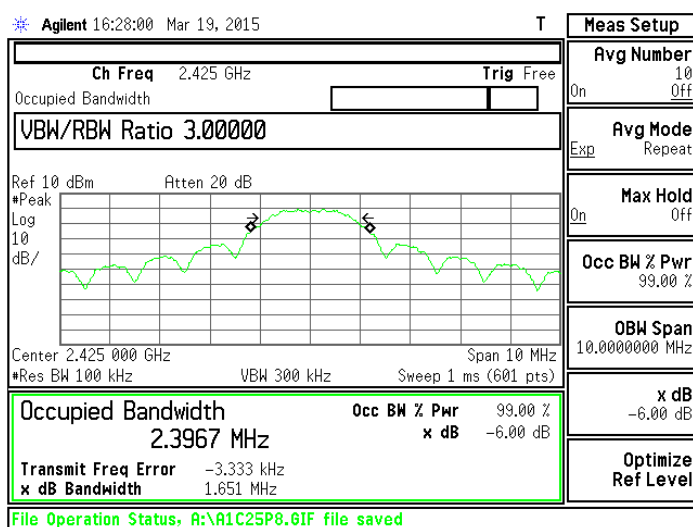


Antenna 1 2425.0 MHz

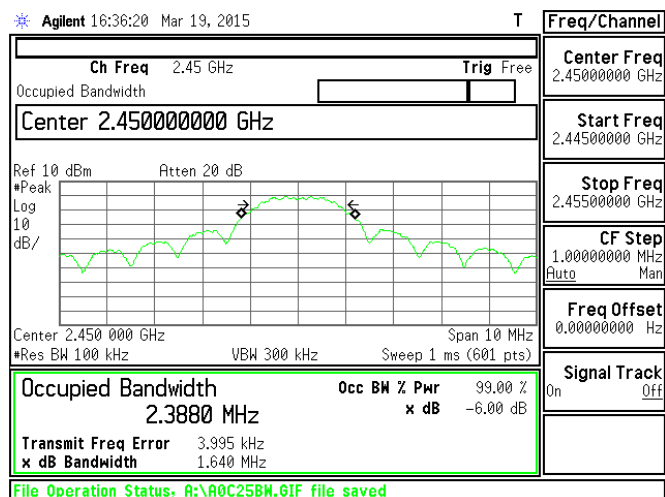


Antenna 0 2450.0 MHz

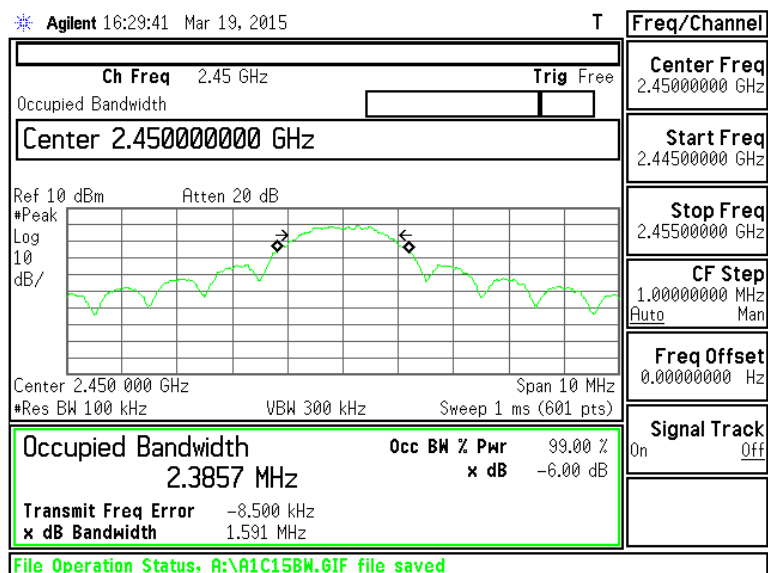

Antenna 1 2450.0 MHz

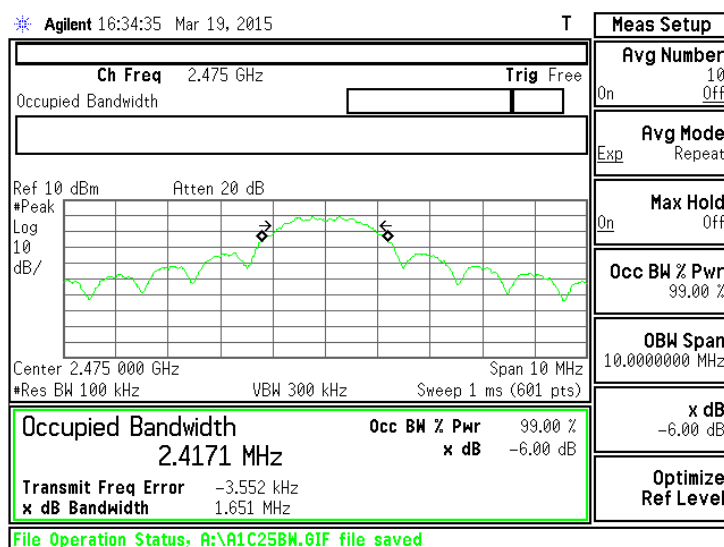


Antenna 0 2475.0 MHz

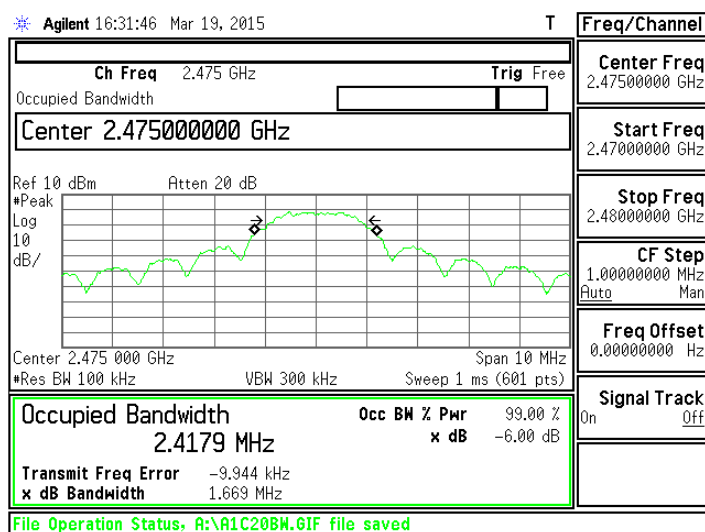


Antenna 1 2475.0 MHz

Conducted Spurious emissions


Antenna 0 2425.0 MHz

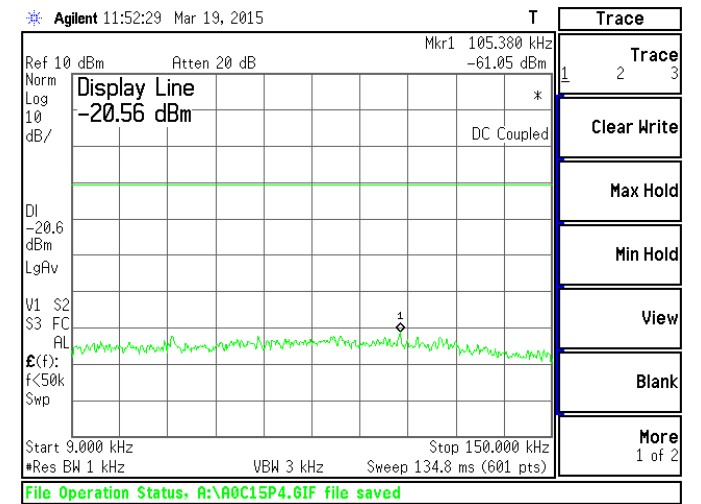


9 kHz – 150 kHz

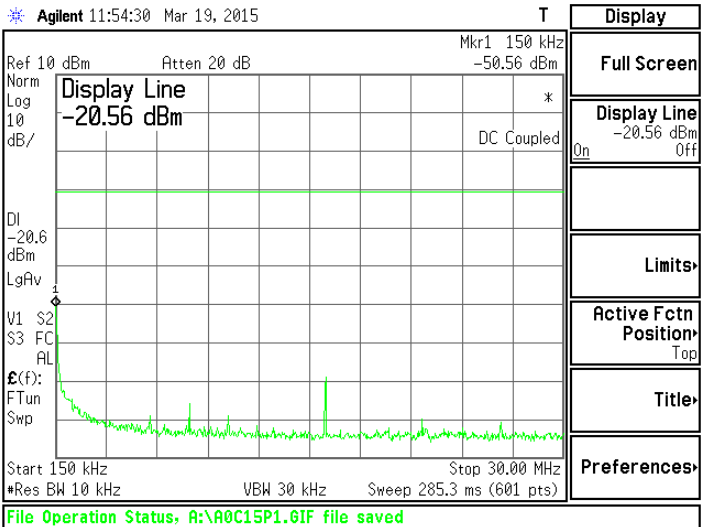


150kHz to 30 MHz

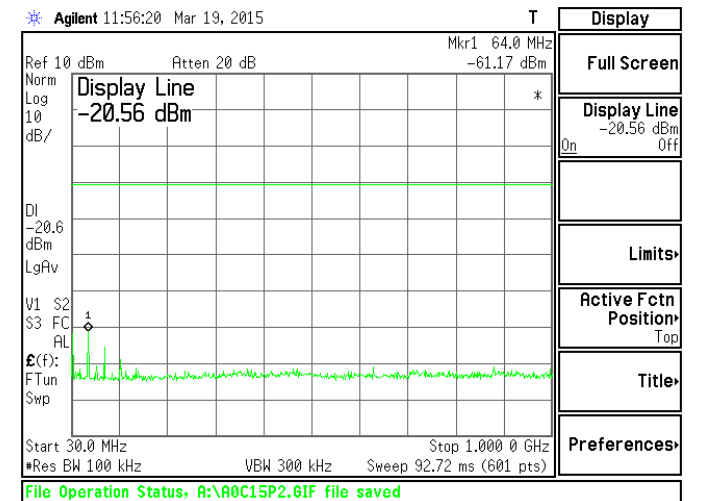


30 MHz – 1 GHz

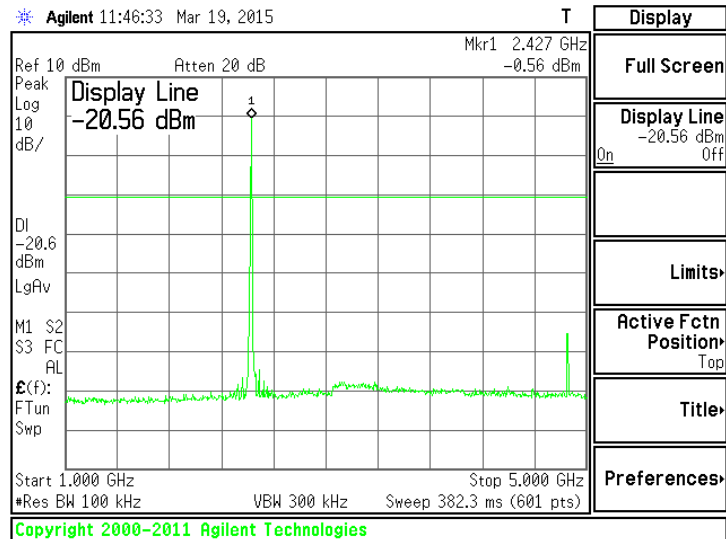

1 GHz – 5 GHz

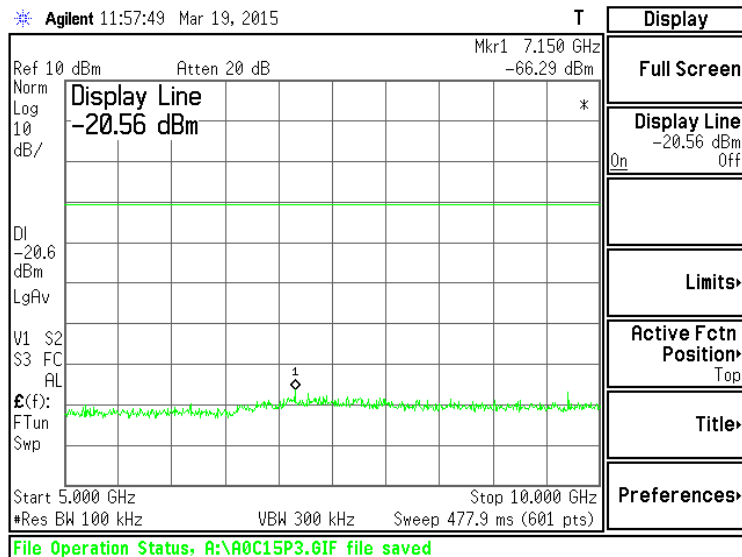


5 GHz – 10 GHz

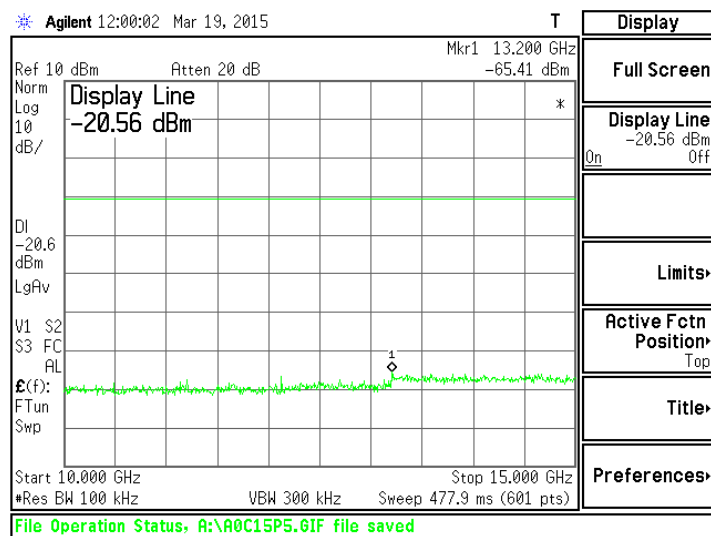


10 GHz – 15 GHz

Conducted Spurious emissions

Antenna 0 2425.0 MHz

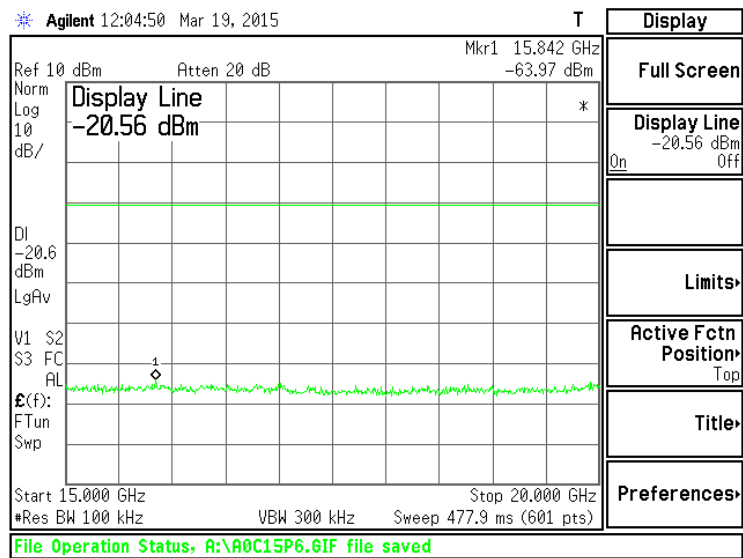


15 GHz – 20 GHz

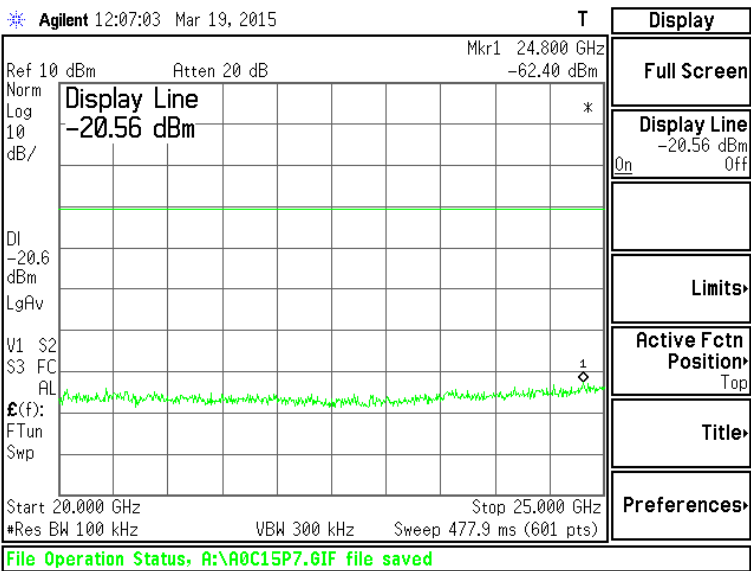


20 GHz – 25 GHz

Conducted Spurious emissions


Antenna 0 2450.0 MHz

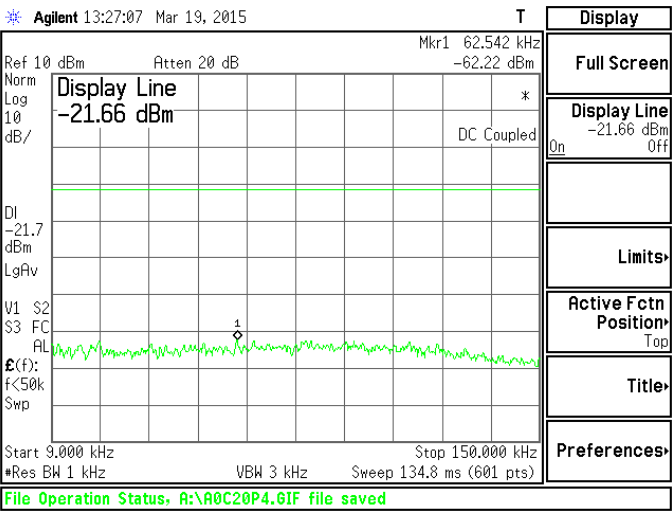

9 kHz – 150 kHz

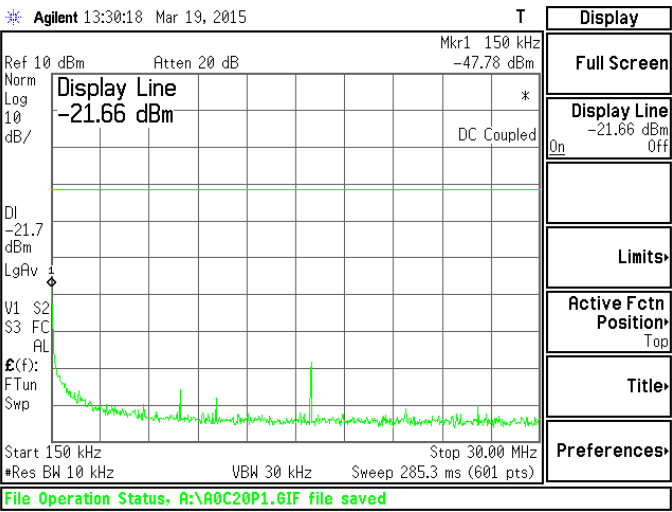


150kHz to 30 MHz

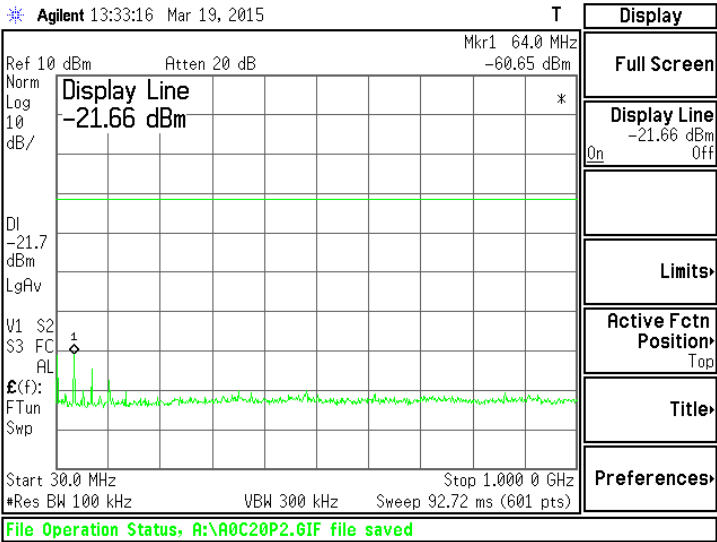


30 MHz – 1 GHz

Conducted Spurious emissions


Antenna 0 2450.0 MHz

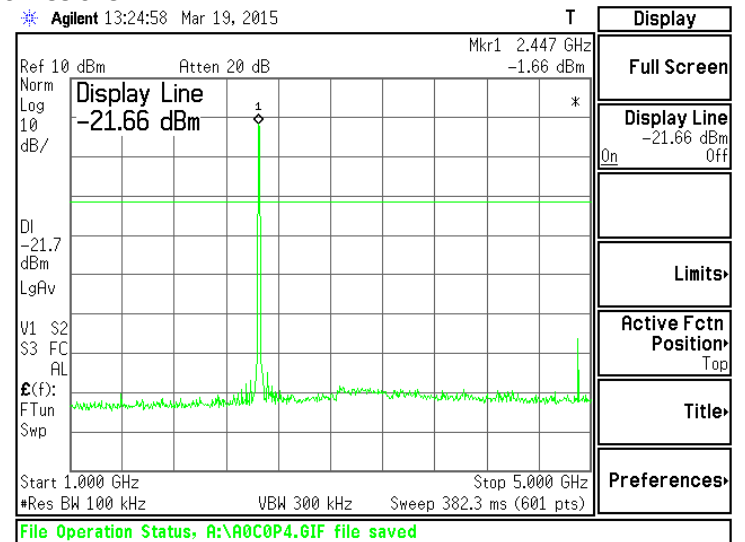

1 GHz – 5 GHz

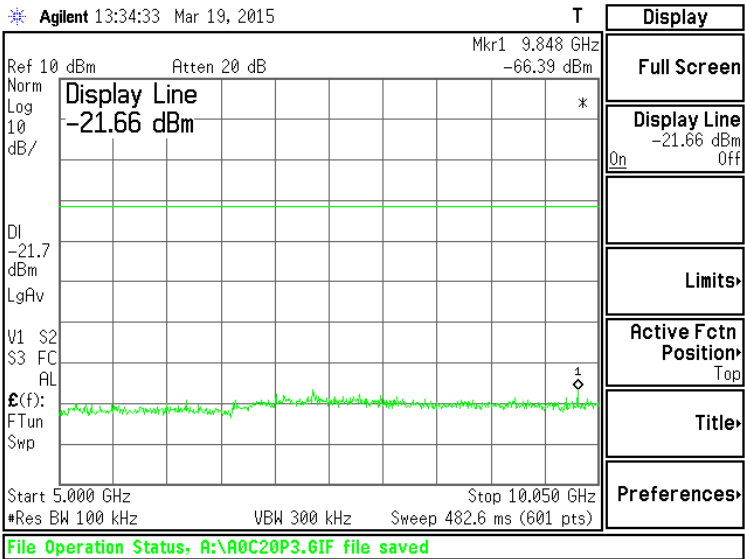


5 GHz – 10 GHz

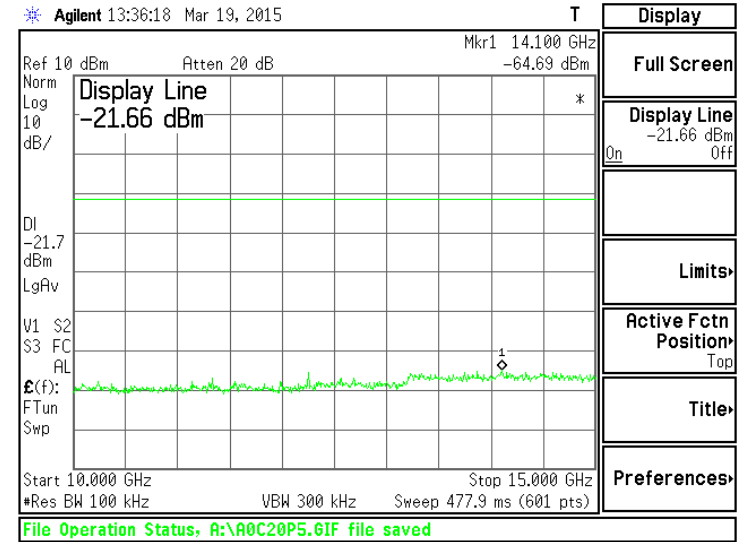


10 GHz – 15 GHz

Conducted Spurious emissions

Antenna 0 2450.0 MHz

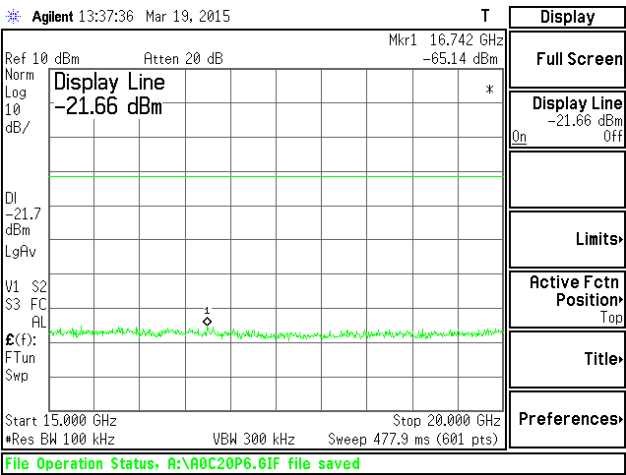


15 GHz – 20 GHz

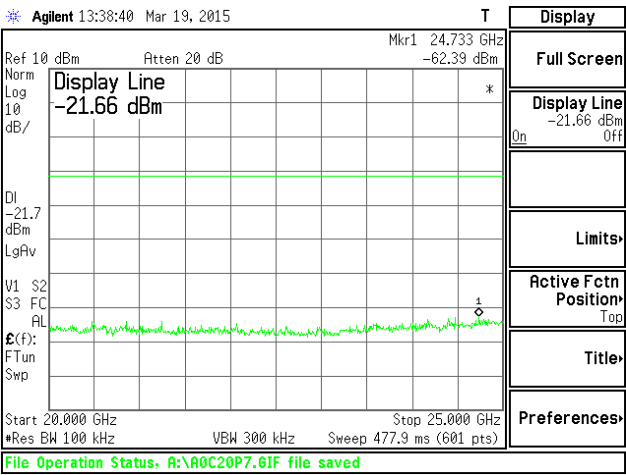

20 GHz – 25 GHz


Conducted Spurious emissions

Antenna 0 2475.0 MHz

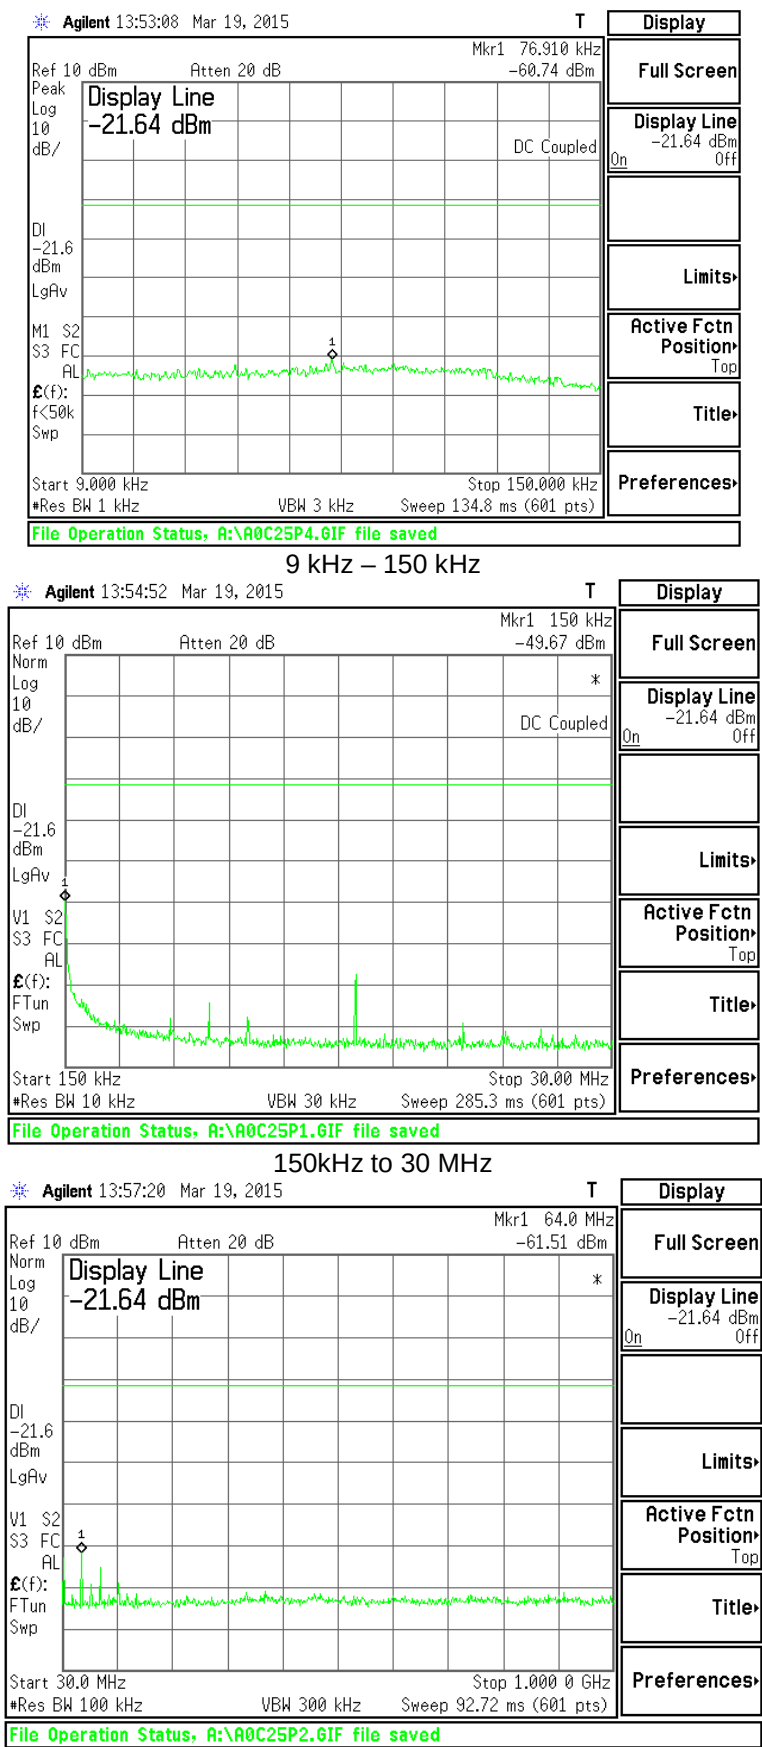


Conducted Spurious emissions


Antenna 0 2475.0 MHz

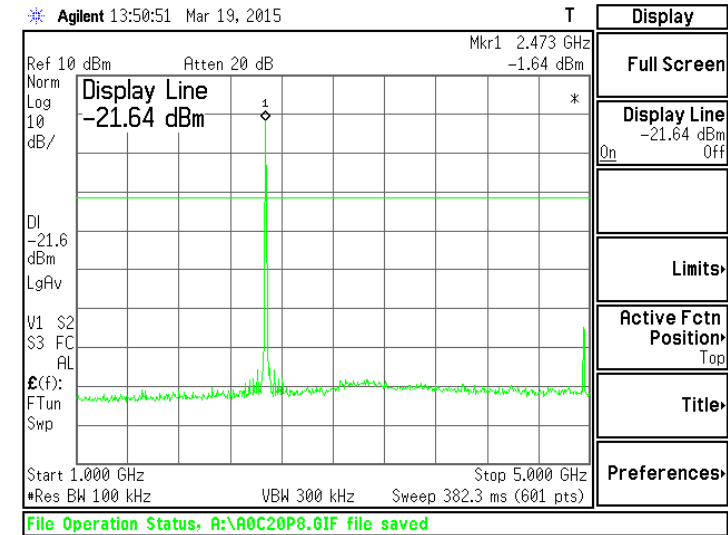

1 GHz – 5 GHz

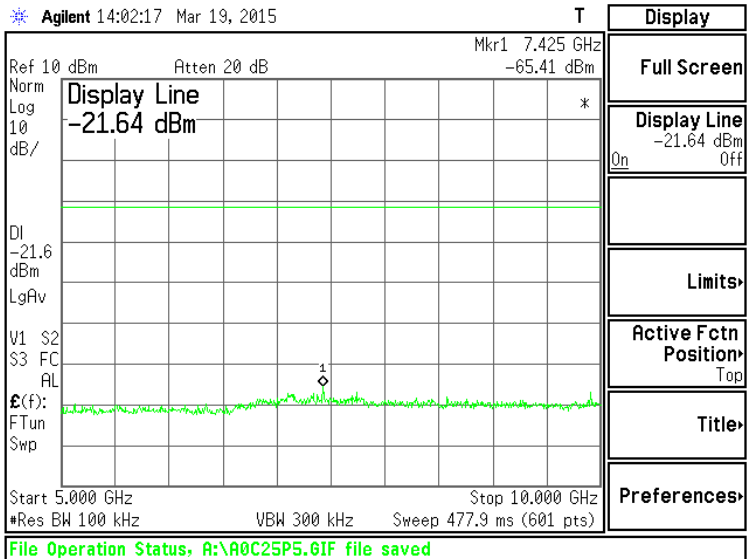


5 GHz – 10 GHz

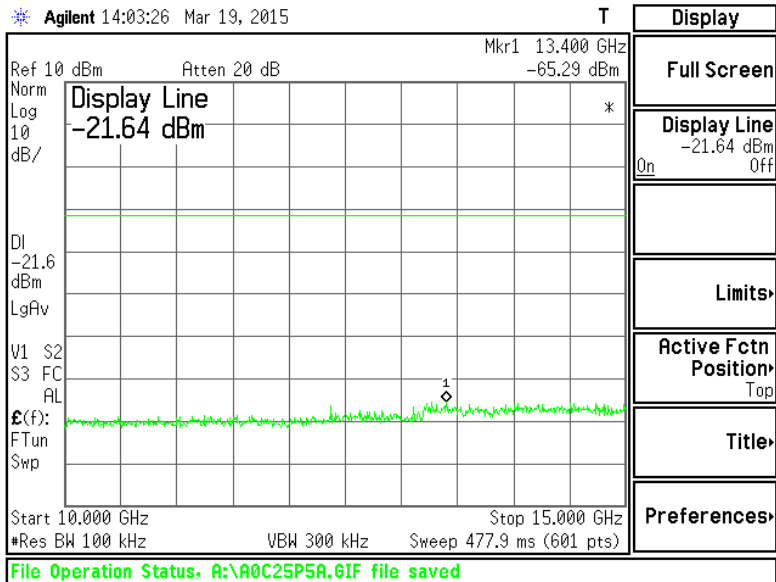


10 GHz – 15 GHz

Conducted Spurious emissions

Antenna 0 2475.0 MHz

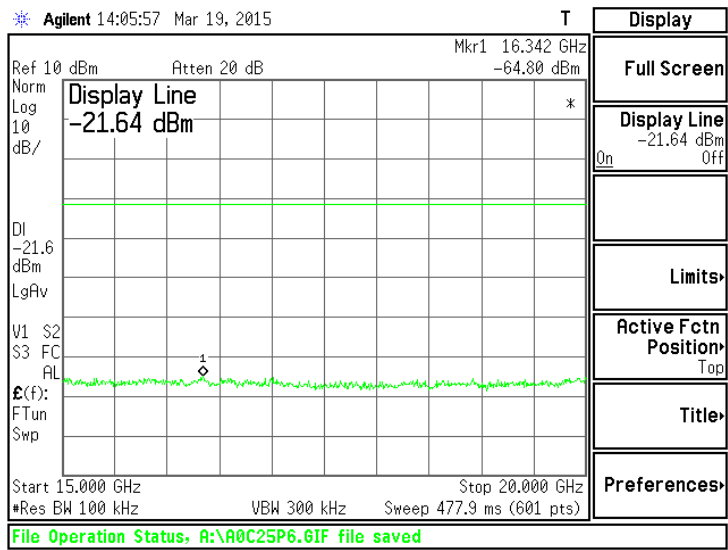




15 GHz – 20 GHz

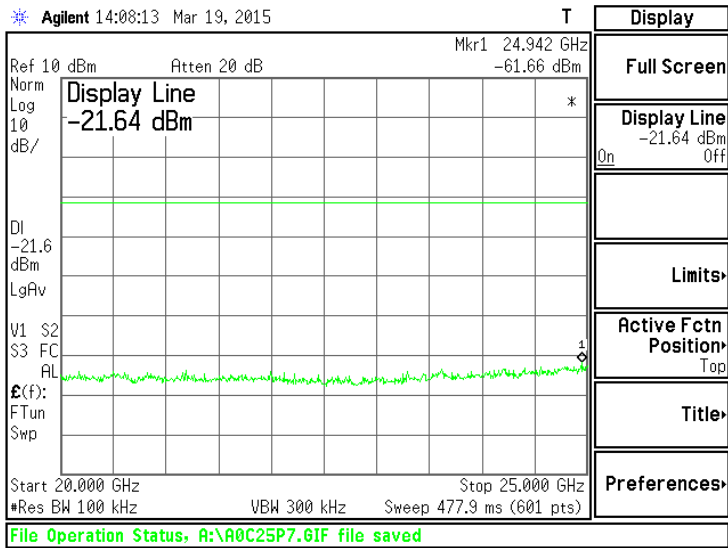

20 GHz – 25 GHz


Conducted Spurious emissions

Antenna 1 2425.0 MHz

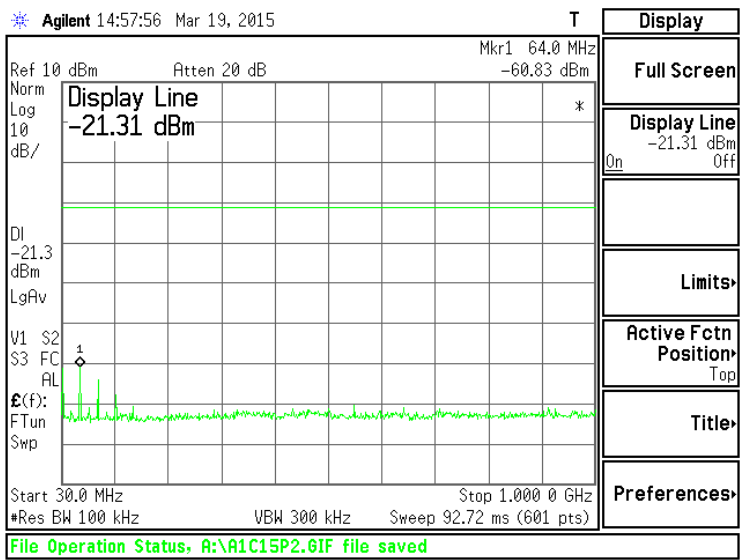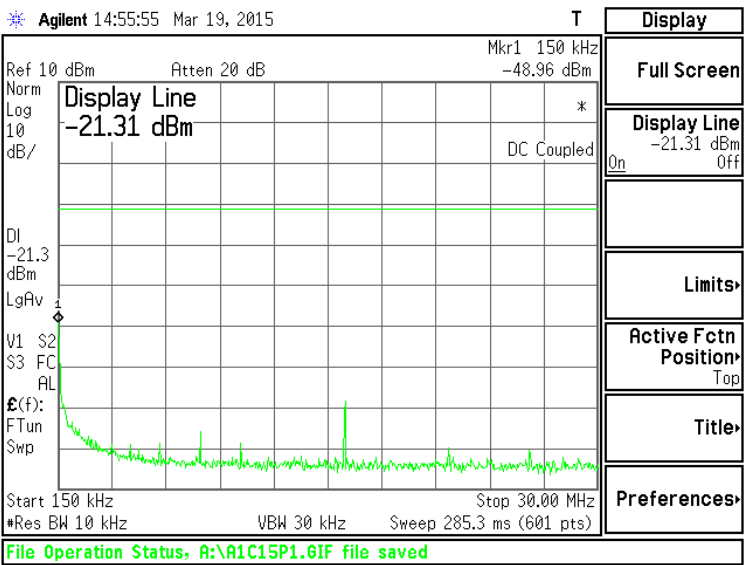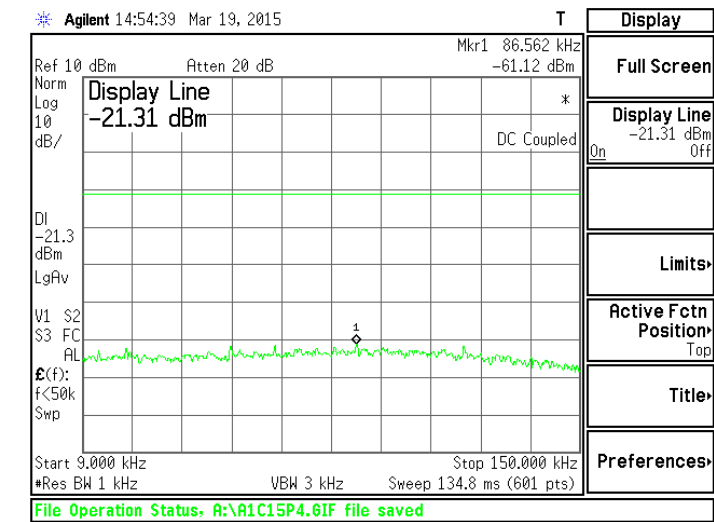


Conducted Spurious emissions


Antenna 1 2425.0 MHz

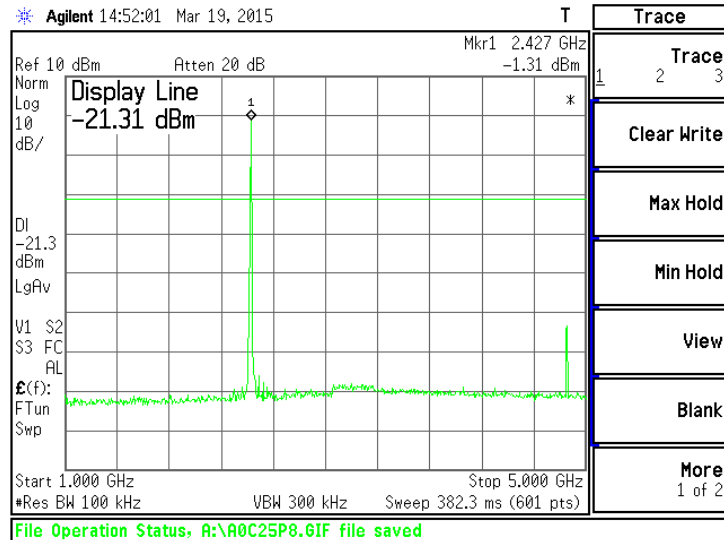

1 GHz – 5 GHz

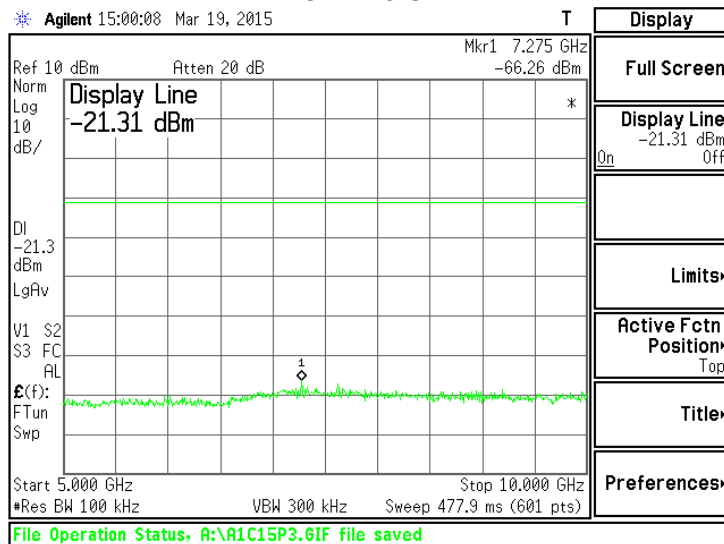


5 GHz – 10 GHz

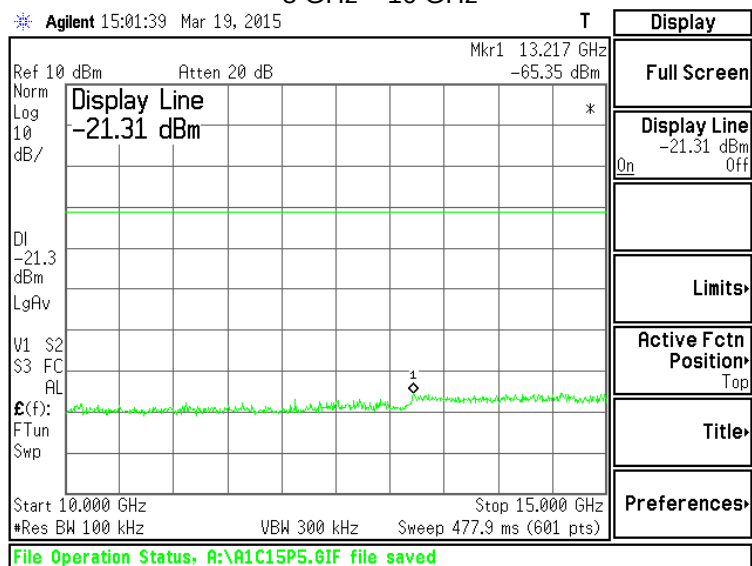


10 GHz – 15 GHz

Conducted Spurious emissions

Antenna 1 2425.0 MHz

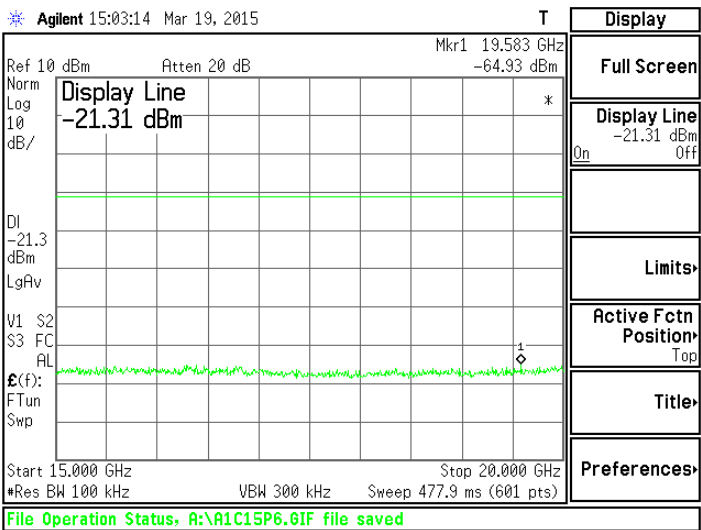


15 GHz – 20 GHz

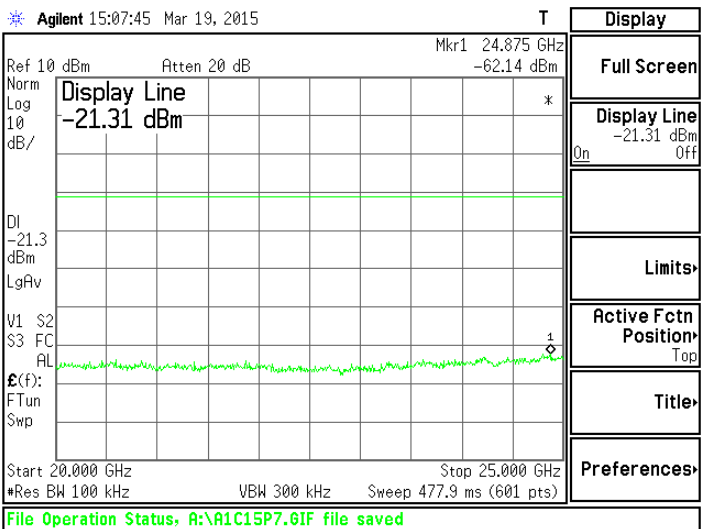


20 GHz – 25 GHz

Conducted Spurious emissions


Antenna 1 2450.0 MHz

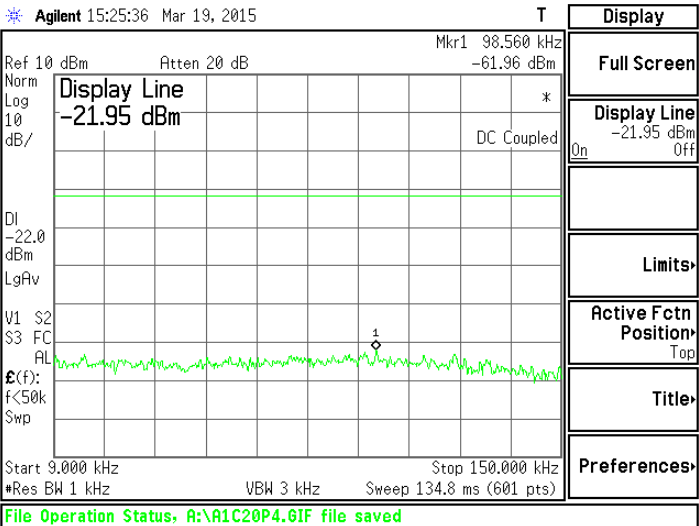

9 kHz – 150 kHz

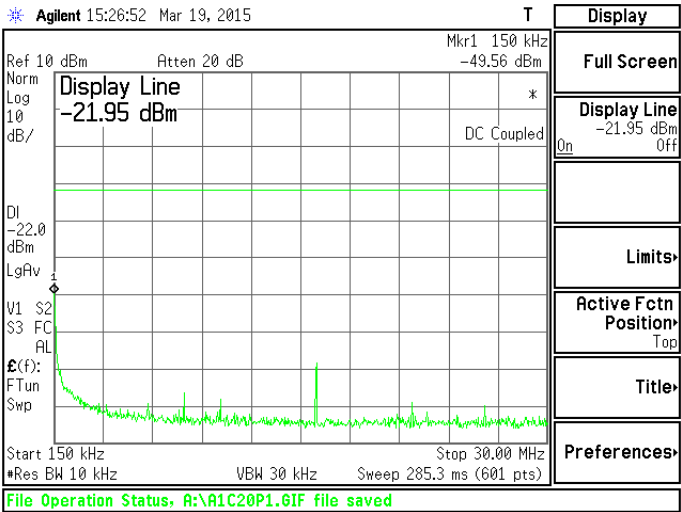


150kHz to 30 MHz

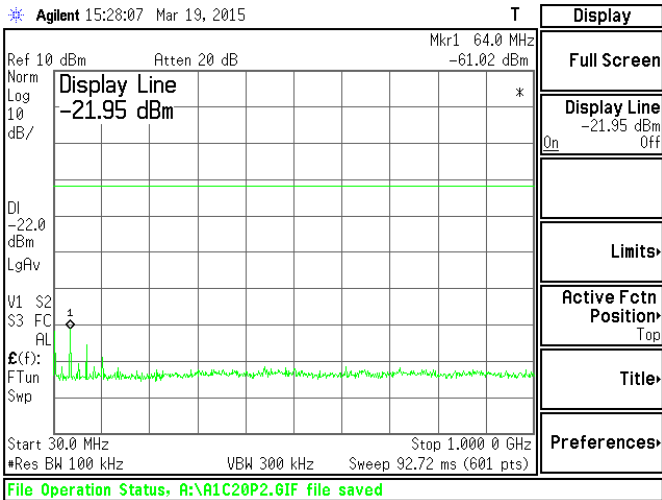


30 MHz – 1 GHz

Conducted Spurious emissions


Antenna 1 2450.0 MHz

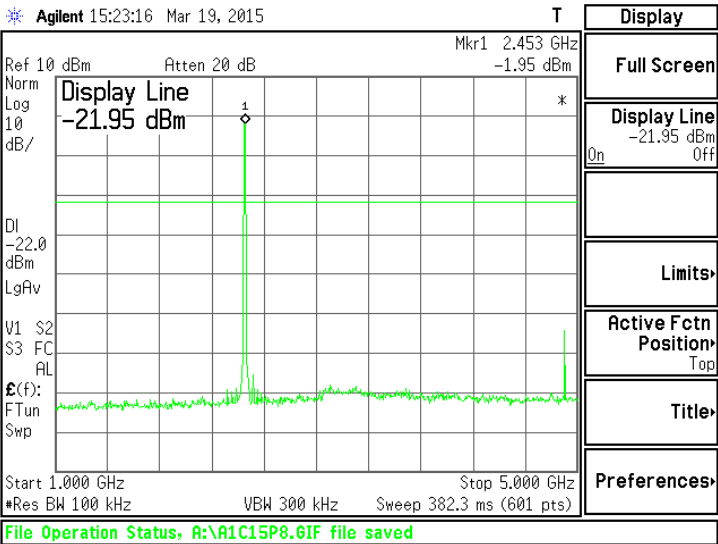

1 GHz – 5 GHz

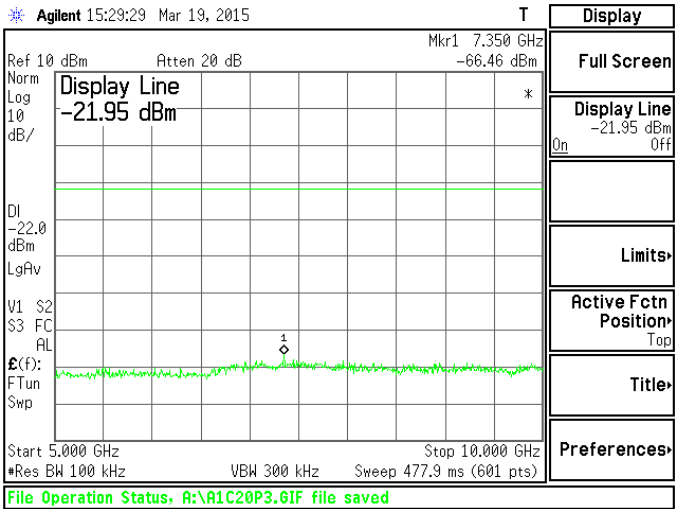


5 GHz – 10 GHz

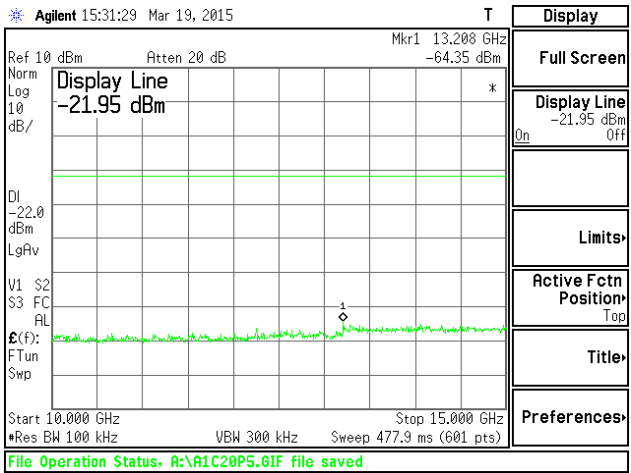


10 GHz – 15 GHz

Conducted Spurious emissions

Antenna 1 2450.0 MHz

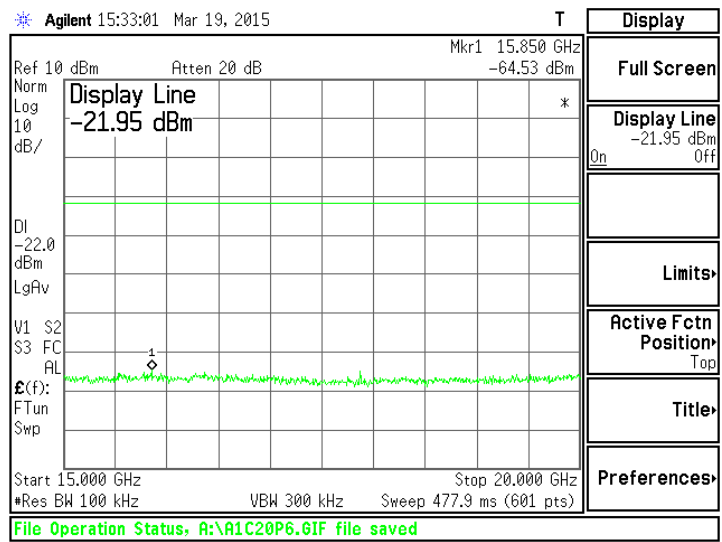




15 GHz – 20 GHz

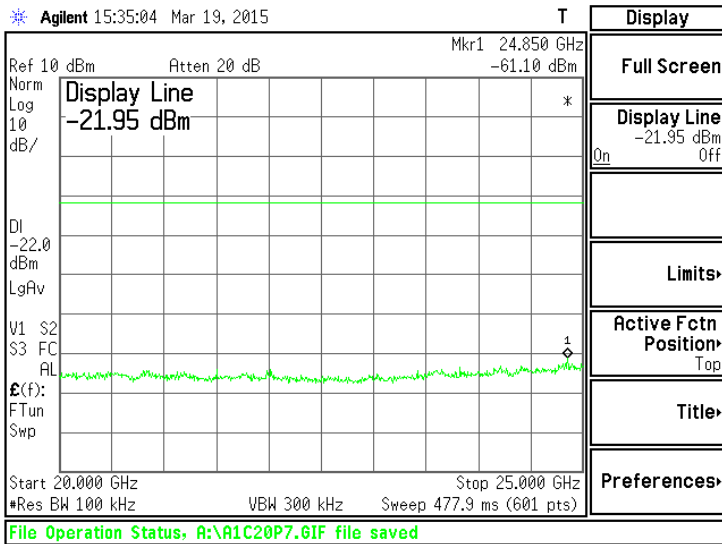

20 GHz – 25 GHz




Conducted Spurious emissions

Antenna 1 2475.0 MHz

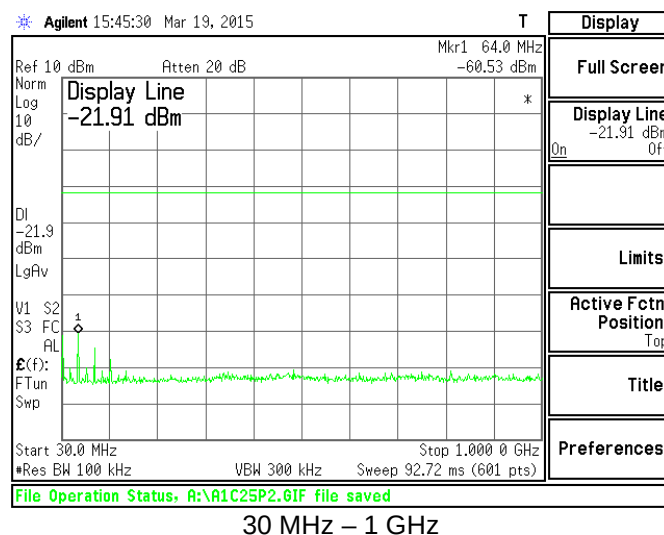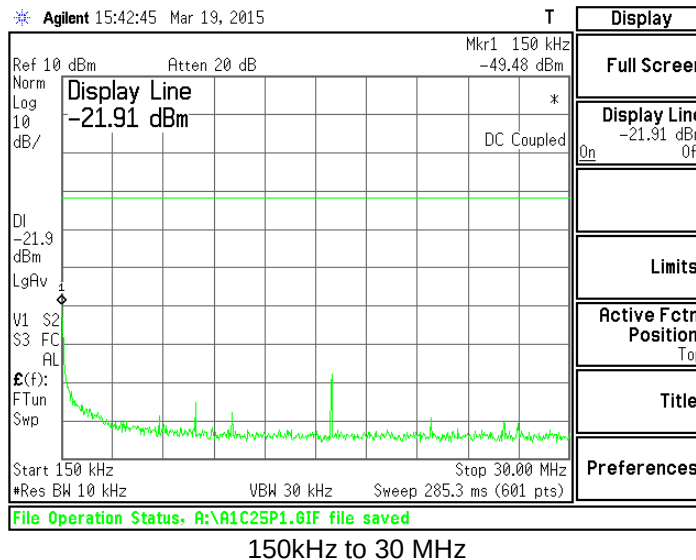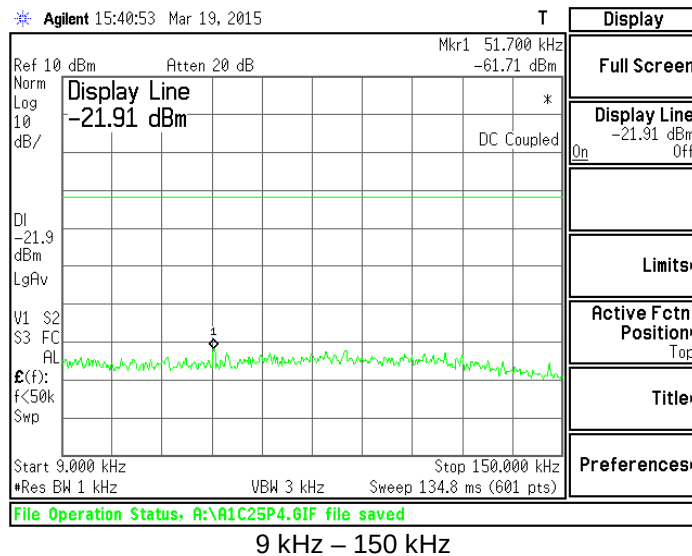


Conducted Spurious emissions

Antenna 1 2475.0 MHz

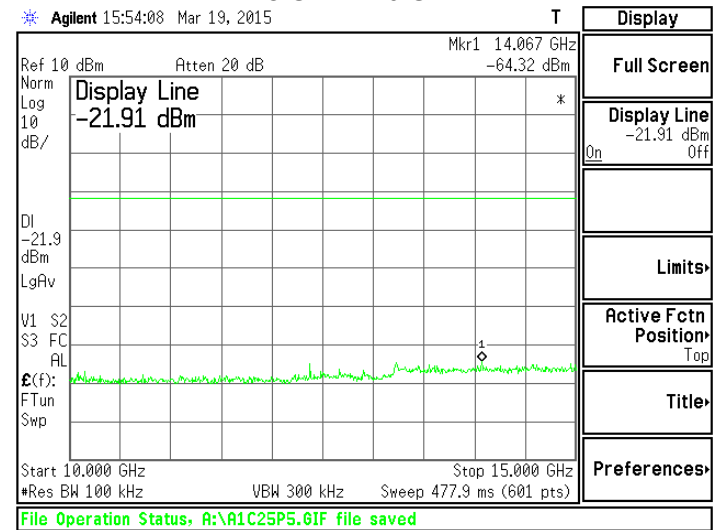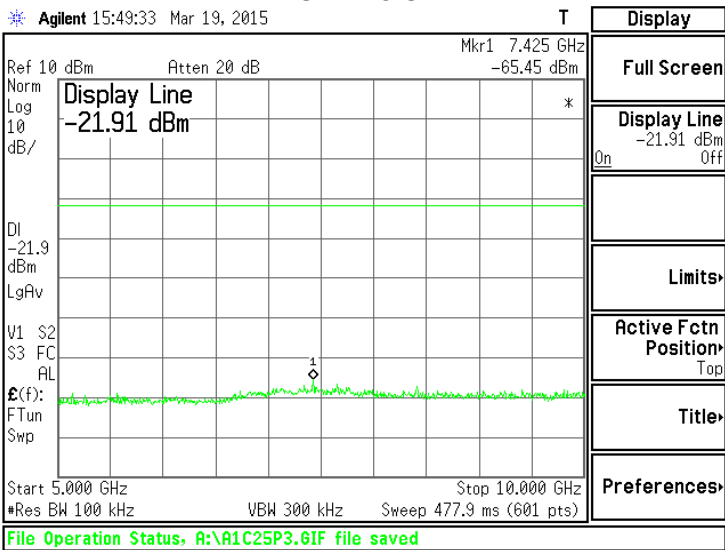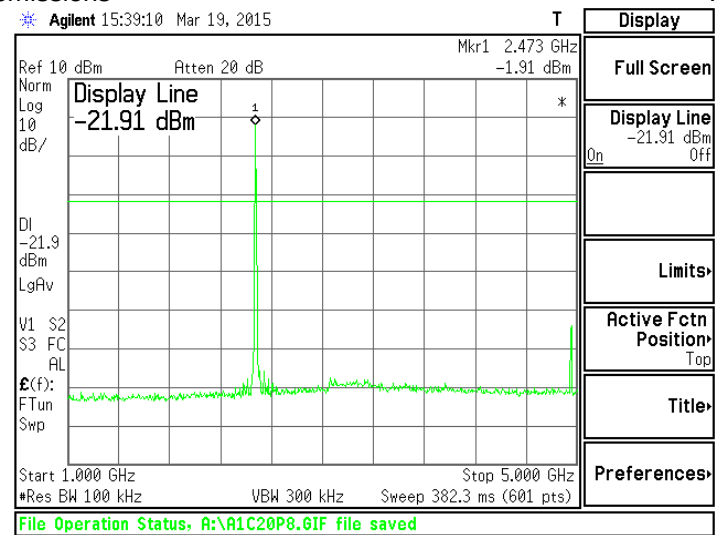


Conducted Spurious emissions

Antenna 1 2475.0 MHz

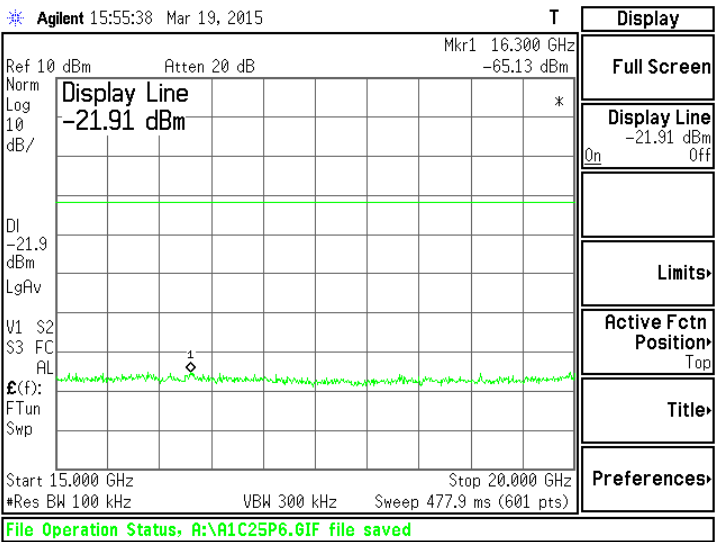


15 GHz – 20 GHz

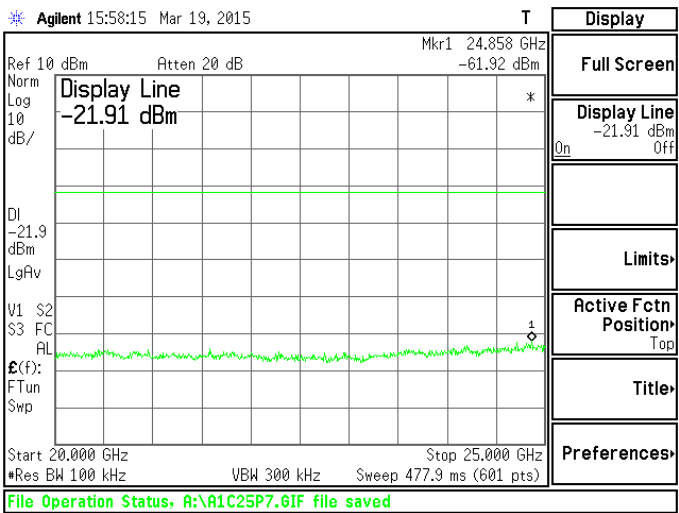


20 GHz – 25 GHz

Conducted Bandedge Compliance

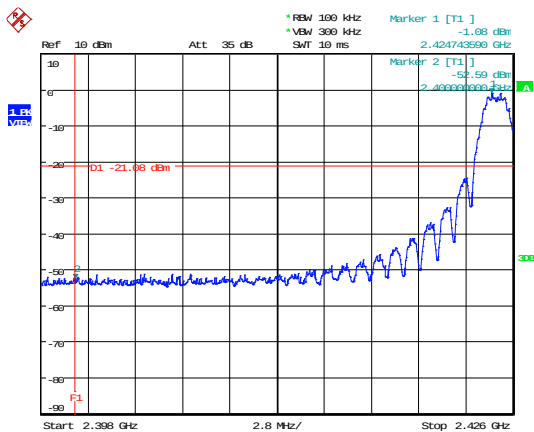


Date: 20.MAR.2015 10:19:30

Antenna 0 - Lower Bandedge

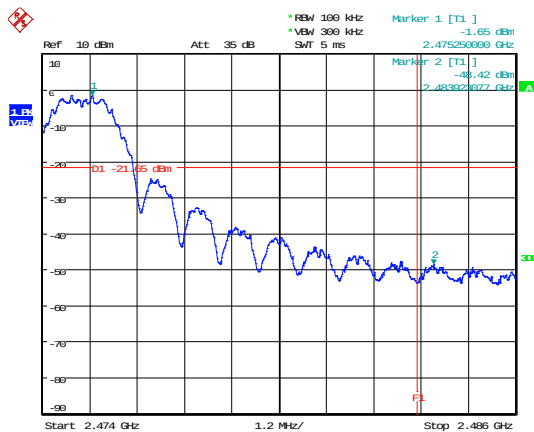


Date: 20.MAR.2015 10:31:22

Antenna 0 - Upper Bandedge

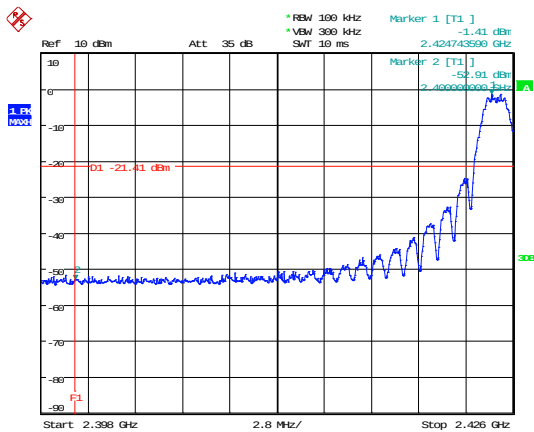

Date: 20.MAR.2015 10:22:30


Antenna 1 - Lower Bandedge

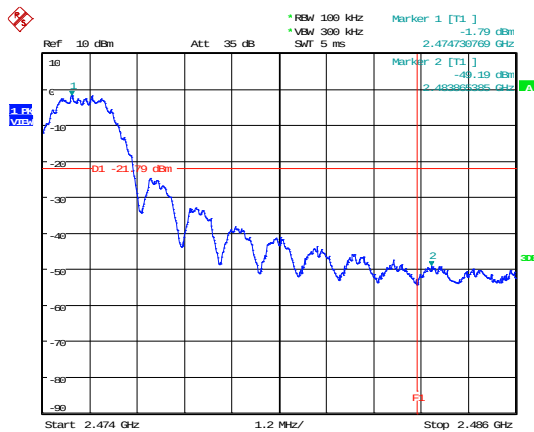

Date: 20.MAR.2015 10:28:52


Antenna 1 - Upper Bandedge

Conducted Power Spectral Density

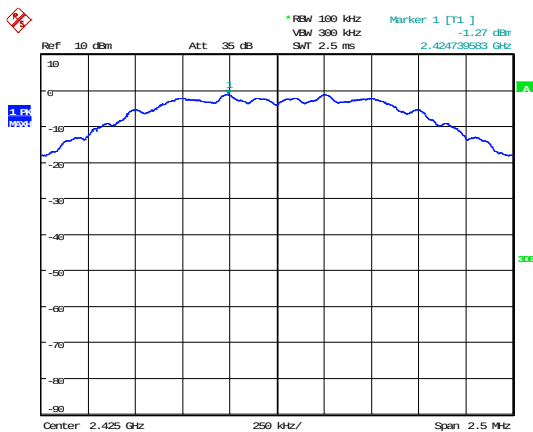


Date: 20.MAR.2015 11:01:47

Antenna 0 2425.0 MHz

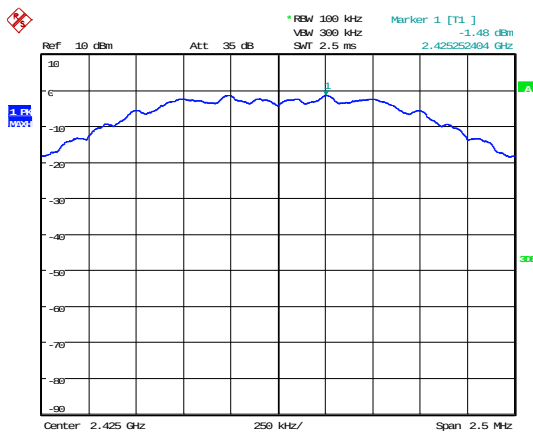


Date: 20.MAR.2015 10:59:34

Antenna 1 2425.0 MHz

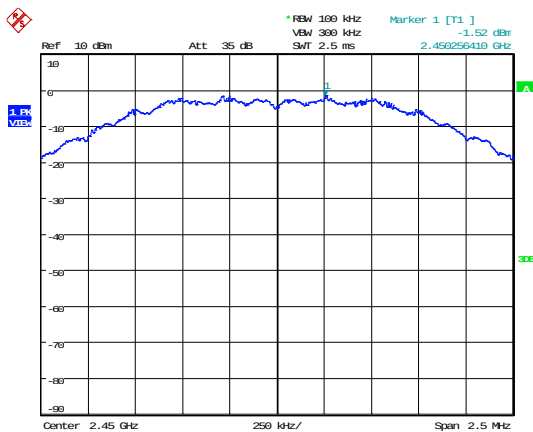


Date: 20.MAR.2015 10:47:55

Antenna 0 2450.0 MHz

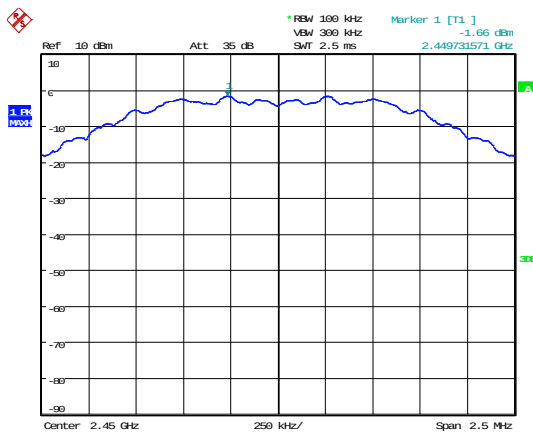


Date: 20.MAR.2015 10:56:03

Antenna 1 2450.0 MHz

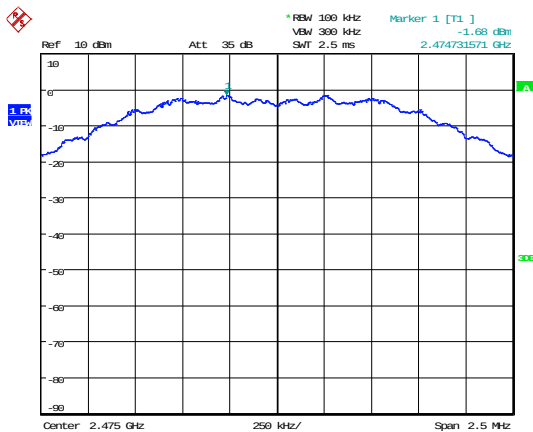

Date: 20.MAR.2015 10:47:01

Antenna 0 2475.0 MHz

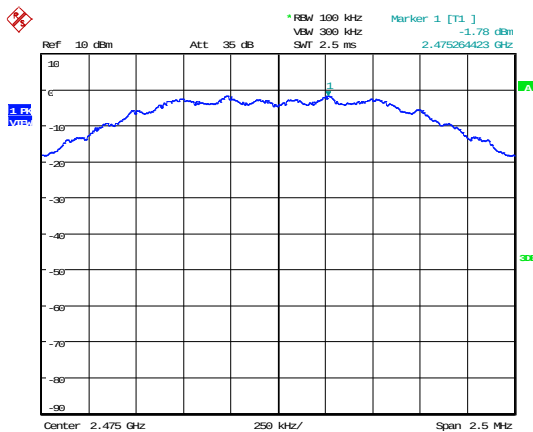


Date: 20.MAR.2015 10:45:57


Antenna 1 2475.0 MHz

Radiated Spurious emissions


Antenna 0 - 2425.0 MHz

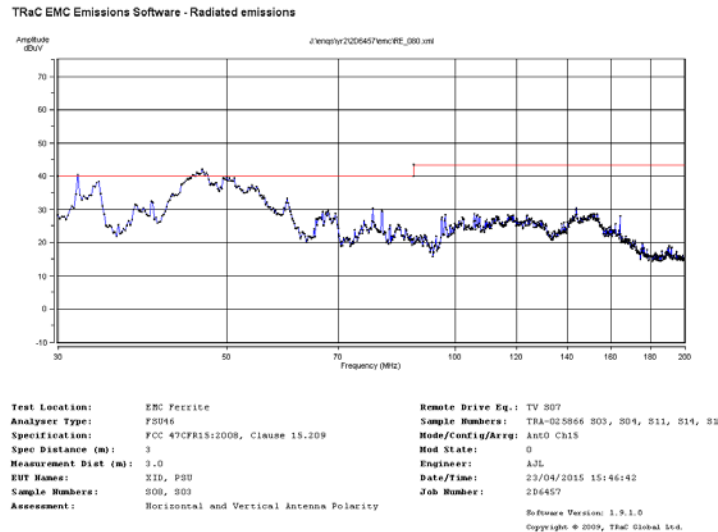

30 MHz – 200 MHz

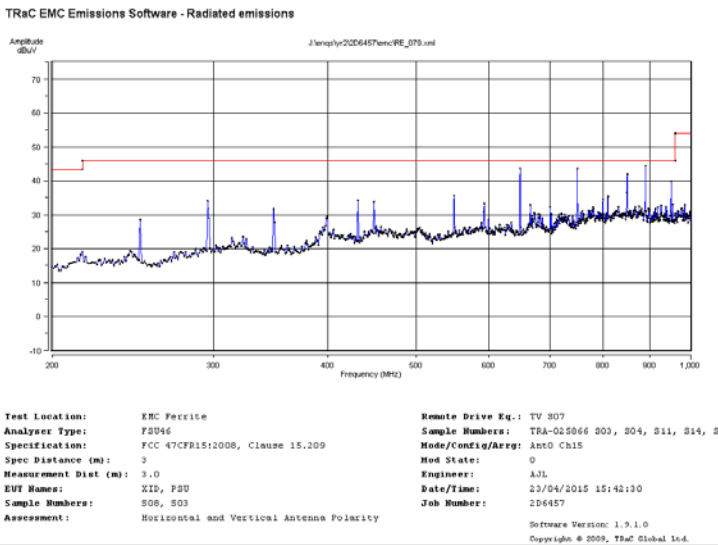


200 MHz – 1 GHz

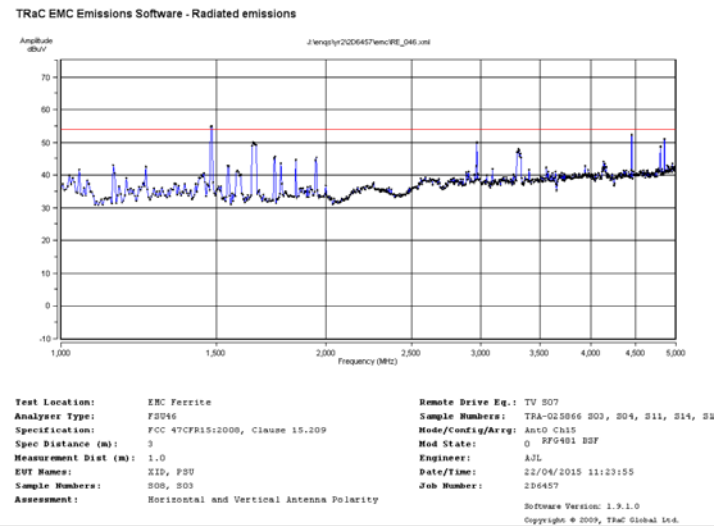


1 GHz – 5 GHz

Radiated Spurious emissions


Antenna 0 - 2425.0 MHz

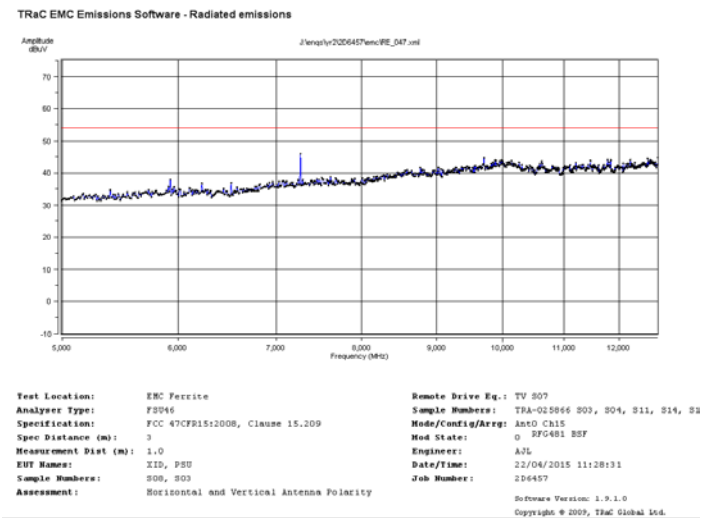

5 GHz – 12.75 GHz

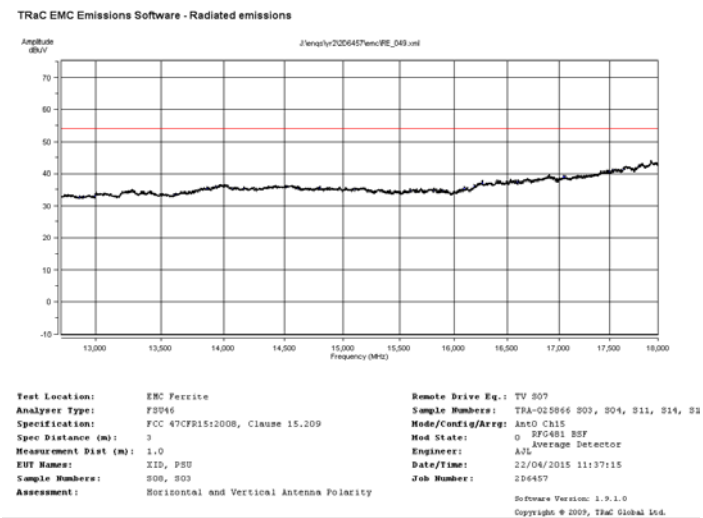


12.75 GHz – 18 GHz

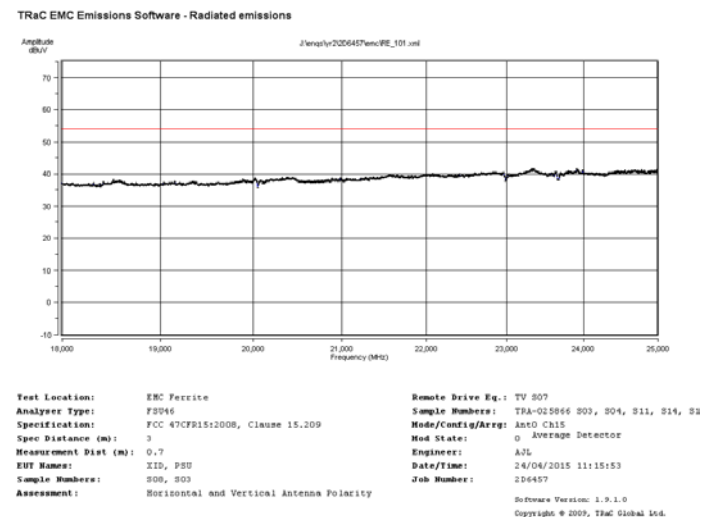


18 GHz – 25 GHz

Radiated Spurious emissions


Antenna 0 - 2450.0 MHz

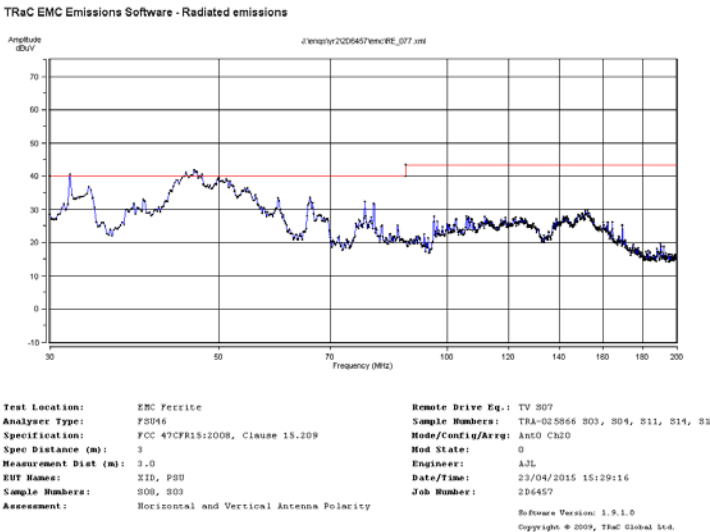

30 MHz – 200 MHz

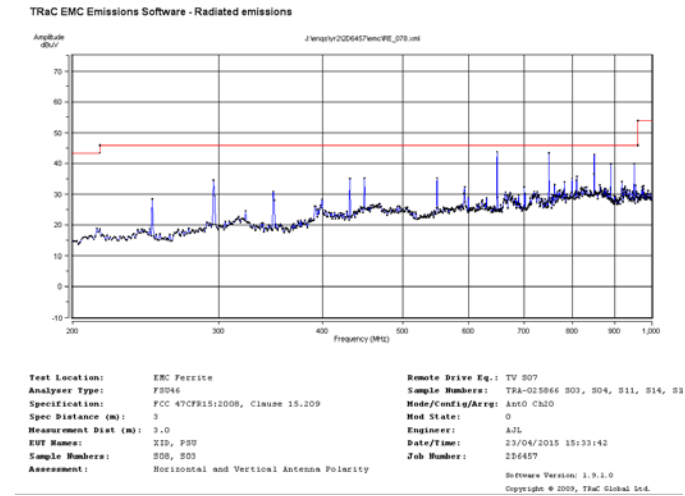


200 MHz – 1 GHz

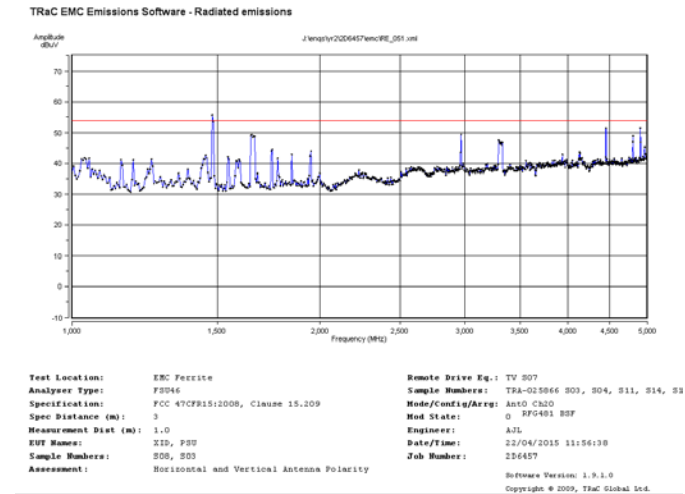


1 GHz – 5 GHz

Radiated Spurious emissions


Antenna 0 - 2450.0 MHz

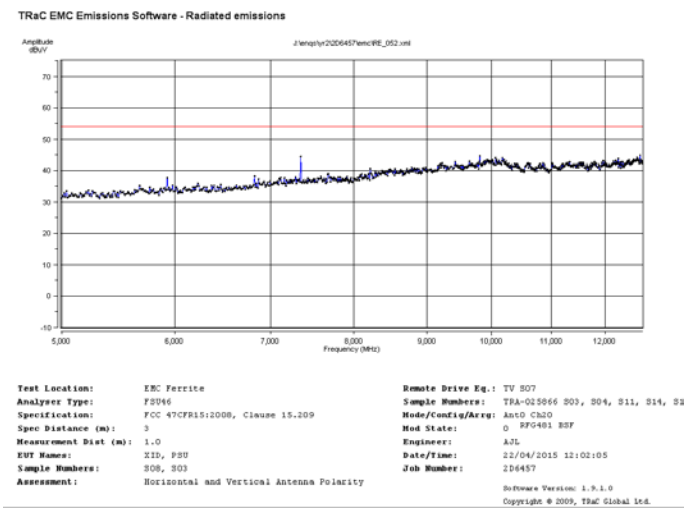

5 GHz – 12.75 GHz

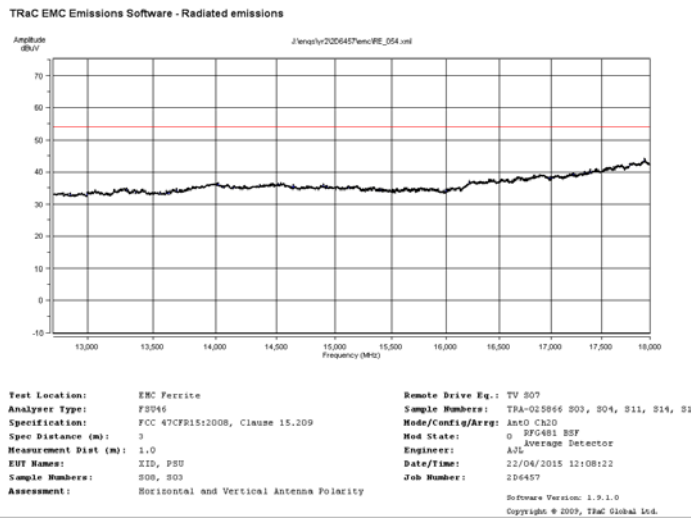


12.75 GHz – 18 GHz

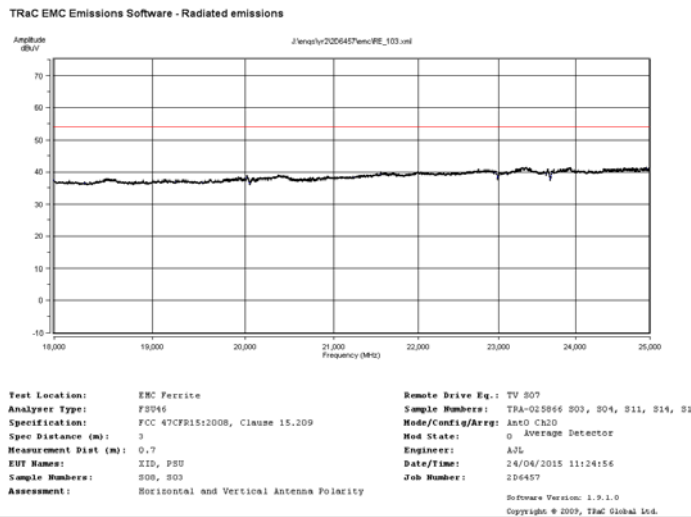


18 GHz – 25 GHz

Radiated Spurious emissions


Antenna 0 - 2475.0 MHz

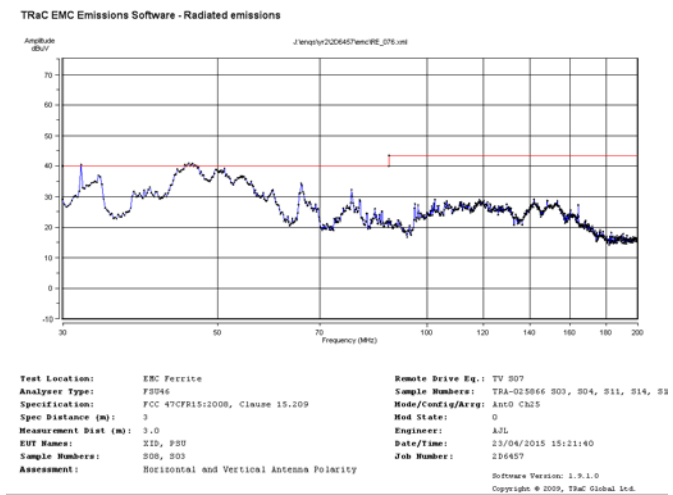

30 MHz – 200 MHz

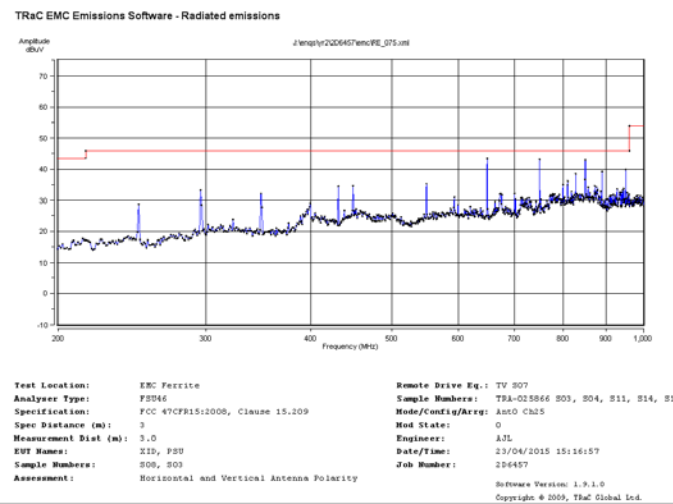


200 MHz – 1 GHz

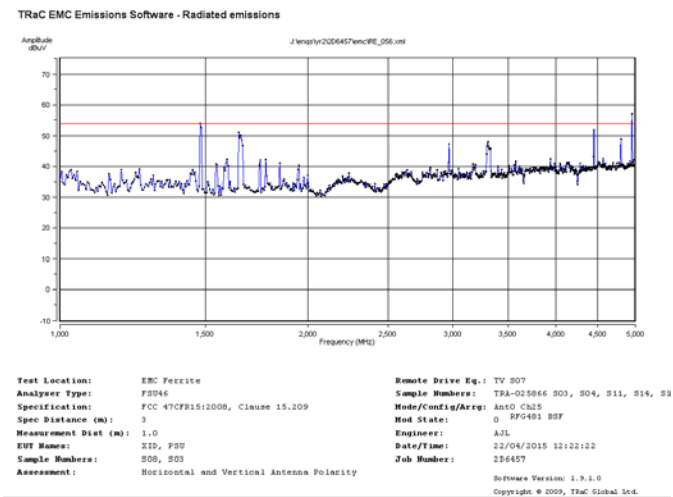


1 GHz – 5 GHz

Radiated Spurious emissions


Antenna 0 - 2475.0 MHz

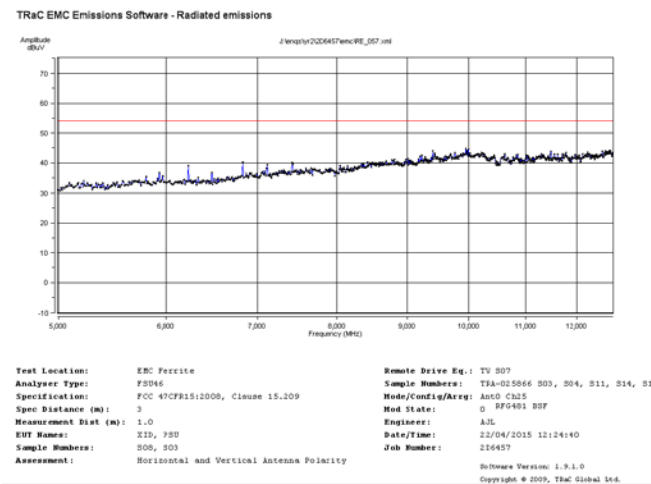

5 GHz – 12.75 GHz

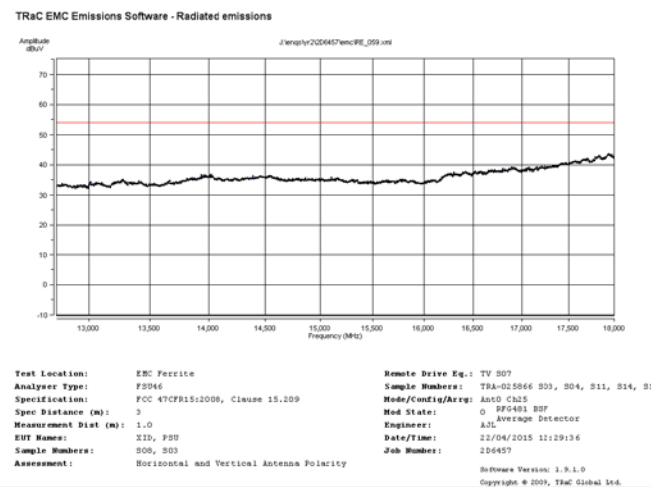


12.75 GHz – 18 GHz

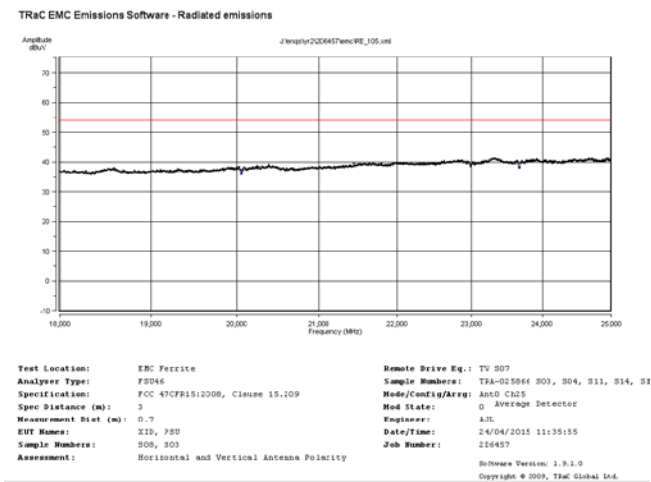


18 GHz – 25 GHz

Radiated Spurious emissions


Antenna 1 - 2425.0 MHz

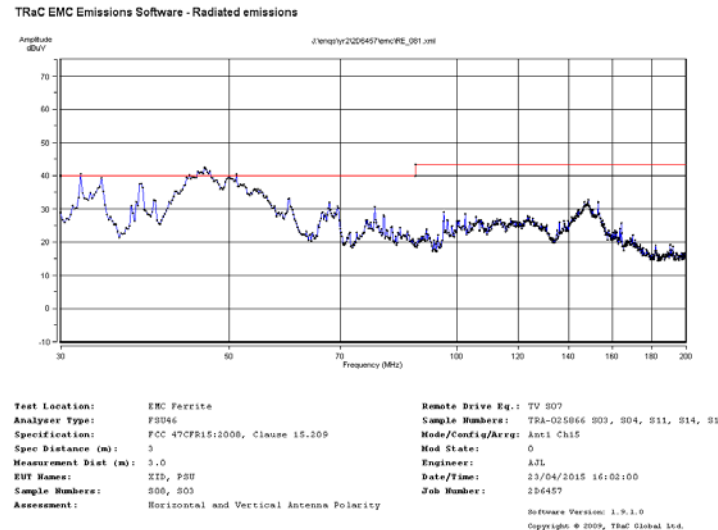

30 MHz – 200 MHz

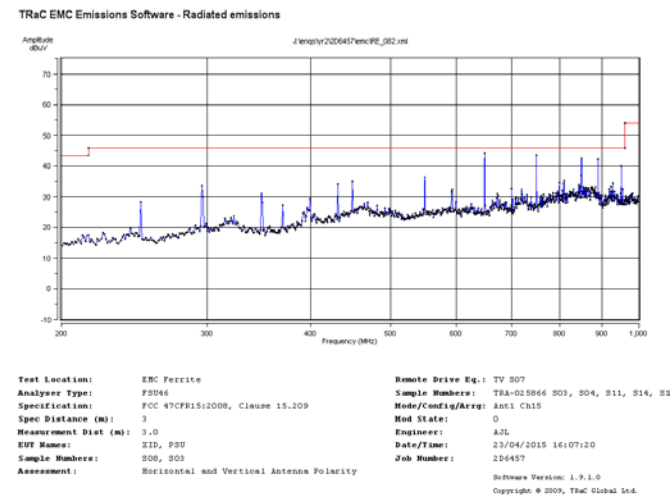


200 MHz – 1 GHz

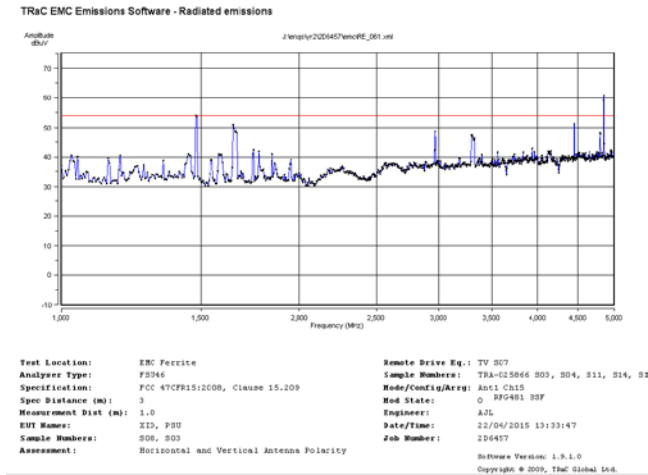


1 GHz – 5 GHz

Radiated Spurious emissions


Antenna 1 - 2425.0 MHz

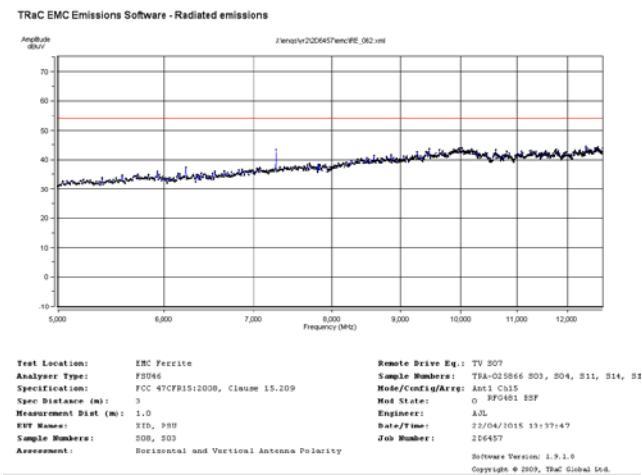

5 GHz – 12.75 GHz

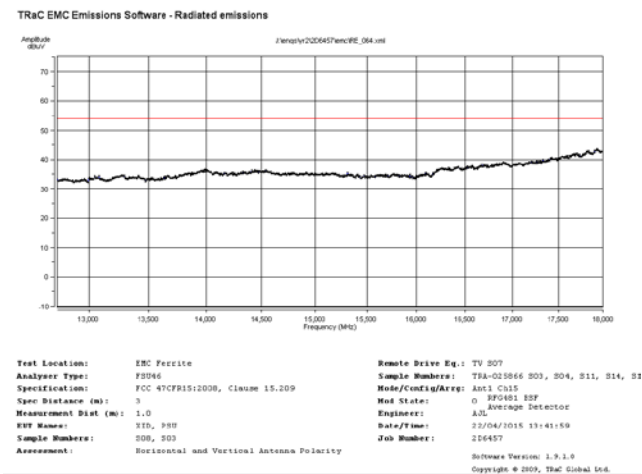




12.75 GHz – 18 GHz

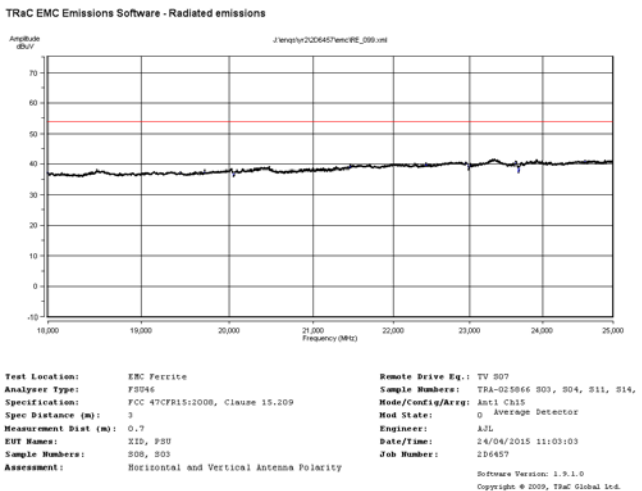

18 GHz – 25 GHz


Radiated Spurious emissions

Antenna 1 - 2450.0 MHz

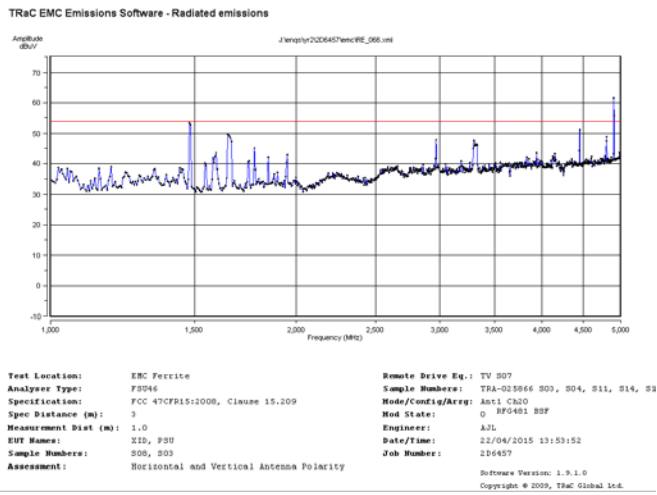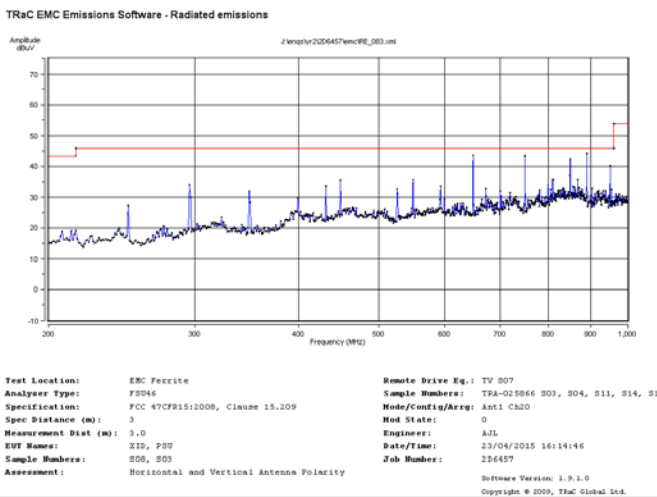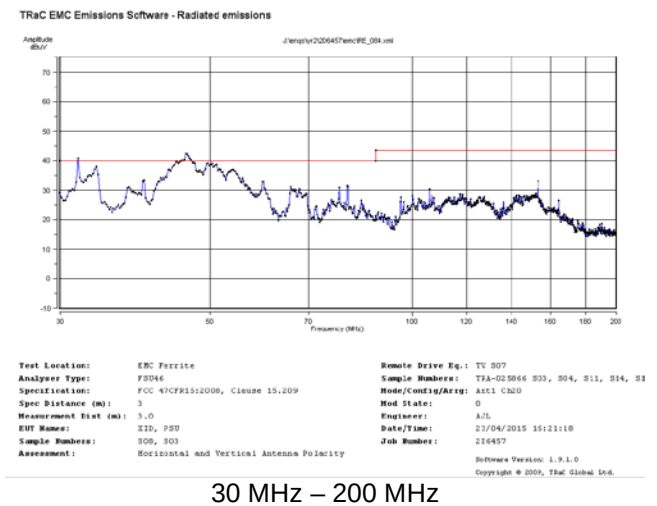


Radiated Spurious emissions


Antenna 1 - 2450.0 MHz

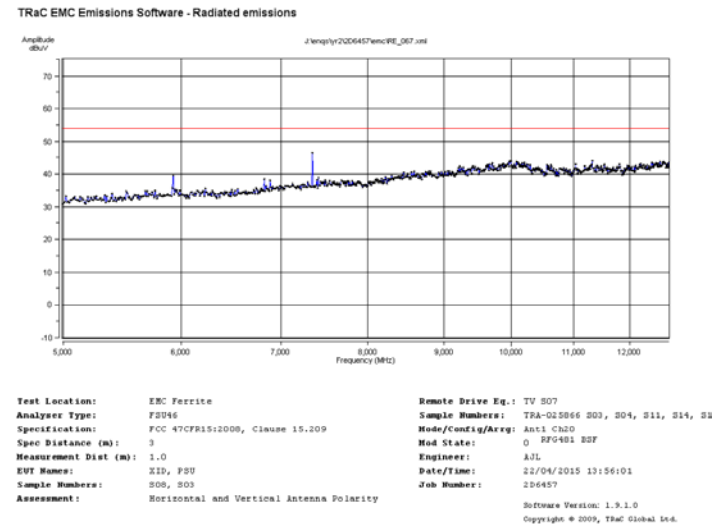

5 GHz – 12.75 GHz

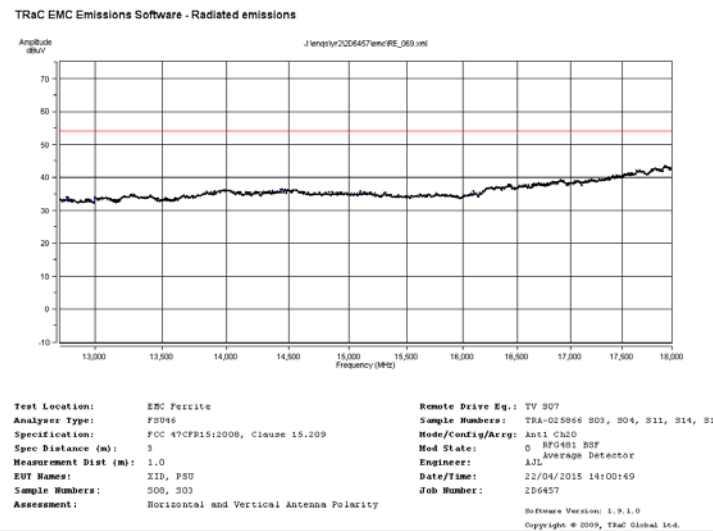

12.75 GHz – 18 GHz

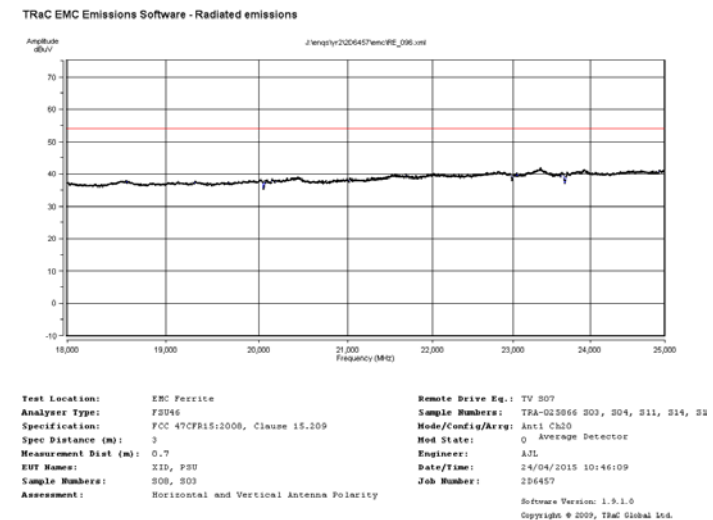


18 GHz – 25 GHz

Radiated Spurious emissions

Antenna 1 - 2475.0 MHz

TRaC EMC Emissions Software - Radiated emissions

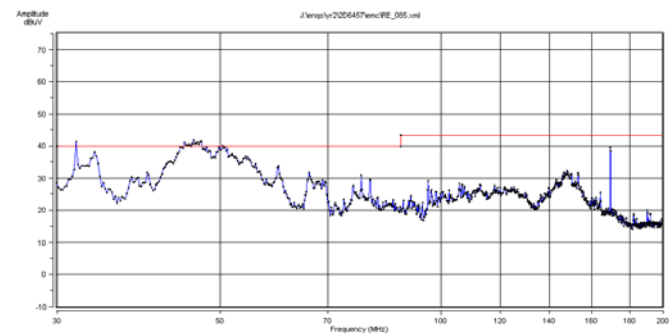


Test Location: EMC Facility
Analyser Type: FS946
Specification: FCC 47CFR15.209, Clause 15.209
Spec Distance (m): 3
Measurement Dist (m): 3.0
EUT Names: I1D, PSU
Sample Numbers: S08, S03
Assessment: Horizontal and Vertical Antenna Polarity

Remote Drive Eq.: TV S07
Sample Numbers: TRA-025866 S03, S04, S11, S14, S1
Node/Config/Argv: Ant1 Ch25
Mod State: 0
Engineer: A3L
Date/Time: 23/04/2015 16:27:48
Job Number: 206457

Software Version: 1.9.1.0
Copyright © 2009, TRaC Global Ltd.

30 MHz – 200 MHz

TRaC EMC Emissions Software - Radiated emissions

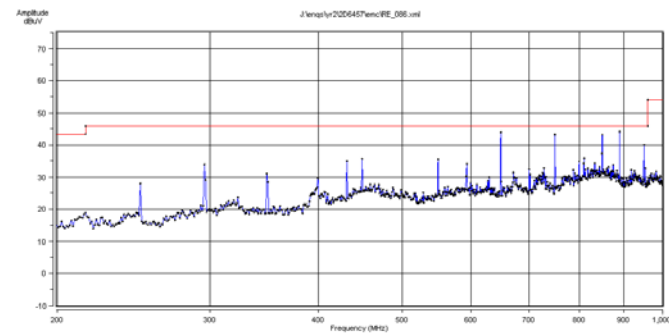


Test Location: EMC Facility
Analyser Type: FS946
Specification: FCC 47CFR15.209, Clause 15.209
Spec Distance (m): 3
Measurement Dist (m): 3.0
EUT Names: I1D, PSU
Sample Numbers: S08, S03
Assessment: Horizontal and Vertical Antenna Polarity

Remote Drive Eq.: TV S07
Sample Numbers: TRA-025866 S03, S04, S11, S14, S1
Node/Config/Argv: Ant1 Ch25
Mod State: 0
Engineer: A3L
Date/Time: 23/04/2015 16:42:43
Job Number: 206457

Software Version: 1.9.1.0
Copyright © 2009, TRaC Global Ltd.

200 MHz – 1 GHz

TRaC EMC Emissions Software - Radiated emissions

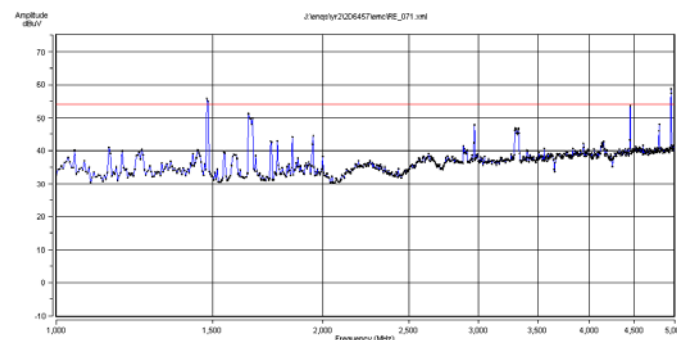

Test Location: EMC Facility
Analyser Type: FS946
Specification: FCC 47CFR15.209, Clause 15.209
Spec Distance (m): 3
Measurement Dist (m): 1.0
EUT Names: I1D, PSU
Sample Numbers: S08, S03
Assessment: Horizontal and Vertical Antenna Polarity




Remote Drive Eq.: TV S07
Sample Numbers: TRA-025866 S03, S04, S11, S14, S1
Node/Config/Argv: Ant1 Ch25
Mod State: 0 WFO801 RSP
Engineer: A3L
Date/Time: 22/04/2015 14:11:23
Job Number: 206457

Software Version: 1.9.1.0
Copyright © 2009, TRaC Global Ltd.

1 GHz – 5 GHz


Radiated Spurious emissions

Antenna 1 - 2475.0 MHz

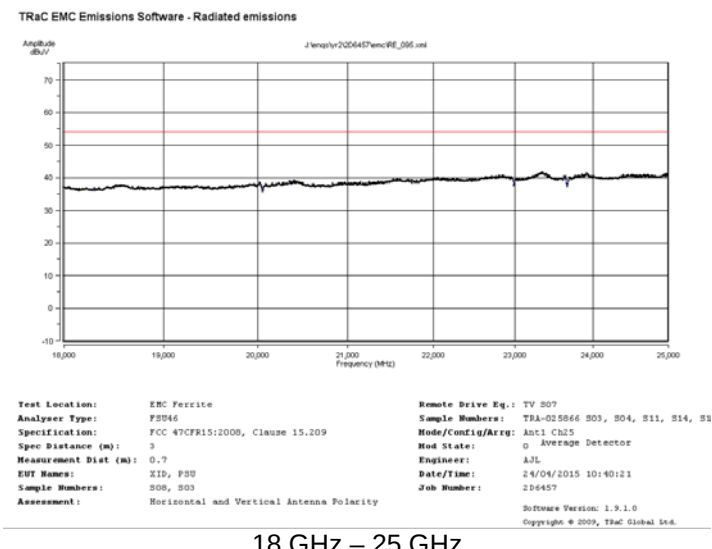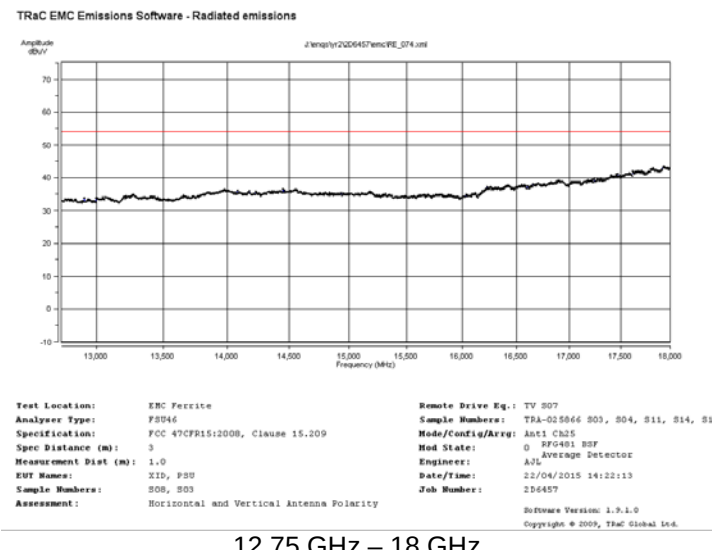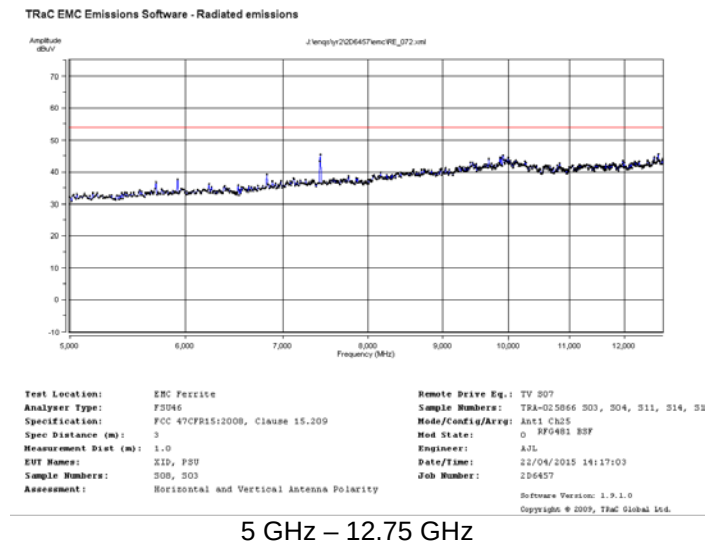


Radiated Bandedge Compliance

TRaC EMC Emissions Software - Radiated emissions

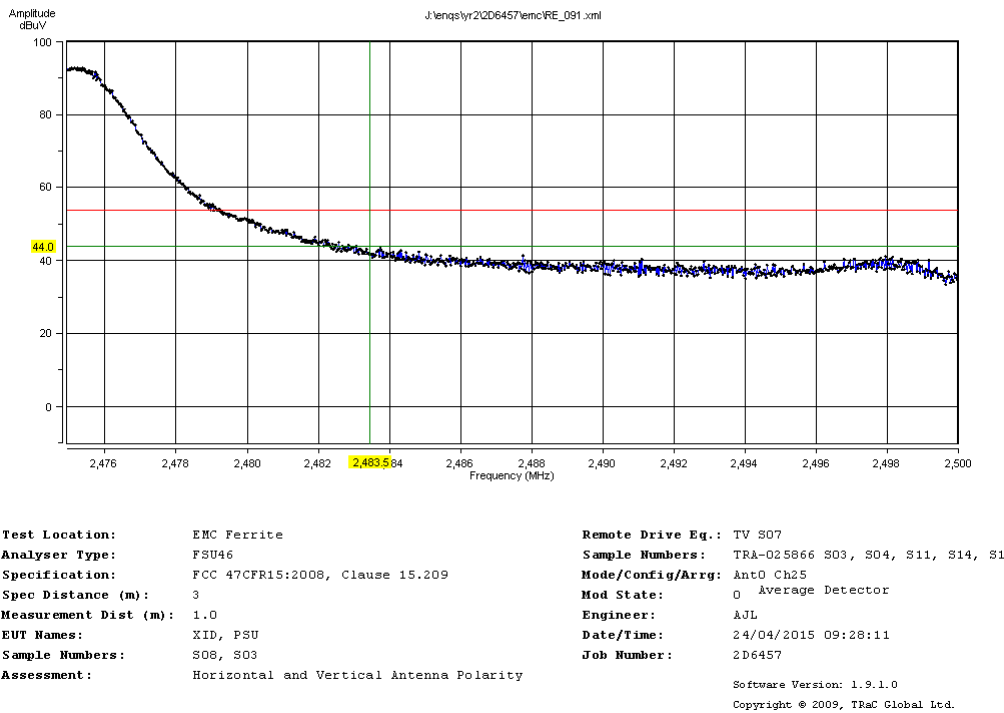


Antenna 0 - Upper Bandedge

TRaC EMC Emissions Software - Radiated emissions

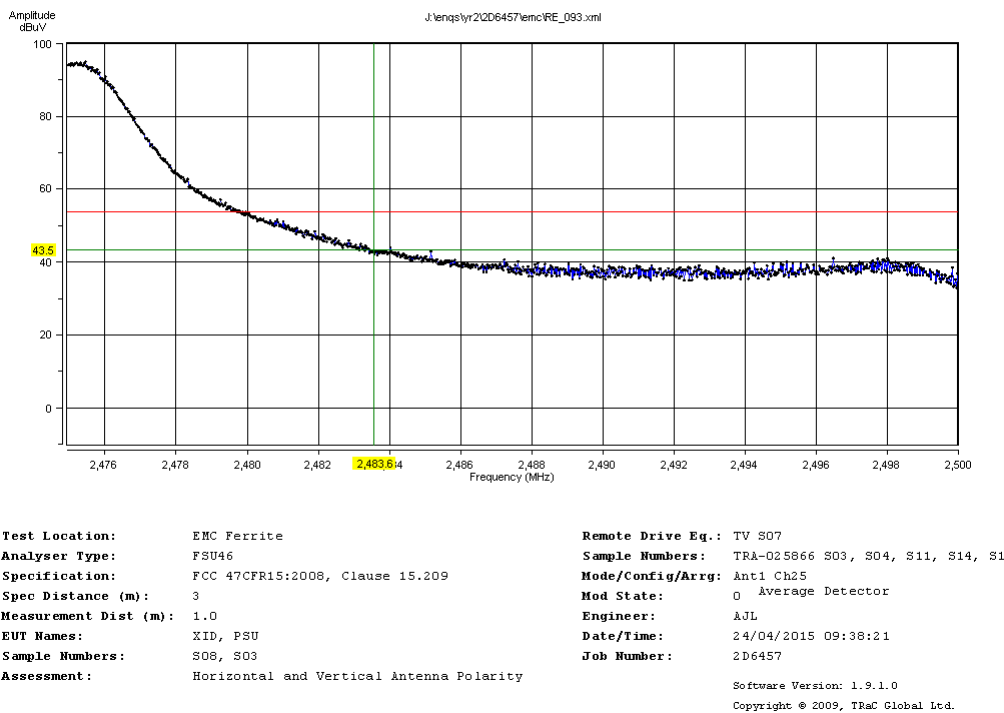

Antenna 1 - Upper Bandedge

AC Powerline Conducted Emissions

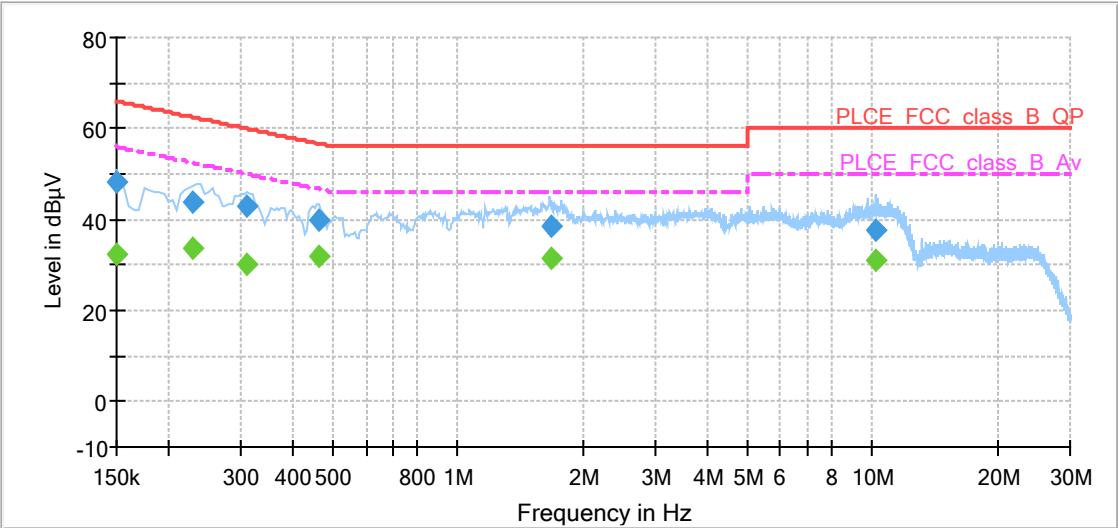

Appendix C:**Additional Test and Sample Details**

This appendix contains details of:

1. The samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and it's modification state:

Sample No: Sxx Mod w

where:

xx	= sample number	eg. S01
w	= modification number	eg. Mod 2

The following terminology is used throughout the test report:

Support Equipment (SE) is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

EUT configuration refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis.
- Setting of any internal switches.
- Circuit board jumper settings.
- Alternative internal power supplies.

Where no change in EUT configuration is **possible**, the configuration is described as "single possible configuration".

EUT arrangement refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods - An Overview", which can be supplied by TRaC Global upon request.

C1) Test samples

The following samples of the apparatus were submitted by the client for testing :

Sample No.	Description	Identification
S02	PXD01ANI Conducted Sample	PAM600000654
S04	Plug-top PSU	WC02048JN27A
S08	PXD01ANI Radiated Sample	WC02033L551A
S03	Plug-top PSU	PAM600000676

The following samples of apparatus were submitted by the client as host, support or drive equipment (auxiliary equipment):

Sample No.	Description	Identification
S07	4k TV	

The following samples of apparatus were submitted by the client as host, support or drive equipment (auxiliary equipment) (Booked into TRaC system under job number TRA-025866):

Sample No.	Description	Identification
S03	F-type load	None
S04	AV load	None
S11	USB memory Pen Drive	None
S14	Dell Laptop	None
S15	TRIAX F-type combiner	None
S20	XINFINTY D911 CEB	None
S19	DEKTEC DTU-215 modulator	4215-002-007
S22	Dell Laptop	None

The following samples of apparatus were supplied by TRaC Global as support or drive equipment (auxiliary equipment):

Identification	Description
None	

C2) EUT Operating Mode During Testing.

During testing, the EUT was exercised as described in the following tables :

Test	Description of Operating Mode
All tests detailed in this report	EUT transmitting a Modulated carrier Software power setting level 3

C3) EUT Configuration Information.

The EUT was submitted for testing in one single possible configuration.

C4) List of EUT Ports

The tables below describe the termination of EUT ports:

Sample : S02
Tests : Conducted

Port	Description of Cable Attached	Cable length	Equipment Connected
dc power	2 core	1m	S04
Antenna 0	Co-Axial	<1m	Measurement System
Antenna 1	Co-Axial	<1m	Measurement System
USB	USB – Serial – USB	2m	TRA-025866 S14

Sample : S08
Tests : Radiated Emissions

Port	Description of Cable Attached	Cable length	Equipment Connected
dc power	2 core	1m	S03
Cable in	75 Ohm co-axial	1m	TRA-025866 [S15 (S19 & S20)]
Cable out	75 Ohm co-axial	1m	TRA-025866 [S03]
HDMI in	HDMI cable	1.5m	TRA-025866 [S17]
HDMI out	HDMI	10m	S07

C5 Details of Equipment Used

TRaC No	Equipment Type	Equipment Description	Manufacturer	Last Cal Calibration	Calibration Period	Due For Calibration
REF910	FSU46	Spectrum Analyser	R&S	01/04/2015	12	01/04/2016
REF2112	RPR3006W	Power Meter	Dare	10/03/2015	12	10/03/2016
REF837	E4440A	Spectrum Analyser	Agilent	19/05/2014	12	19/05/2015
REF886	ATS	Ferrite Lined Chamber	TRaC	21/07/2014	12	21/07/2015
RFG095		Biconical Antenna	EMCO	09/05/2013	36	09/05/2016
RFG191		Log Periodic Antenna	EMCO	09/05/2013	36	09/05/2016
RFG129	3115	Horn Antenna	EMCO	05/02/2014	24	05/02/2016
RFG629		Horn Antenna	Q-Par	19/09/2013	24	19/09/2015
REF927	310	Pre-Amp (9kHz – 1GHz)	Sonoma	01/07/2014	24	01/07/2016
REF913	8449B	Pre-Amp (1 – 26.5GHz)	Agilent	05/02/2014	24	05/02/2016
RFG450		SMA RF coaxial cable		14/07/2014	12	14/07/2015
RFG453		SMA RF coaxial cable		14/07/2014	12	14/07/2015
REF881		N-Type RF coaxial cable		06/10/2014	12	06/10/2015
REF882		N-Type RF coaxial cable		06/10/2014	12	06/10/2015
REF884		N-Type RF coaxial cable		06/10/2014	12	06/10/2015
REF885		N-Type RF coaxial cable		06/10/2014	12	06/10/2015
RFG832		K-Type RF coaxial cable	Teleydyne	17/07/2014	12	17/07/2015
RFG919		K-Type RF coaxial cable	Teleydyne	17/07/2014	12	17/07/2015
RFG680	ESH3-Z2	Pulse Limiter	R & S	01/07/2014	12	01/07/2015
RFG296	-	BNC coaxial cable	-	27/02/2015	12	27/02/2016
RFG298	-	BNC coaxial cable	-	27/02/2015	12	27/02/2016
RFG189	ESH3-Z5	LISN	R & S	22/07/2014	12	22/07/2015
RFG125	ESHS10	Measuring Receiver	R & S	17/04/2015	12	17/04/2016

Appendix D:

Additional Information

No additional information is included within this test report.

Appendix E:**Calculation of the duty cycle correction factor**

Using a spectrum analyser in zero span mode, centred on the fundamental carrier frequency with a RBW of 1MHz and a video Bandwidth of 1MHz the sweep time was set accordingly to capture the pulse train. The transmit pulsewidths and period was measured. A plots of the pulse train is contained in Appendix B of this test report.

If the pulse train was less than 100 ms, including blanking intervals, the duty cycle was calculated by averaging the sum of the pulsewidths over one complete pulse train. However if the pulse train exceeds 100ms then the duty cycle was calculated by averaging the sum of the pulsewidths over the 100ms width with the highest average value. (The duty cycle is the value of the sum of the pulse widths in one period (or 100ms), divided by the length of the period (or 100ms). The duty cycle correction factor was then expressed in dB and the peak emissions adjusted accordingly to give an average value of the emission.

Correction factor dB = $20 \times (\text{Log}_{10} \text{ Calculated Duty Cycle})$

Therefore the calculated duty cycle was determined:

The pulse train period was greater than >100ms and in as shown from the plots in contained in appendix B of this test report.

Duty cycle = $\frac{\text{the sum of the highest average value pulsewidths over 100ms}}{100\text{ms}}$

e.g

$$= \frac{7.459\text{ms}}{100\text{ms}} = 0.07459$$

0.07459 or 7.459%

Correction factor (dB) = $20 \times (\text{Log}_{10} 0.07459) = -22.54\text{dB}$

Duty cycle correction may not be applicable / required by the device covered in this report. The correction factor above is an example of how the correction is calculated. Any applicable duty cycle used will be recorded in the relevant results sections of this report.

Appendix F:

Photographs and Figures

The following photographs were taken of the test samples:

1. Radiated electric field emissions arrangement: Over view.
2. Radiated electric field emissions arrangement: Close up.

Remove for short term confidentiality

Photograph 1

Remove for short term confidentiality

Photograph 2

Appendix G: General SAR test reduction and exclusion guidance**KDB 447498****Section 4.3 General SAR test reduction and exclusion guidance**

For Standalone SAR exclusion consideration, when SAR Exclusion Threshold requirement in KDB 447498 is satisfied, standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

In the frequency range below 100 MHz to 6 GHz and test separation distance of 50mm, the SAR Test Exclusion Threshold for operation in the 2400 – 2483.5 MHz band will be determined as follows

SAR Exclusion Threshold (SARET)

SAR Exclusion Threshold = Step 1 + Step 2

Step 1

$$NT = [(MP/TSD^A) * \sqrt{f_{GHz}}]$$

NT = Numeric Threshold (3.0 for 1-g SAR and 7.5 for 10-g SAR)
MP = Max Power of channel (mW) (inc tune up)
TSD^A = Min Test separation Distance or 50mm (whichever is lower) = 50

We can transpose this formula to allow us to find the maximum power of a channel allowed and compare this to the measured maximum power.

$$= [(NT \times TSD^A) / \sqrt{f_{GHz}}]$$

For Distances Greater than 50 mm Step 2 applies

Step 2

$$(TSD^B - 50mm) * 10\}$$

Where:

TSD^B = Min Test separation Distance (mm) = 50

Operating Frequency 2.425 GHz

$$\begin{aligned} \text{SARET} &= [(3.0 \times 50) / \sqrt{2.425}] + \{ (50 - 50) * 10 \} \\ \text{SARET} &= [150 / 1.55] + (0 * 10) \\ \text{SARET} &= 96.77\text{mW} \end{aligned}$$

Operating Frequency 2.450 GHz

$$\begin{aligned} \text{SARET} &= [(3.0 \times 50) / \sqrt{2.450}] + \{ (50 - 50) * 10 \} \\ \text{SARET} &= [150 / 1.56] + (0 * 10) \\ \text{SARET} &= 96.15\text{mW} \end{aligned}$$

Operating Frequency 2.475 GHz

$$\begin{aligned} \text{SARET} &= [(3.0 \times 50) / \sqrt{2.475}] + \{ (50 - 50) * 10 \} \\ \text{SARET} &= [150 / 1.57] + (0 * 10) \\ \text{SARET} &= 95.54\text{mW} \end{aligned}$$

Channel Frequency (MHz)	EIRP (W)	SAR Exclusion Threshold	SAR Evaluation
2425	0.0025	96.77mW	Not Required
2450	0.0025	96.15mW	Not Required
2475	0.0023	95.54mW	Not Required

Therefore standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

Appendix G Continued**MPE Calculation****47 CFR §§1.1310****Prediction of MPE limit at a given distance**

$$S = \frac{EIRP}{4\pi R^2} \text{ re - arranged } R = \sqrt{\frac{EIRP}{S 4\pi}}$$

where:

S = power density

R = distance to the centre of radiation of the antenna

EIRP = EUT Maximum power

Result

Prediction Frequency (MHz)	Maximum EIRP (W)	Power density limit (S) (mW/cm ²)	Distance (R) cm Required to be less than 1 mW/cm ²
2425	0.0025	1	0.01
2450	0.0025	1	0.01
2475	0.0023	1	0.01



HULL

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.

T +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com

www.tracglobal.com