

APPENDIX B Plots Of The SAR Measurements

Test Lab: EMCTech

Test File: M130336 483 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-01**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 470.1 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=469.7$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 55.4$; $\rho = 1.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (7.57,7.57,7.57); Calibrated: 10/12/2012;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 4/12/2012
 Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
 DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 1 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;
 Maximum value of SAR (interpolated) = 0.326 W/kg

Body Worn Belt Clip/Channel 1 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 16.735 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.325 W/kg; SAR(10g) = 0.208 W/kg

Maximum value of SAR (interpolated) = 0.513 W/kg

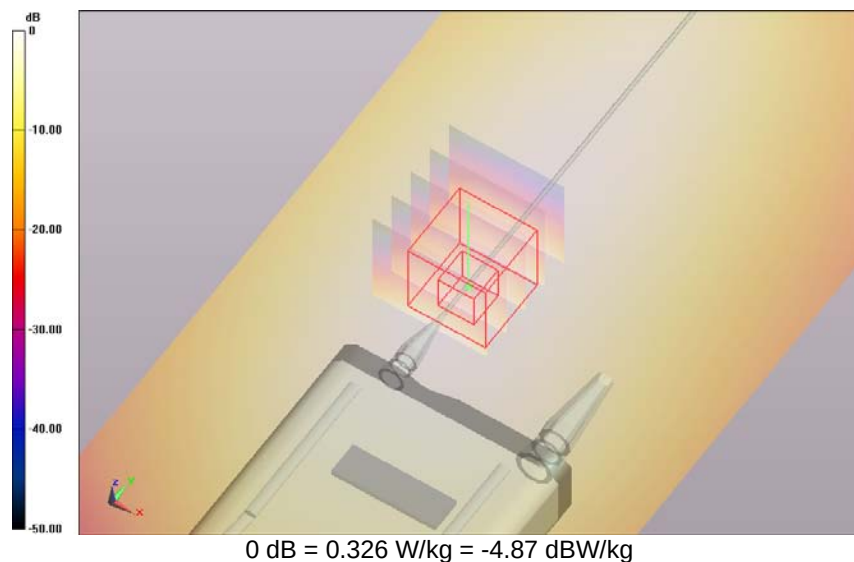


SAR Measurement Plot 1



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

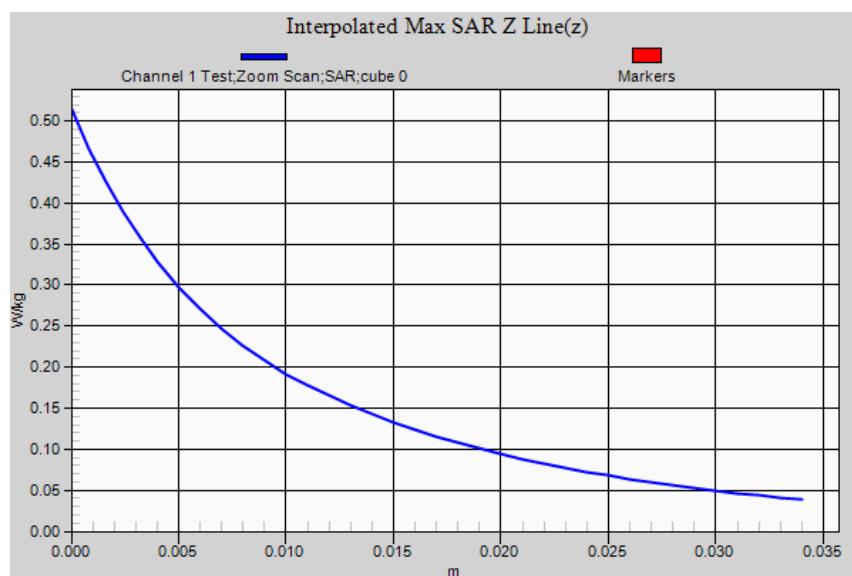

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 483 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-01**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 483.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=469.7$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (7.57,7.57,7.57); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 2 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.339 W/kg**Body Worn Belt Clip/Channel 2 Test/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 17.226 V/m; **Power Drift = -0.02 dB****Averaged SAR: SAR(1g) = 0.334 W/kg; SAR(10g) = 0.214 W/kg**

Maximum value of SAR (interpolated) = 0.533 W/kg

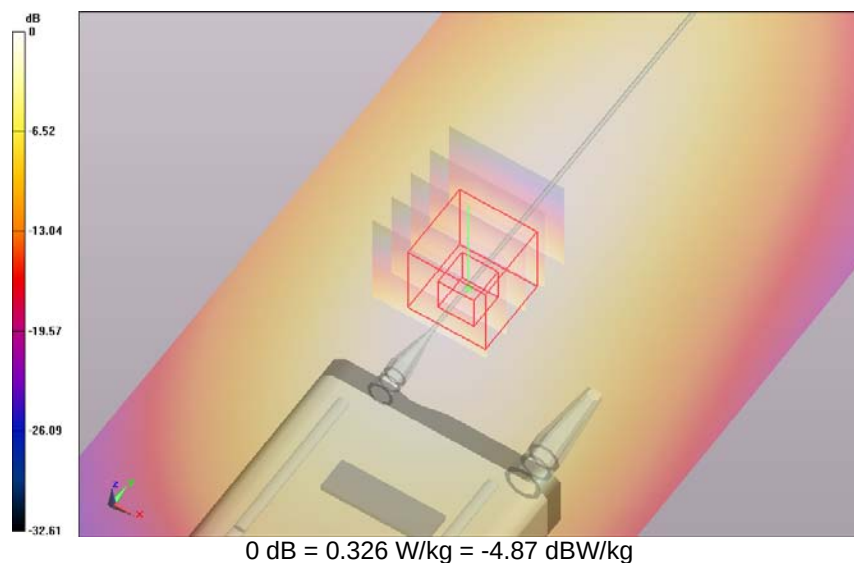


SAR Measurement Plot 2



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

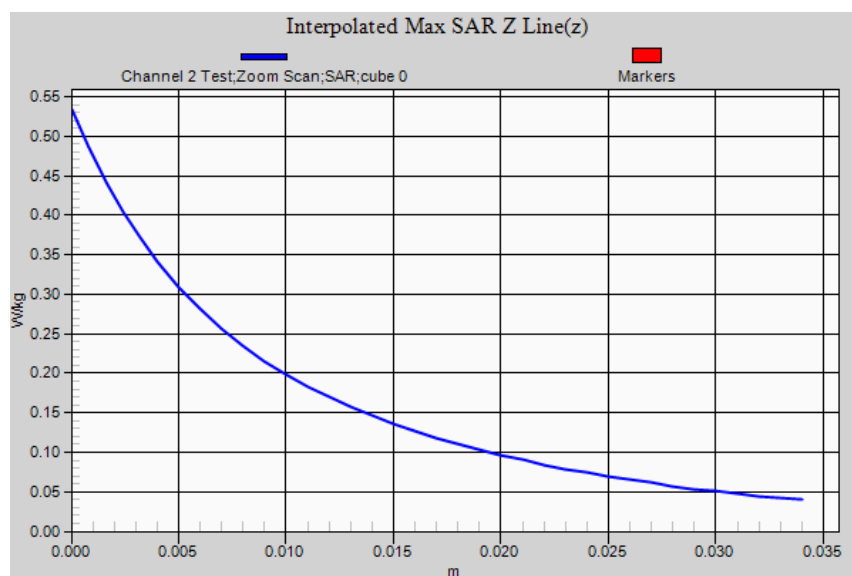

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 483 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-01**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 495.9 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=482.9$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 55.2$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (7.57,7.57,7.57); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 3 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;

Maximum value of SAR (interpolated) = 0.313 W/kg

Body Worn Belt Clip/Channel 3 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 16.294 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 0.307 W/kg; SAR(10g) = 0.197 W/kg**

Maximum value of SAR (interpolated) = 0.496 W/kg

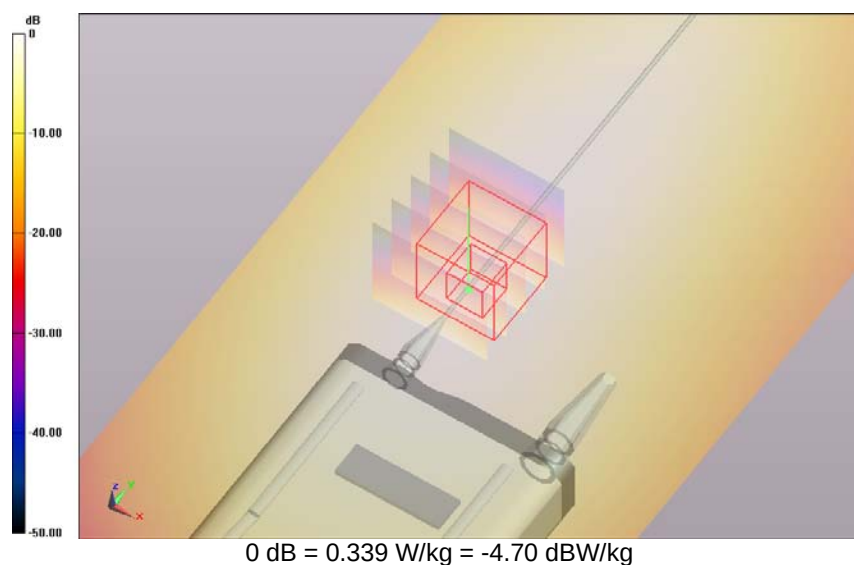


SAR Measurement Plot 3



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

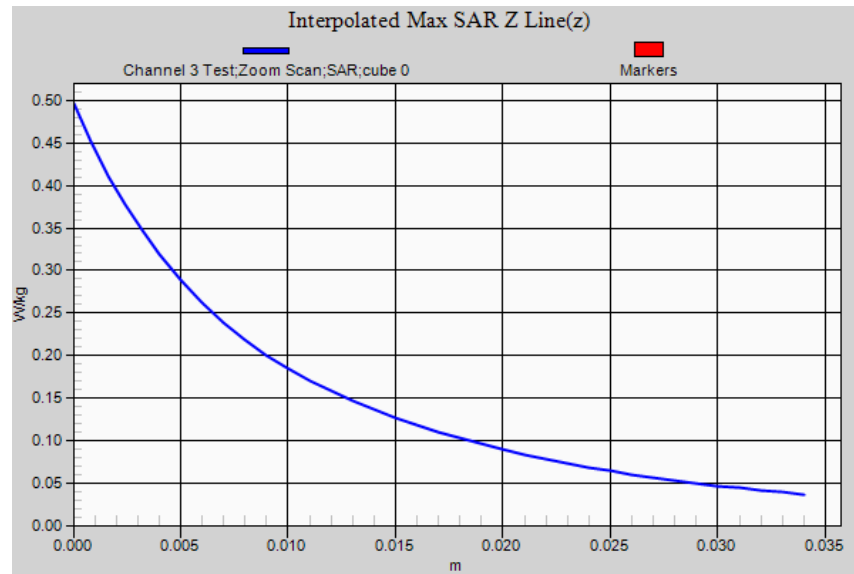

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 483 MHz Belt Clip 31-07-13.da52:1

DUT Name: Dipole 450 MHz, Type: D450V3, Serial: 1074**Configuration: System Check**

Communication System: 0 - n/a - CW 450 MHz; Communication System Band: 450 MHz; Frequency: 450.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=449.9$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 55.5$; $\rho = 1.0\text{g/cm}^3$

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (7.57,7.57,7.57); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

System Check/Channel 1Test/Area Scan (51x121x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;

Maximum value of SAR (interpolated) = 2.310 W/kg

System Check/Channel 1Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 49.816 V/m; **Power Drift = 0.02 dB****Averaged SAR: SAR(1g) = 2.390 W/kg; SAR(10g) = 1.480 W/kg**

Maximum value of SAR (interpolated) = 3.870 W/kg

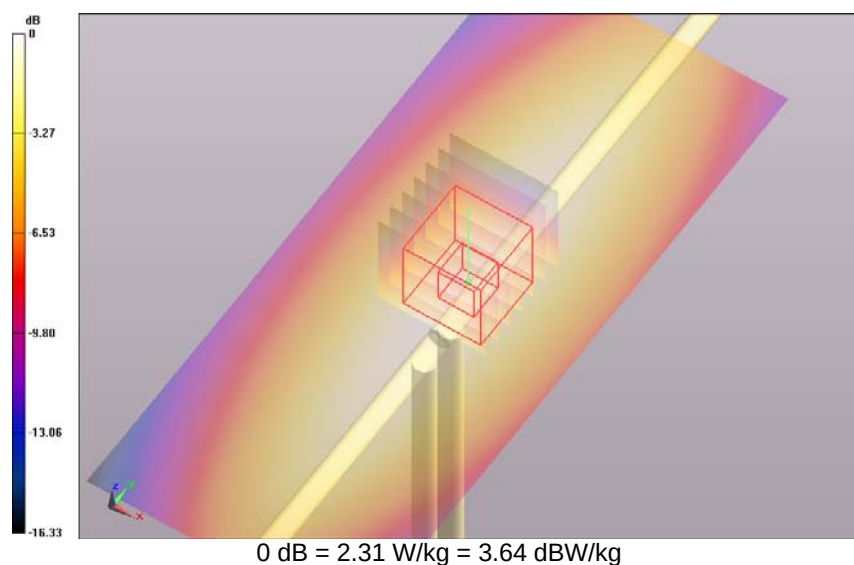


SAR Measurement Plot 4



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

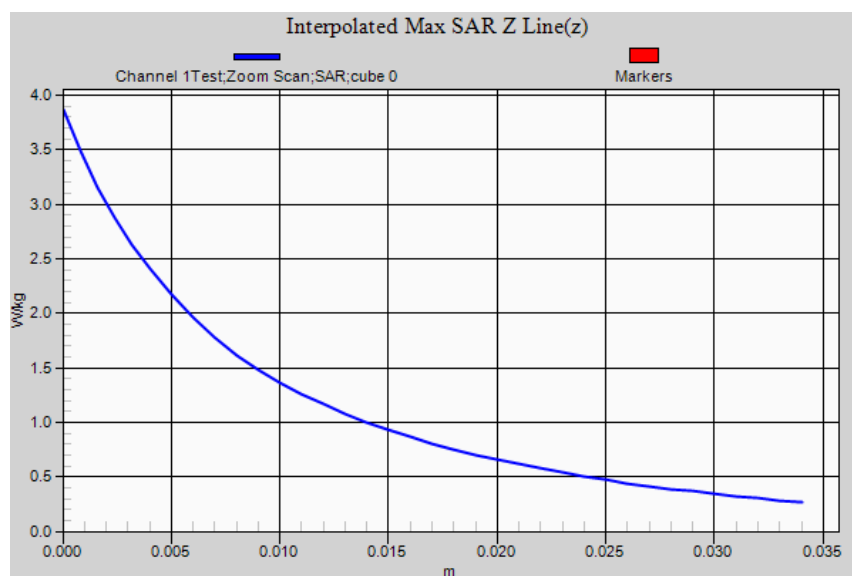

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 510 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-02**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 496.1 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=496.1$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 55.2$; $\rho = 1.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (7.57,7.57,7.57); Calibrated: 10/12/2012;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 4/12/2012
 Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
 DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 4 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;
 Maximum value of SAR (interpolated) = 0.406 W/kg

Body Worn Belt Clip/Channel 4 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 17.650 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.396 W/kg; SAR(10g) = 0.254 W/kg

Maximum value of SAR (interpolated) = 0.639 W/kg

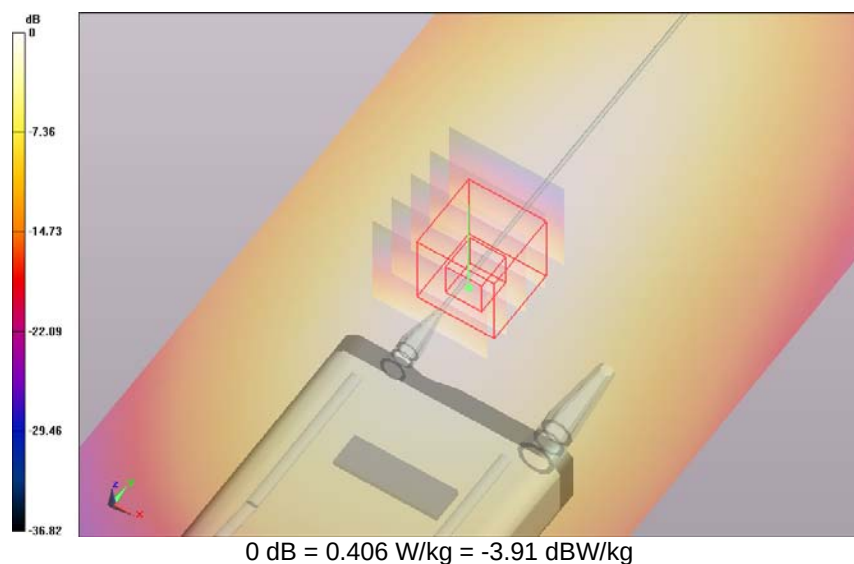


SAR Measurement Plot 5



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

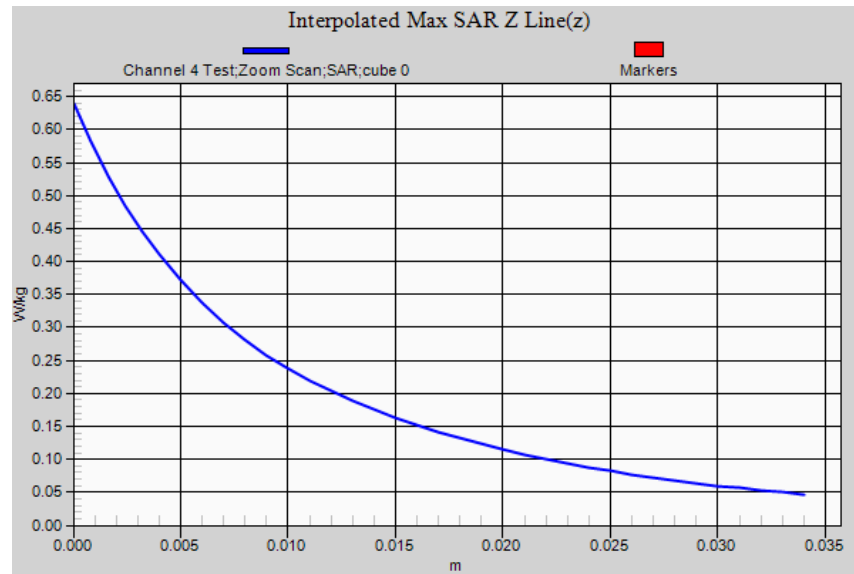

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 510 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-02**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 510.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=496.1$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (7.57,7.57,7.57); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 5 Test/Area Scan (81x181x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.336 W/kg**Body Worn Belt Clip/Channel 5 Test/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 16.143 V/m; **Power Drift = 0.02 dB****Averaged SAR: SAR(1g) = 0.330 W/kg; SAR(10g) = 0.208 W/kg**

Maximum value of SAR (interpolated) = 0.550 W/kg

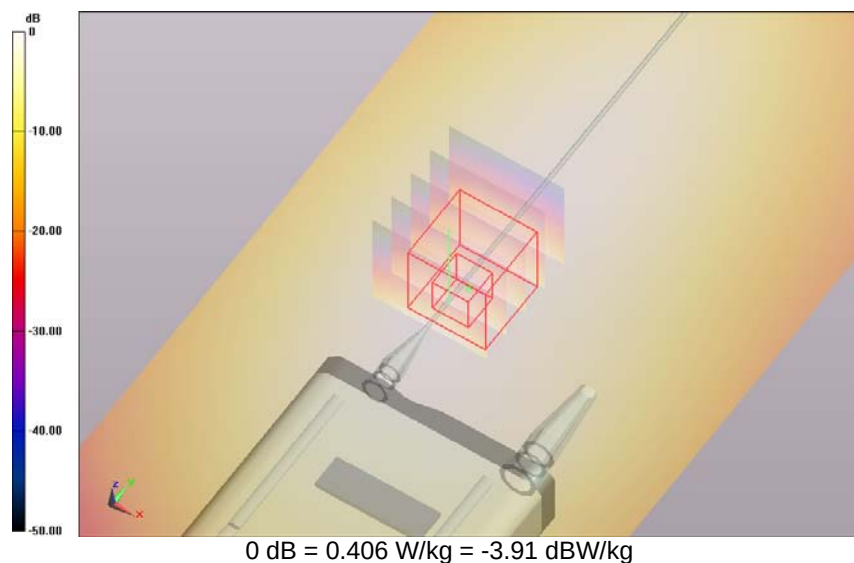


SAR Measurement Plot 6



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

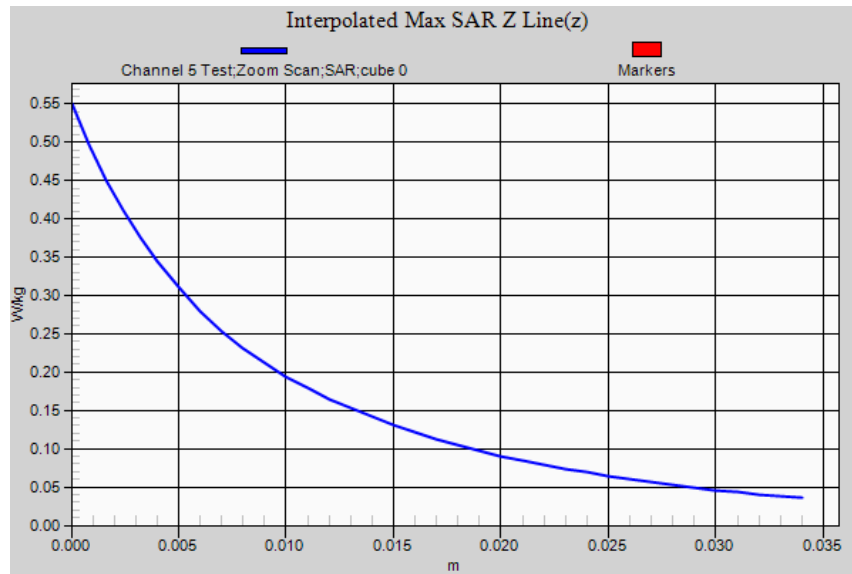

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 510 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-02**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 523.9 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=510.4$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 55.0$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (7.57,7.57,7.57); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 6 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;

Maximum value of SAR (interpolated) = 0.233 W/kg

Body Worn Belt Clip/Channel 6 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 14.475 V/m; **Power Drift = -0.09 dB****Averaged SAR: SAR(1g) = 0.225 W/kg; SAR(10g) = 0.145 W/kg**

Maximum value of SAR (interpolated) = 0.370 W/kg

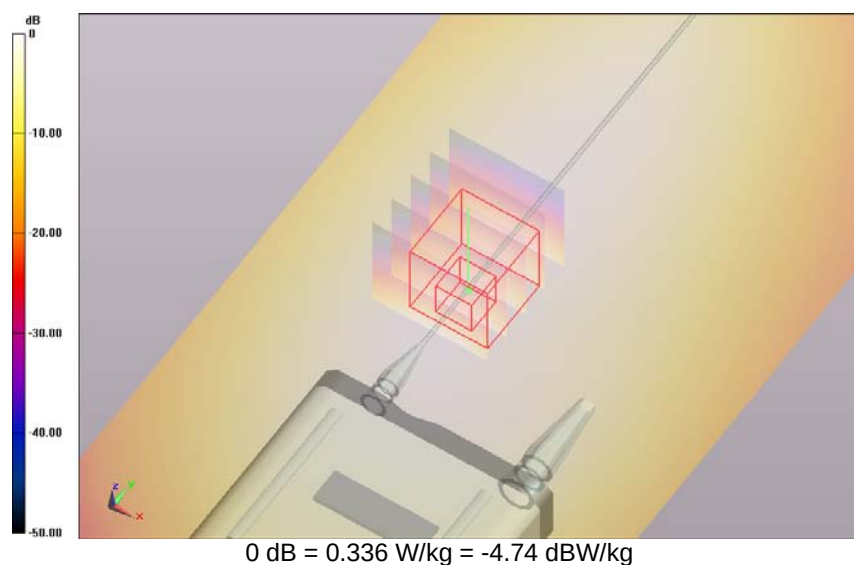


SAR Measurement Plot 7



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

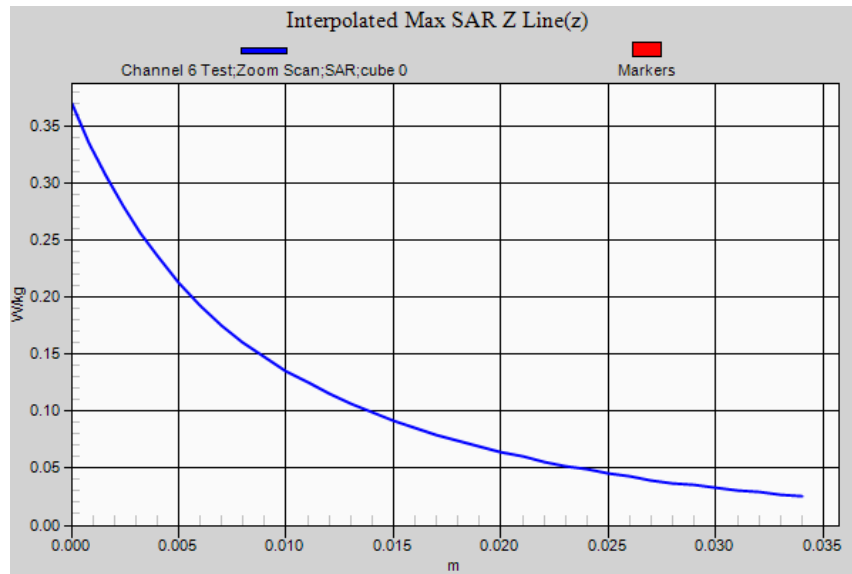

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 527 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 512.1 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=512.6$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 55.1$; $\rho = 1.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (7.57,7.57,7.57); Calibrated: 10/12/2012;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 4/12/2012
 Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
 DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 7 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;
 Maximum value of SAR (interpolated) = 0.310 W/kg

Body Worn Belt Clip/Channel 7 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 16.176 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.301 W/kg; SAR(10g) = 0.190 W/kg

Maximum value of SAR (interpolated) = 0.501 W/kg

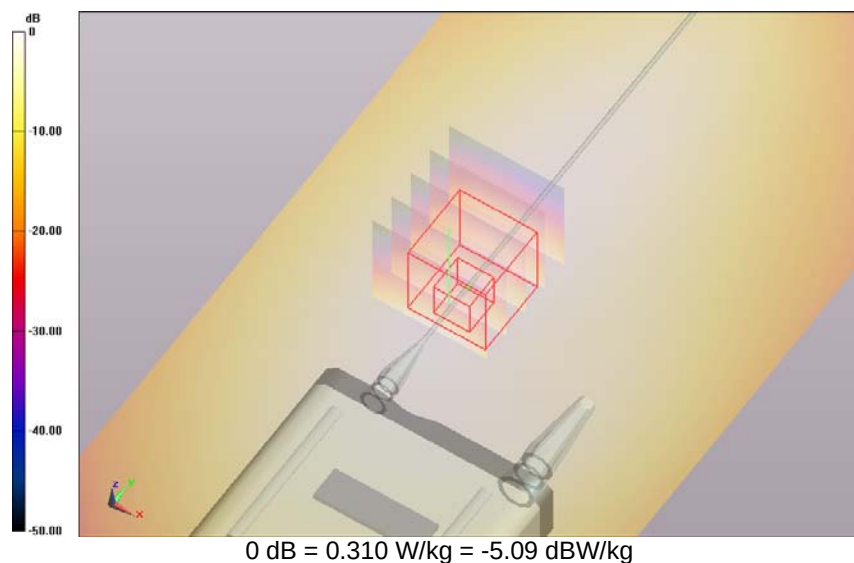


SAR Measurement Plot 8



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

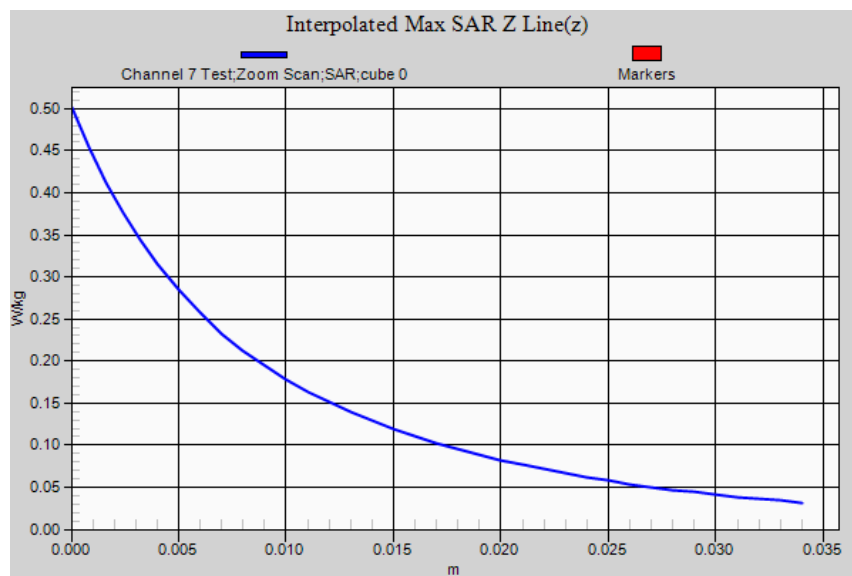

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 527 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 527.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=512.6$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 54.9$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (7.57,7.57,7.57); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 8 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.330 W/kg**Body Worn Belt Clip/Channel 8 Test/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 16.491 V/m; **Power Drift = -0.02 dB****Averaged SAR: SAR(1g) = 0.320 W/kg; SAR(10g) = 0.204 W/kg**

Maximum value of SAR (interpolated) = 0.528 W/kg

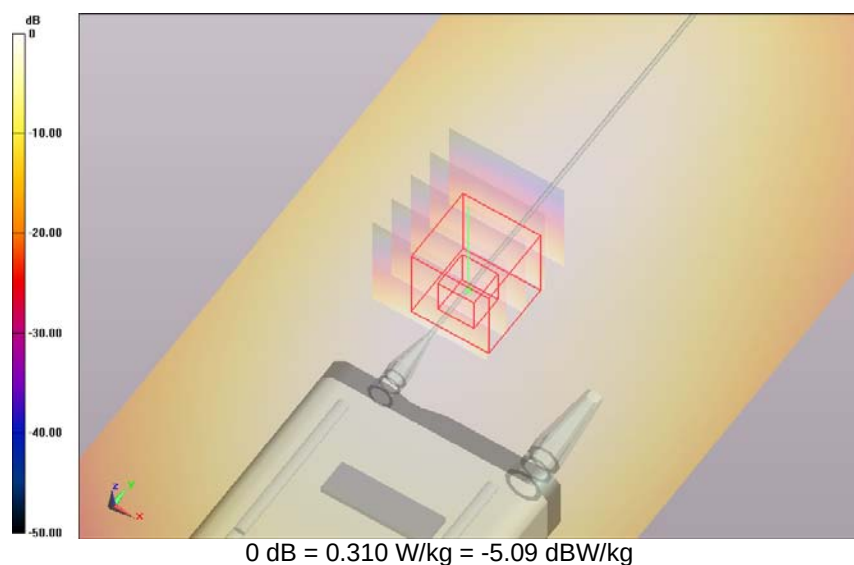


SAR Measurement Plot 9



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

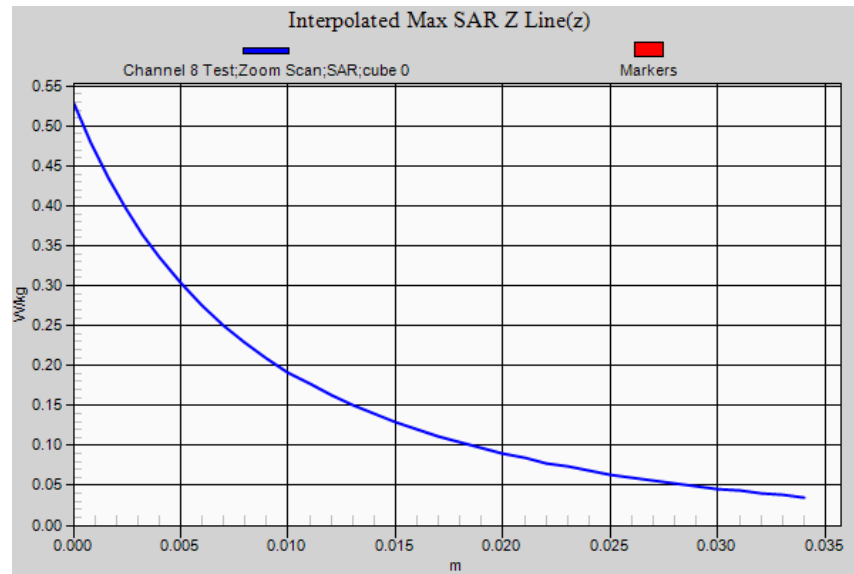

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 527 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 541.9 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=526.9$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 54.8$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (7.57,7.57,7.57); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 9 Test/Area Scan (81x181x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.323 W/kg**Body Worn Belt Clip/Channel 9 Test/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 15.989 V/m; **Power Drift = -0.00 dB****Averaged SAR: SAR(1g) = 0.310 W/kg; SAR(10g) = 0.199 W/kg**

Maximum value of SAR (interpolated) = 0.513 W/kg

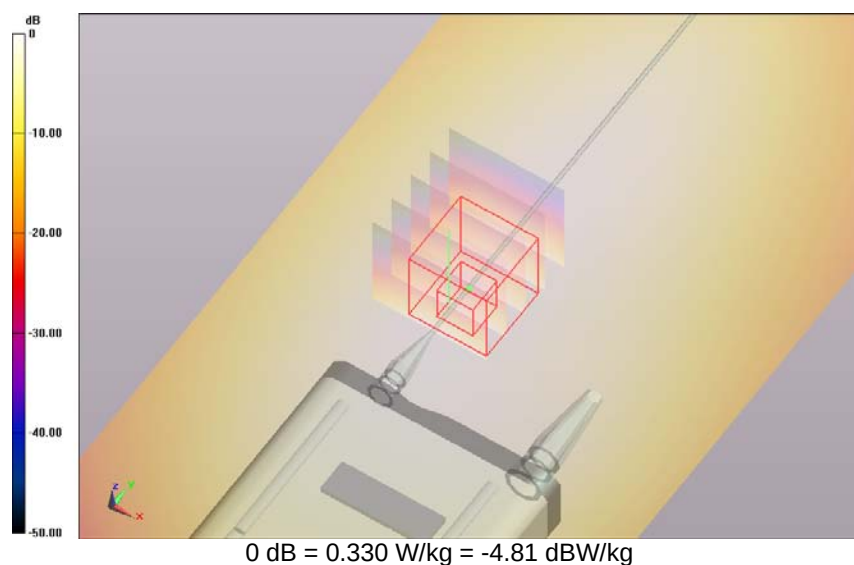


SAR Measurement Plot 10



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

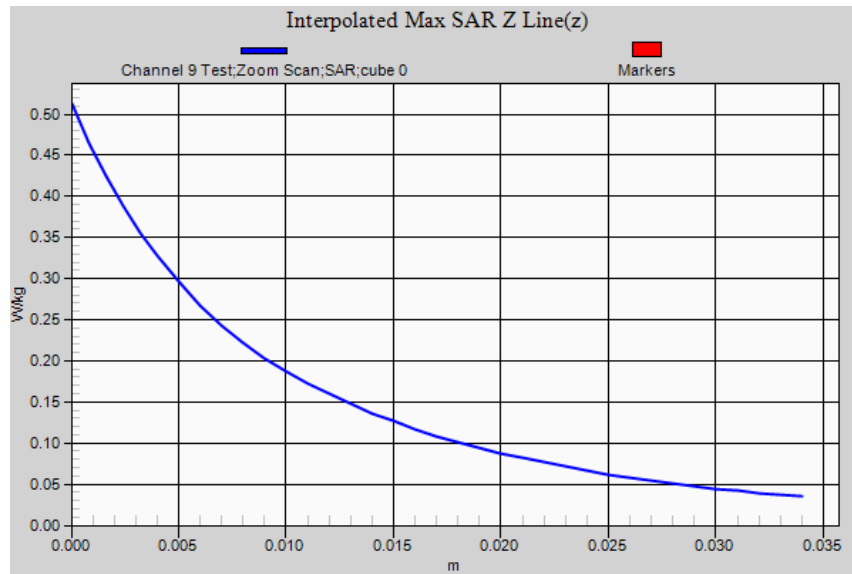

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 557 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip 1**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 542.1 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=542.3$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 54.8$; $\rho = 1.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (7.57,7.57,7.57); Calibrated: 10/12/2012;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 4/12/2012
 Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
 DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip 1/Channel 10 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.365 W/kg

Body Worn Belt Clip 1/Channel 10 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 15.700 V/m; **Power Drift = -0.04 dB**

Averaged SAR: SAR(1g) = 0.349 W/kg; SAR(10g) = 0.216 W/kg

Maximum value of SAR (interpolated) = 0.596 W/kg

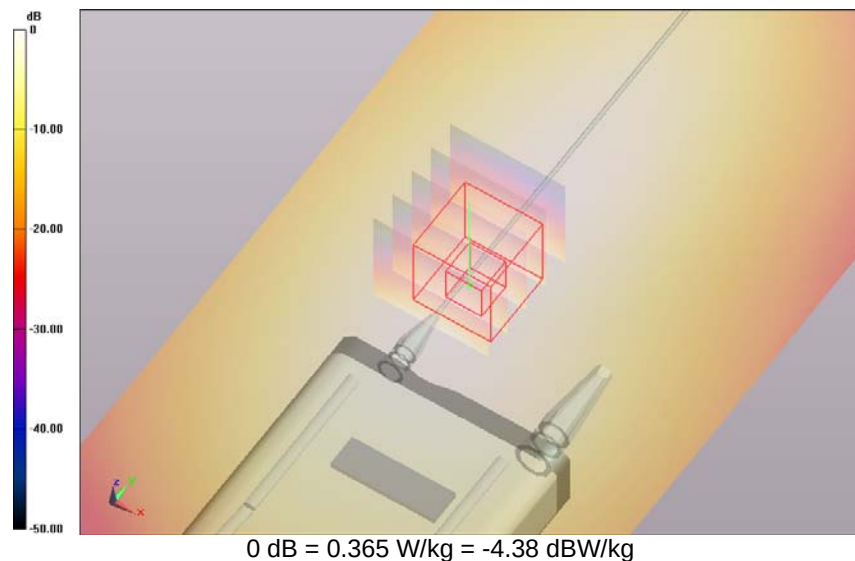


SAR Measurement Plot 11



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

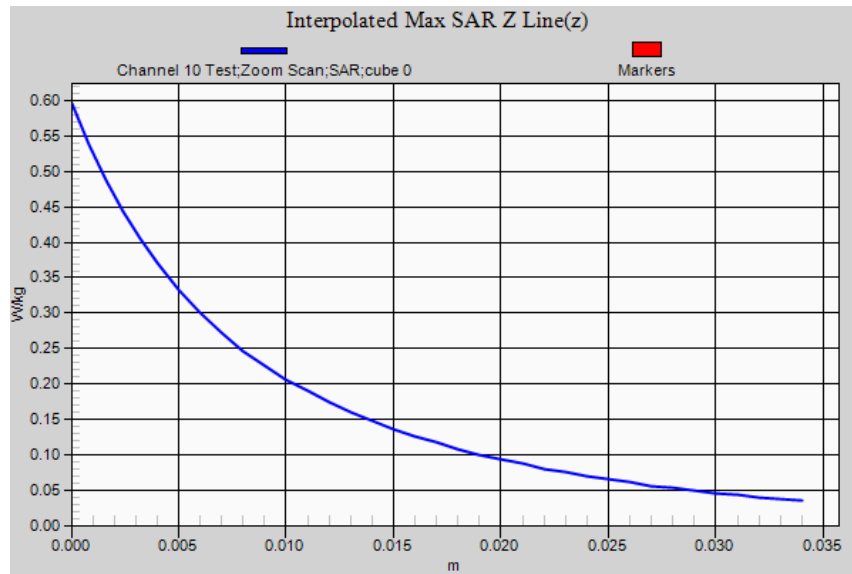

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 557 MHz Belt Clip 31-07-13.da52:1

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip 2**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 557.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=556.6$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 56.3$; $\rho = 1.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 4/12/2012
 Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
 DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip 2/Channel 11 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.419 W/kg

Body Worn Belt Clip 2/Channel 11 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 17.403 V/m; **Power Drift = -0.01 dB**

Averaged SAR: SAR(1g) = 0.439 W/kg; SAR(10g) = 0.263 W/kg

Maximum value of SAR (interpolated) = 0.760 W/kg

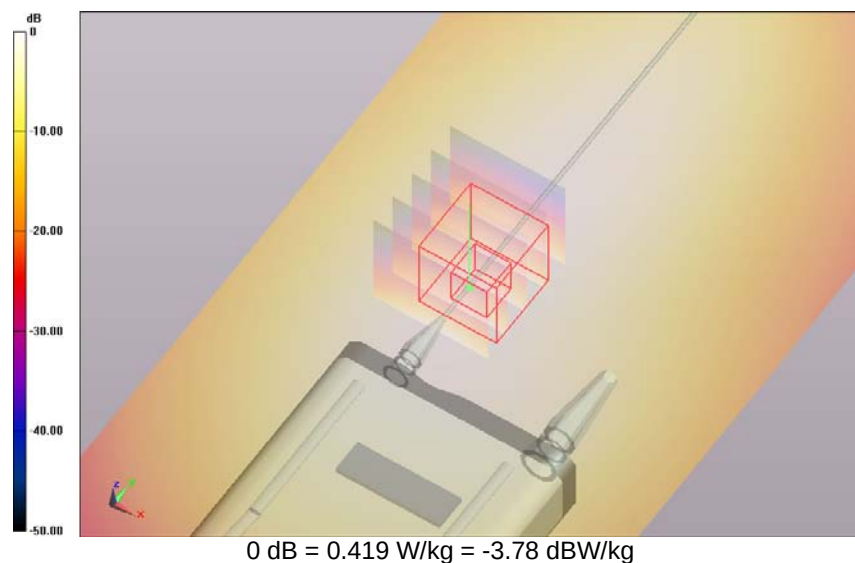


SAR Measurement Plot 12



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

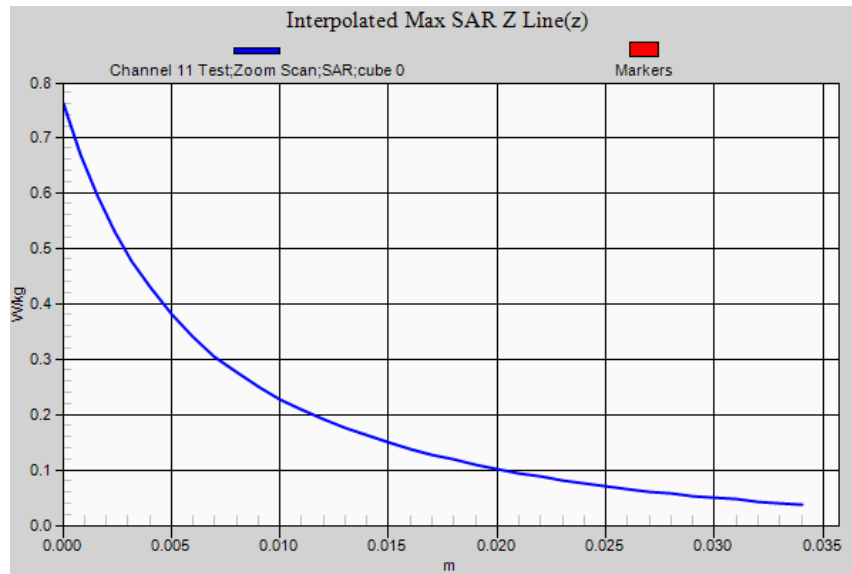

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 557 MHz Belt Clip 31-07-13.da52:1

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip 2**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 571.9 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=556.6$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip 2/Channel 12 Test/Area Scan (81x181x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.448 W/kg**Body Worn Belt Clip 2/Channel 12 Test/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 19.136 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 0.462 W/kg; SAR(10g) = 0.277 W/kg**

Maximum value of SAR (interpolated) = 0.811 W/kg

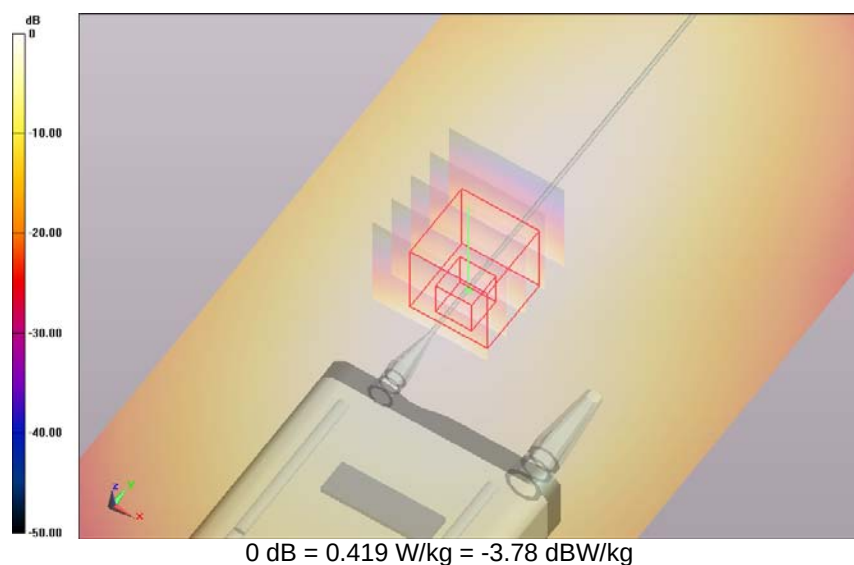


SAR Measurement Plot 13



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

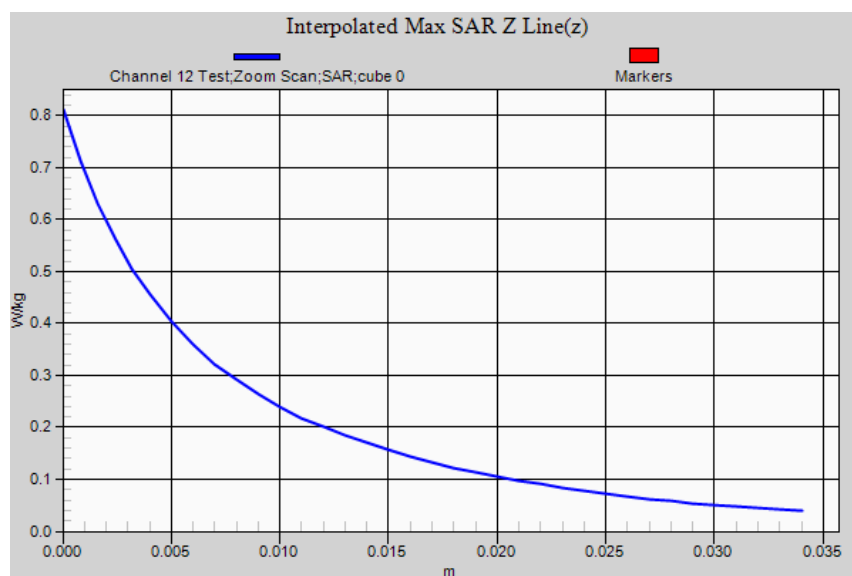

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 557 MHz Belt Clip 31-07-13.da52:2

DUT Name: Dipole 750 MHz, Type: D750V3, Serial: D750V3 - SN:1051**Configuration: System Check 2**

Communication System: 0 - n/a - CW (0); Communication System Band: 600 MHz; Frequency: 600.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=599.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.7$; $\rho = 1.0\text{g/cm}^3$

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

System Check 2/Channel 1Test/Area Scan (51x121x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;

Maximum value of SAR (interpolated) = 2.470 W/kg

System Check 2/Channel 1Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 48.724 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 2.310 W/kg; SAR(10g) = 1.420 W/kg**

Maximum value of SAR (interpolated) = 4.150 W/kg

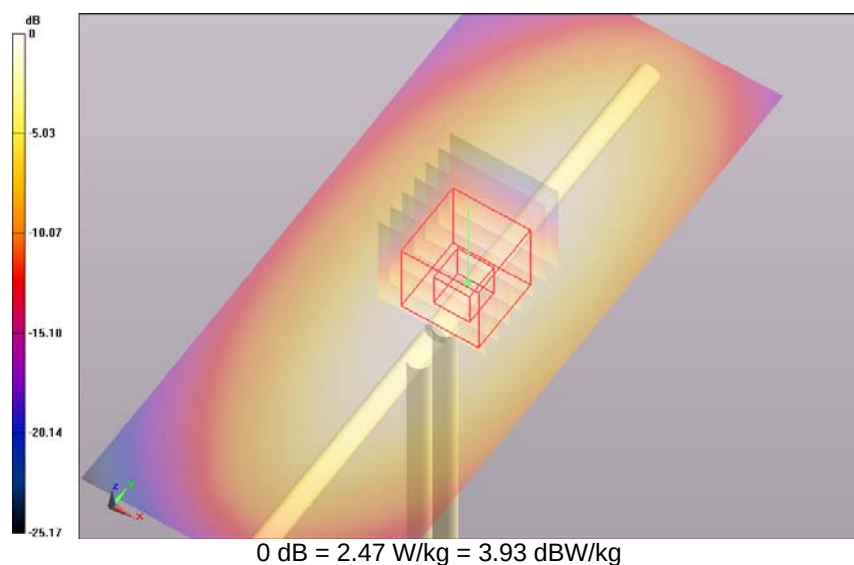


SAR Measurement Plot 14



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

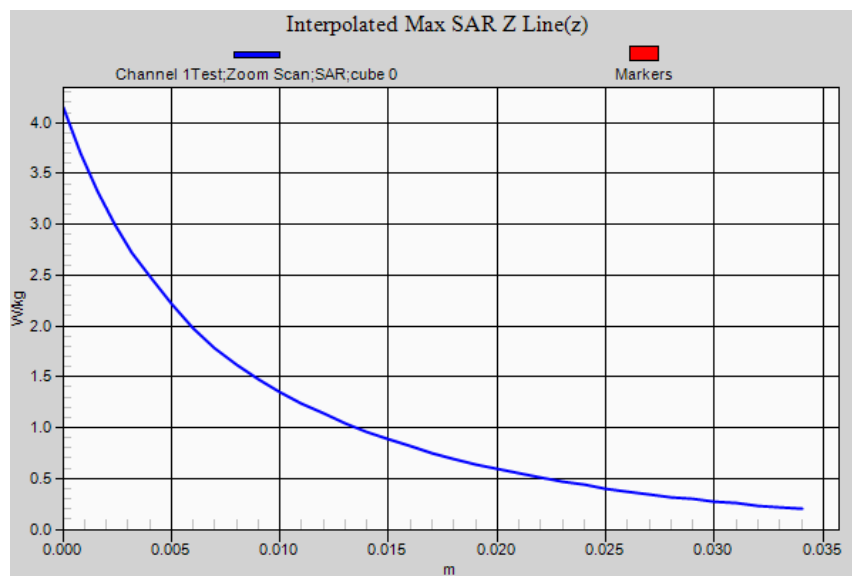

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 557 MHz Belt Clip 31-07-13.da52:3

DUT Name: Dipole 750 MHz, Type: D750V3, Serial: D750V3 - SN:1051**Configuration: System Check 3**

Communication System: 0 - n/a - CW (0); Communication System Band: 600 MHz; Frequency: 600.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=599.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.7$; $\rho = 1.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 4/12/2012
 Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
 DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

System Check 3/Channel 1Test/Area Scan (51x121x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;
 Maximum value of SAR (interpolated) = 2.470 W/kg

System Check 3/Channel 1Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 48.449 V/m; **Power Drift = -0.07 dB**

Averaged SAR: SAR(1g) = 2.330 W/kg; SAR(10g) = 1.430 W/kg

Maximum value of SAR (interpolated) = 4.150 W/kg

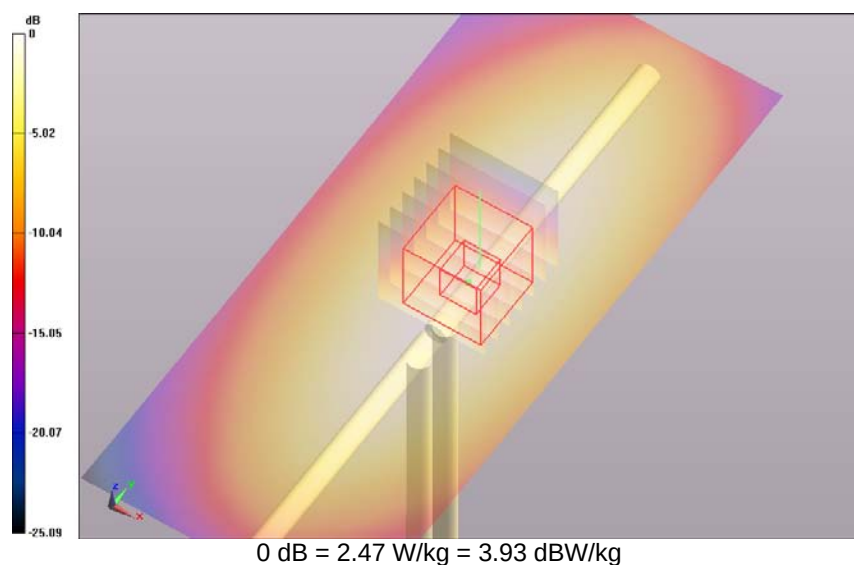


SAR Measurement Plot 15



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

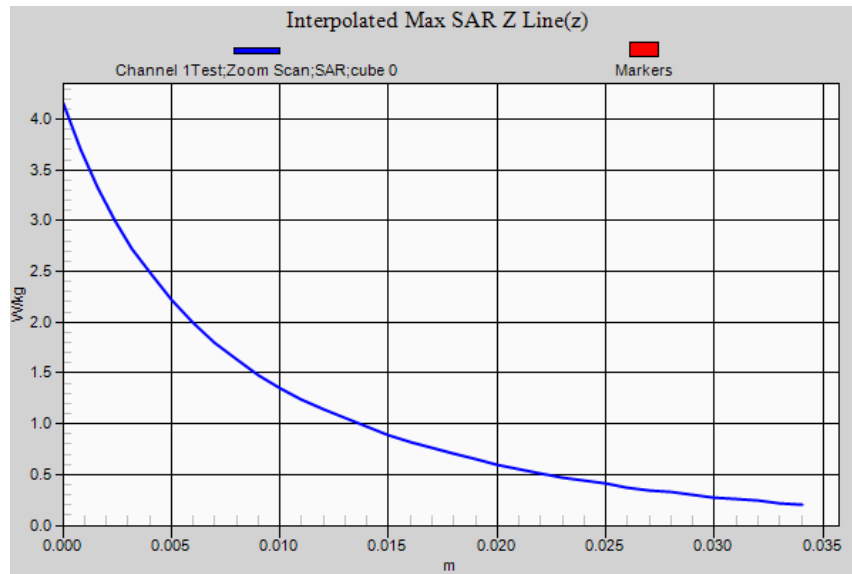

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 557 MHz Belt Clip 31-07-13.da52:4

DUT Name: Dipole 750 MHz, Type: D750V3, Serial: D750V3 - SN:1051**Configuration: System Check 4**

Communication System: 0 - n/a - CW (0); Communication System Band: 600 MHz; Frequency: 600.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=599.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.7$; $\rho = 1.0\text{g/cm}^3$

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

System Check 4/Channel 1Test/Area Scan (51x121x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;

Maximum value of SAR (interpolated) = 2.450 W/kg

System Check 4/Channel 1Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 49.003 V/m; **Power Drift = -0.06 dB****Averaged SAR: SAR(1g) = 2.330 W/kg; SAR(10g) = 1.430 W/kg**

Maximum value of SAR (interpolated) = 4.190 W/kg

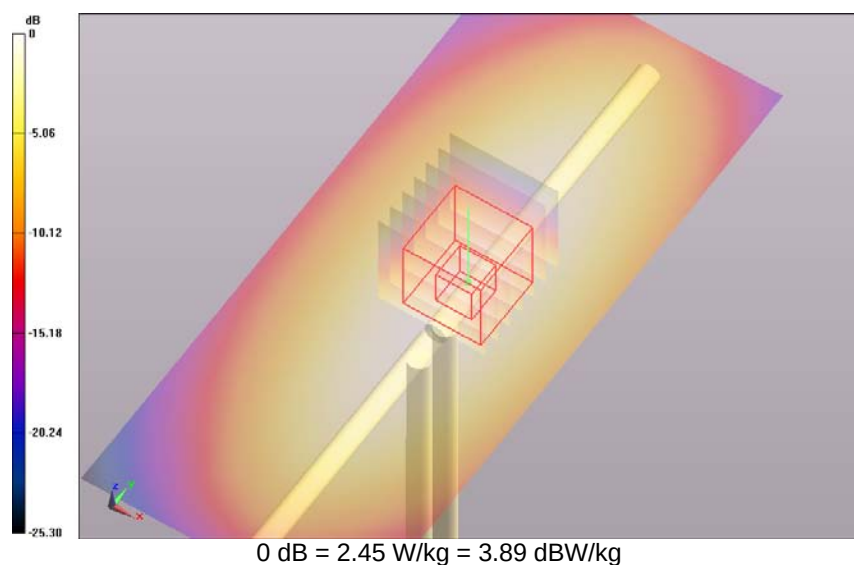


SAR Measurement Plot 16



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

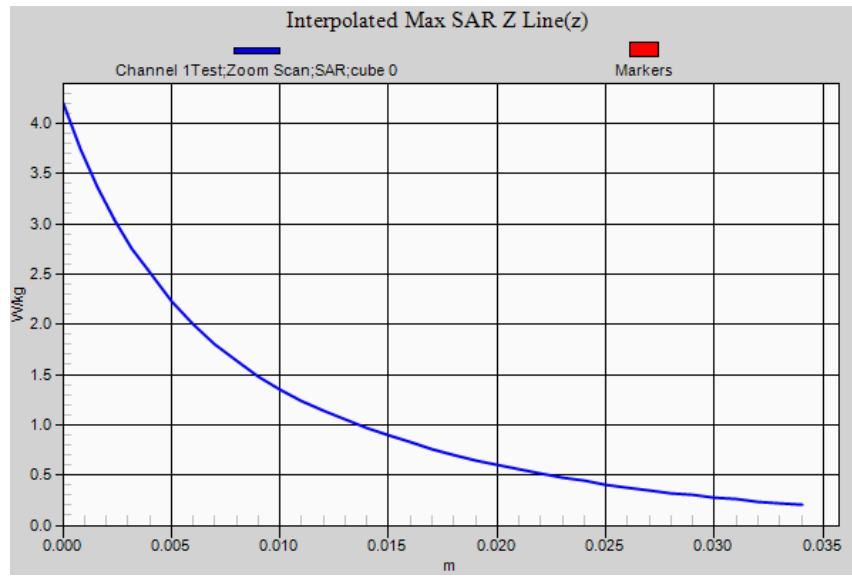

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 557 MHz Belt Clip 31-07-13.da52:5

DUT Name: Dipole 750 MHz, Type: D750V3, Serial: D750V3 - SN:1051**Configuration: System Check 5**

Communication System: 0 - n/a - CW (0); Communication System Band: 600 MHz; Frequency: 600.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=599.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.7$; $\rho = 1.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 4/12/2012
 Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
 DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

System Check 5/Channel 1Test/Area Scan (51x121x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;

Maximum value of SAR (interpolated) = 2.480 W/kg

System Check 5/Channel 1Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 48.515 V/m; **Power Drift = -0.06 dB****Averaged SAR: SAR(1g) = 2.320 W/kg; SAR(10g) = 1.430 W/kg**

Maximum value of SAR (interpolated) = 4.110 W/kg

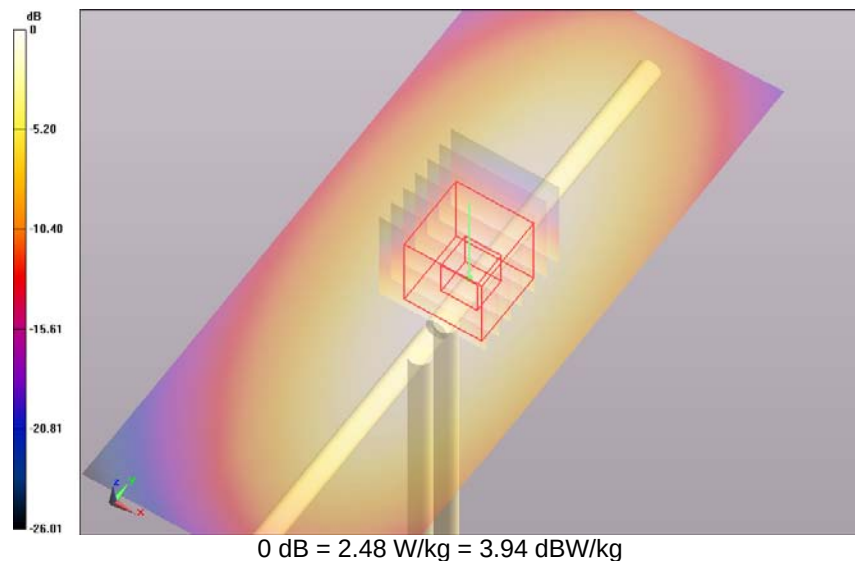


SAR Measurement Plot 17



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

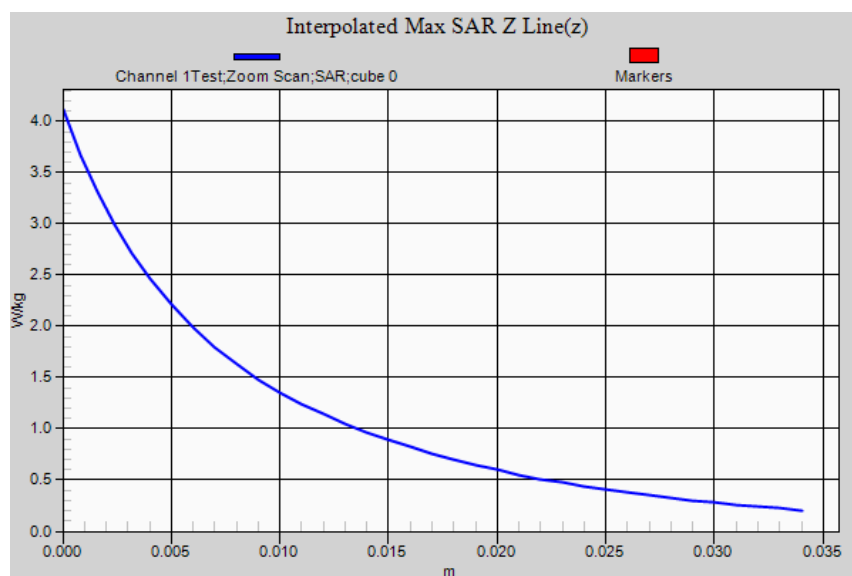

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 557 MHz Belt Clip 31-07-13.da52:6

DUT Name: Dipole 750 MHz, Type: D750V3, Serial: D750V3 - SN:1051**Configuration: System Check 6**

Communication System: 0 - n/a - CW (0); Communication System Band: 600 MHz; Frequency: 600.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=599.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.7$; $\rho = 1.0\text{g/cm}^3$

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

System Check 6/Channel 1Test/Area Scan (51x121x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;

Maximum value of SAR (interpolated) = 2.490 W/kg

System Check 6/Channel 1Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 48.468 V/m; **Power Drift = -0.06 dB****Averaged SAR: SAR(1g) = 2.340 W/kg; SAR(10g) = 1.430 W/kg**

Maximum value of SAR (interpolated) = 4.170 W/kg

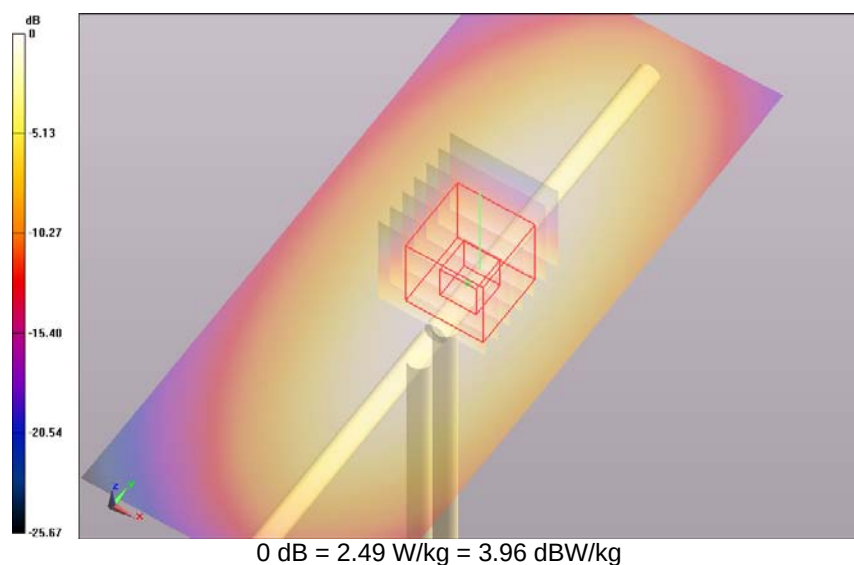


SAR Measurement Plot 18



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

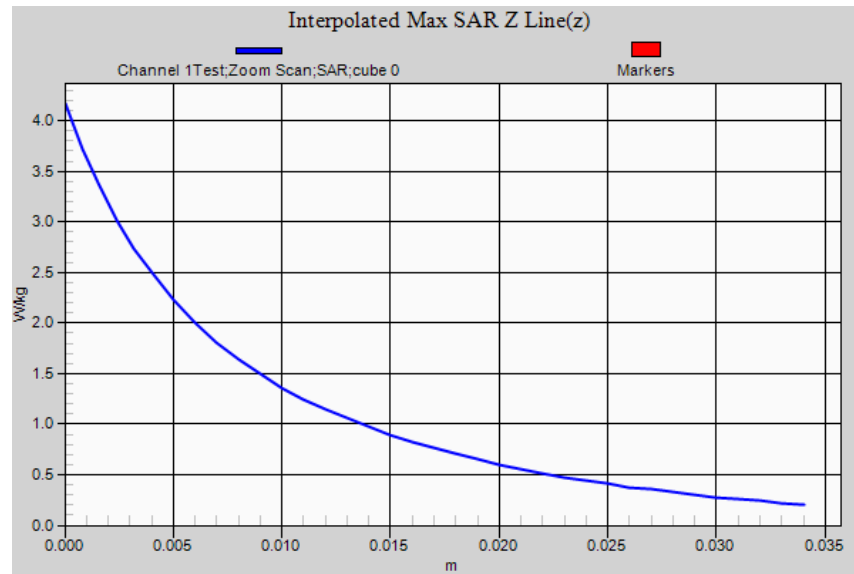

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 590 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 572.0 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=572$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 56.1$; $\rho = 1.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 4/12/2012
 Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
 DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 13 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;
 Maximum value of SAR (interpolated) = 0.375 W/kg

Body Worn Belt Clip/Channel 13 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 16.397 V/m; **Power Drift = -0.01 dB**

Averaged SAR: SAR(1g) = 0.385 W/kg; SAR(10g) = 0.233 W/kg

Maximum value of SAR (interpolated) = 0.661 W/kg

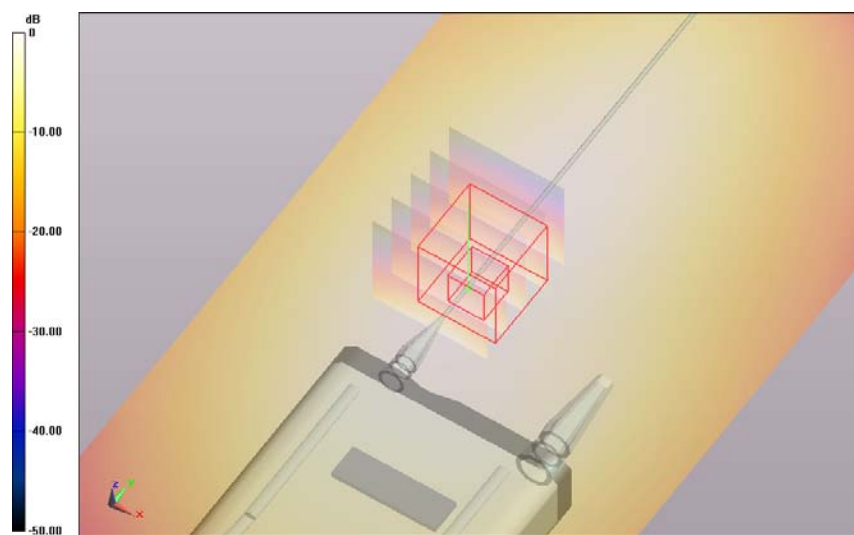


0 dB = 0.375 W/kg = -4.26 dBW/kg

SAR Measurement Plot 19



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

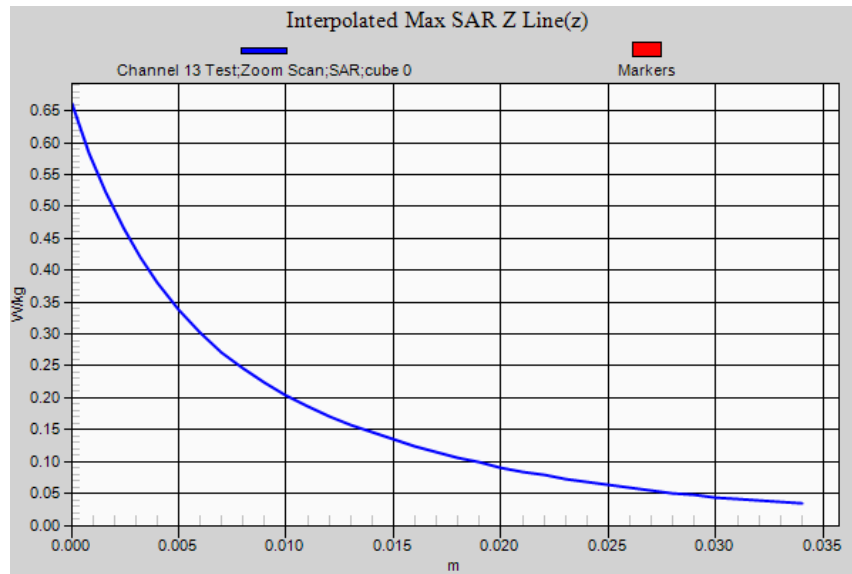

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 590 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 584.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=572$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 55.9$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 14 Test/Area Scan (81x181x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.466 W/kg**Body Worn Belt Clip/Channel 14 Test/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 18.533 V/m; **Power Drift = -0.04 dB****Averaged SAR: SAR(1g) = 0.474 W/kg; SAR(10g) = 0.285 W/kg**

Maximum value of SAR (interpolated) = 0.828 W/kg

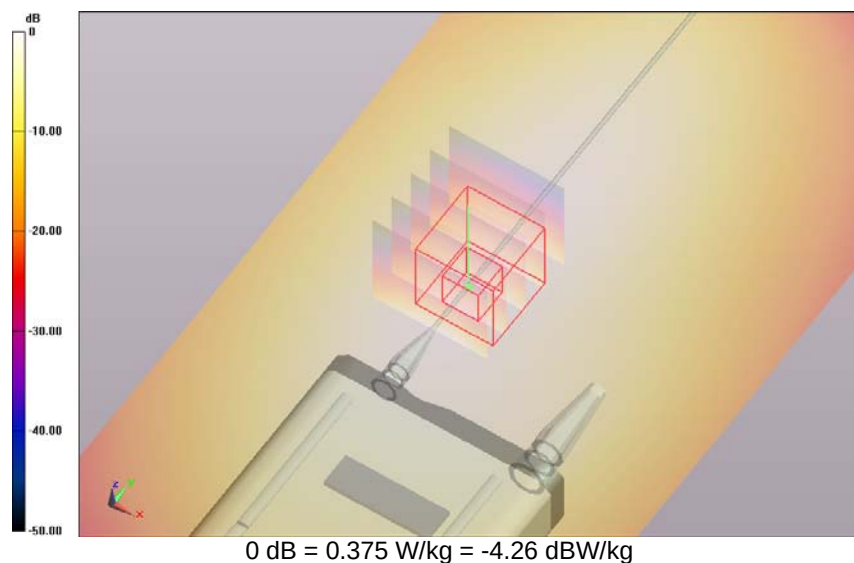


SAR Measurement Plot 20



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

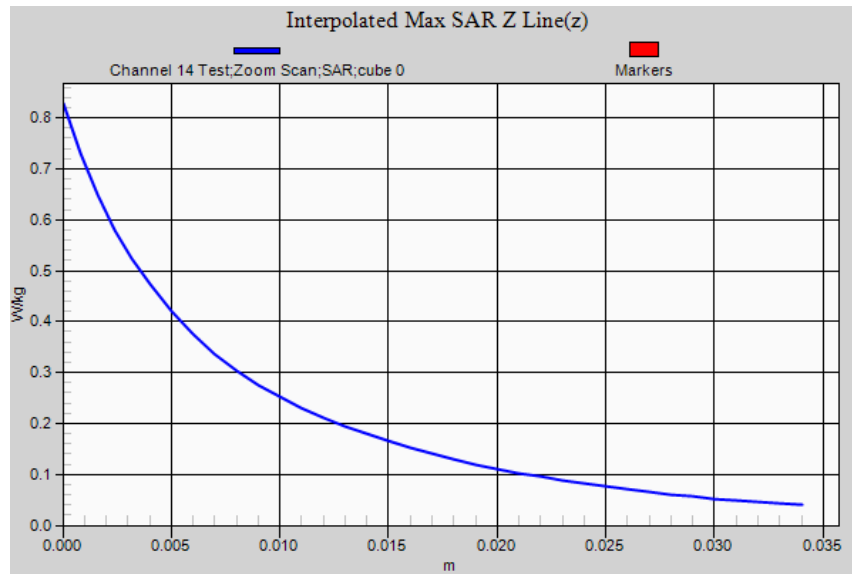

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 590 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 596.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=584.1$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 55.8$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 15 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.550 W/kg**Body Worn Belt Clip/Channel 15 Test/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 21.711 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 0.547 W/kg; SAR(10g) = 0.327 W/kg**

Maximum value of SAR (interpolated) = 0.968 W/kg

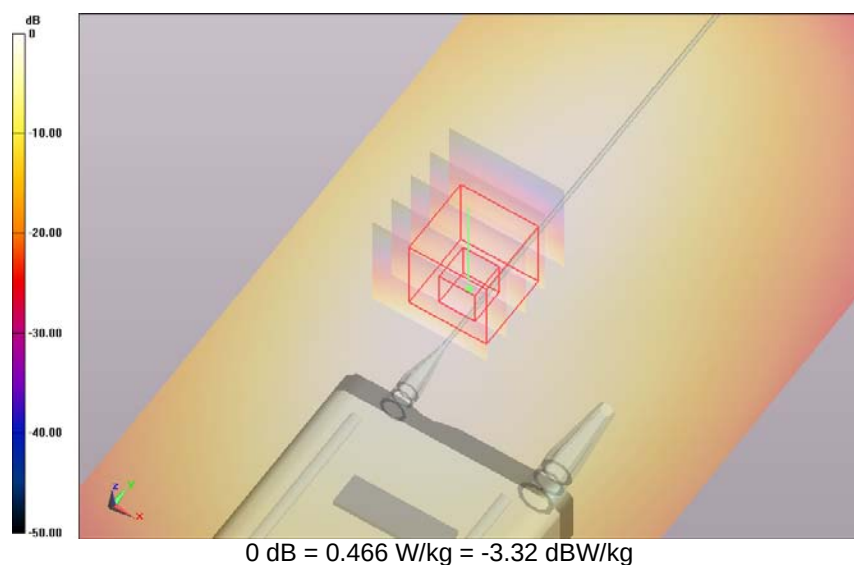


SAR Measurement Plot 21



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

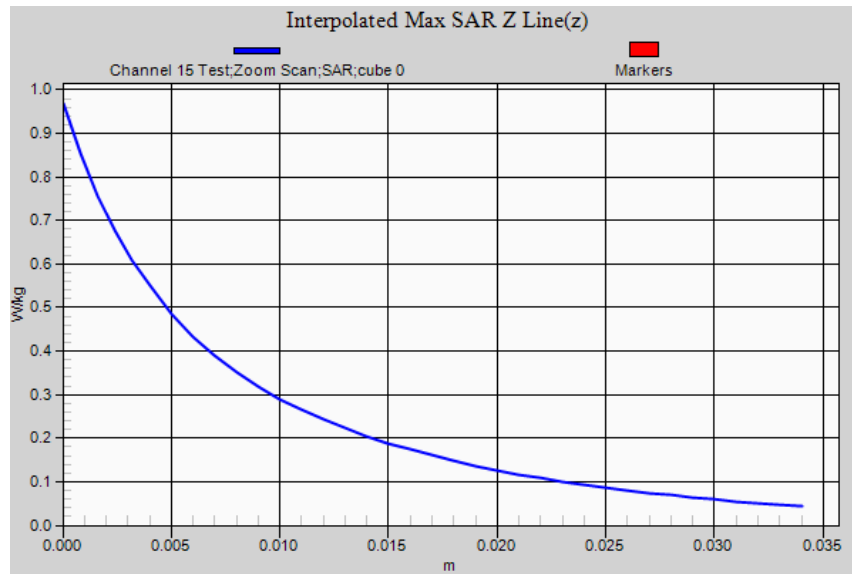

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 590 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 607.9 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=596.2$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 55.6$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 16 Test/Area Scan (81x181x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.570 W/kg**Body Worn Belt Clip/Channel 16 Test/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 21.527 V/m; **Power Drift = -0.00 dB****Averaged SAR: SAR(1g) = 0.568 W/kg; SAR(10g) = 0.340 W/kg**

Maximum value of SAR (interpolated) = 1.010 W/kg

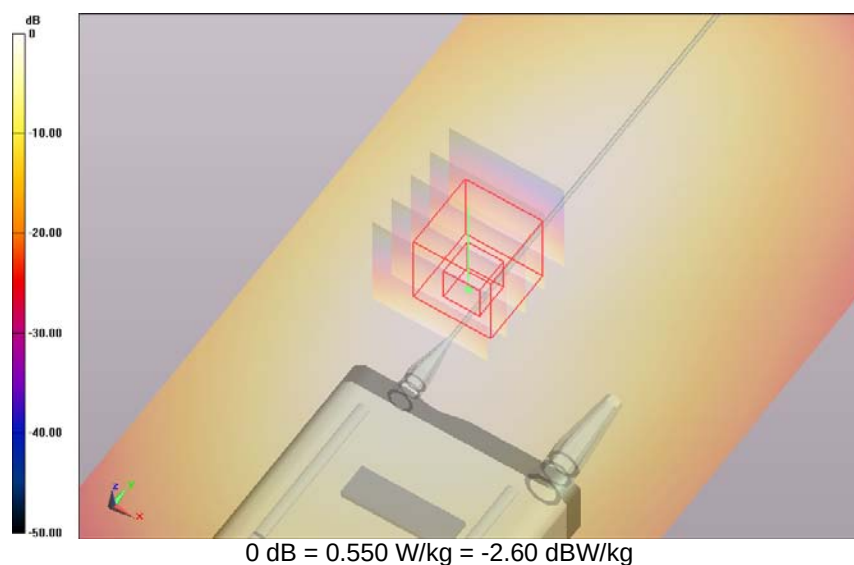


SAR Measurement Plot 22



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

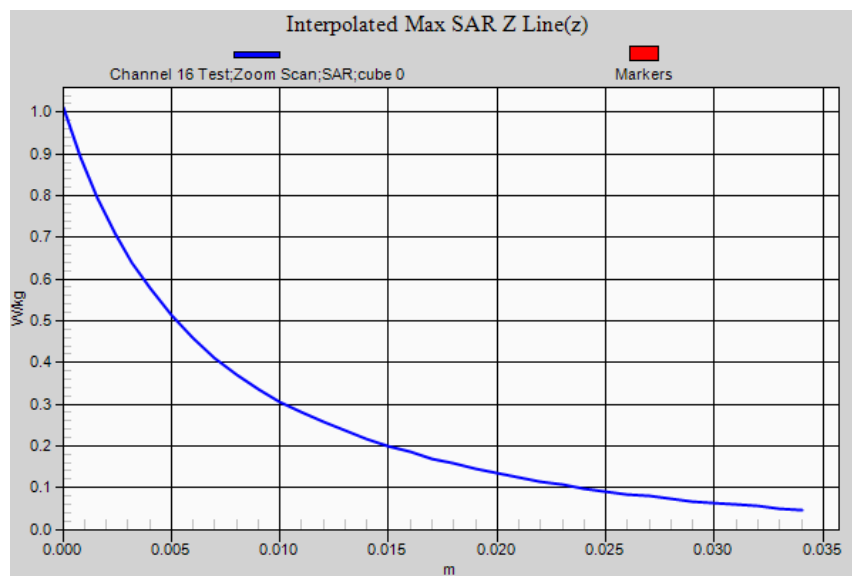

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 635 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip 1**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 614.1 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=613.8$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 55.6$; $\rho = 1.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 4/12/2012
 Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
 DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip 1/Channel 17 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.543 W/kg

Body Worn Belt Clip 1/Channel 17 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 20.655 V/m; **Power Drift = -0.01 dB**

Averaged SAR: SAR(1g) = 0.532 W/kg; SAR(10g) = 0.318 W/kg

Maximum value of SAR (interpolated) = 0.952 W/kg

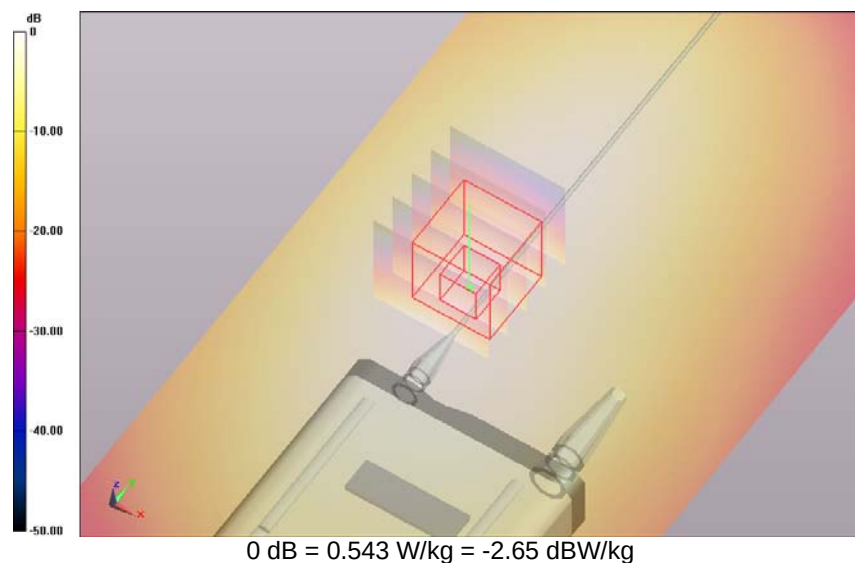


SAR Measurement Plot 23



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

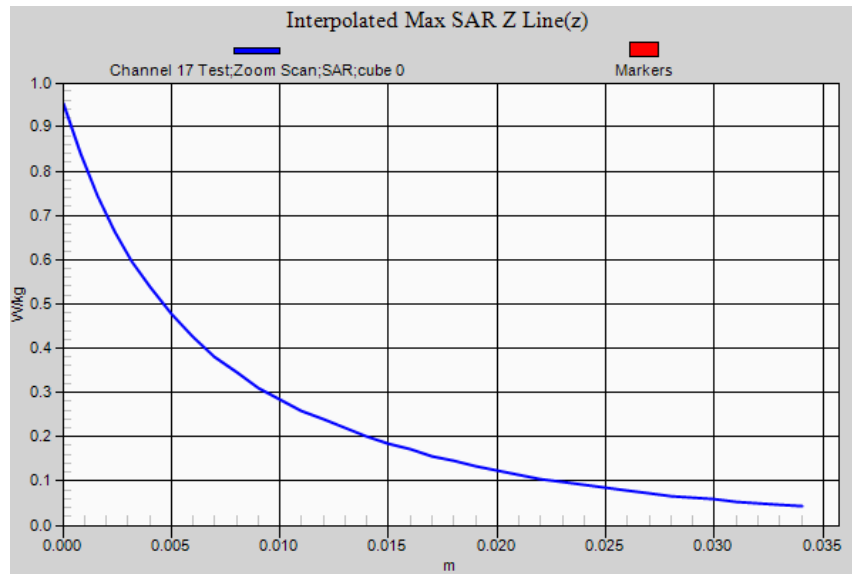

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 635 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip 1**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 628.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=613.8$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 55.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip 1/Channel 18 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.555 W/kg**Body Worn Belt Clip 1/Channel 18 Test/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 20.464 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 0.547 W/kg; SAR(10g) = 0.327 W/kg**

Maximum value of SAR (interpolated) = 0.984 W/kg

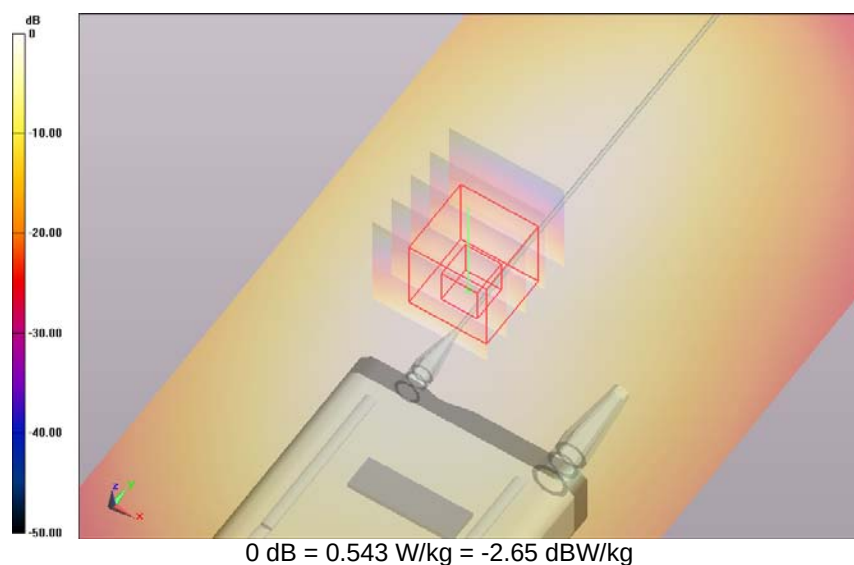


SAR Measurement Plot 24



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

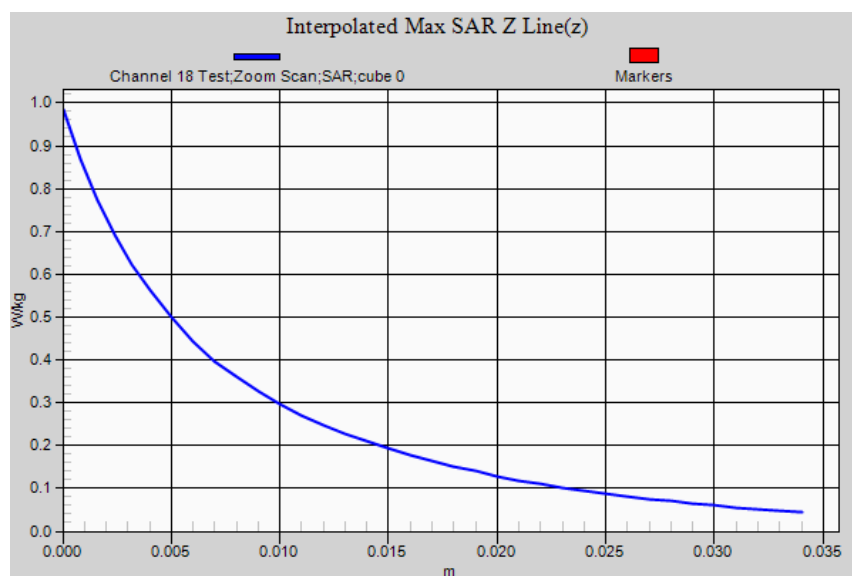

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 635 MHz Belt Clip 31-07-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip 1**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 642.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=628.1$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 55.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.43,6.43,6.43); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip 1/Channel 19 Test/Area Scan (81x181x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 0.625 W/kg**Body Worn Belt Clip 1/Channel 19 Test/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 22.112 V/m; **Power Drift = -0.05 dB****Averaged SAR: SAR(1g) = 0.609 W/kg; SAR(10g) = 0.363 W/kg**

Maximum value of SAR (interpolated) = 1.110 W/kg

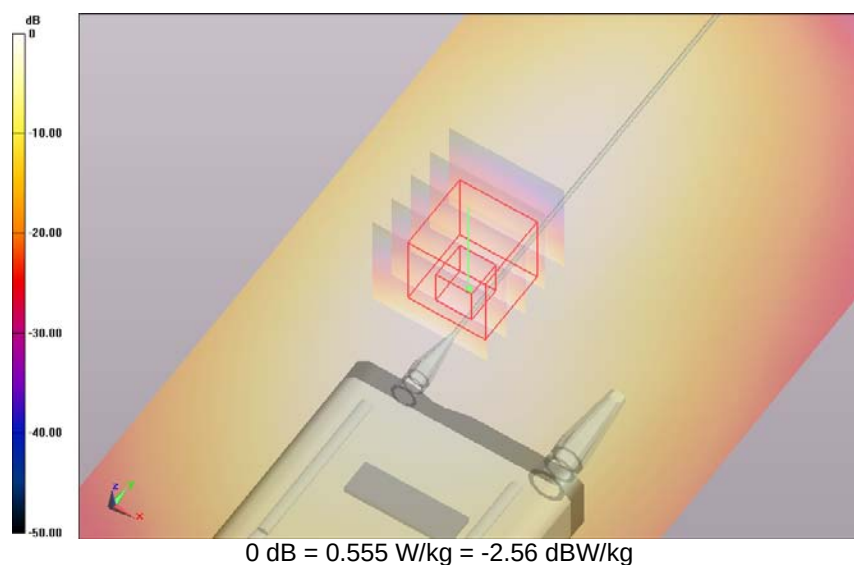


SAR Measurement Plot 25



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

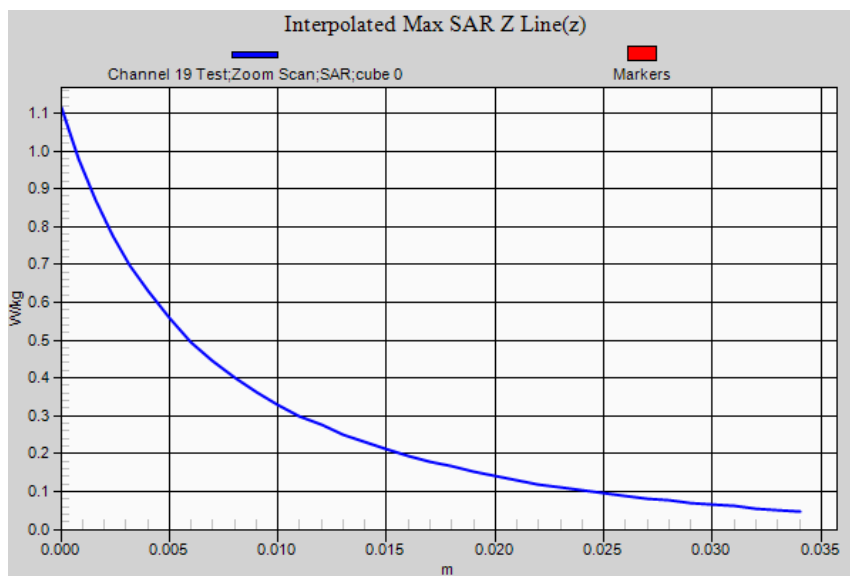

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 635 MHz Belt Clip 31-07-13.da52:1

DUT Name: Dipole 750 MHz, Type: D750V3, Serial: D750V3 - SN:1051**Configuration: System Check**

Communication System: 0 - n/a - CW (0); Communication System Band: 750 MHz; Frequency: 750.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=749.8$ MHz; $\sigma = 1.00$ S/m; $\epsilon_r = 56.6$; $\rho = 1.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.19,6.19,6.19); Calibrated: 10/12/2012;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 4/12/2012
 Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
 DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

System Check/Channel 1Test/Area Scan (51x121x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;

Maximum value of SAR (interpolated) = 2.450 W/kg

System Check/Channel 1Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 49.527 V/m; **Power Drift = -0.04 dB****Averaged SAR: SAR(1g) = 2.320 W/kg; SAR(10g) = 1.550 W/kg**

Maximum value of SAR (interpolated) = 3.230 W/kg

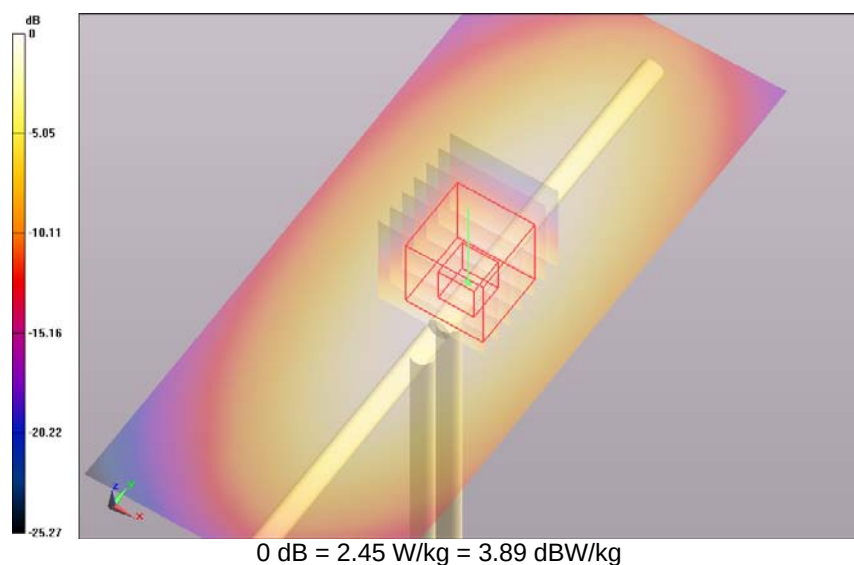


SAR Measurement Plot 26



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

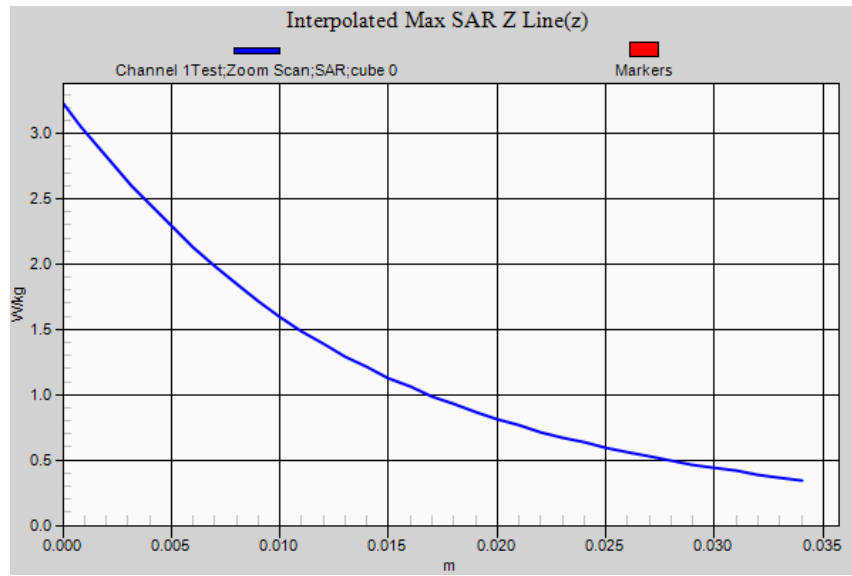

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 635 MHz Belt Clip 31-07-13.da52:2

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip 2**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 655.9 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=655.6$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 57.6$; $\rho = 1.0\text{g/cm}^3$

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.19,6.19,6.19); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip 2/Channel 20 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 0.581 W/kg**Body Worn Belt Clip 2/Channel 20 Test/Zoom Scan (21x21x36)/Cube 0:** Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 22.895 V/m; **Power Drift = -0.02 dB****Averaged SAR: SAR(1g) = 0.595 W/kg; SAR(10g) = 0.382 W/kg**

Maximum value of SAR (interpolated) = 0.815 W/kg

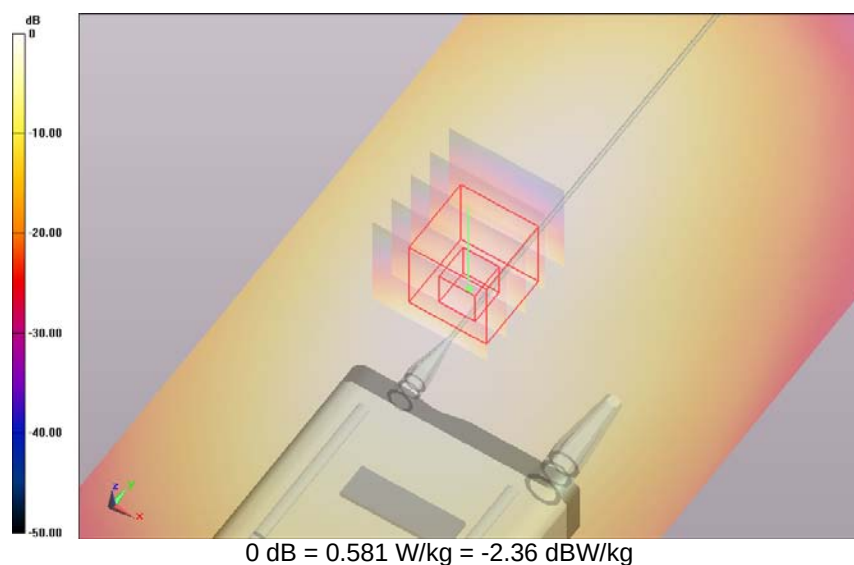


SAR Measurement Plot 27



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

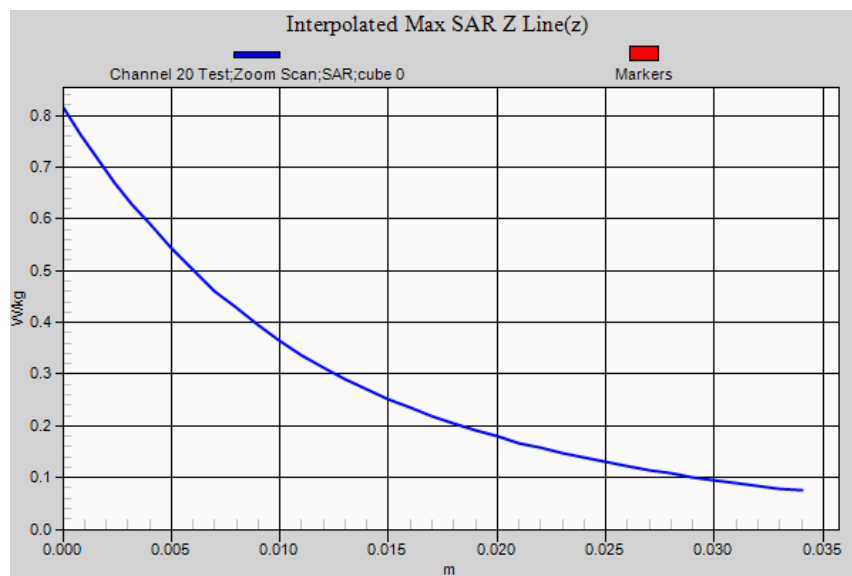

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 677 MHz Belt Clip 01-08-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 656.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=656.2$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 57.6$; $\rho = 1.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (6.19,6.19,6.19); Calibrated: 10/12/2012;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 4/12/2012
 Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
 DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 21 Test/Area Scan (81x181x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm;
 Maximum value of SAR (interpolated) = 0.641 W/kg

Body Worn Belt Clip/Channel 21 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 22.362 V/m; **Power Drift = -0.02 dB**

Averaged SAR: SAR(1g) = 0.646 W/kg; SAR(10g) = 0.413 W/kg

Maximum value of SAR (interpolated) = 0.892 W/kg

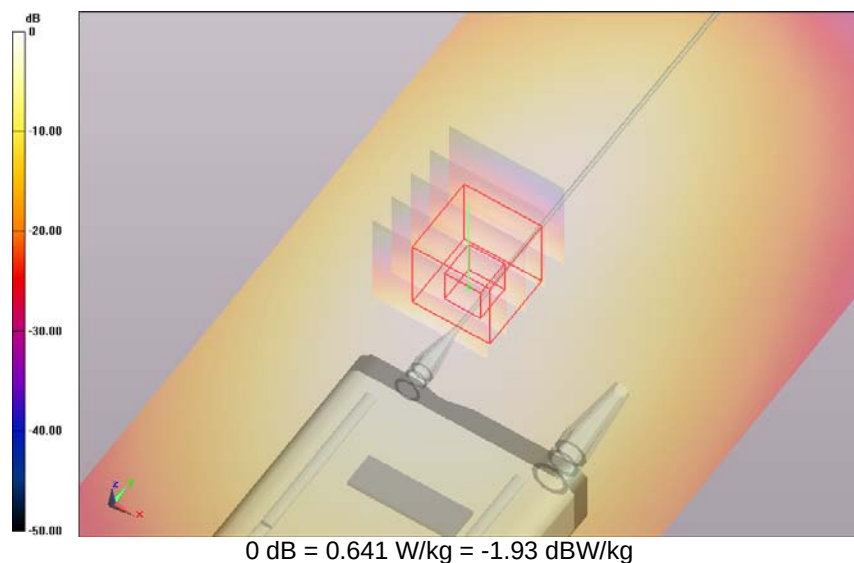


SAR Measurement Plot 28



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

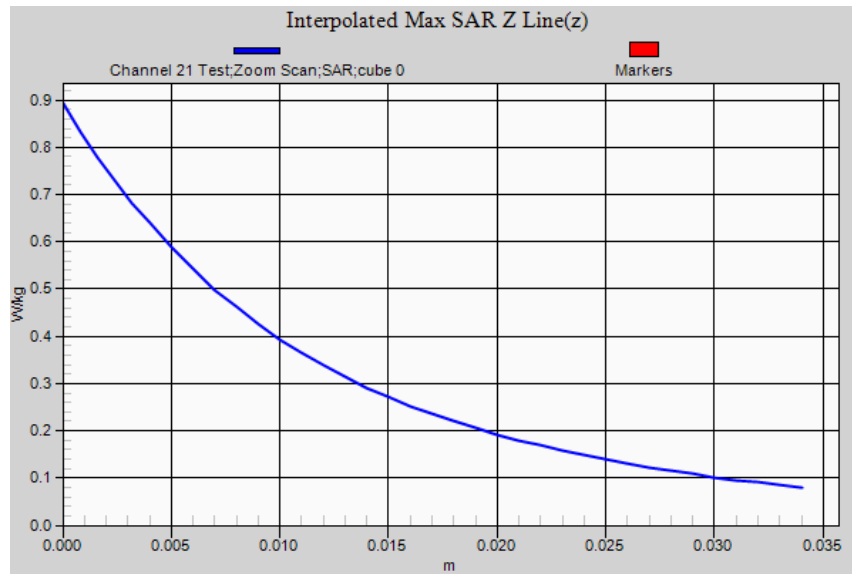

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 677 MHz Belt Clip 01-08-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 670.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=656.2$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 57.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.19,6.19,6.19); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 22 Test/Area Scan (81x181x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;

Maximum value of SAR (interpolated) = 0.658 W/kg

Body Worn Belt Clip/Channel 22 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 22.161 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 0.656 W/kg; SAR(10g) = 0.414 W/kg**

Maximum value of SAR (interpolated) = 0.915 W/kg

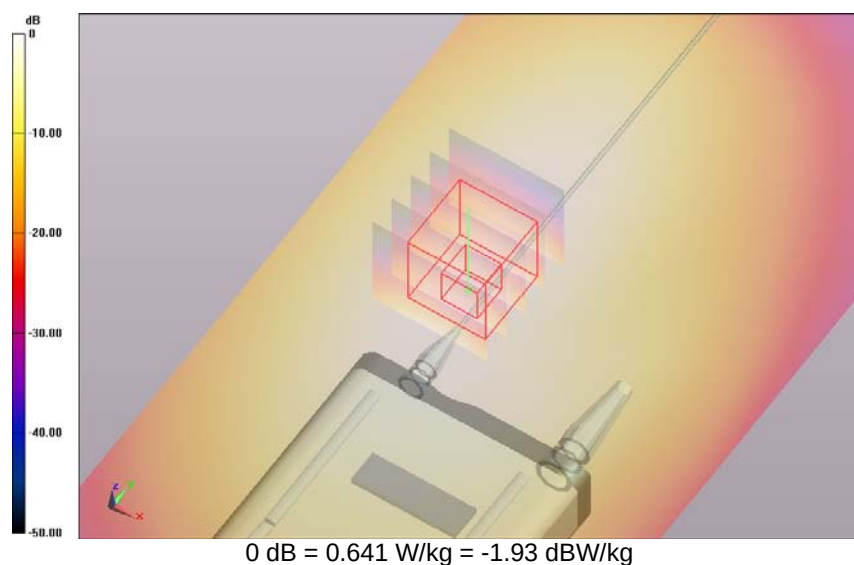


SAR Measurement Plot 29



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

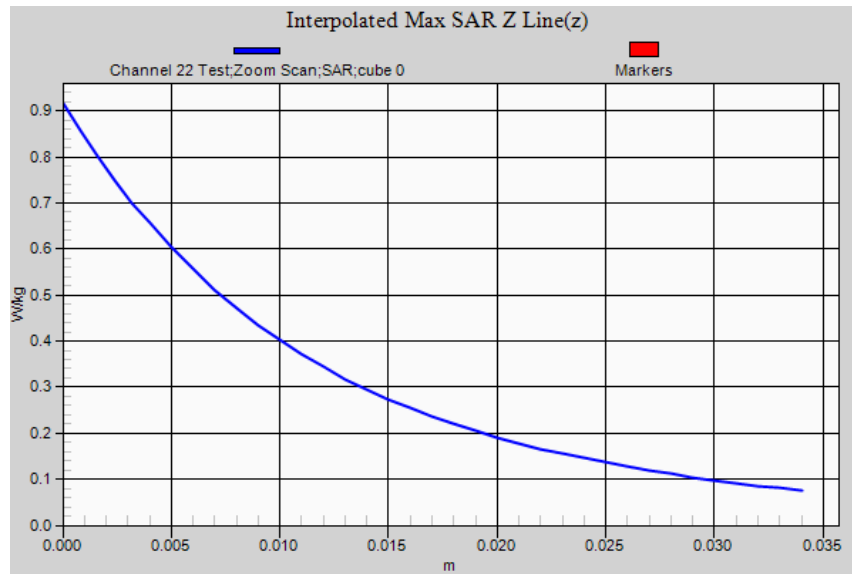

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 677 MHz Belt Clip 01-08-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 684.0 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=670$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 57.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.19,6.19,6.19); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 23 Test/Area Scan (81x181x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;

Maximum value of SAR (interpolated) = 0.637 W/kg

Body Worn Belt Clip/Channel 23 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 20.508 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 0.630 W/kg; SAR(10g) = 0.398 W/kg**

Maximum value of SAR (interpolated) = 0.886 W/kg

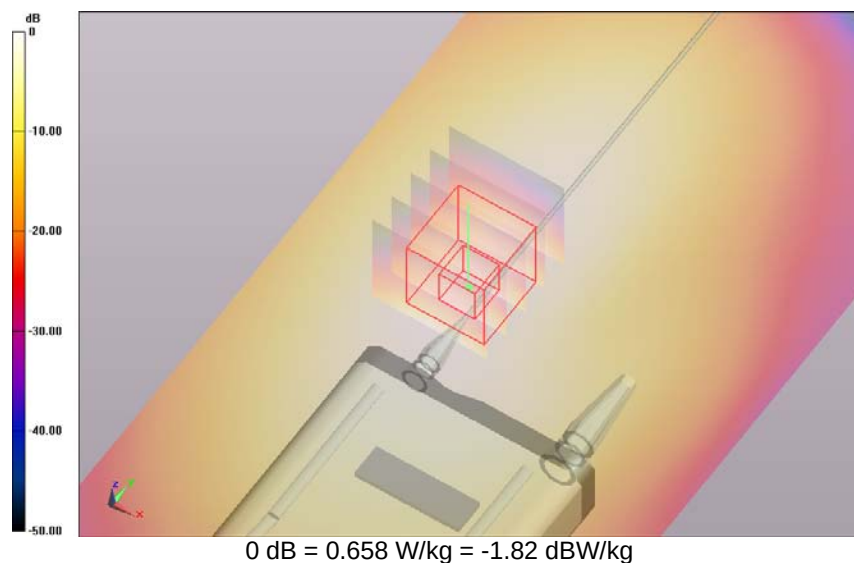


SAR Measurement Plot 30



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

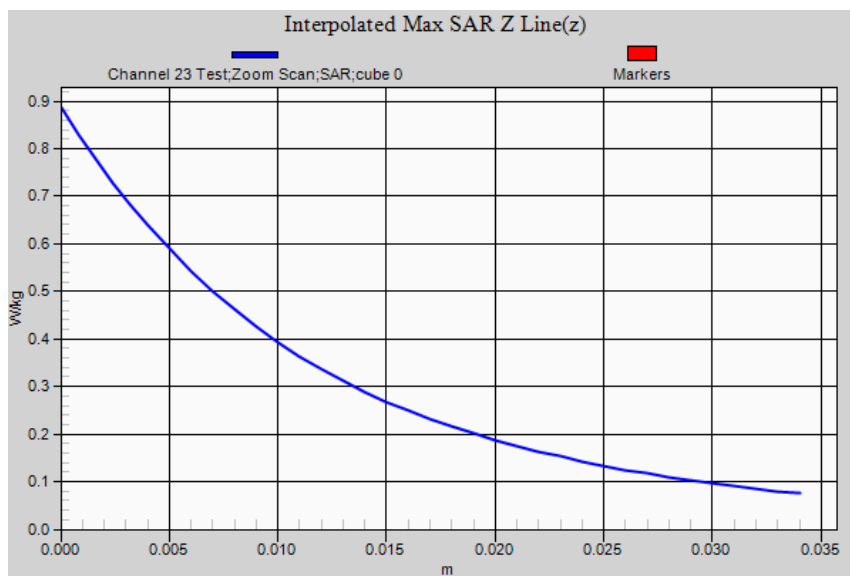

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M130336 677 MHz Belt Clip 01-08-13.da52:0

DUT Name: Audio Limited Wireless Microphone, Type: En2 HTP, Serial: 638735-03**Configuration: Body Worn Belt Clip**

Communication System: 0 - n/a - CW (0); Communication System Band: Audio Limited; Frequency: 697.9 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=683.8$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 57.2$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (6.19,6.19,6.19); Calibrated: 10/12/2012;

Sensor-Surface: 4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 4/12/2012

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.7(1137); SEMCAD X Version 14.6.9 (7117)

Body Worn Belt Clip/Channel 24 Test/Area Scan (81x181x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;

Maximum value of SAR (interpolated) = 0.575 W/kg

Body Worn Belt Clip/Channel 24 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 20.077 V/m; **Power Drift = -0.01 dB****Averaged SAR: SAR(1g) = 0.561 W/kg; SAR(10g) = 0.360 W/kg**

Maximum value of SAR (interpolated) = 0.797 W/kg

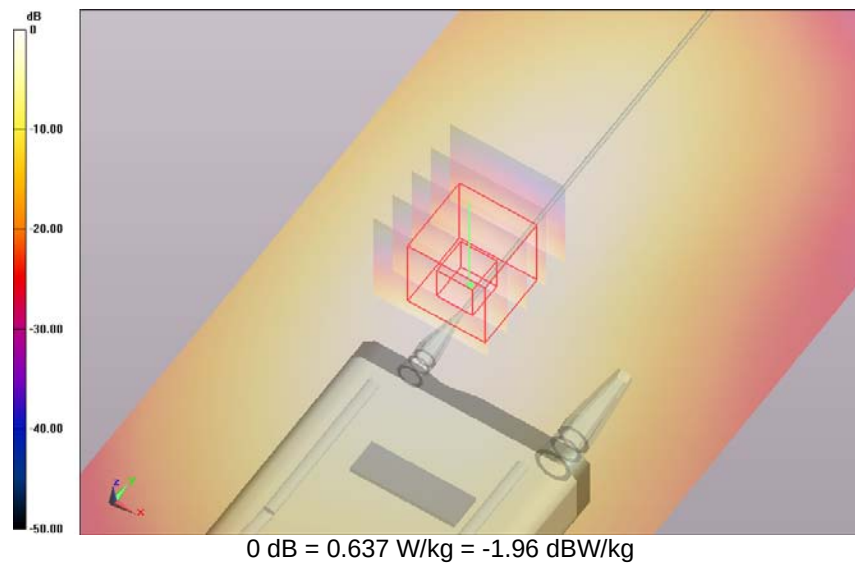


SAR Measurement Plot 31



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

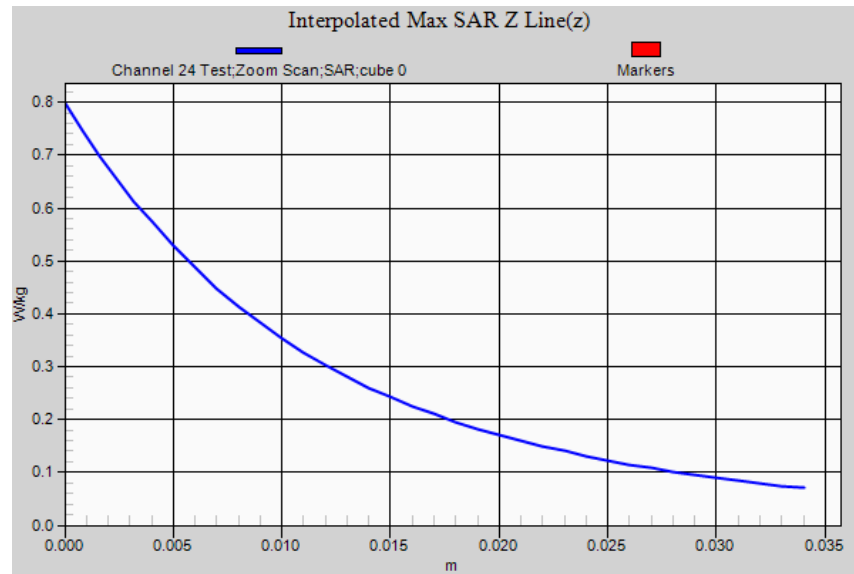

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.