

Subject: Correspondence ID 4058

Date: July 13, 2001

FCC ID: NRM93

From: Cayetano Chavez

To: Federal Communications Commission

Equipment Authorization Branch

7435 Oakland Mills Road

Columbia, MD 21046

To whom it may concern:

The following is part of the Information Requested by Correspondence ID 4058.

The items covered by this part of the report are 3 and 4.

Please notice the type of detector used is in the end of each page, also the results reported for strength of 3 channels are included in page 6.

Sincerely

Cayetano Chavez

This test data is not necessarily indicative of a product's conformance to a particular standard or EC directive unless taken in the context of a formal Global Product Compliance Laboratory test report and signed by an authorized Global Product Compliance Laboratory reviewer.

1.1 Radiated Emissions OATS

Name of EUT: 8500 Cordless Telephone
Serial Number:
Temperature: 22°C
Product Class: B
Test Specification: CFR 47, Part 15
File Number: 98083

Date of Test: Sept. 11, 1998
Relative Humidity: 55%
Test Facility: Open Area Test Site
Measurement Distance: 3 Meters
Test Engineer: T. Donnelly


Freq. (MHz)	EUT Azimuth (Degrees)	Antenna Height (cm)	Antenn a Polarity (H/V)	Meter Reading (dBuV)	Cable Loss (dB)	Antenna Factor (dB/m)	Ambient Level (dBuV/m)	Field Intensity (dBuV/m)	Spec Limit (dBuV/m)	Margin (dB)
52.50	129.0	202	V	5.0	1.8	10.4	0*	17.3	40.0	22.7
62.62	360.0	143	H	8.1	2.0	9.1	0*	19.2	40.0	20.8
62.62	216.6	131	V	7.0	2.0	9.1	0*	18.1	40.0	21.9
75.01	60.0	305	V	8.6	2.2	8.0	0*	18.7	40.0	21.3
141.01	360.0	135	H	11.2	2.9	12.8	0*	26.9	43.5	16.6
173.02	0.0	100	H	8.6	3.2	12.3	0*	24.1	43.5	19.4
185.02	358.2	166	H	2.7	3.3	12.8	0*	18.7	43.5	24.8

1. The data in the above table was measured with an Electro-Metrics EMC- 60 utilizing and quali-peak detector and a 1MHz Bandwidth.

This test data is not necessarily indicative of a product's conformance to a particular standard or EC directive unless taken in the context of a formal Global Product Compliance Laboratory test report and signed by an authorized Global Product Compliance Laboratory reviewer.

Name of EUT: 8500 Cordless Telephone
Serial Number:
Temperature: 22°C
Product Class: B
Test Specification: CFR 47, Part 15
File Number: 98083

Date of Test: Sept. 11, 1998
Relative Humidity: 55%
Test Facility: Open Area Test Site
Measurement Distance: 3 Meters
Test Engineer: T. Donnelly

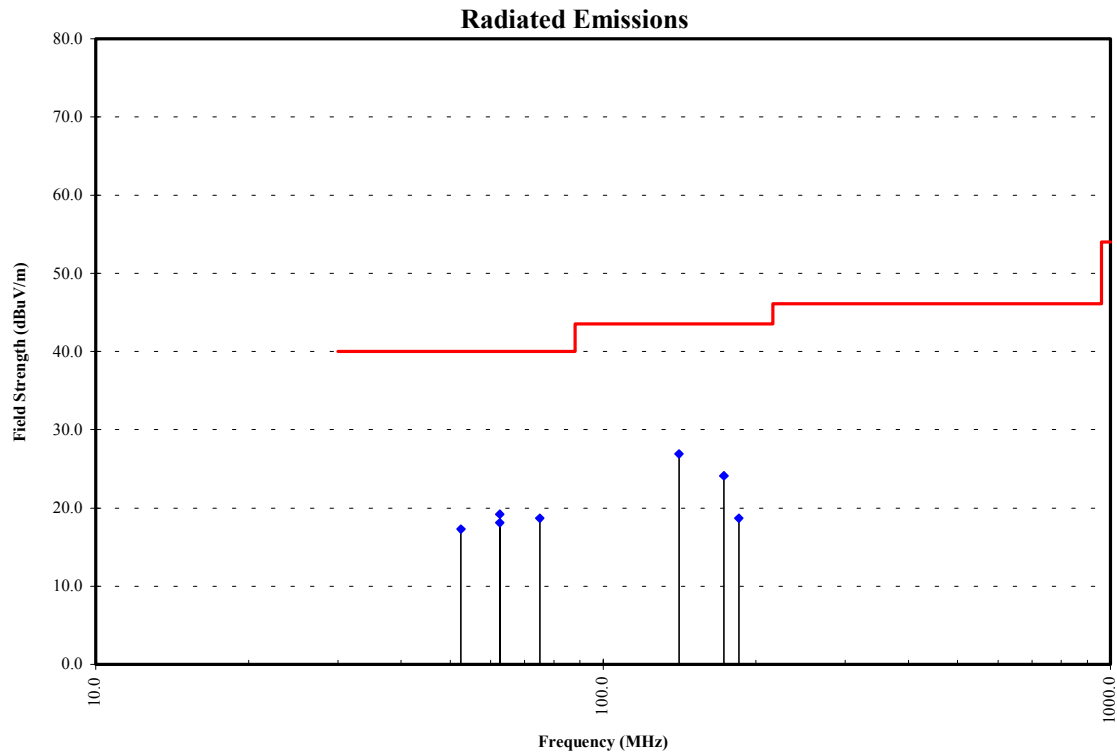

1. The data in the above table was measured with an Electro-Metrics EMC- 60 utilizing and average detector and a 1MHz Bandwidth.

This test data is not necessarily indicative of a product's conformance to a particular standard or EC directive unless taken in the context of a formal Global Product Compliance Laboratory test report and signed by an authorized Global Product Compliance Laboratory reviewer.

1.2 Radiated Emissions OATS

Name of EUT: 8500 Cordless Telephone
 Serial Number:
 Temperature: 22°C
 Product Class: B
 Test Specification: CFR 47, Part 15
 File Number: 98083

Date of Test: Sept. 11, 1998
 Relative Humidity: 55%
 Test Facility: Open Area Test Site
 Measurement Distance: 3 Meters
 Test Engineer: T. Donnelly


Freq. (MHz)	EUT Azimuth (Degrees)	Antenna Height (cm)	Antenn a Polarity (H/V)	Meter Reading (dBuV)	Cable Loss (dB)	Antenna Factor (dB/m)	Ambient Level (dBuV/m)	Field Intensity (dBuV/m)	Spec Limit (dBuV/m)	Margin (dB)
902.40	162.6	194	H	52.6	6.5	26.3	0*	85.4	94.0	8.6
902.40	231.6	100	V	58.1	6.5	26.3	0*	90.9	94.0	3.1
903.55	93.0	100	V	60.5	6.6	26.3	0*	93.3	94.0	0.7
903.55	177.6	100	H	53.3	6.6	26.3	0*	86.1	94.0	7.9
904.83	180.0	100	H	52.5	6.6	26.3	0*	85.4	94.0	8.6
904.83	342.6	100	V	60.3	6.6	26.3	0*	93.2	94.0	0.8
924.93	315.0	179	V	58.0	6.7	26.7	0*	91.4	94.0	2.6
924.93	58.8	158	H	56.2	6.7	26.7	0*	89.6	94.0	4.4
926.08	332.4	100	V	57.1	6.7	26.7	0*	90.5	94.0	3.5
926.08	57.0	100	H	53.8	6.7	26.7	0*	87.2	94.0	6.8
927.36	66.6	161	H	54.2	6.7	26.8	0*	87.6	94.0	6.4
927.36	339.0	100	V	56.7	6.7	26.8	0*	90.1	94.0	3.9

1. The measured data in the table above was taken using a Polarad (R&S) test receiver utilizing an average detector.

This test data is not necessarily indicative of a product's conformance to a particular standard or EC directive unless taken in the context of a formal Global Product Compliance Laboratory test report and signed by an authorized Global Product Compliance Laboratory reviewer.

Name of EUT: 8500 Cordless Telephone
Serial Number:
Temperature: 22°C
Product Class: B
Test Specification: CFR 47, Part 15
File Number: 98083

Date of Test: Sept. 11, 1998
Relative Humidity: 55%
Test Facility: Open Area Test Site
Measurement Distance: 3 Meters
Test Engineer: T. Donnelly

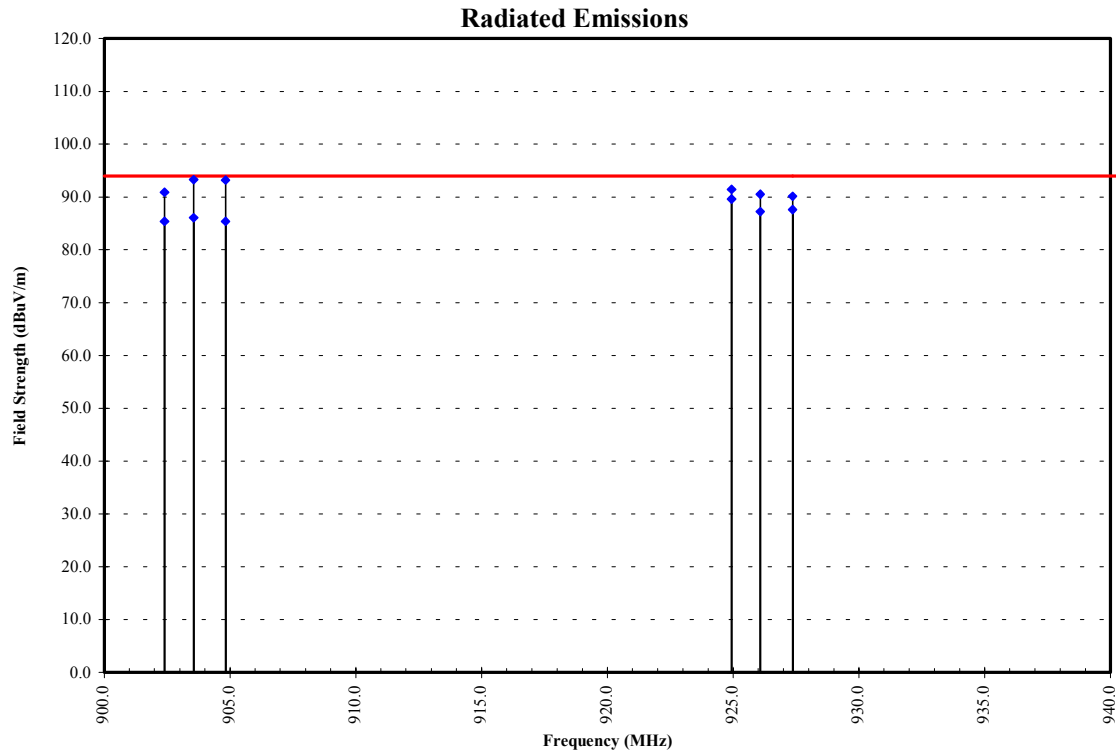

1. The measured data in the table above was taken using a Polarad (R&S) test receiver utilizing an average detector.

This test data is not necessarily indicative of a product's conformance to a particular standard or EC directive unless taken in the context of a formal Global Product Compliance Laboratory test report and signed by an authorized Global Product Compliance Laboratory reviewer.

1.3 Radiated Emissions OATS

Name of EUT: 8500 Cordless Telephone
 Serial Number:
 Temperature: 22°C
 Product Class: B
 Test Specification: CFR 47, Part 15
 File Number: 98083

Date of Test: Sept. 11, 1998
 Relative Humidity: 55%
 Test Facility: Open Area Test Site
 Measurement Distance: 3 Meters
 Test Engineer: T. Donnelly

Freq. (MHz)	EUT Azimuth (Degrees)	Antenna Height (cm)	Antenn a Polarity (H/V)	Meter Reading (dBuV)	Cable Loss (dB)	Antenna Factor (dB/m)	Ambient Level (dBuV/m)	Field Intensity (dBuV/m)	Spec Limit (dBuV/m)	Margin (dB)
Channel 1, Handset										
1808.0	33.0	156.0	V	11.0	0.0	27.0	0*	38.0	54	16.0
1808.0	316.0	268.0	H	8.0	0.0	27.0	0*	35.0	54	19.0
2714.0	329.0	268.0	H	14.0	0.0	29.0	0*	43.0	54	11.0
2714.0	153.0	324.0	V	10.0	0.0	29.0	0*	39.0	54	15.0
3621.0	166.0	126.0	H	7.0	0.0	31.3	0*	38.3	54	15.7
Channel 1, Base										
1850.0	12.0	149.0	V	11.0	0.0	27.2	0*	38.2	54.0	15.8
2775.0	164.0	126.0	V	14.0	0.0	29.2	0*	43.2	54.0	10.8
2775.0	344.0	302.0	H	11.0	0.0	29.2	0*	40.2	54.0	13.8
Channel 10, Handset										
1890.0	148.0	149.0	H	15.0	0.0	27.4	0*	42.4	54.0	11.6
1890.0	106.0	122.0	V	22.0	0.0	27.4	0*	49.4	54.0	4.6
2711.0	358.0	141.0	V	23.0	0.0	29.0	0*	52.0	54.0	2.0
2711.0	224.0	149.0	H	19.0	0.0	29.0	0*	48.0	54.0	6.0
Channel 10, Base										
1854.0	333.0	152.0	V	10.0	0.0	27.2	0*	37.2	54.0	16.8
2711.0	3.0	282.0	V	18.0	0.0	29.0	0*	47.0	54.0	7.0
2711.0	145.0	100.0	H	20.0	0.0	29.0	0*	49.0	54.0	5.0
3709.0	98.0	152.0	V	15.0	0.0	31.8	0*	46.8	54.0	7.2
4631.0	26.0	100.0	V	15.0	0.0	32.2	0*	47.2	54.0	6.8
Channel 20, Handset										
1806.0	356.0	152.0	H	12.0	0.0	27.0	0*	39.0	54.0	15.0
1806.0	108.0	156.0	V	22.0	0.0	27.0	0*	49.0	54.0	5.0
2710.0	0.0	202.0	V	23.0	0.0	29.0	0*	52.0	54.0	2.0
2710.0	189.0	133.0	H	19.0	0.0	29.0	0*	48.0	54.0	6.0
Channel 20, Base										
1856.0	99.0	227.0	H	10.0	0.0	27.2	0*	37.2	54.0	16.8
1856.0	239.0	180.0	V	13.0	0.0	27.2	0*	40.2	54.0	13.8
2716.0	323.0	269.0	V	13.0	0.0	29.0	0*	42.0	54.0	12.0
2716.0	359.0	268.0	H	12.0	0.0	29.0	0*	41.0	54.0	13.0
3713.0	7.0	100.0	H	11.0	0.0	31.8	0*	42.8	54.0	11.2
3713.0	92.0	148.0	V	16.0	0.0	31.8	0*	47.8	54.0	6.2
4637.0	102.0	137.0	V	15.0	0.0	32.2	0*	47.2	54.0	6.8

This test data is not necessarily indicative of a product's conformance to a particular standard or EC directive unless taken in the context of a formal Global Product Compliance Laboratory test report and signed by an authorized Global Product Compliance Laboratory reviewer.

1.4 Equipment Calibration Information

The Following list shows the calibration data of the equipment used for the tests.

Manufacturer	Model Number	Serial Number	Description	Last Calibrated mm/dd/yy	Cal Cycle Month
Eaton	96002	2436	Biconical Antenna	8/31/98	12
Electro-Metrics	EM- 2135/EMC-60	44174	Test Receiver	5/13/98	12
EMCO	3146	9509-4165	Log-Periodic Antenna	7/16/98	12
EMCO	3115	9006-3460	Double Ridged Horn 1-18 Ghz	5/27/98	12
Rohde & Schwarz	EPM	883613/014	Panorama Monitor	N/A	N/A
Rohde & Schwarz	ESVP	879529/047	Test Receiver	9/30/97	12

This test data is not necessarily indicative of a product's conformance to a particular standard or EC directive unless taken in the context of a formal Global Product Compliance Laboratory test report and signed by an authorized Global Product Compliance Laboratory reviewer.