

4

3

1

REV	DESCRIPTION	DATE	DRAFTER	ENGINEER	APPROVED
I	PRODUCTION RELEASE PER EO11694-00	07/14/16	L. LIN	B. AQAQUI	JA. LIN

NOTES: UNLESS OTHERWISE SPECIFIED

1. FCC ID LABEL ON THE SBD
SMARTCODE HOME CONNECT MAMBA
DAUGHTER CARD, PCBA# 450-00041-001
AS THE FOLLOWING:

A. IC: 3022A-45024ICBR
WHERE IC --- INDUSTRY CANADA
WHERE 3022A-45024ICBR --- INDUSTRY CANADA NUMBER

B. FCC ID: NUL45024ICBR
WHERE NUL --- FIRST THREE CHARACTERS OF GRANTEE CODE
WHERE 45024ICBR --- REMAINING NUMBERS/CHARACTERS FCC ID

C. MODEL: 450241.
WHERE 450241 --- INTERNAL HHI FCC MODEL NUMBER.


D. LABEL COLOR: BLACK.

E. LABEL MATERIAL:
REFER TO 695-00006-001 FOR LABEL SPECIFICATION.

F. FONT: FIT ON LABEL, WHITE.

G. LABEL LOCATION: REFER TO DRAWING 5066157.

H. ALL DIMENSIONS ARE IN INCHES.

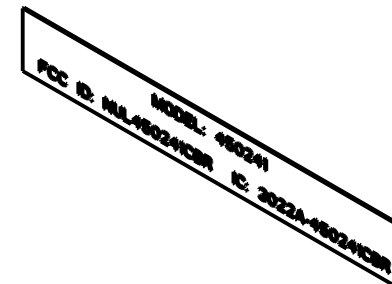

MODEL: 450241

FCC ID: NUL450241CBR IC: 3022A-450241CBR

- 1.38

. 20

D

D

C

C

B

B

A

A


4

3

2

1

KWIKSET Spectrum Brands Hardware & Home Improvement	THIS DOCUMENT IS THE PROPERTY OF SPECTRUM BRANDS, INC AND/OR ITS AFFILIATES. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO SPECTRUM BRANDS. NEITHER THIS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON, COPIED, OR PUBLISHED WITHOUT SPECTRUM BRANDS' PRIOR WRITTEN CONSENT.	APPROVED	DATE	SIZE	DO NOT SCALE DRAWING	DWG NO			
		JA. LIN	07/14/16	B			5066187		
		THIRD ANGLE PROJECTION		RELEASE STATE			REV		ITER
				Preliminary			A		4
		SCALE			4 / 1		SHEET		OF

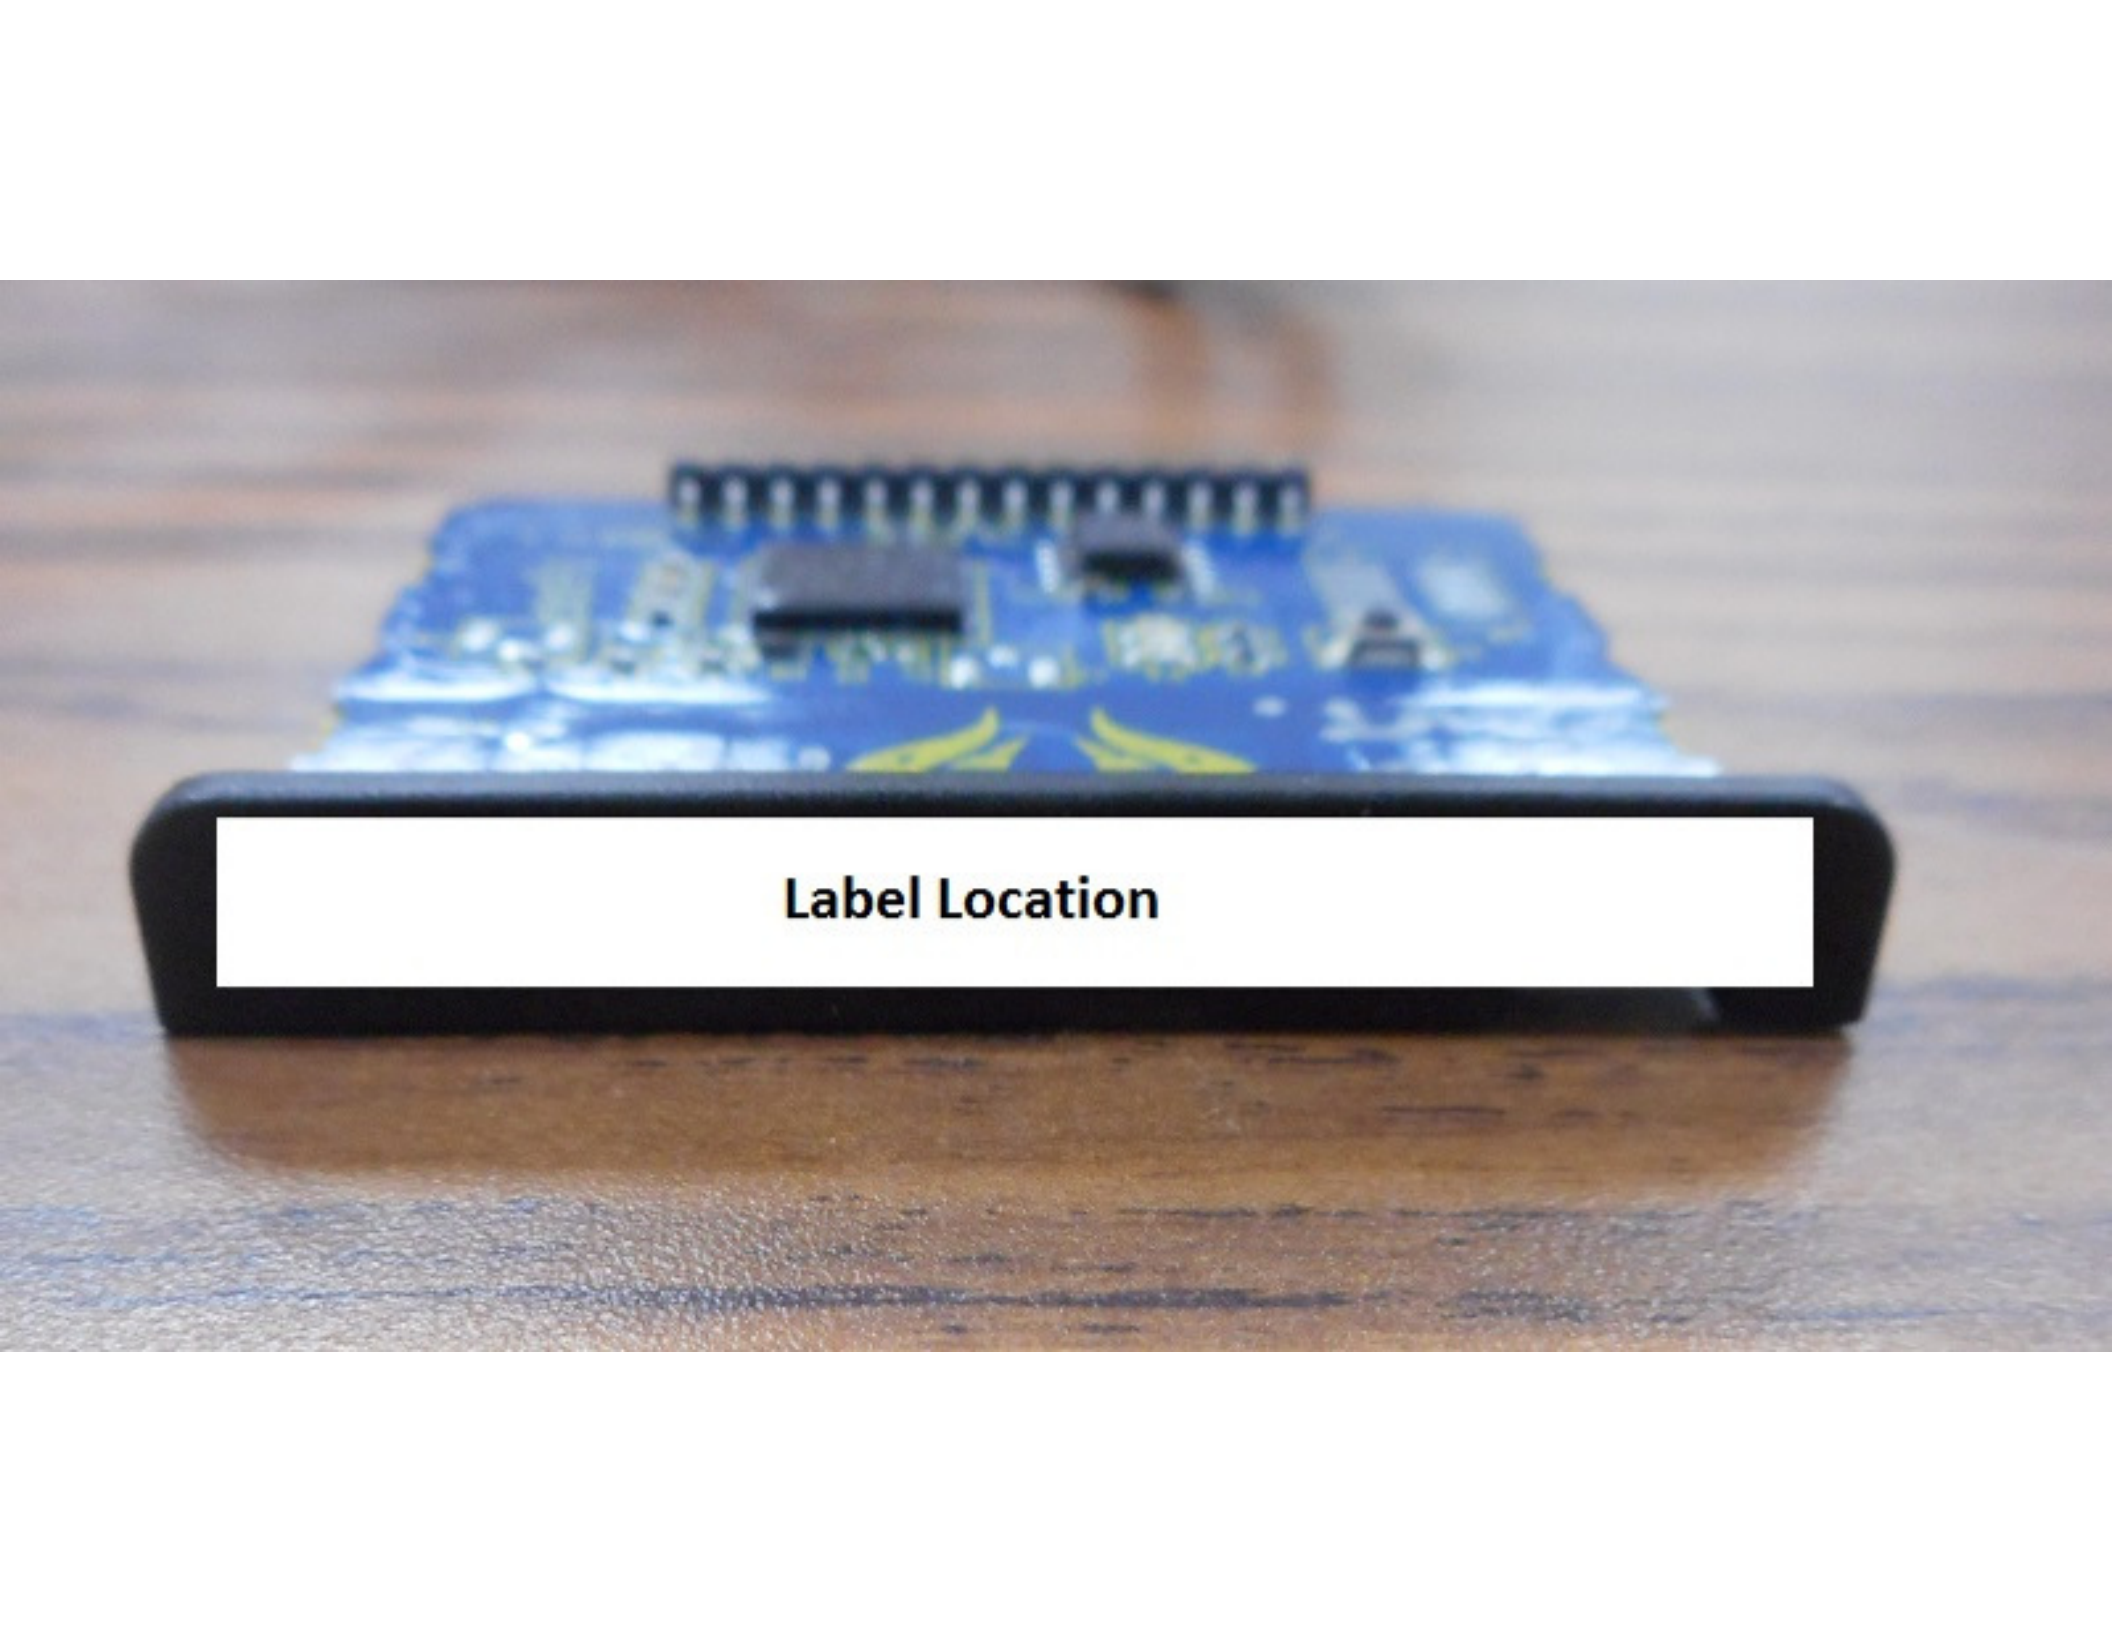

Label Location



WS Packaging Group, Inc.[®]

Leaders in Printing and Packaging Worldwide

PRODUCTION SPECIFICATION SHEET

Item Code: R2WPET-PERM-50KRAF-104

Old FAL: 0097-0H52-0002

Total Construction Caliper: 6 mils +/- 10%

FACESHEET: A white topcoated polyester featuring excellent tear strength, heat resistance, dimensional stability, opacity, and chemical resistance. Excellent thermal transfer printability with some resin enhanced wax and most resin based ribbons.

Caliper: 2 mil +/- 10%

ADHESIVE: A high performance permanent adhesive with balanced adhesion to a wide variety of substrates, including low surface energy plastics, engineering grade plastics, bare, coated, or painted metals, including powder coat and enamel paints. It features medium tack and excellent chemical and UV resistance for outdoor industrial applications.

Minimum Application Temperature: +50° F

Service Temperature Range: - 40°F - + 302° F

LINER: A 50# bleached super-calendered paper kraft liner for roll to roll label applications.

Caliper: 3.2 mil +/- 10%

UL and c-UL Recognized.

Shelf Life:

One year when stored at 72°F at 50% RH

All original documents remain on file at WS Packaging Group, Algoma, Wisconsin.