


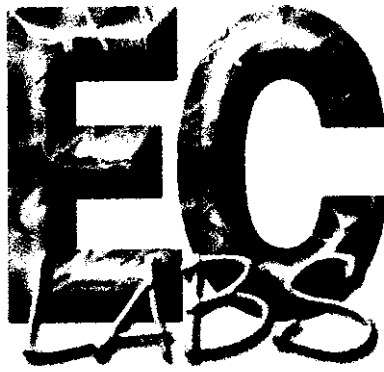

**15.247 CERTIFICATION
FCC ID: NYC-BSR-0001**

EMI TEST REPORT

HITEST BSR

PREPARED FOR

**DIABLO RESEARCH
DIABLO RESEARCH CORP.
825 STEWART DRIVE
SUNNYVALE, CA 94086-5120
TEL: 408/730-9555
FAX: 408/738-2370**

PREPARED BY

**ELECTRONIC COMPLIANCE LABORATORIES INC.
1249 BIRCHWOOD DR.
SUNNYVALE, CA 94089
TEL: (408) 747-1490
FAX: (408) 747-1495**

TEST REPORT NUMBER: A803004

DATE OF TEST: FEBRUARY 24-26, 1998

**IF THIS DOCUMENT IS REPRODUCED, IT MUST BE REPRODUCED
IN ITS ENTIRETY**



Table of Contents

1.0 Test Facility	3
2.0 Test Equipment.....	3
3.0 EUT	4
4.0 Support Equipment	5
5.0 Equipment Configuration.....	5
6.0 Summary Of Tests	6
7.0 Labeling Requirements	11
APPENDIX A Spread Spectrum Data	12
APPENDIX B Restricted Band Data	56
APPENDIX C Conducted Emissions	58
APPENDIX D Radiated Emissions.....	62
APPENDIX E Sample Label.....	64
APPENDIX F Antenna Data Sheet	67
APPENDIX G Set-up Photographs	71
APPENDIX H EUT Photographs	74
APPENDIX I Users Manual	75
APPENDIX J Client Confidential Information	78

1.0 TEST FACILITY

Name: Electronic Compliance Laboratories

Location: 1249 Birchwood Dr.
Sunnyvale, CA 94089

Site Filing: A site description is on file at the
Federal Communications Commission
P.O. Box 429
Columbia, MD 21045

Types of Sites: Open Field Radiated and Indoor Screen Room (Line Conducted).
All sites are constructed and calibrated to meet ANSI C63.4-1994 requirements.
Test facility is recognized by the National Voluntary Laboratory Accreditation Program for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations.

NVLAP Code: 20089 effective through: March 31, 1999

2.0 TEST EQUIPMENT

Description	Manufacturer	Model	SN
EMI Receiver	HP	8546A	3325A00137
Power Meter	HP	437B	3125U13399
Power Sensor	HP	8481	3318A16275
Spectrum Analyzer	HP	8563E	3137A01183
Preamplifier	HP	8447F	3113A05849
Preamplifier	HP	8449B	3008A00527
LISN	EM	ANS-25/2	2532
Biconical Antenna	EM	EM 6912	677
Log Periodic Ant	EM	EM 6950	858
Double Ridge Horn	EM	EM 6961	6231
Filter BP 1.2-4 GHz	FSY	HM1160-11SS	001
Filter BP 4-10 GHz	FSY	HM2950-15SS	001
Filter BP10-18 GHz	FSY	HP8601-7SS	001

3.0 EUT

The Whisper System RF Metering System is defined as various gas and electric Remote Meter Interface (RMI) devices using spread spectrum, frequency hopping (SSFH) radio technology to communicate energy usage data to a Base Station Repeater (BSR) unit on a reporting schedule. The BSR communicates to a Base Station Master (BSM) over a separate SSFH RF link using MDCN protocol on a scheduled basis. Base Station Concentrators (BSC's) are standing alone RF data concentrators that function both as a BSM and a BSR. BSC's only use SSFH to communicate with and receive scheduled reports from RMI's. BSM's and BSR's are connected to a Host Control program using a landline or other WAN interface. All RF devices operate in the 902 to 928 MHz range. In addition, a back up battery box can be attached to a BSR, BSM, or BSC to provide electrical power to the device during power outage conditions.

RMI's are integrated into or connected to a standard residential or commercial and Industrial Electro-mechanical demand meter. RMI's are powered from the line for units integrated into an Electric Meter. Gas and Water Meter RMI's are battery powered. RMI's reports to a BSR or BSC on a scheduled basis, transmissions in a single channel are less than 400 mS.

The BSM Base Station Master (BSM) that polls 20 to 30 Base Station Repeaters (BSR's). A BSR can control and receive scheduled reports from 540 RMI's using a one hour reporting schedule. A BSR utilizes a schedule that assigns a six second slot to each RMI reporting to a BSM. The RMI utilizes the first two seconds of the time slot for scheduled reports. The remaining 4 second period is used for new acquisitions or re-acquisitions of RMI's. A BSR reports to a BSM every tenth reporting slot (60 seconds). A BSR to BSM reporting schedule is 2 seconds. A BSR supports 540 RMI reporting slots and 60 slots for reporting data to a BSM

Battery Box	P/N 10655-0000
Base Station Master	P/N 11034-0900
Base Station Repeater	P/N 11031-0900
Base Station Concentrator	P/N 11032-0900

4.0 SUPPORT EQUIPMENT

No support equipment was used.

5.0 EQUIPMENT CONFIGURATION

All of the equipment and cables were placed in worst case positions to maximize emissions.

Interconnecting cables were of the type and length specified in the individual equipment requirements.

Grounding was in accordance with the manufacturers requirements and conditions for intended use.

EUT			
PORT	CONNECTED TO	CABLE TYPE	

6.0 SUMMARY OF TESTS

The Diablo Hitest BSR is a frequency hopping spread spectrum (FHSS) radio system operating in the 902-928 MHz band. Tests were performed with one standard antenna. Test firmware resident in the EUT and software provided by Diablo was used to do the test.

6.1 15.247(a)(1) FREQUENCY HOPPING SYSTEMS

The Hitest BSR uses one FHSS radio that handles both the Metricom and Whisper mode protocols. The modes will be referenced in this report as the "Metricom" Mode and the "Whisper" Mode. The system hops using pseudorandom sequences. On average, each channel is used equally. Please refer to **"Whisper Radio System Interface Theory of Operation"** in the confidentiality package attached to this submission for more details.

Metricom Mode

6.1.1 15.247(a)(1)(i) CHANNEL UTILIZATION

The Metricom radio uses 162 channels with a channel bandwidth of 160 kHz.

Three spectrum analyzer plots labeled **"CHANNEL UTILIZATION 902 - 908 MHz"**, **"CHANNEL UTILIZATION 908 - 915 MHz"** and the total number of channels shown is 75, which exceeds the minimum requirement of 50. **Plots are in Appendix A.**

Three spectrum analyzer MAX HOLD plots labeled **"20 dB BANDWIDTH"** show the 20 dB bandwidth of the hopping channel to be < 500 kHz (133 / 127 / 128 kHz) at the low/midband/high frequencies of 902.08 / 914.08 / 927.84 MHz. **Plots are in Appendix A.**

Zero span spectrum analyzer plots labeled **"CHANNEL DWELL TIME"** shows Worst case transmission time in a given slot 180 msec elapsed time, <100 % duty

Maximum allowed: 400 msec.
The test plots are in Appendix A.

6.1.2 15.247(b) MAXIMUM PEAK OUTPUT POWER

The maximum power of the hopping channel is +29.5 dBm or .891 W. The EUT was made to transmit uninterrupted random data on each of the low / mid / high channels.

The output was fed directly via a SMA 3-inch RG 142 cable to a 20-dB pad to the spectrum analyzer set on MAX HOLD with no additional attenuation.

At 902.08 MHz Pout = 29.2 dBm

At 914.08 MHz Pout = 29.3 dBm

At 927.84 MHz Pout = 29.5 dBm

Limit: +30 dBm / 1 W maximum power

6dBi antenna,

EIRP = +29.5 (peak power) +6.0(peak gain, dBi) = +35.5 dBm /
3.55W EIRP

6.1.3 15.247(c) OUT OF BAND EMISSIONS

The spectrum analyzer plots, in **Appendix A**, titled "**OUT OF BAND Lower Band Edge**", "**OUT OF BAND Upper Band Edge**" shows the output spectrum of the EUT at its highest and lowest operating frequencies. The plots show the output of the EUT to be at least 20dB down at the band edges.

The spectrum analyzer plots labeled "**OUT OF BAND Emissions 30 MHz - 1 GHz**", "**OUT OF BAND Emissions 1 - 2.75 GHz**", "**OUT OF BAND Emissions 2.75 - 26.5 GHz**" show that emissions are more than 20 dB below the highest level of the desired power outside of the 902 - 928 MHz band.

Whisper Mode

6.2.1 15.247(a)(1)(i) CHANNEL UTILIZATION

The Whisper radio uses 128 channels each 180 kHz wide.

Three spectrum analyzer plots labeled "**CHANNEL UTILIZATION 902 - 908 MHz**", "**CHANNEL UTILIZATION 908 - 915 MHz**", and The total number of channels shown is 63, which exceeds the minimum requirement of 50. **Plots are in Appendix A.**

Three spectrum analyzer MAX HOLD plots labeled "**20 dB BANDWIDTH**" show the 20 dB bandwidth of the hopping channel to be < 500 kHz (42.5.7/40.0/42.5 kHz) at the low/midband/high frequencies of 903.42 / 914.94 / 926.28 GHz. **Plots are in Appendix A.**

Zero span spectrum analyzer plots labeled "**CHANNEL DWELL TIME**" shows Worst case transmission time in a given slot: 100 msec elapsed time, <100 % duty

Maximum allowed: 400 msec.
The test plots are in Appendix A.

6.2.2 15.247(b) MAXIMUM PEAK OUTPUT POWER

The maximum power of the hopping channel is +19.7 dBm or .093W. The EUT was made to transmit uninterrupted random data on each of the low/mid/high channels.

The output was fed directly via an N Type RG 142 cable with a 10 dB pad to the spectrum analyzer set on MAX HOLD with no additional attenuation.

At 903.42 MHz Pout = 19.7 dBm / .093W

At 914.94 MHz Pout = 19.7 dBm / .093W

At 926.28 MHz Pout = 19.5dBm / .089W

Limit: +30 dBm / 1 W maximum power

6dBi antenna,

EIRP = +19.7 (peak power) +6.0(peak gain, dBi) = +25.7 dBm / 3.72W EIRP

6.2.3 15.247(c) OUT OF BAND EMISSIONS

The spectrum analyzer plots, in **Appendix A**, titled "**OUT OF BAND Lower Band Edge**", "**OUT OF BAND Upper Band Edge**" shows the output spectrum of the EUT while hopping one of the pseudorandom sequences and continuously transmitting packetized data. The analyzer was placed in MAX HOLD mode, and individual sweeps were recorded continually for 10 minutes with the same spectrum analyzer connection as was used for peak output power. The resultant plot shows that the EUT emissions remain inside the 902-928 MHz band.

The spectrum analyzer plots labeled "**OUT OF BAND Emissions 30 MHz - 1 GHz**", "**OUT OF BAND Emissions 1 - 2.75 GHz**", "**OUT OF BAND Emissions 2.75 - 26.5 GHz**" show that emissions are more than 20 dB below the highest level of the desired power outside of the 902 - 928 MHz band.

6.3 15.203 ANTENNA REQUIREMENT

This product is intended for professional installation by trained personnel and is therefore exempt from the requirements of 15.203.

6.4 15.205 RESTRICTED BAND RADIATION LIMITS

The EUT was placed on a wooden table resting on a turntable. The wooden table was approximately 1 meter above the groundplane of the 3 meter test site. The search antenna was moved in to 1 meter when necessary to improve the noise floor, and the appropriate range factor was applied. While the EUT was transmitting uninterrupted random data on each of the low/mid/high channels and with the spectrum analyzer on MAX HOLD, the turntable was rotated, and the search antenna raised and lowered in an attempt to maximize the received radiated emission level. Test results are attached in tabular form showing that no spurious signals were detected above the 74-dBuV/m peak/54dBuV/m average limits. Peak measurements were taken with an RBW and VBW = 1MHz. Average readings were taken with an RBW = 1MHz and a VBW = 10 Hz. **Test data is in Appendix B.**

6.5 15.207 AC LINE CONDUCTED EMISSIONS

The RF line conducted levels for emissions in the 0.45 - 30 MHz band must not exceed 250 μ V when measured with a LISN. Attached graphs and tabular data show that emissions are below the 250 μ V (48 dB μ V) maximum allowed level. **The test data sheets are in Appendix C.**

6.6 15.209 RADIATED EMISSIONS

The data sheets in Appendix D show that the Class B radiated limits from 30 - 1000 MHz are not exceeded by the EUT. The EUT was operating normally with a combination of transmission and reception and hopping using a pseudorandom sequence during this test. The EUT was placed near one edge of a wooden table resting on a turntable. The wooden table was approximately 1 meter above the groundplane. The search antennas were located at 3 meters. Measurements were made in accordance with ANSI C63.4-1994.

7.0 LABELING REQUIREMENT

7.1 SAMPLE LABEL

A drawing of the label and a drawing of the label location are shown in **Appendix E**.

7.2 FCC WARNING STATEMENT

A sample of the FCC warning statement that will be placed in the manual is shown in **Appendix I**. The manual is still in the design stage and has not been included.

Electronic Compliance Laboratories



Chris Byleckie
Technical Director

April - 13 - 1998
Date

APPENDIX A


SPREAD SPECTRUM PLOTS

Metricom Mode

ATTEN 30dB Channel Utilization 902 - 908 MHz

REL 20.0dBm

10dBm

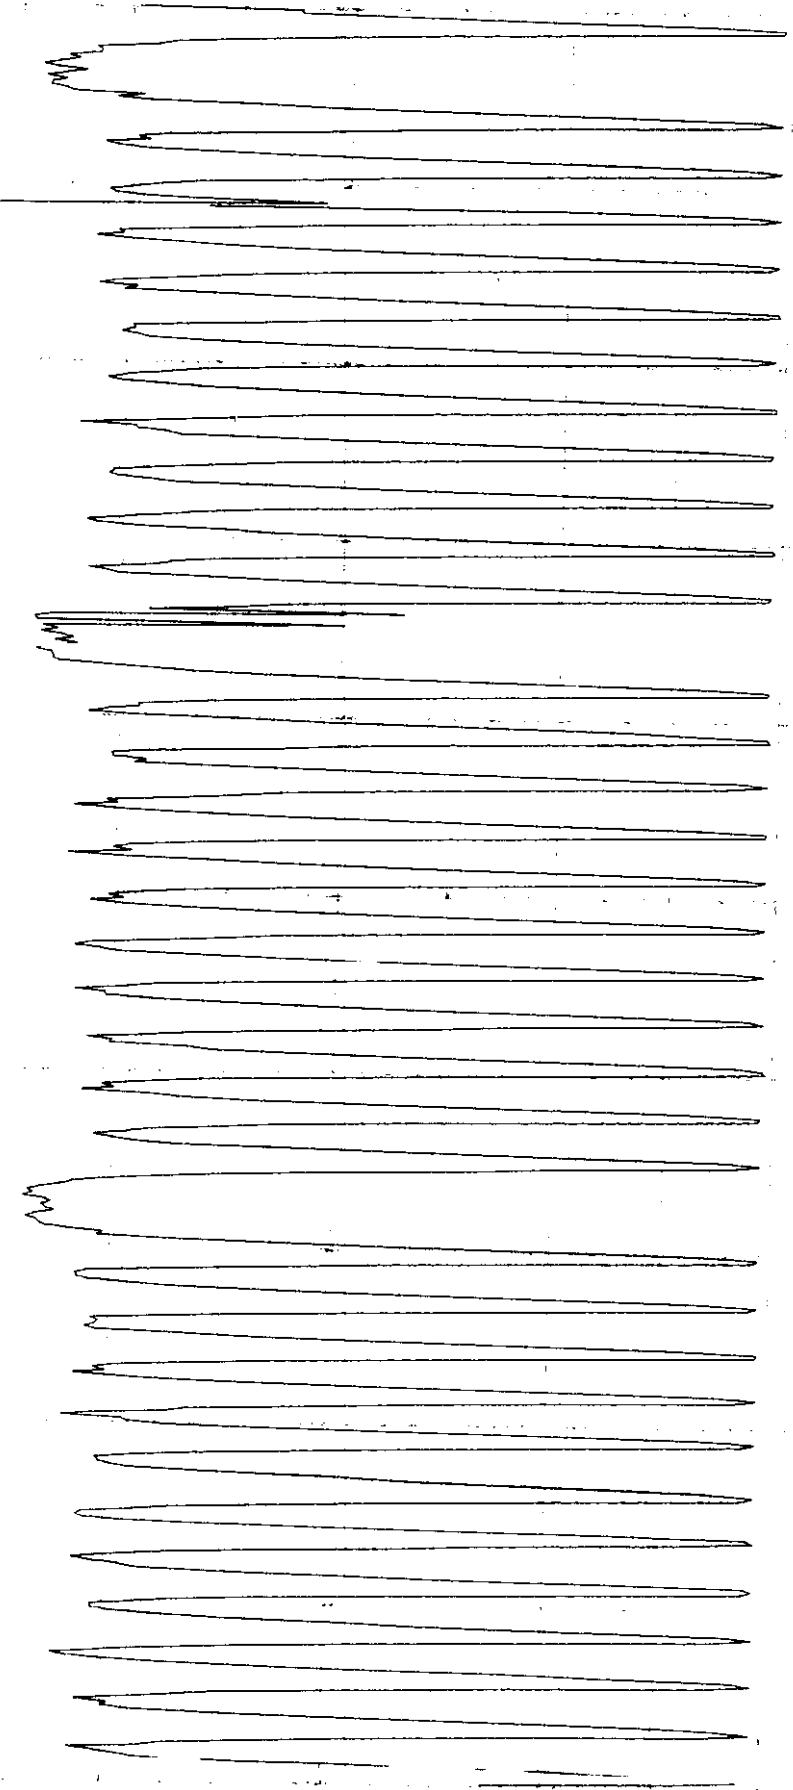

START 300.000MHz

STOP 908.000MHz

*RBW 10kHz

*VBW 10kHz

100kHz

SWP 18dB


18dB

ATTEN 30dB

Channel Utilization 908 - 915 MHz

REL NO. 000000

2000000

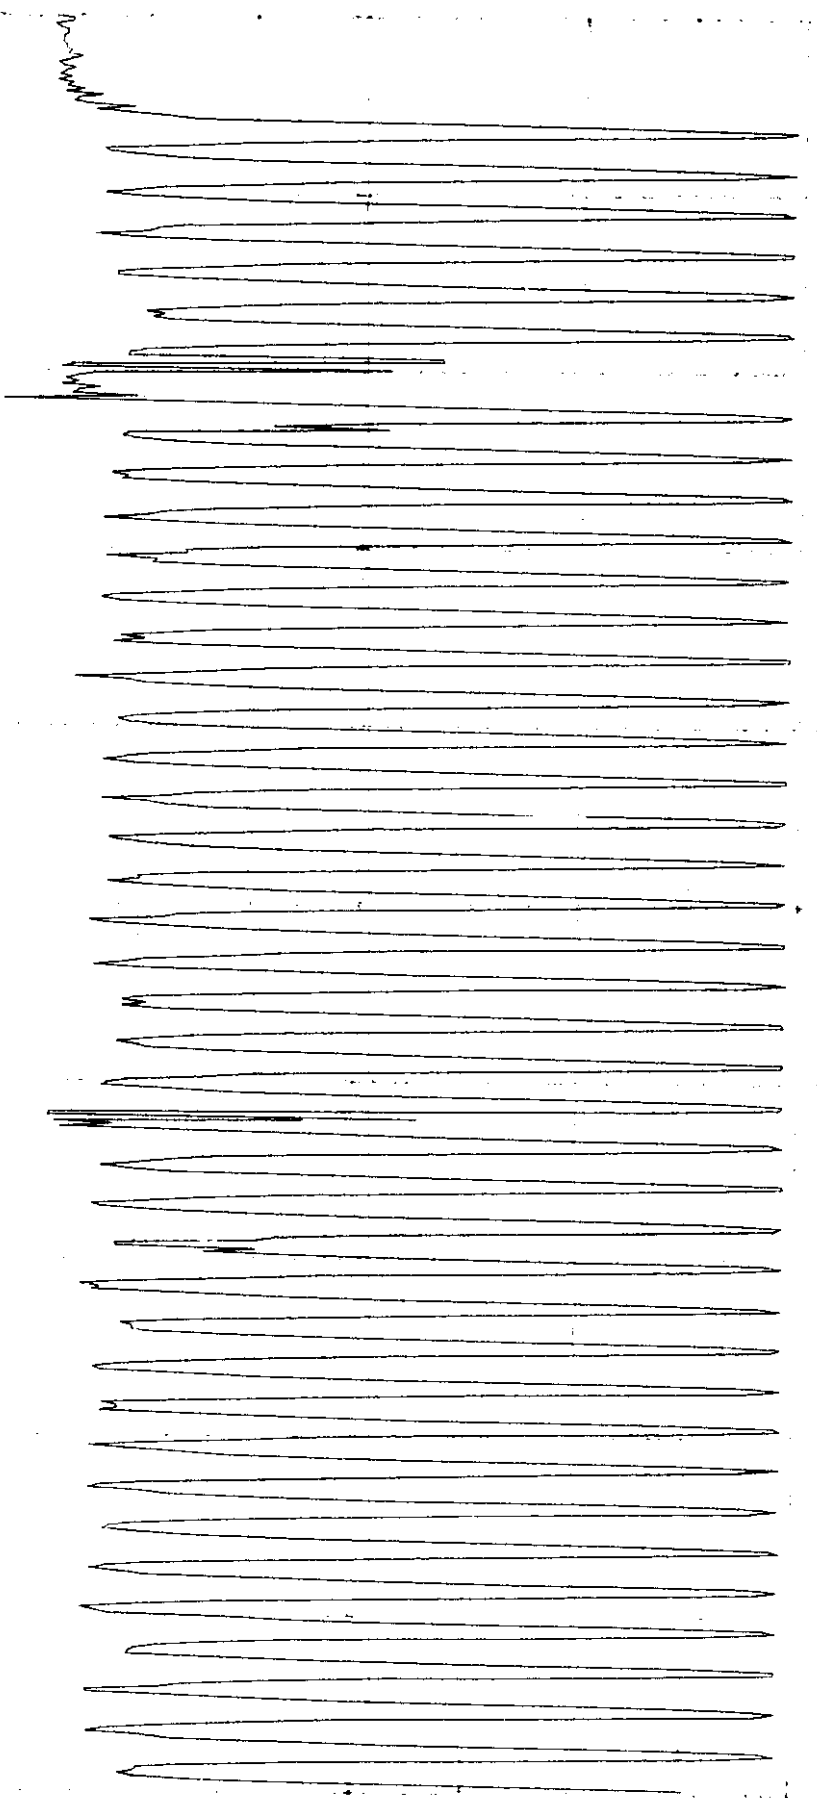

START 908.000MHz

STOP 915.000MHz

*FIRW 10MHz


*V3W

2000000

SWP


280MHz

ATTEN 30dB Dwell Time ΔMKR --. 50dB
RL 20.0dBm 10dB/ 100ms

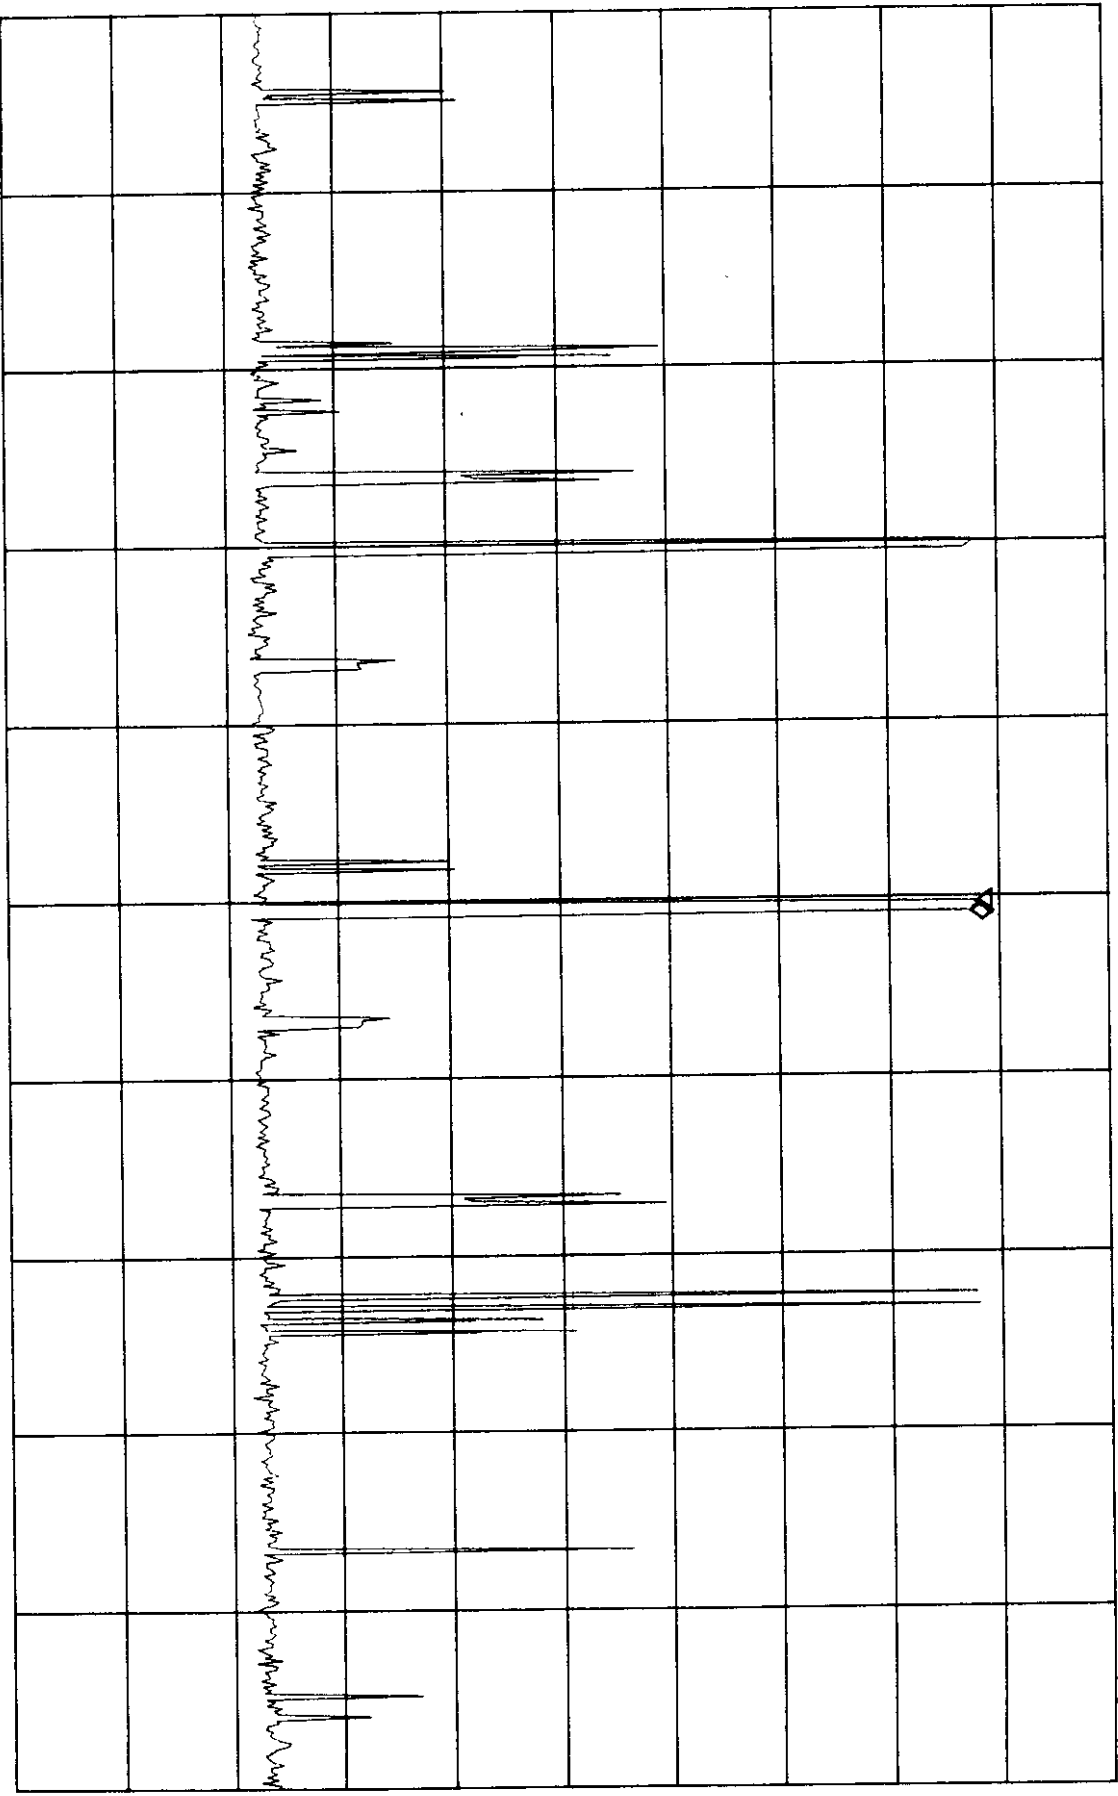

CENTER 914.080000MHz SPAN 0Hz
RBW 10kHz *VBW 100kHz *SWP 20sec
A8030047502

ATTEN 30dB Dwell Time ΔMKR -11.33dB
RL 20.0dBm 10dB/ 100ms

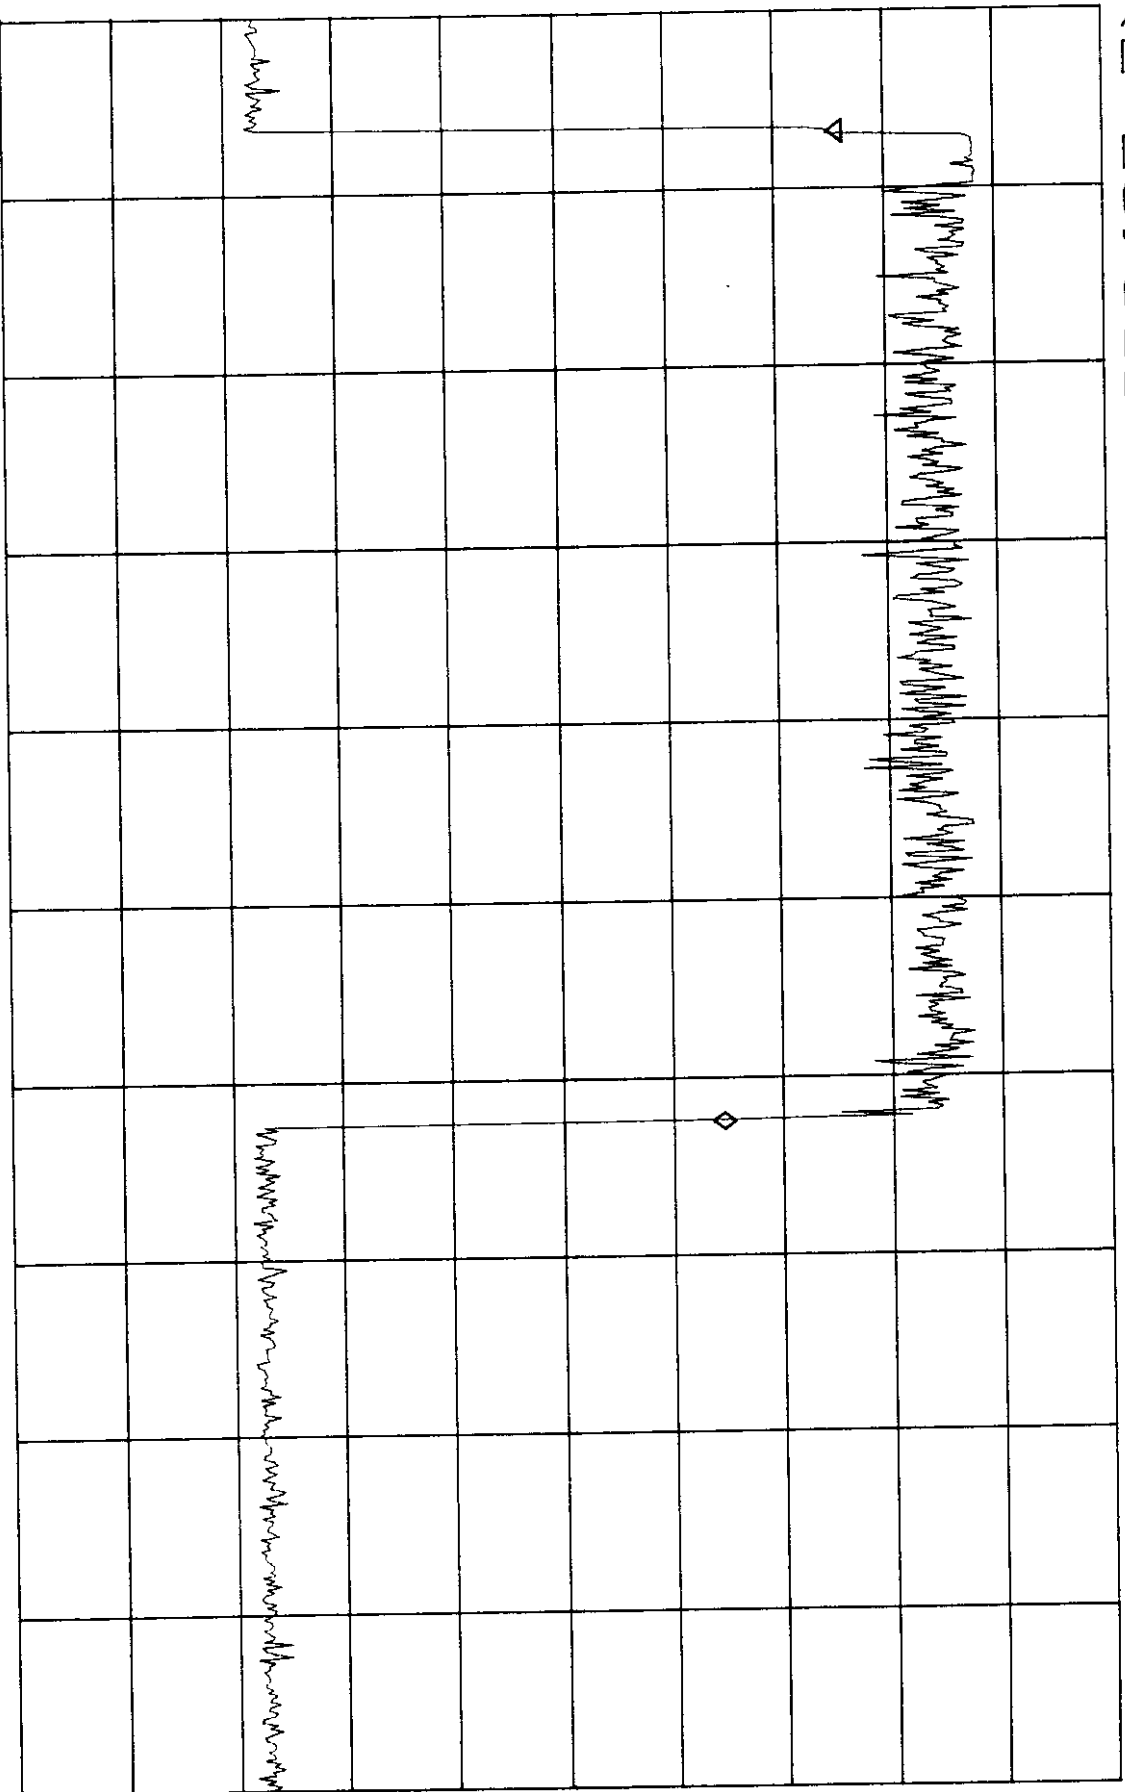

CENTER 914.080000MHz SPAN 0Hz
*RBW 10kHz *VBW 100kHz SWP 180ms
*A86300#D08

ATTEN 30dB


Out of Band Lower Band Edge

4.21. 17dB

REL. 30. 0.13m

1.0dB

-4.2dB

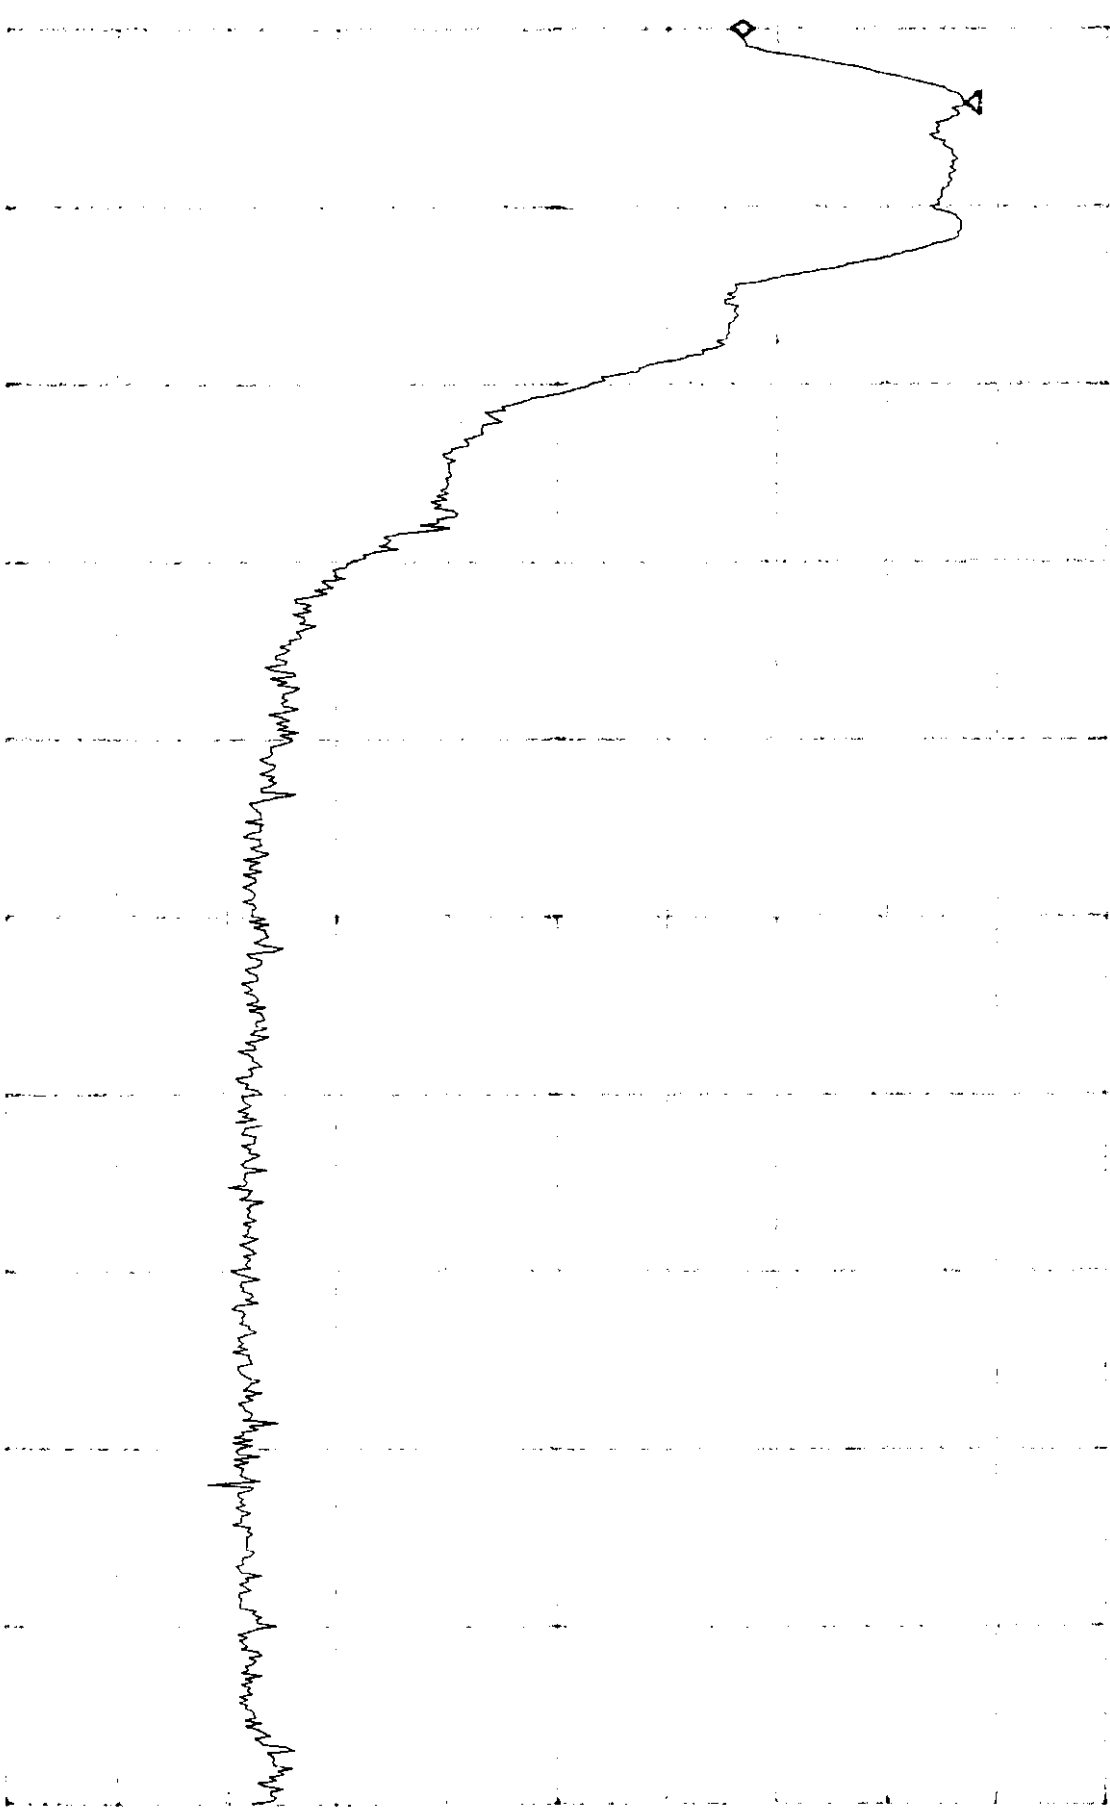

START 302. 000MHz STOP 303. 000MHz

*REM 100kHz *VIEW 100kHz SWP 50MHz

A803004.DOC

Out of Band Upper Edge

40. 000013

RTN 000013
 NO. 000013


10013/

100013

100013

100013

100013

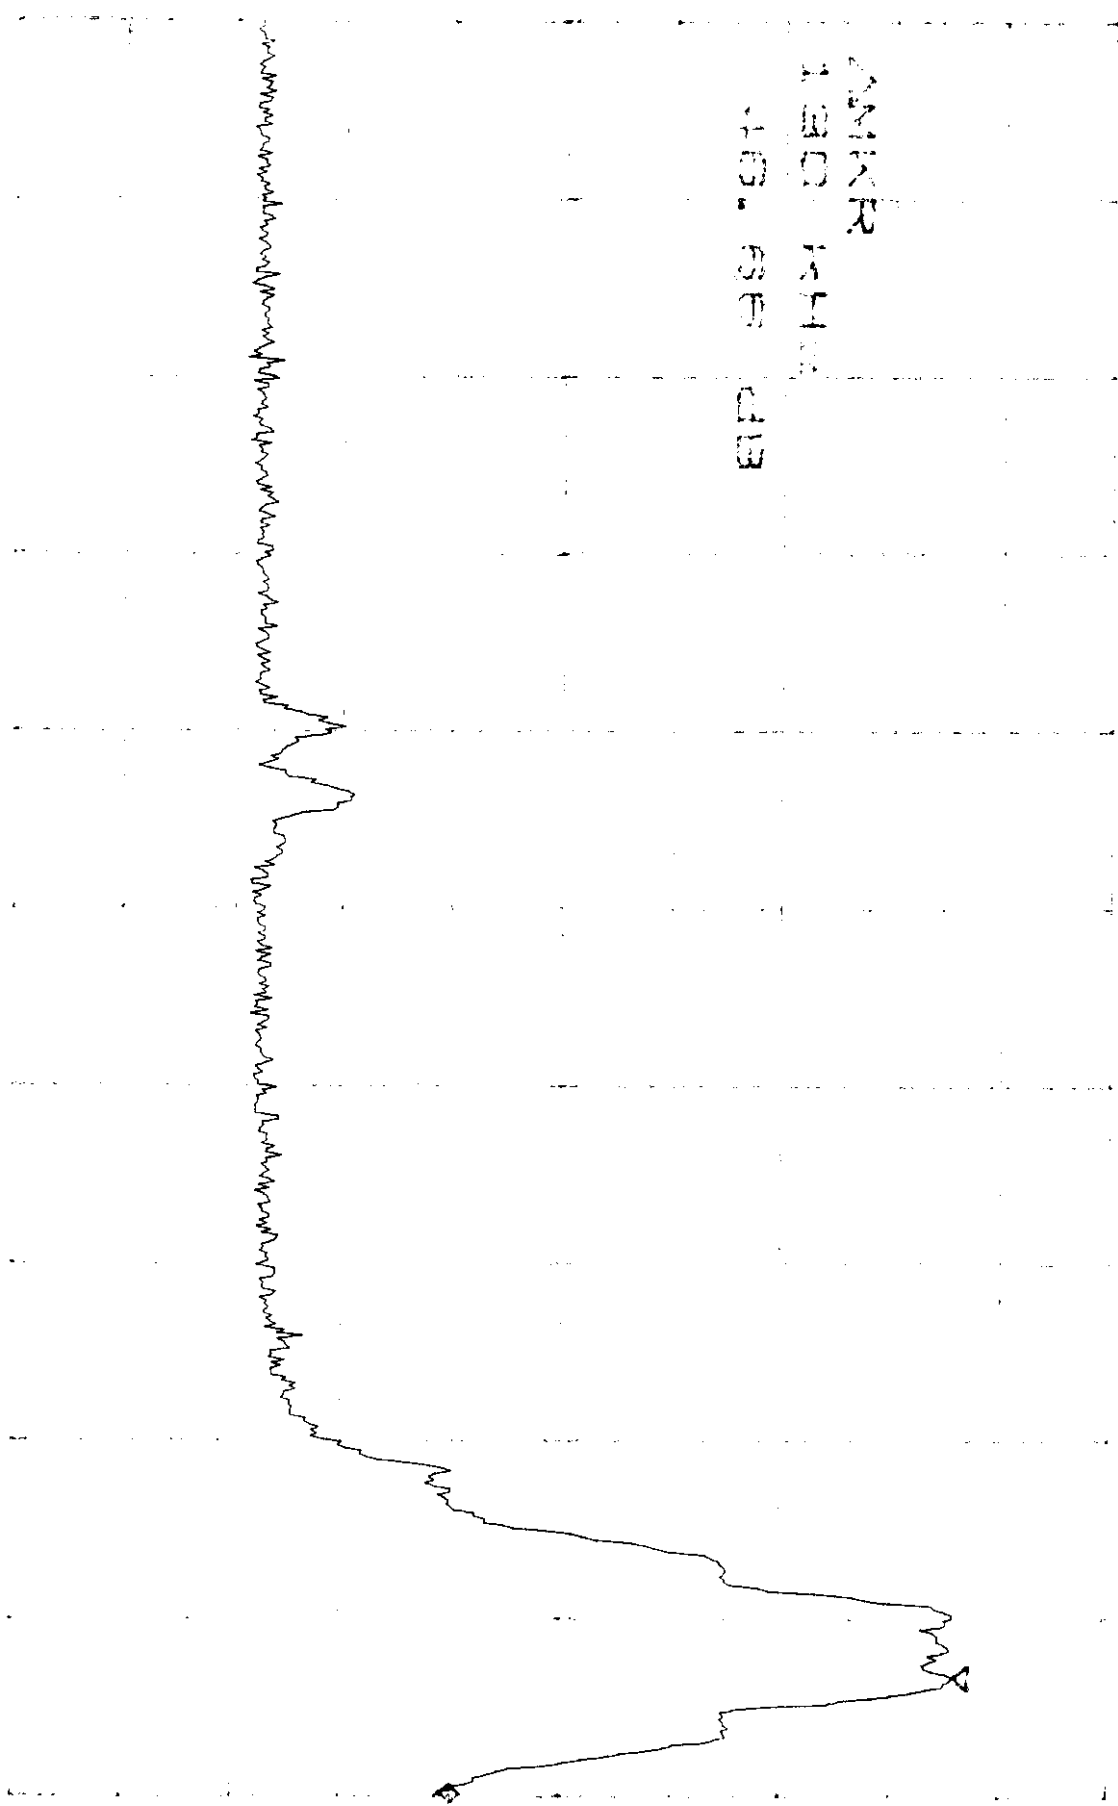

START 000013. 000013

STOP 000013. 000013

RTN 000013

NO. 000013


100013

SWP 000013

ATTEN 20dB OF Band Emissions 0Hz - 1GHz 902.08MHz 57.50dB uV

RL 116.2dB uV 10dB 800MHz

NOISE
 7.60 dB uV

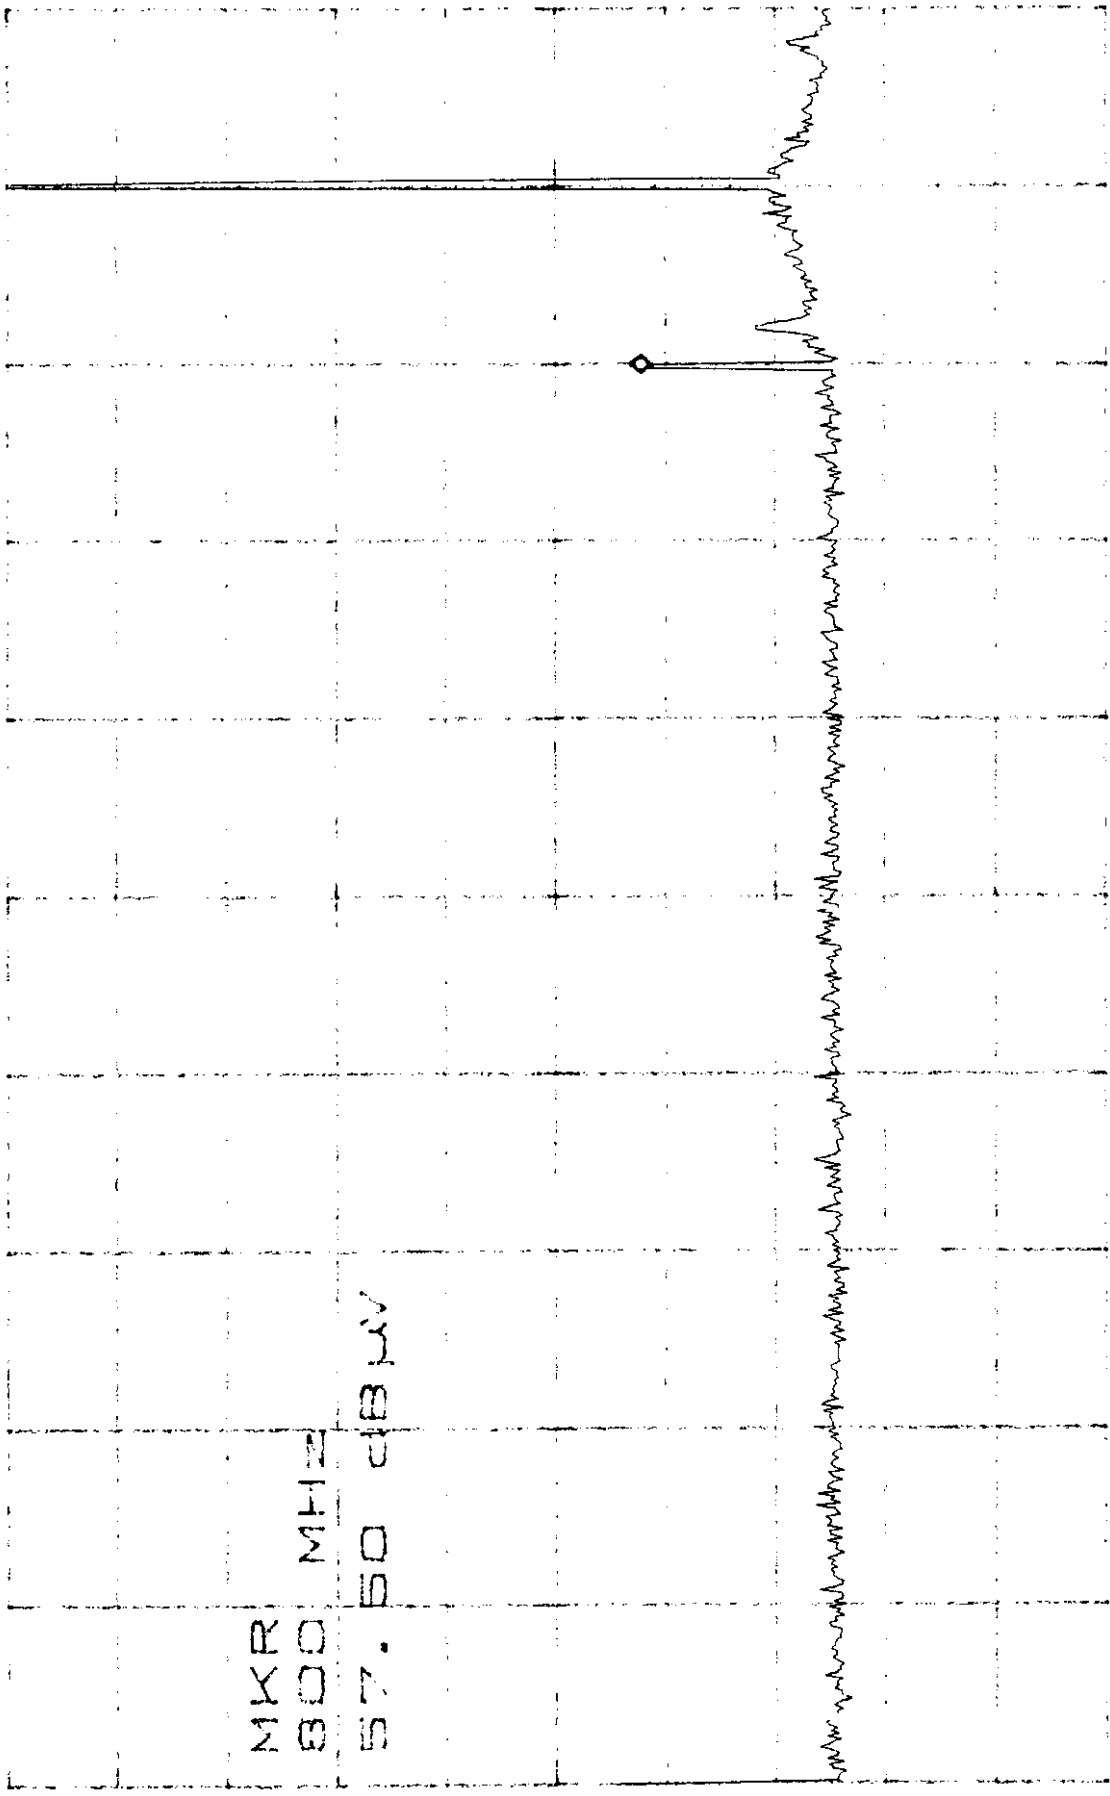

START 0Hz STOP 1.000GHz
 *RBW 100kHz VBW 100kHz SWP 250Hz
 A803004.DOC 20

ATTEN 20 Out of Band Emissions 1-2.75 GHz 902.08 MHz 50. 34 dB

RL 116. 00 dB 100 Hz 1. 000 GHz

NR 1. 000 GHz
50. 34 dB

1.502 GHz
50.84

2.709 GHz
51.34

START 1. 000 GHz

STOP 2. 750 GHz


RESW 100 kHz

VBW 100 kHz

SWP 4.0 dB

ATTEN 20dB Out of Band Emissions 2.75 -26.5 GHz 902.08MHz 1.000000


FREQ 116.250000 100kHz 115.950000

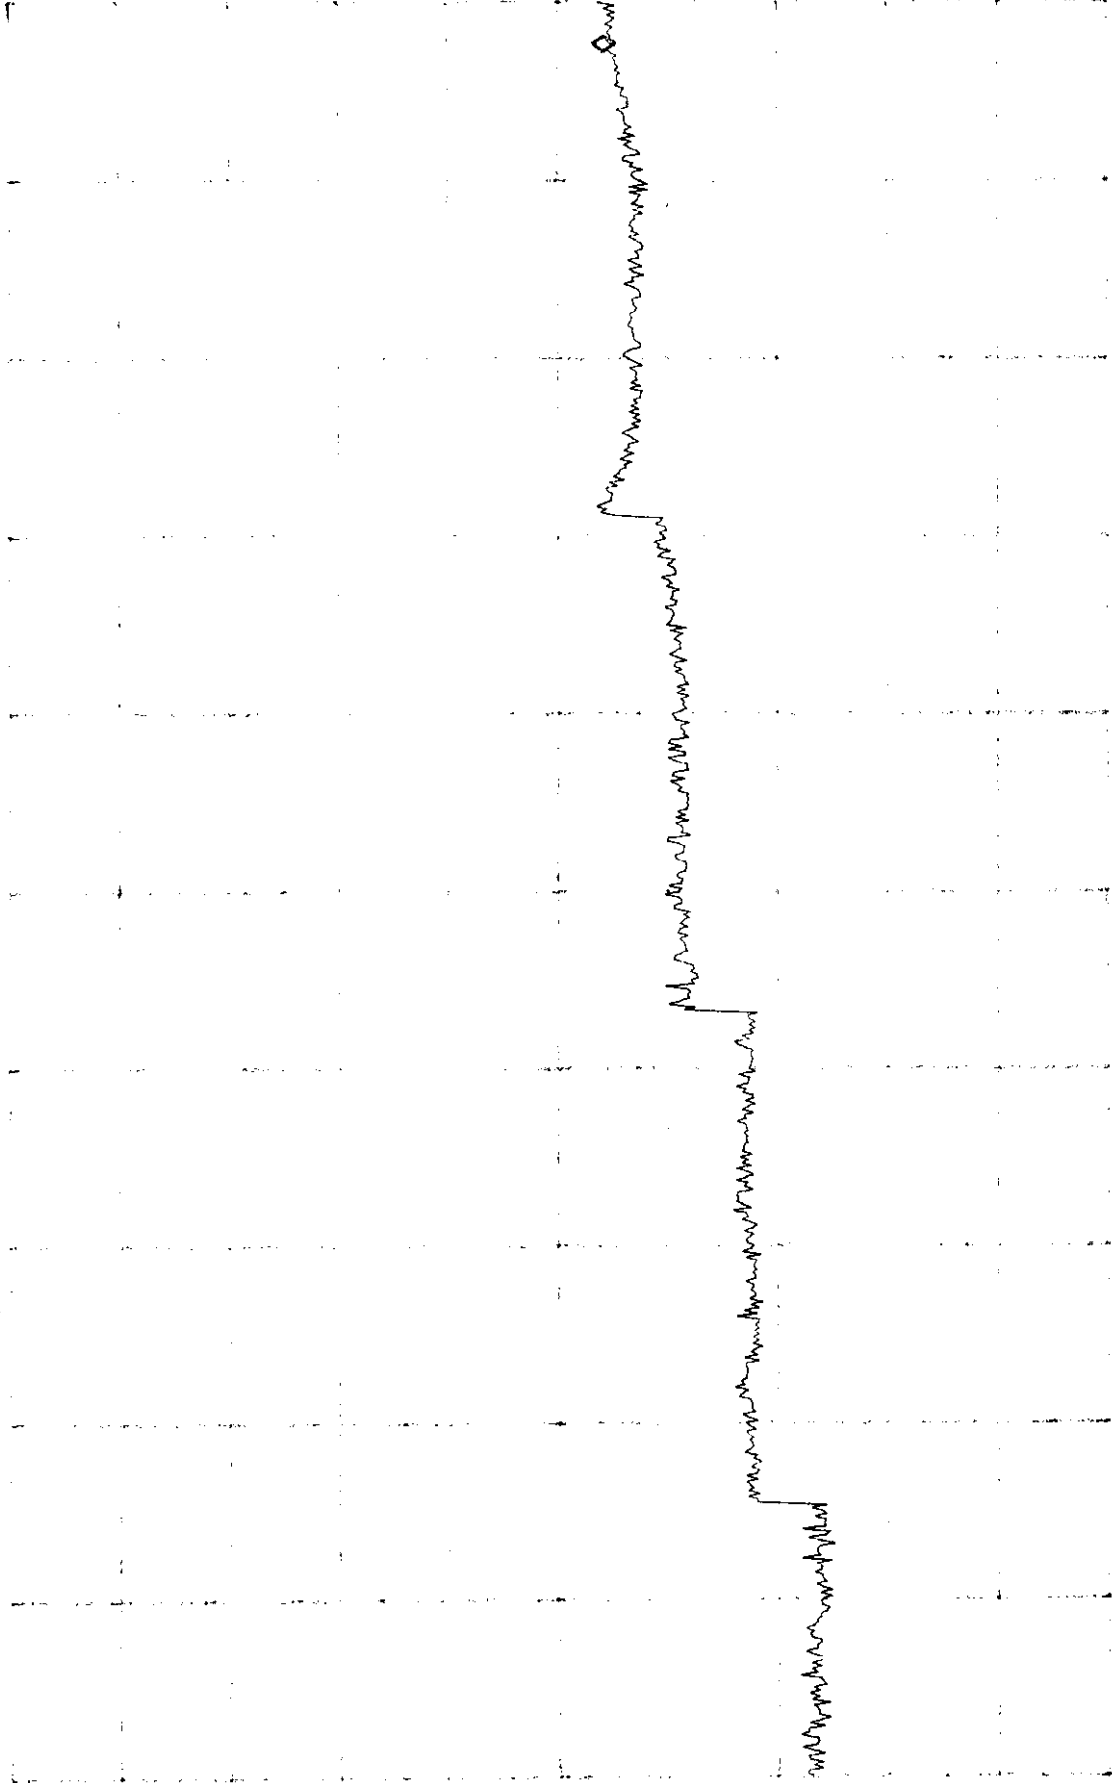

START 2.750000 STOP 26.500000
*FREQ 100kHz VBW 100kHz SWP 6.000000

ATTEN 20dB Out of Band Emissions 0Hz - 1GHz 914.08 MHz 3.50 dB μ V

RL 115.7 dB μ V 10 dB / 798 MHz

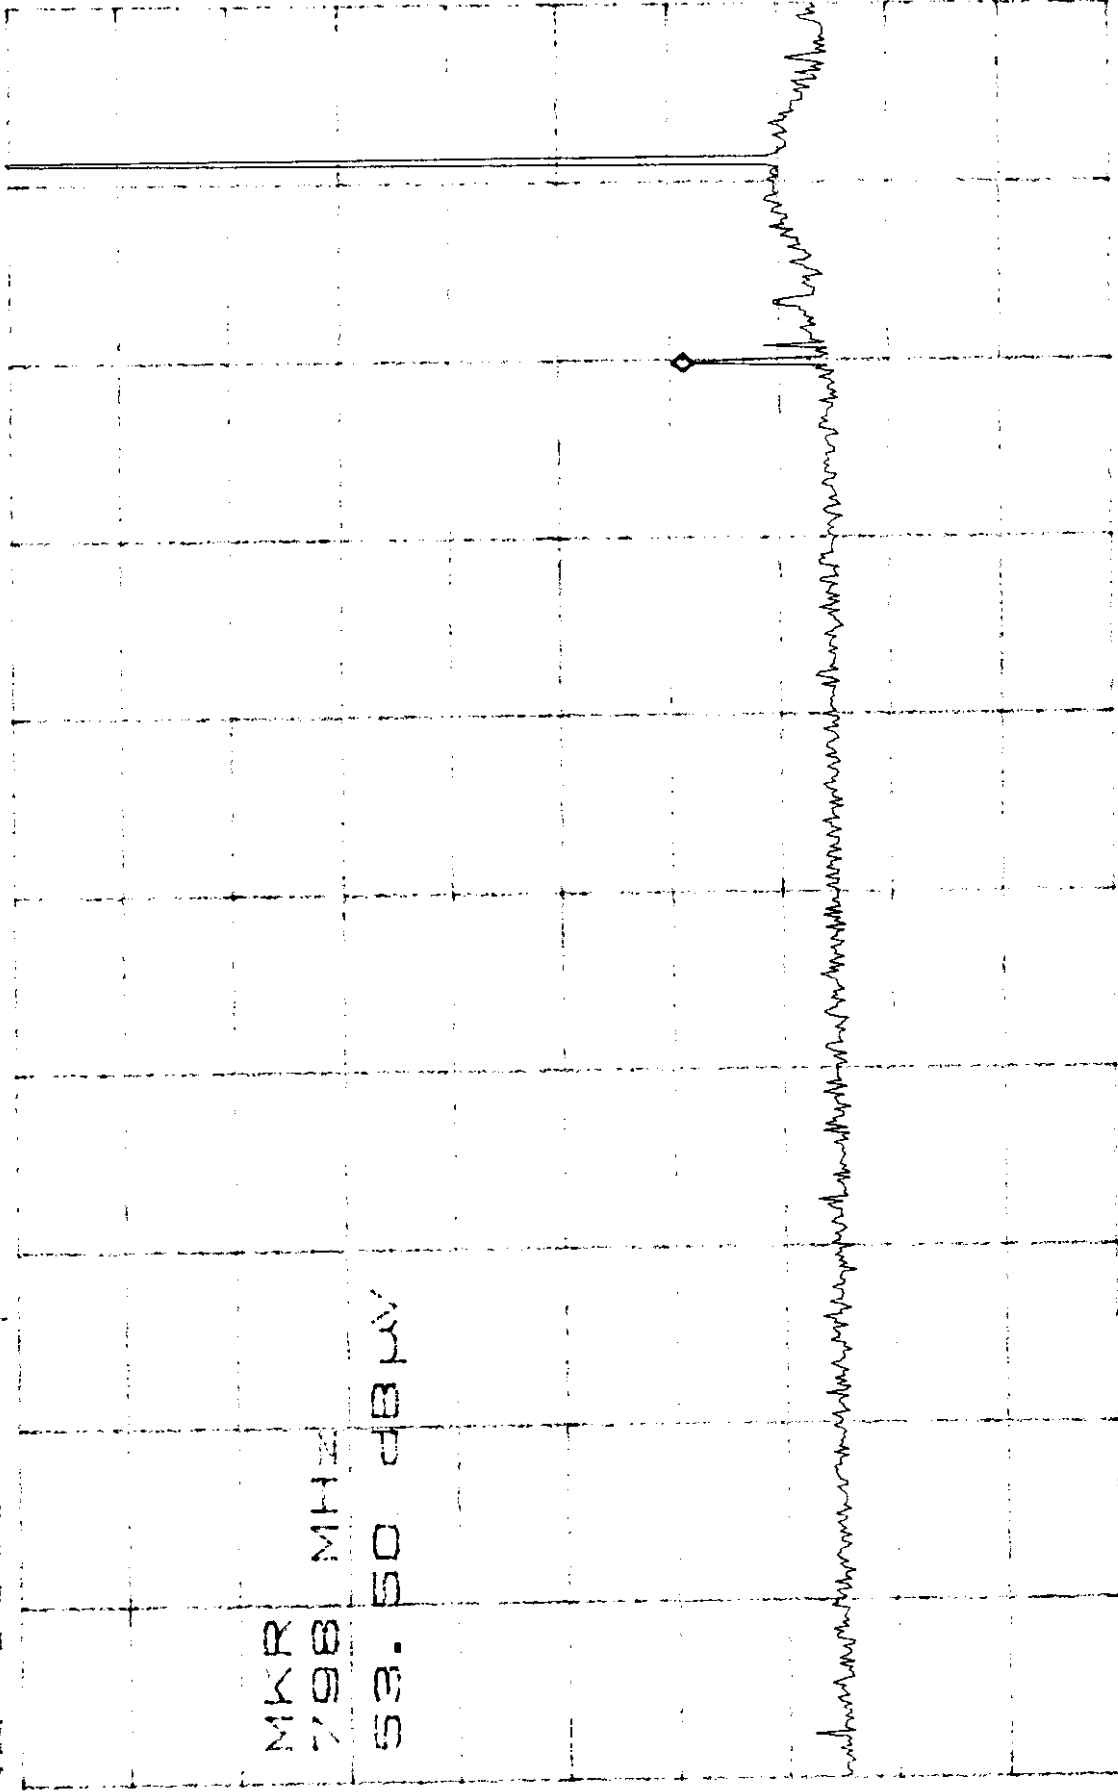

START 0Hz STOP 1.000GHz

*RBW 100kHz VBW 100kHz SWP 250ms

ATTEN 20dB Out of Band Emissions 1-2.75 GHz 914.08MHz 5.4. 150dB

RL 115.7dB 10dB 1.825GHz

NKR
1.825 GHz
5.4. 150 dB

2.75
50.50

1.023
51.24dB

START 1.000GHz STOP 2.750GHz
*RBW 100kHz VBW 100kHz SWP 440ms
A803004.DOC 24


ATTEN 20 Output of Band Emissions 2.75 -26.5 GHz 914.08 MHz 0. 50 dB μ V

RL 115.7 dB μ V 10 dB 26.48 GHz

STOP

26.50 GHz

0

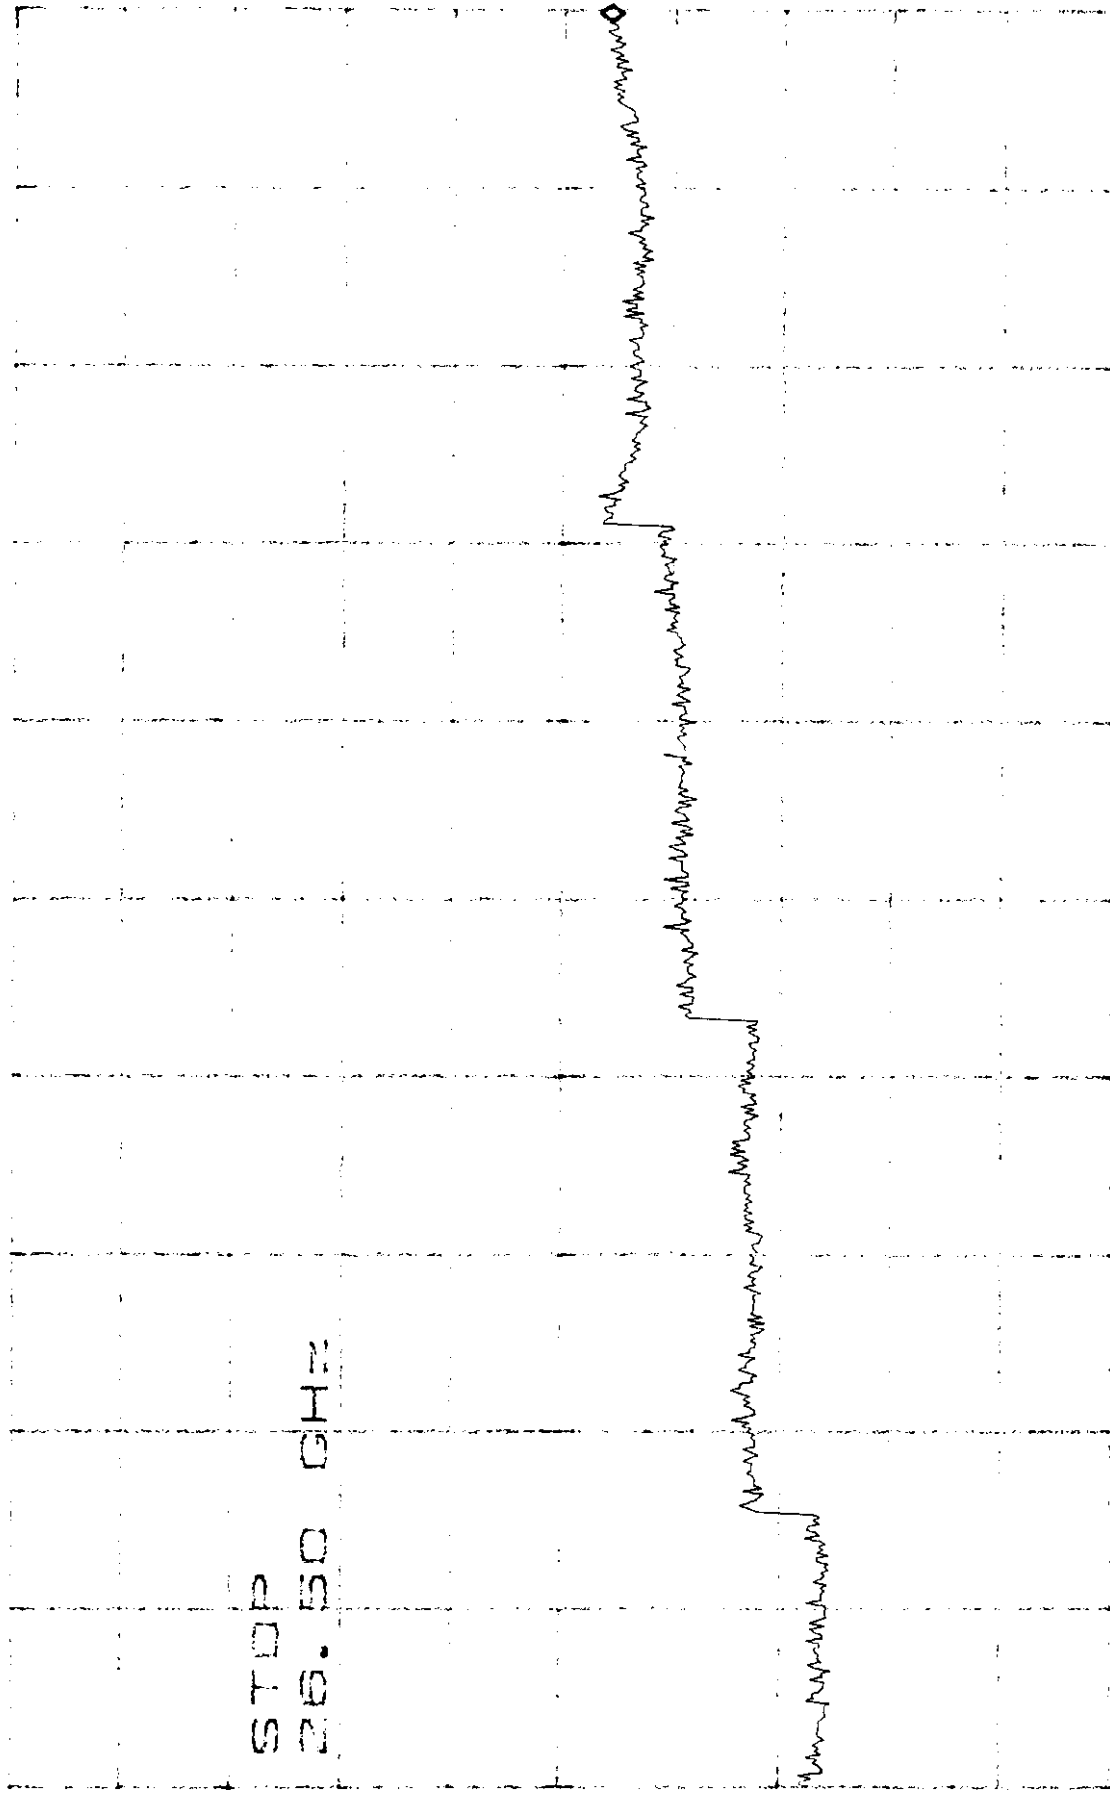

START 2.75 GHz

STOP 26.50 GHz

*RBW 100 kHz


VBW 100 kHz

SWP 6.0000

A803004.DOC

ATTEN 20dB Out of Band Emissions 0Hz - 1GHz 927.84 MHz 14.67 dBμV

RL 117.0dBμV 10dB/ 927 MHz

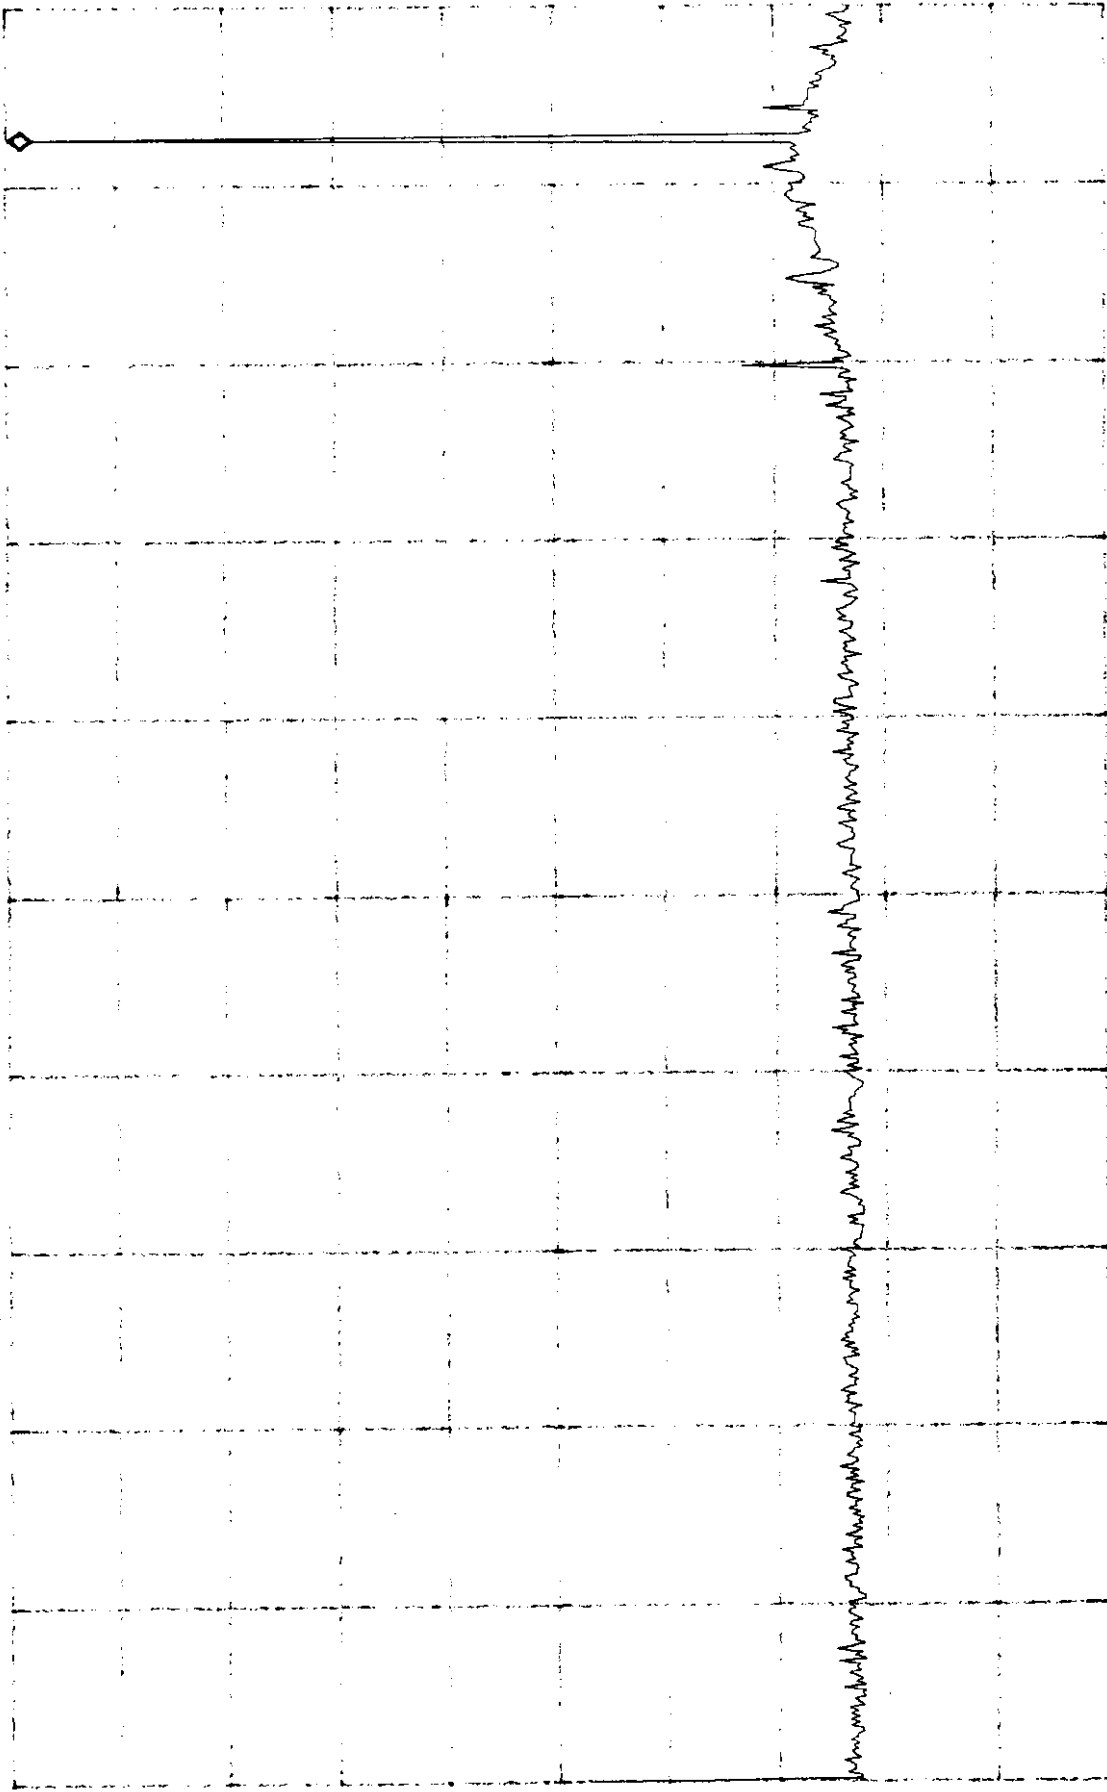

START 0Hz

STOP 1.000GHz


*RBW 100kHz

VBW 100kHz

SWP 250ms

ATTEN 20.0dB of Band Emissions 1-2.75 GHz 927.84 MHz 1.00dB
RL 117.0dB 10dB 1.855GHz

MKR
1.855 GHz
51.00 dB



START 1.000GHz STOP 2.750GHz
*RBW 100kHz VBW 100kHz SWP 440ms
A803004.DOC

ATTEN 20dB
RL 117.0dB μ V 10dB/ 55.67dB μ V
Outer Band Emissions 2.75 - 26.5 GHz 927.84MHz 14.35GHz

STOP

26.50 GHz

START 2.75GHz

*RBW 100kHz

VBW 100kHz

STOP 26.50GHz


A803004.DOC

SWP 5.0dB

00	00
01	01
02	02
03	03
04	04
05	05
06	06
07	07
08	08
09	09
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99

Output Power 902.08 MHz MKK 9.17 GHz
1.0 GHz 902.08 MHz 1.0 MHz

30

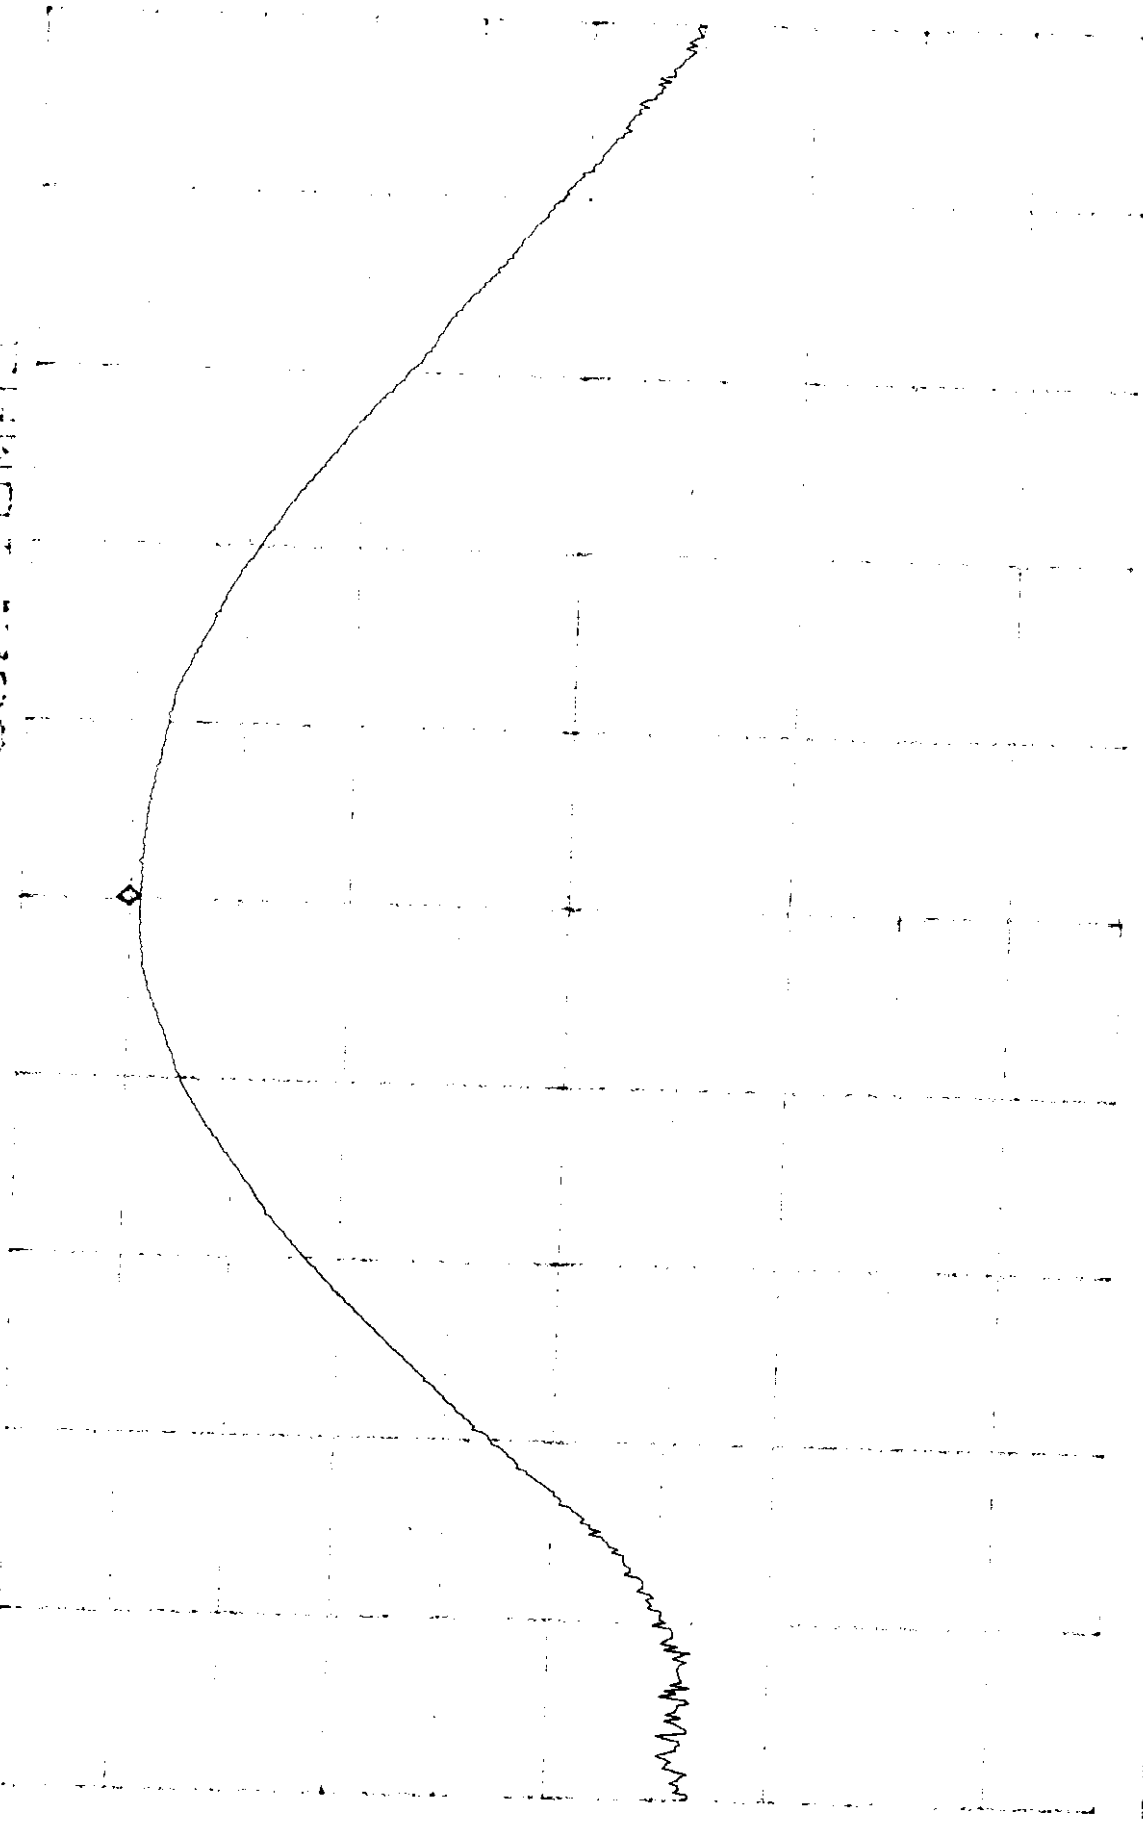[illegible]


W I N C O , G I D E Y W I N C O . A S M O K *

三二〇

29

ATTEN 30dB
RL 20.0dB

Output Power 914.08 MHz MKR 9.93dBm
100dB 914.10 MHz

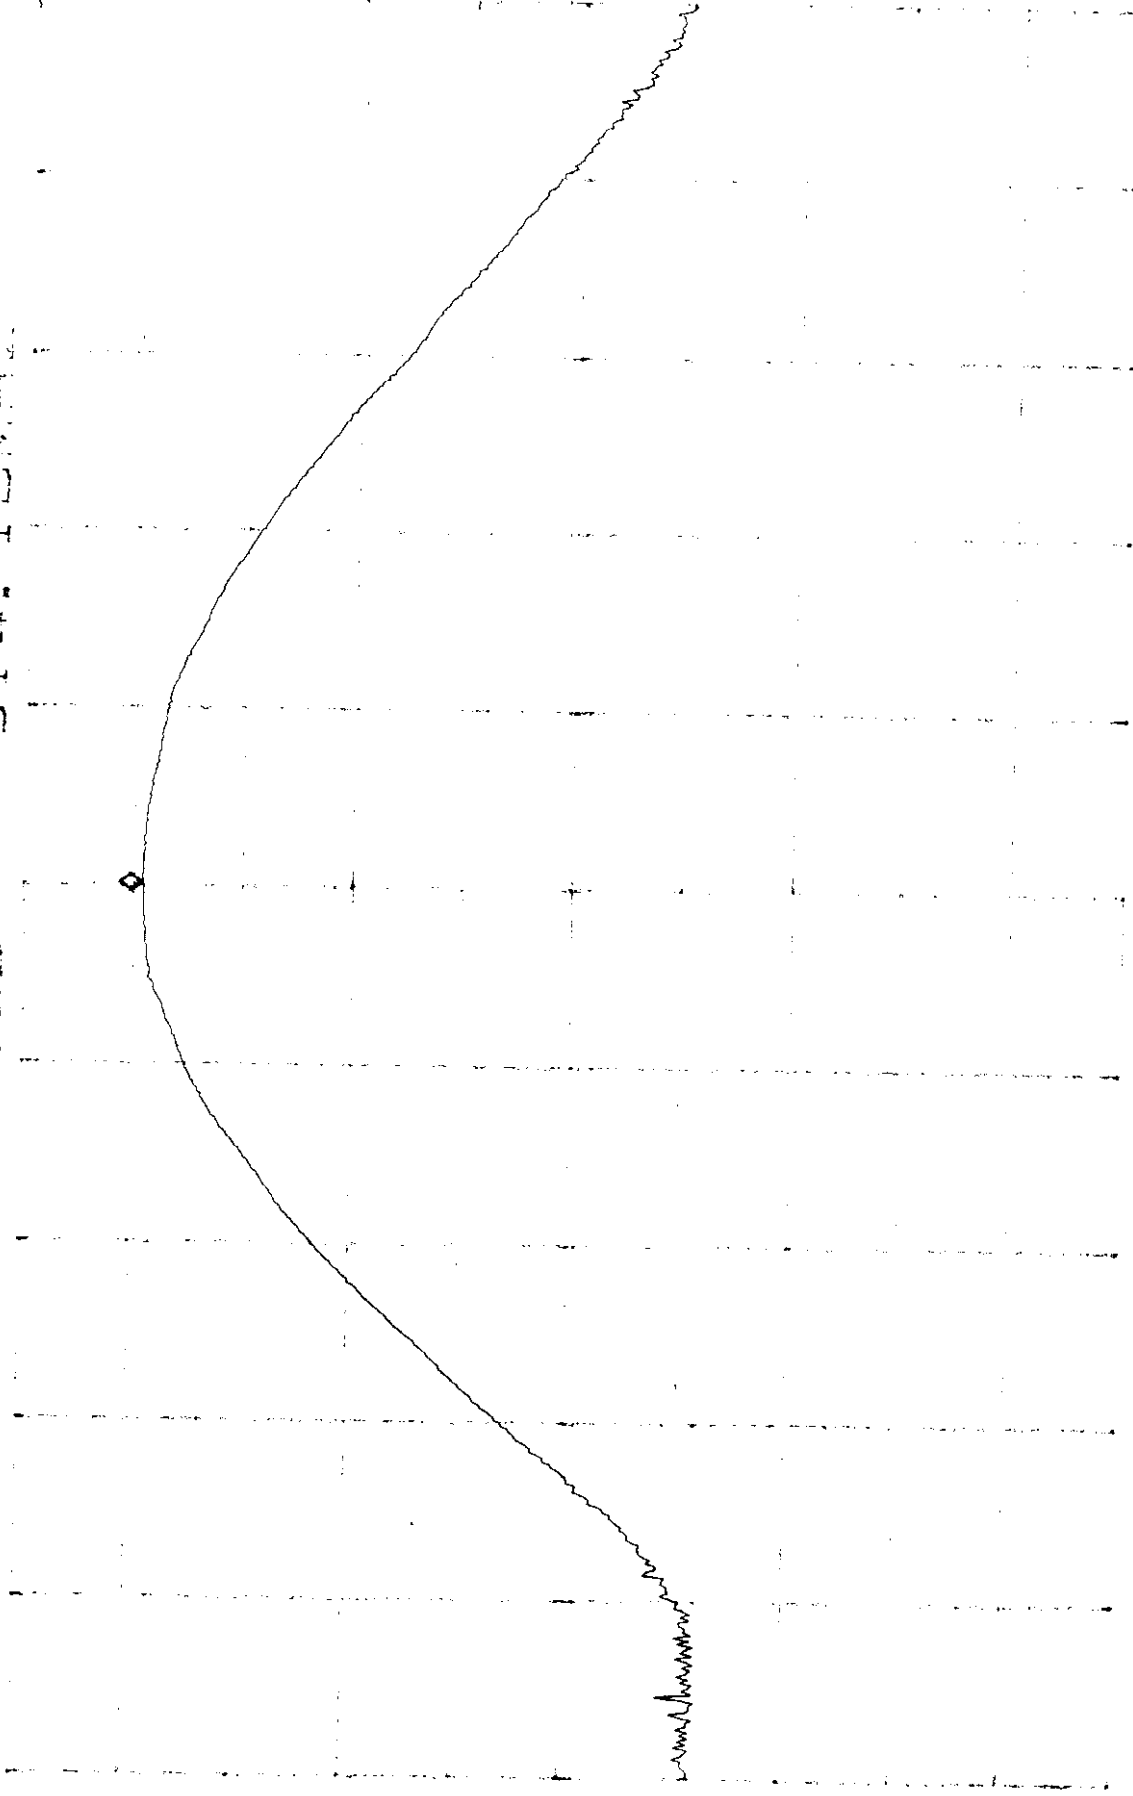


CENTER 914.08 MHz
* RBW 2.0 MHz
VBW 3.0 MHz

SPAN 10.00 MHz
SWP 50 MHz

Output Power 927.84 MHz

ATTEN 30.0dB

20.0dB

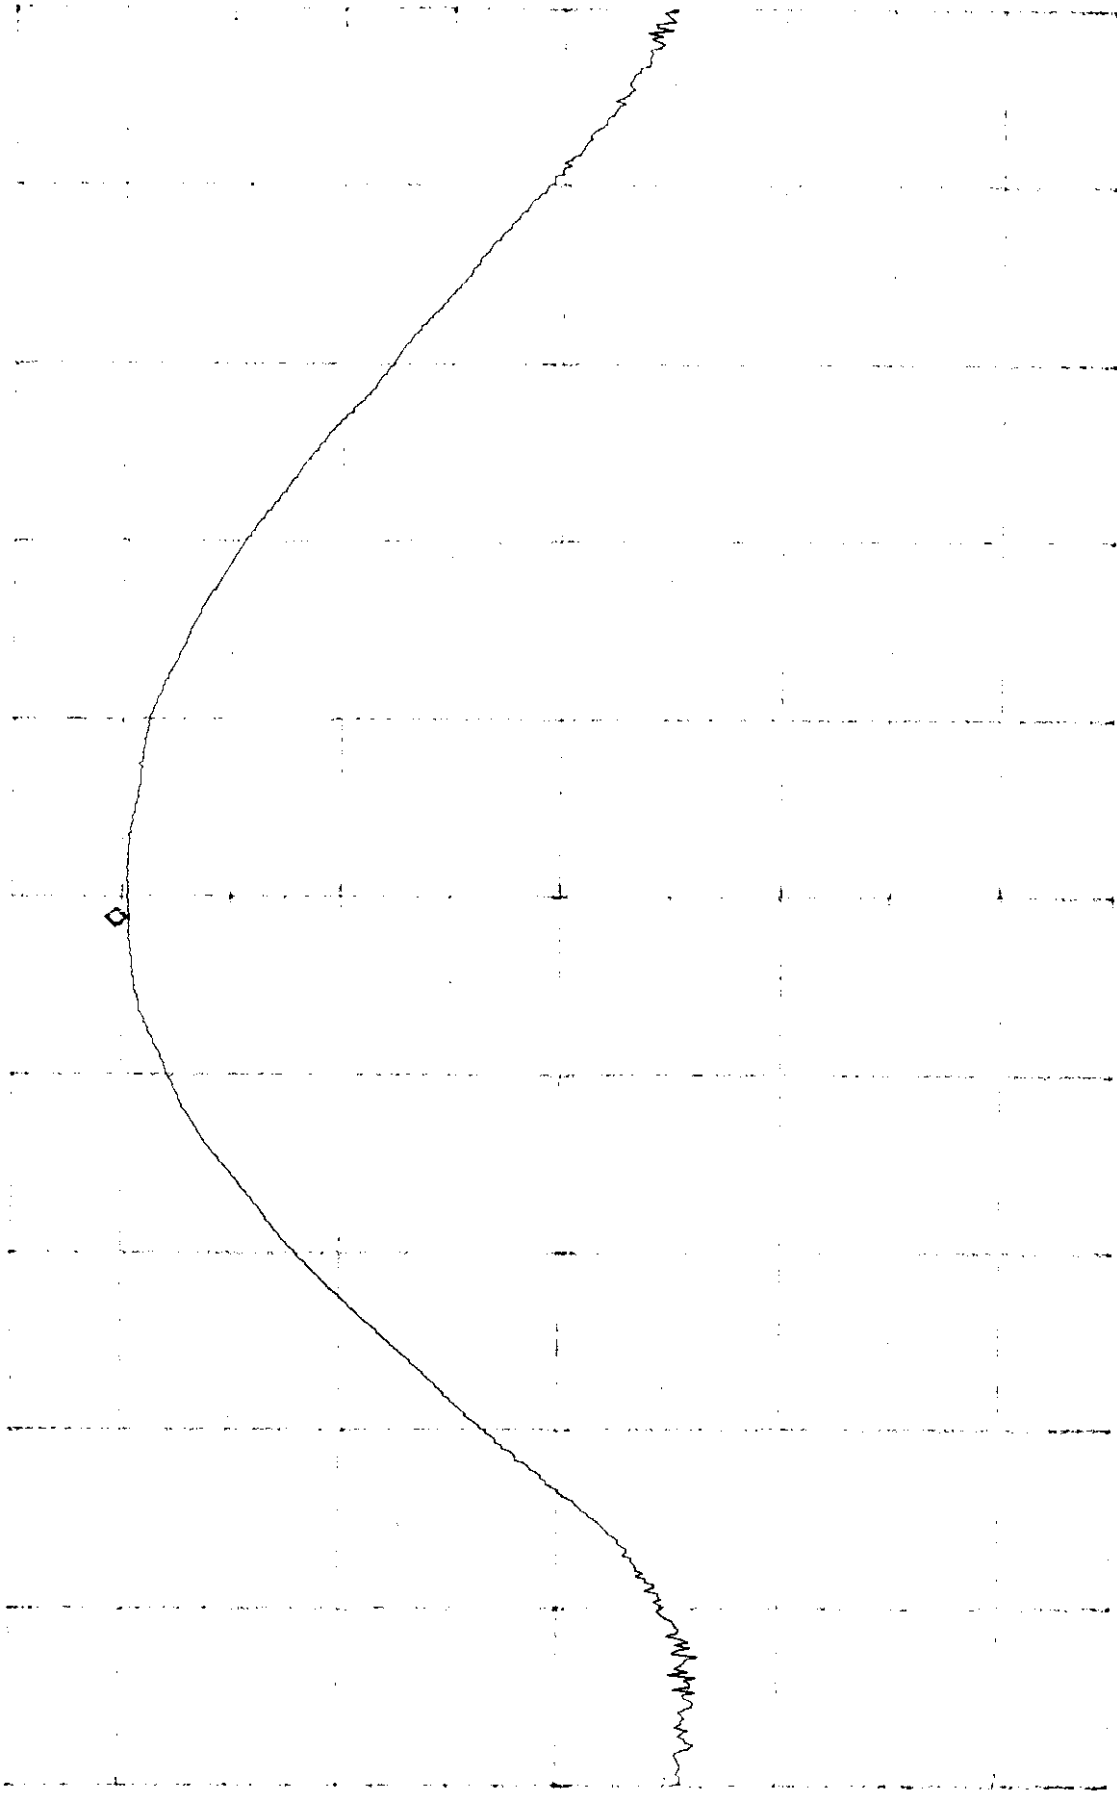

CENTER 927.84MHz


SPAN 10.00MHz

*RBW 2.0MHz

SWP 50Hz

ATTEN 90dB 20dB Occupied Bandwidth 902.08 MHz

902.08MHz 100kHz

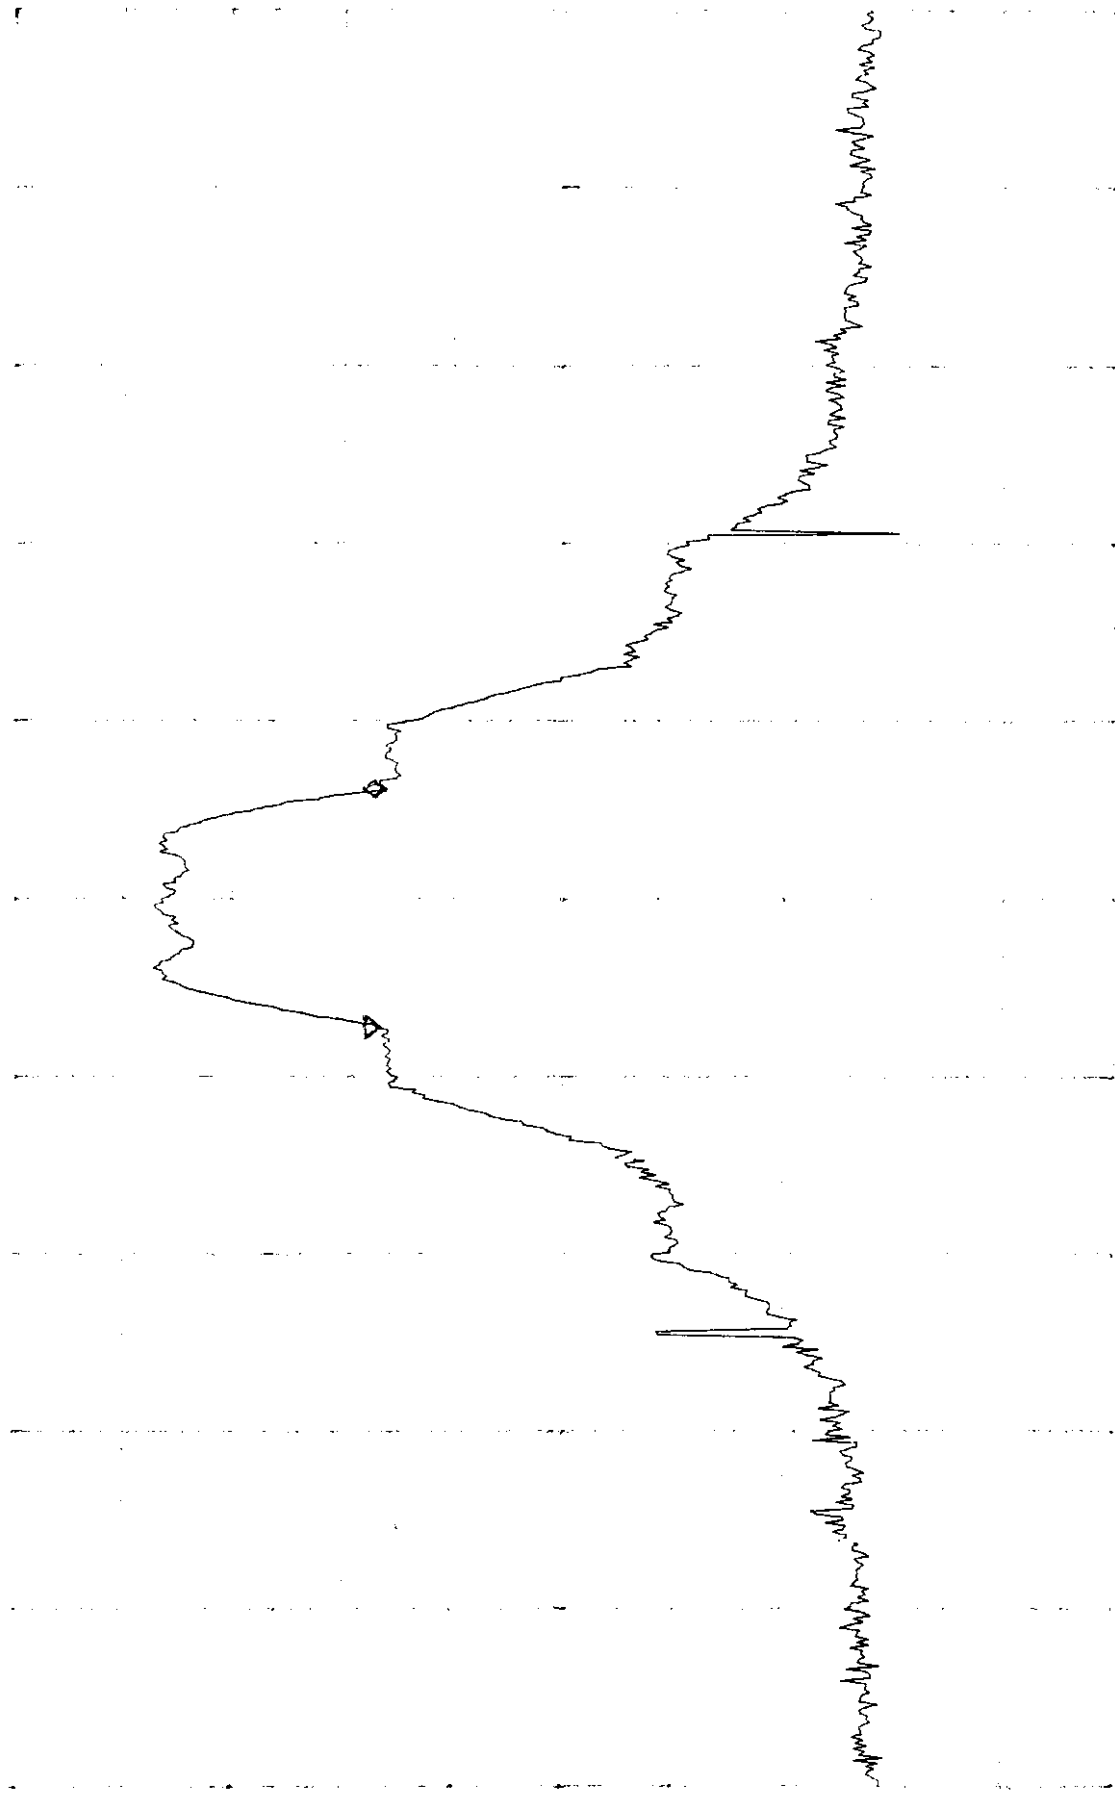

SPAN 1.000MHz

902.08MHz 100kHz

SWP 50m

A803004.DOC

ATTEN 20dB Occupied Bandwidth 914.08 MHz


SPAN 100MHz

CENTER 914.08MHz

MARK

100.00dB

100.00dB

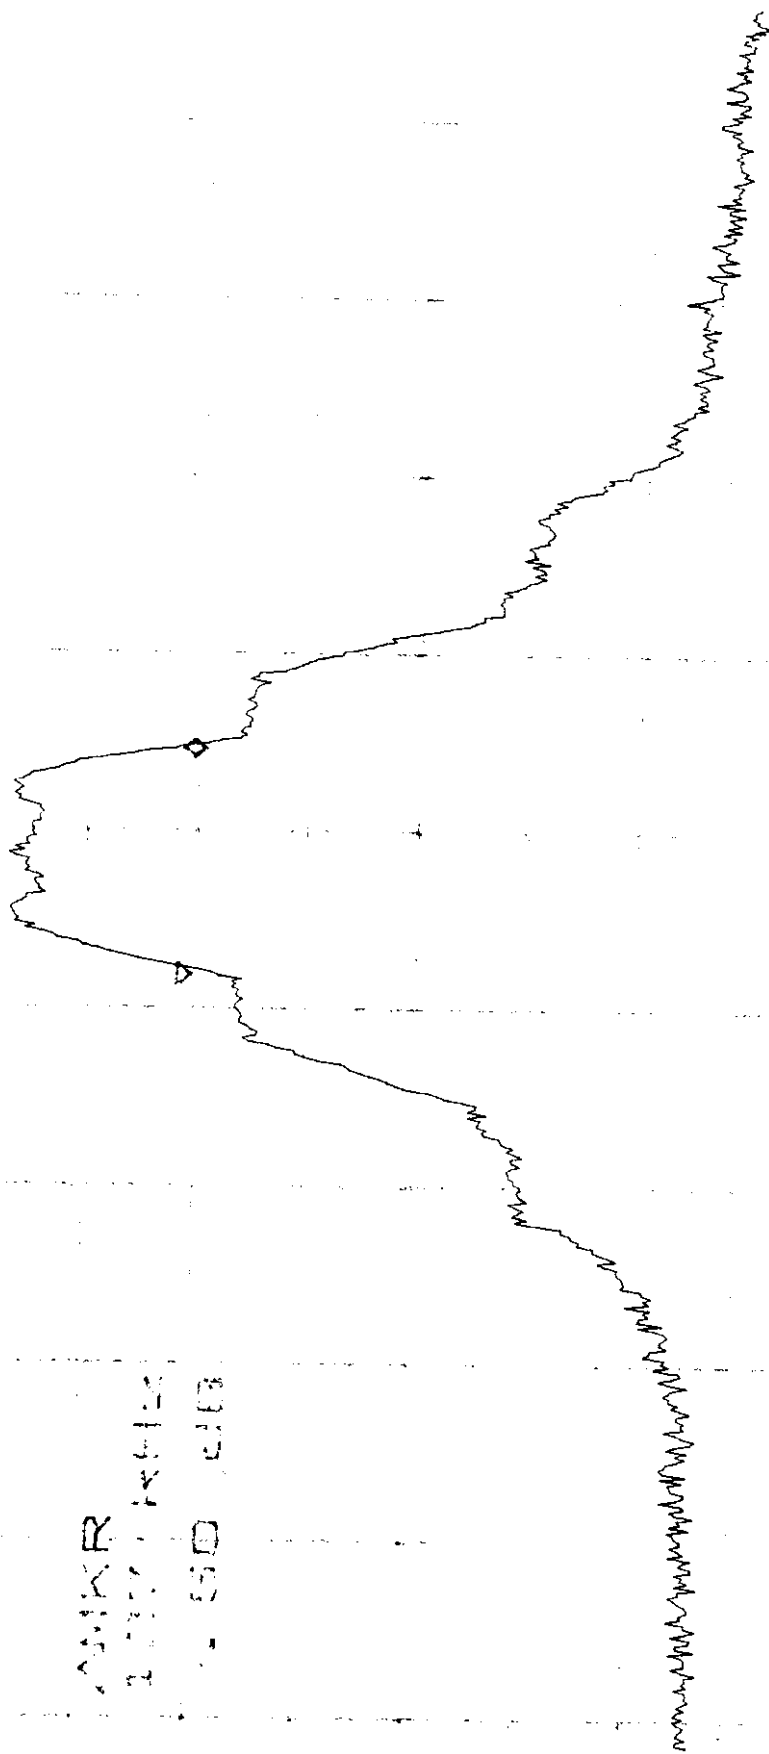

CENTER 914.08MHz


*RBW 10kHz *VBW 100MHz

SPAN 100MHz
SWP 100MHz

ATTEN 30dB 20dB Occupied Bandwidth 927.84 MHz

REL 20.00dB 100KHz 100KHz

MARKER
100.000
100.000

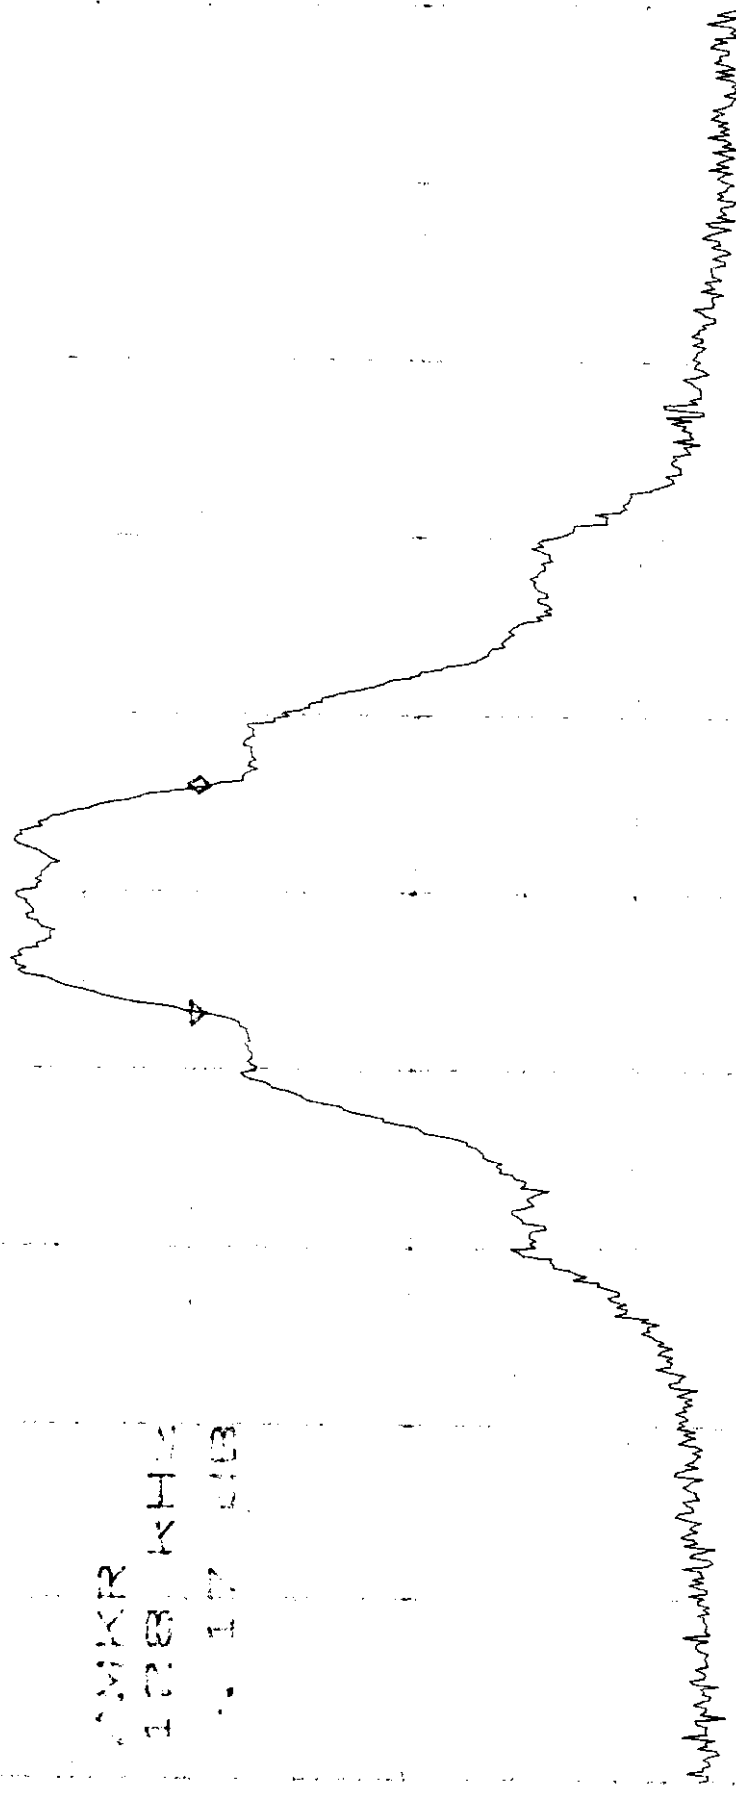


CENTRE 927.84 MHz
SPAN 100KHz

SPAN 100KHz
SWP 5000

Whisper Mode


ATTEN 30dB Channel Utilization 902 - 908 MHz -2.83dBm
 RL 20.0dBm 10dB/ 905.000MHz

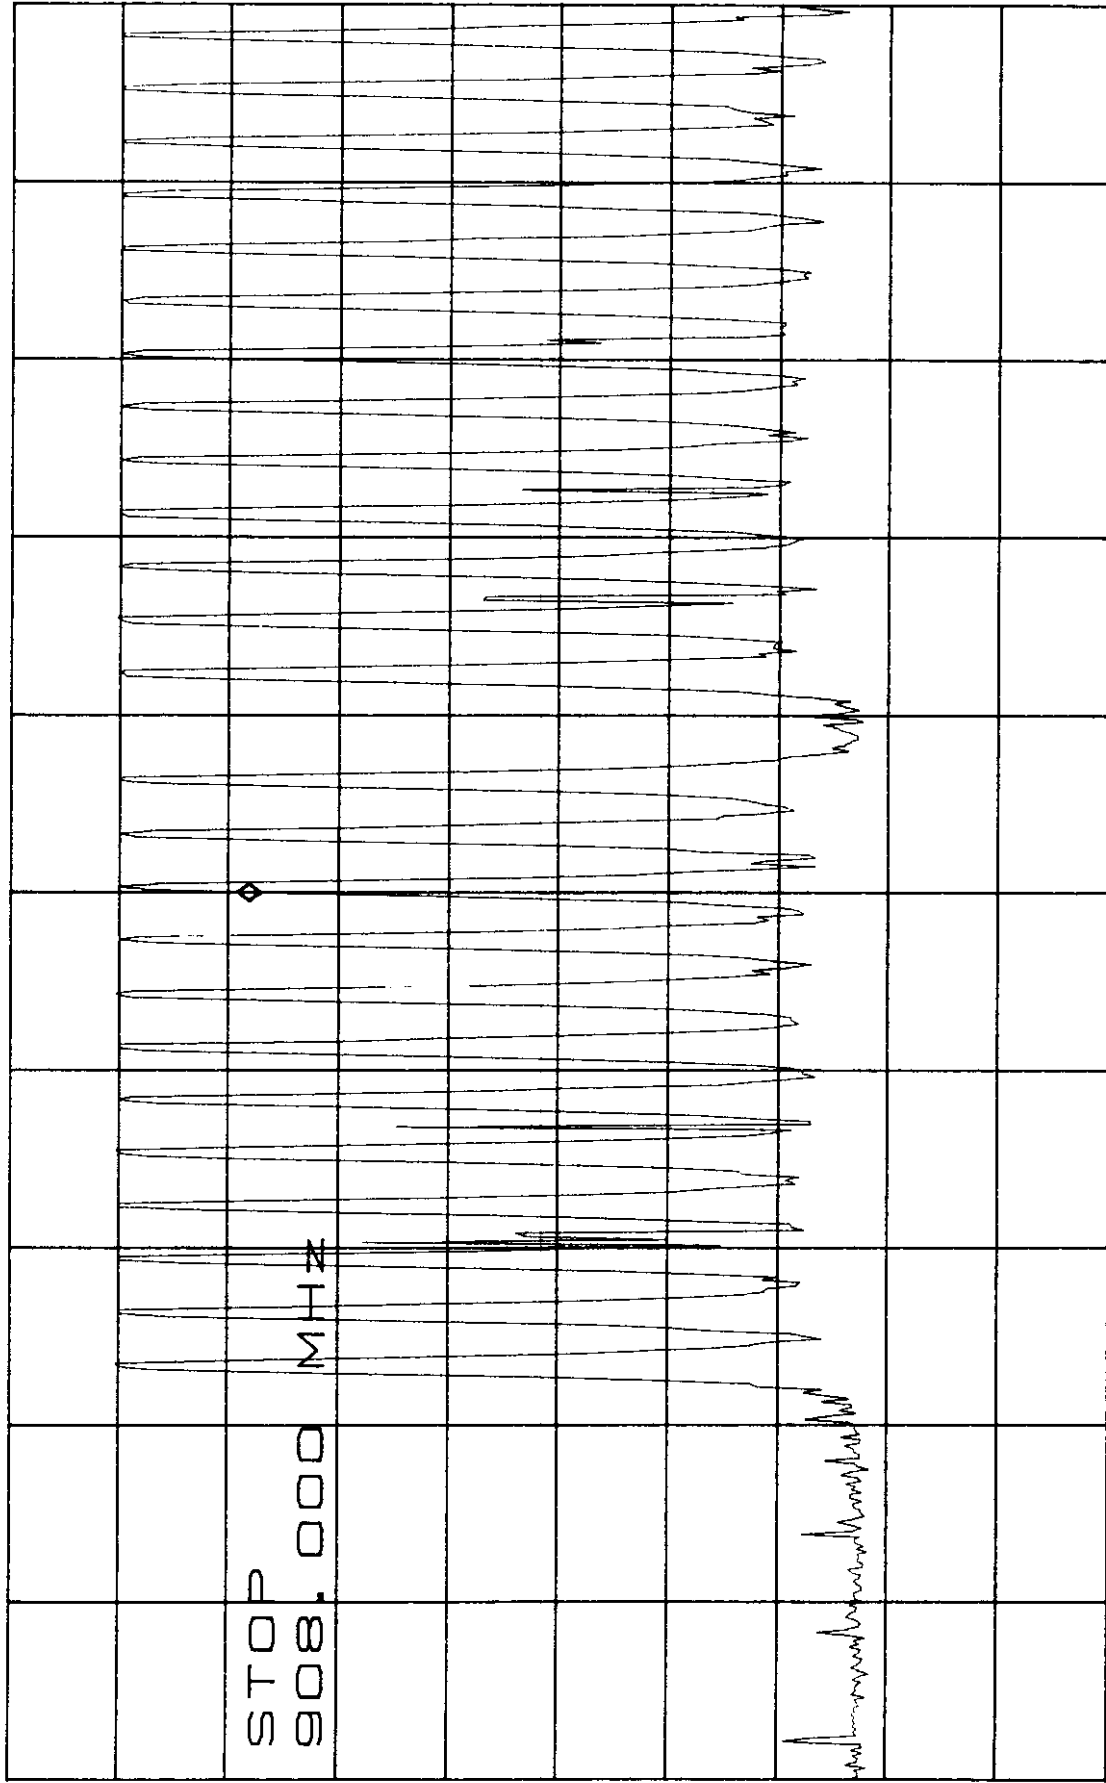

D


START 902.000MHz STOP 908.000MHz
 *RBW 10kHz *VBW 100kHz SWP 150ms
 A803004.DOC 36

ATTEN 30dB Channel Utilization 908 - 915 MHz 9.50dBm
 RL 20.00dBm 10dB/ 911.500MHz

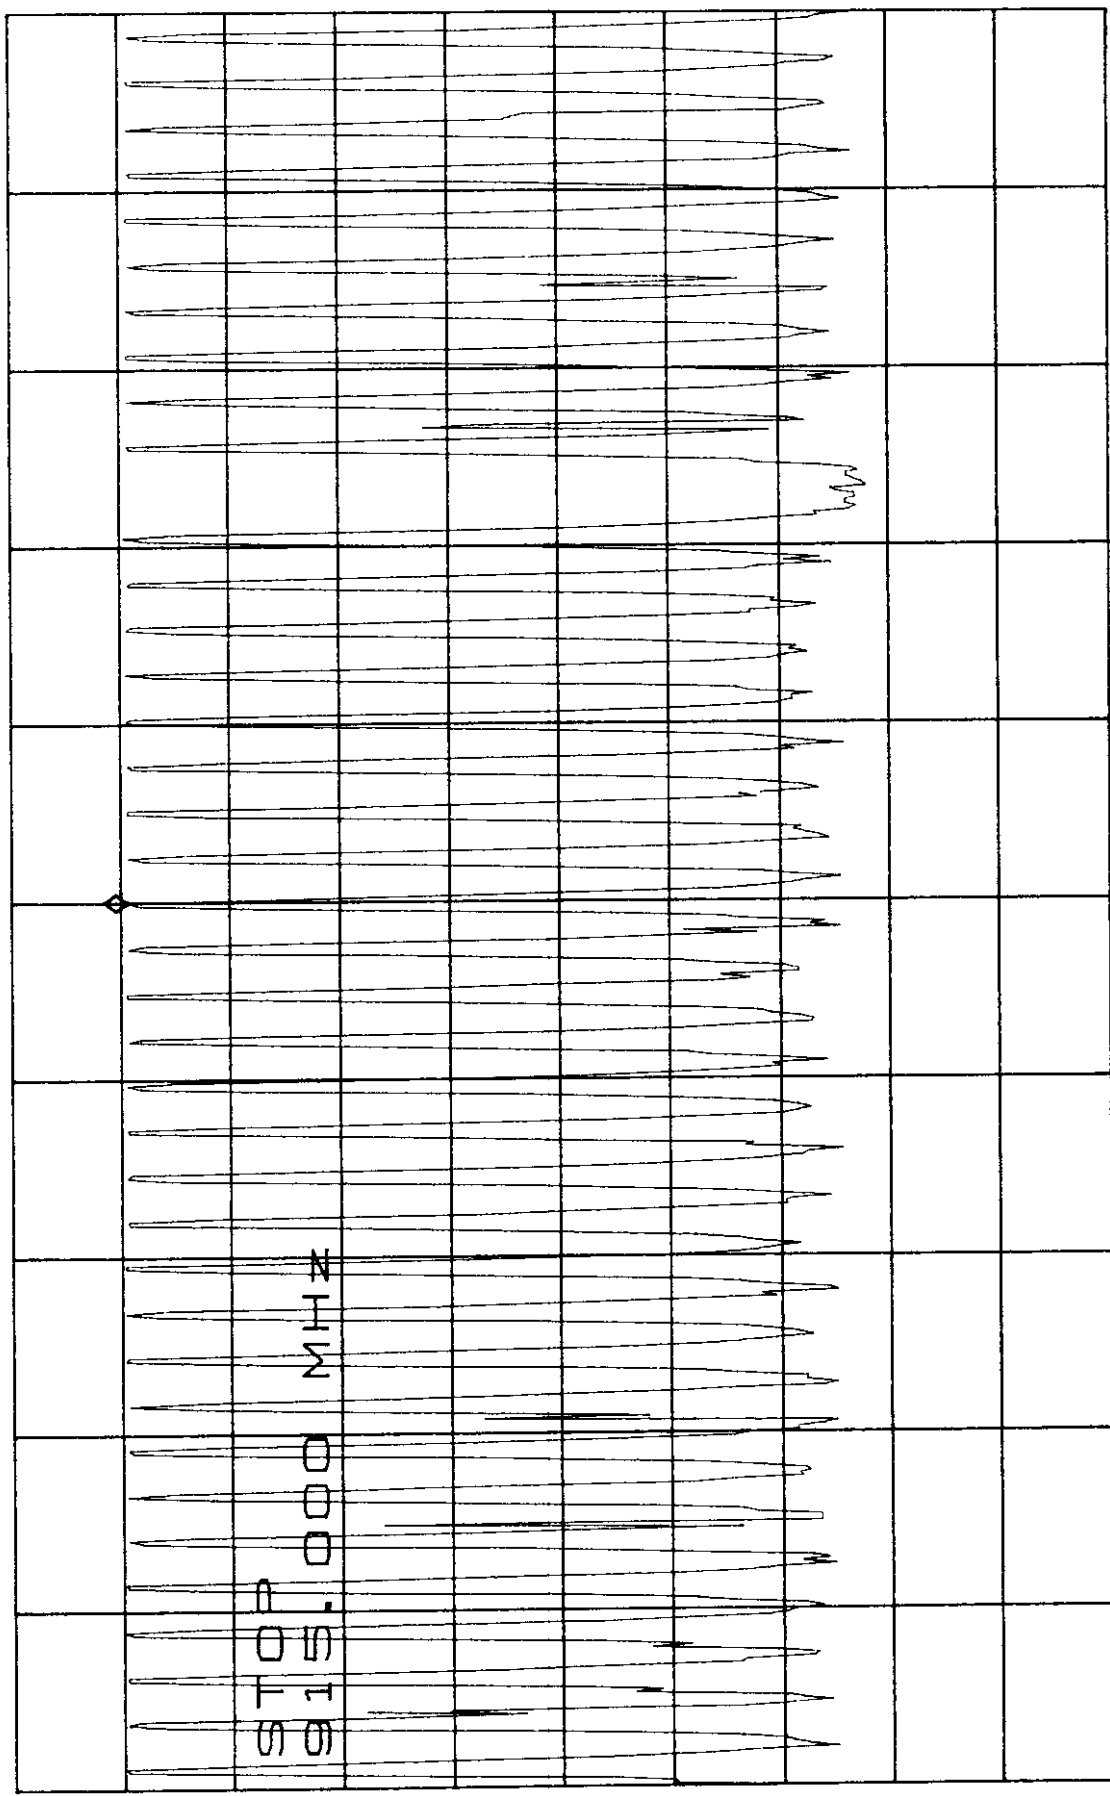

START 908.000MHz STOP 915.000MHz
 *RBW 10kHz *VBW 100kHz SWP 180ms


ATTEN 30dB Dwell Time ΔMKR 1.66dB
 RL 20.0dBm 10dB/

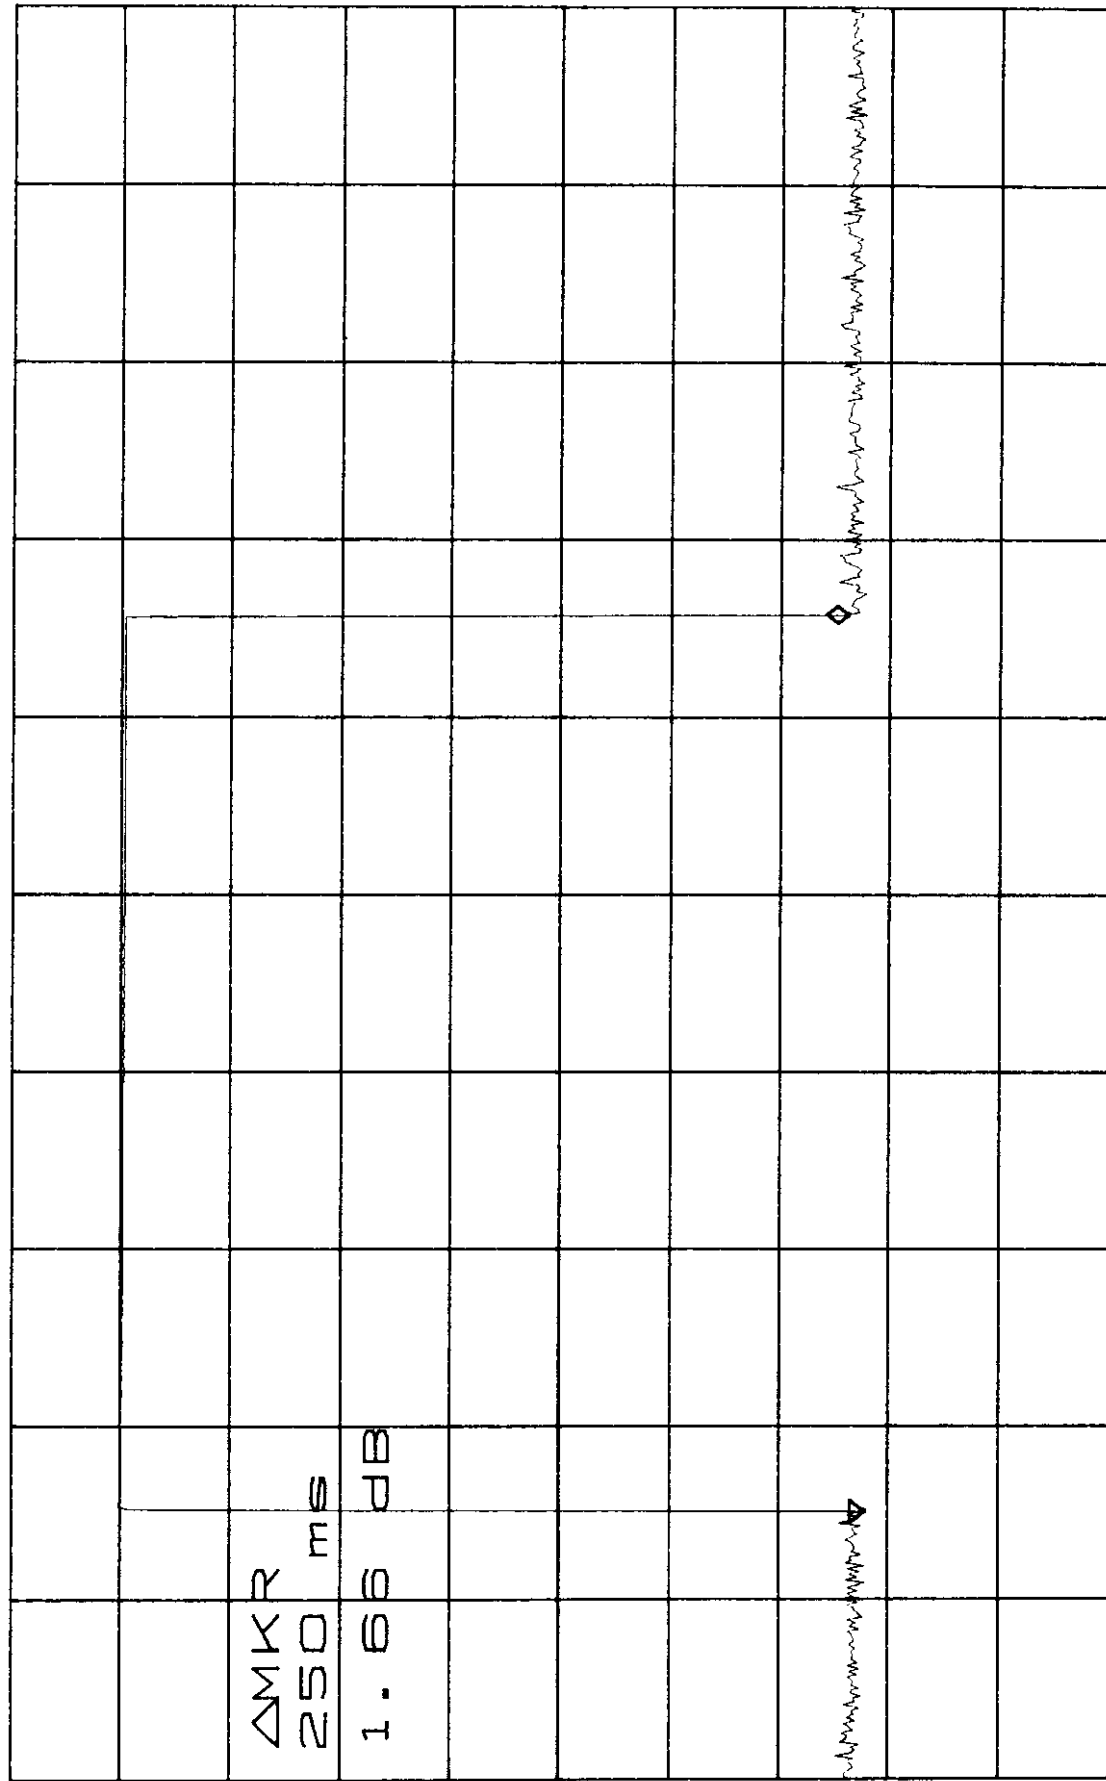

D


CENTER 914.940000MHz SPAN 0Hz
 *RBW 10kHz *VBW 100kHz *SWP 500ms
 A803004.DOC 38

ATTN 30dB Out of Band Lower Band Edge -66.50dB
 RL 20.0dBm 10dB/ -1.403MHz

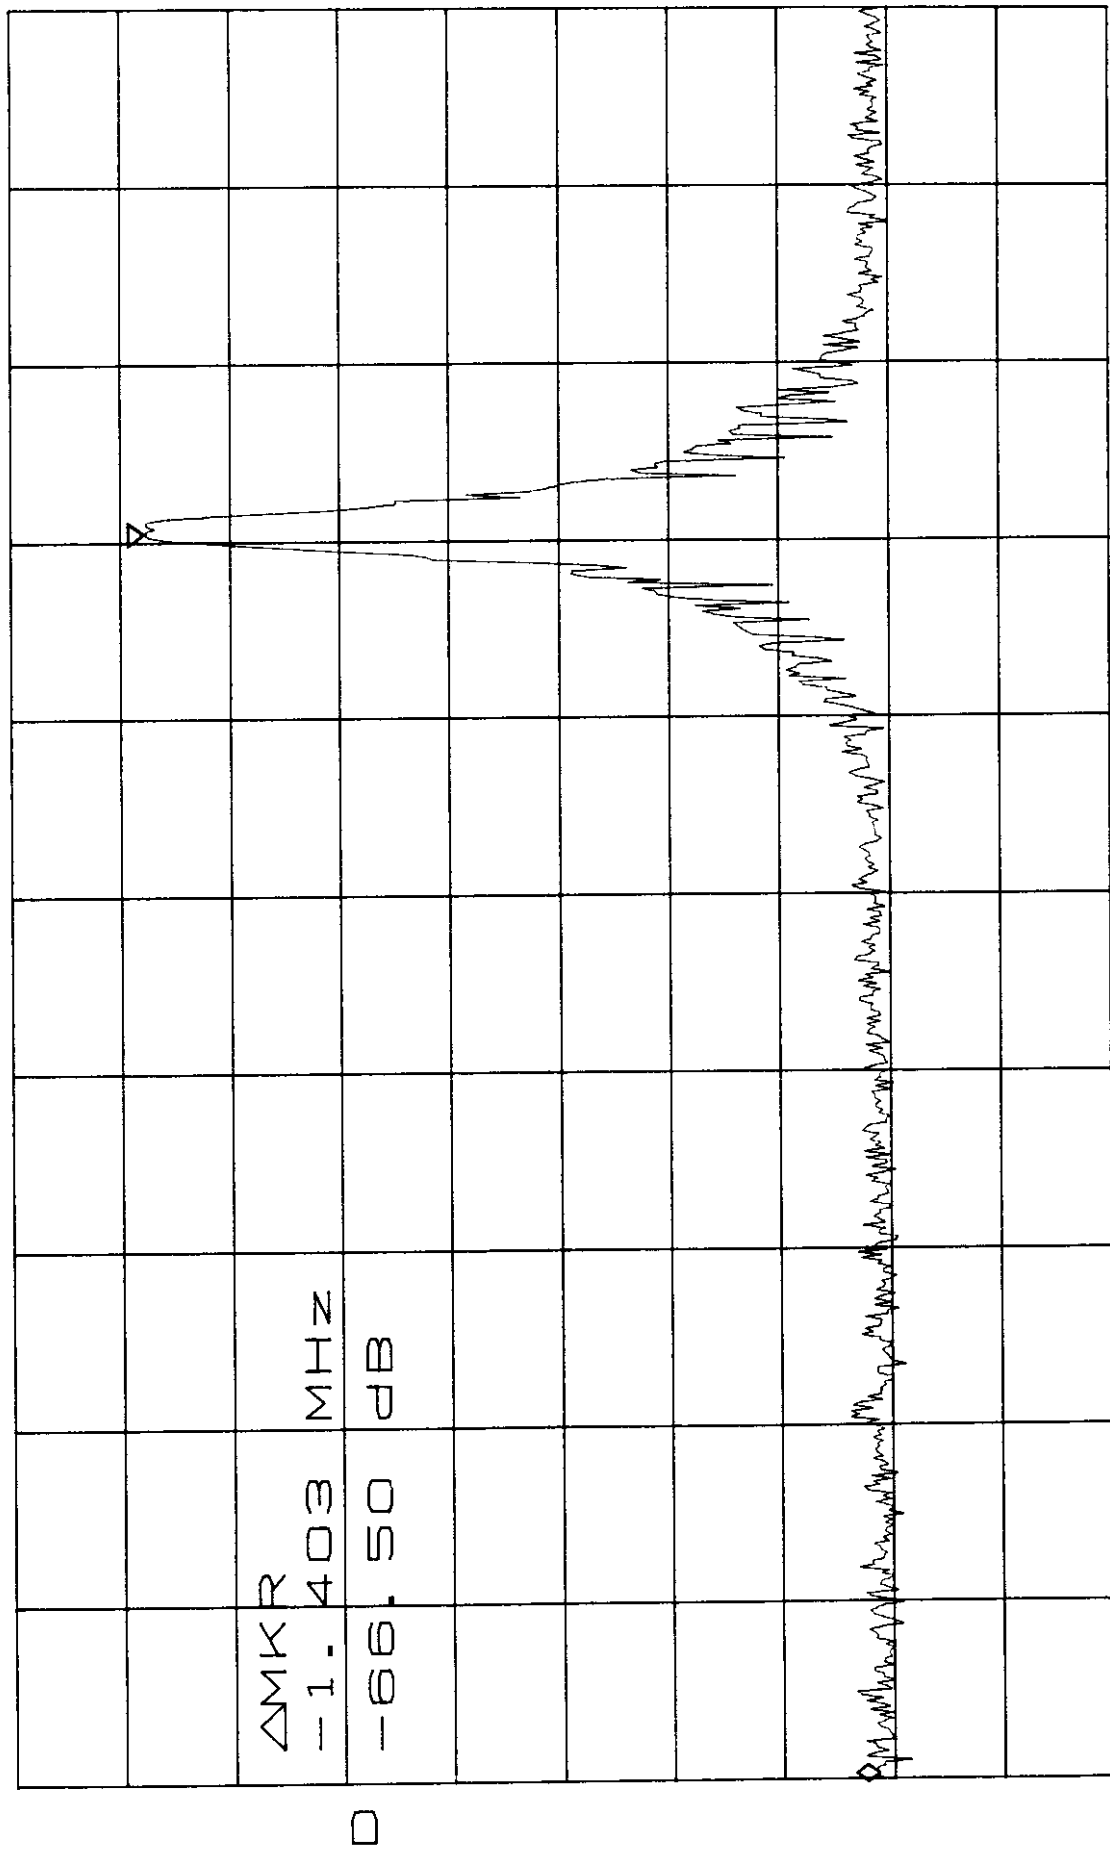


START 902.000MHz STOP 904.000MHz
 *RBW 10kHz *VBW 100kHz SWP 50ms
 A803004.DOC

ATTN 30dB Out of Band Upper Edge MKR -64.50dB
 RL 20.0dBm 10dB/ 1.709MHz

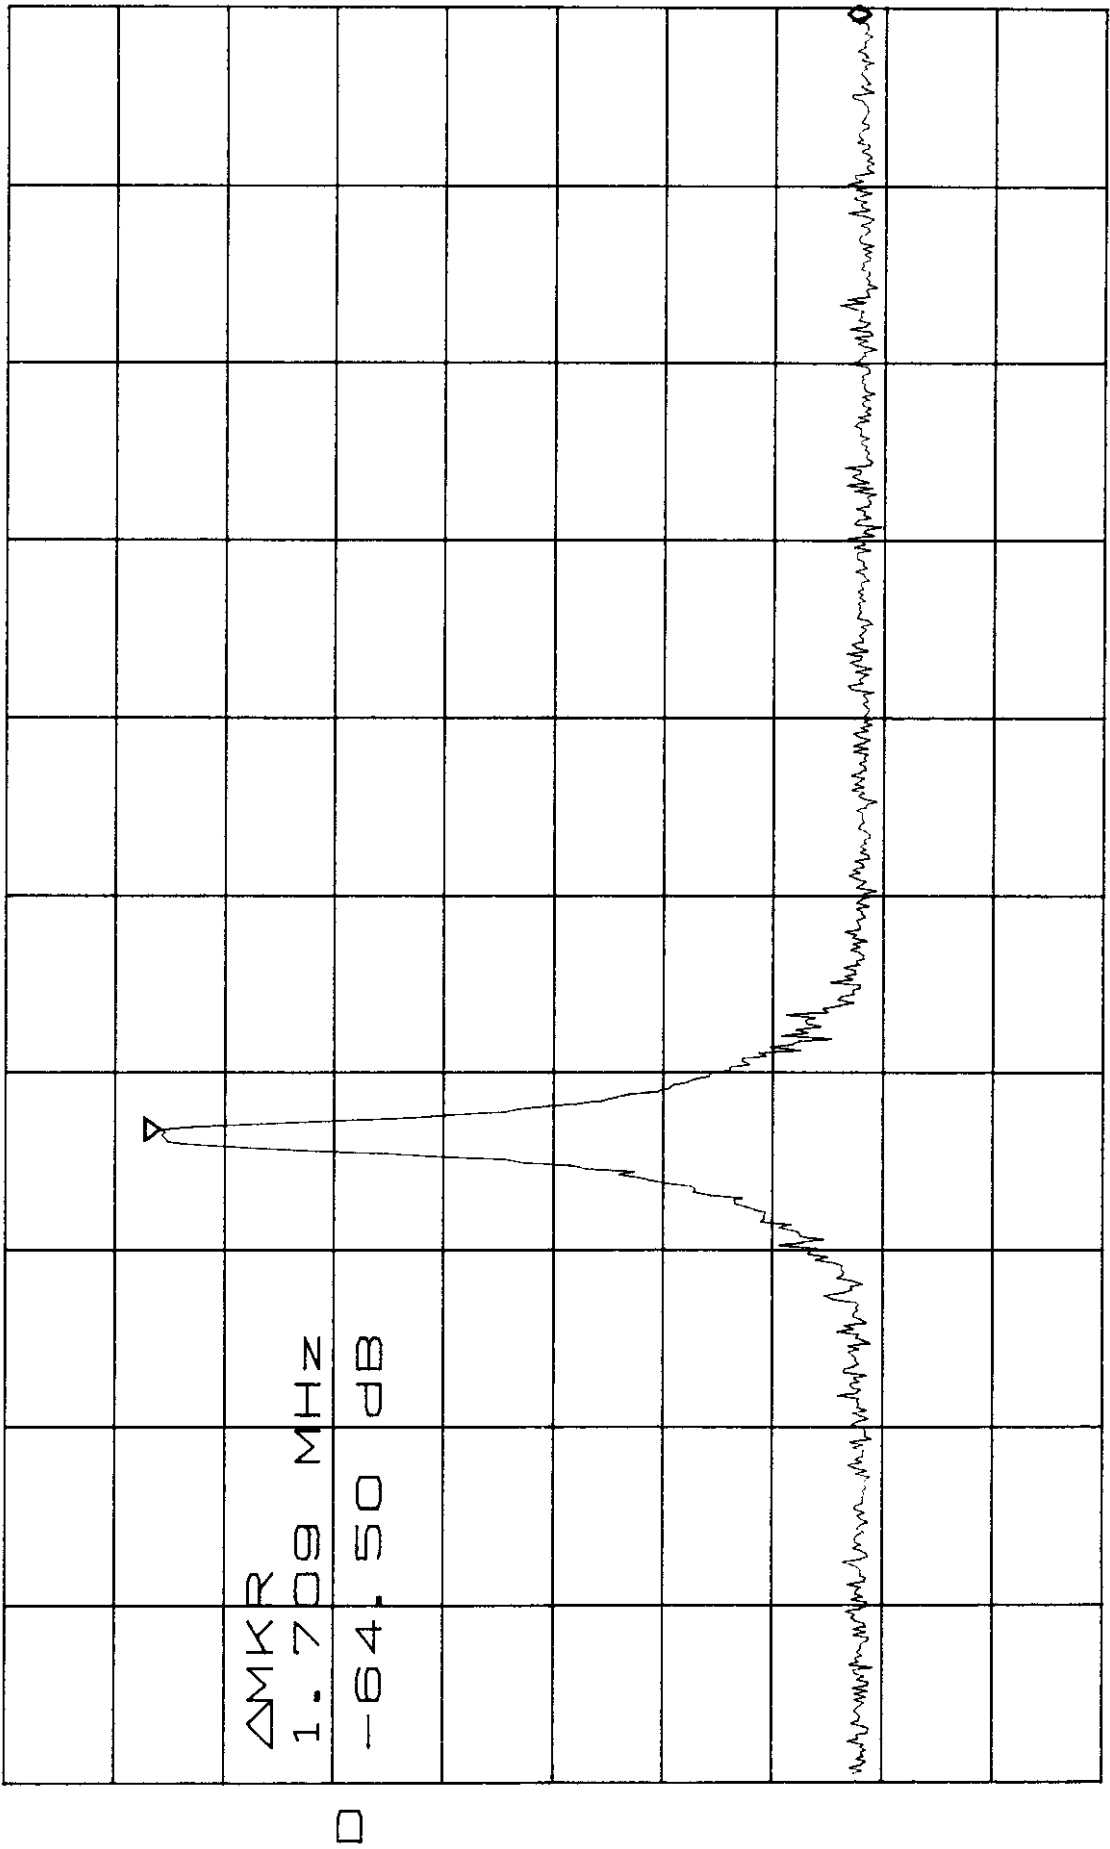


START 925.280MHz STOP 928.000MHz
 *RBW 10kHz *VBW 100kHz SWP 68ms
 A803004.DOC

ATTEN 20dB Out of Band Emissions 0Hz - 1GHz 903.42 MHz 6.87 dB μ V
 RL 116.2 dB μ V 10 dB / 800 MHz

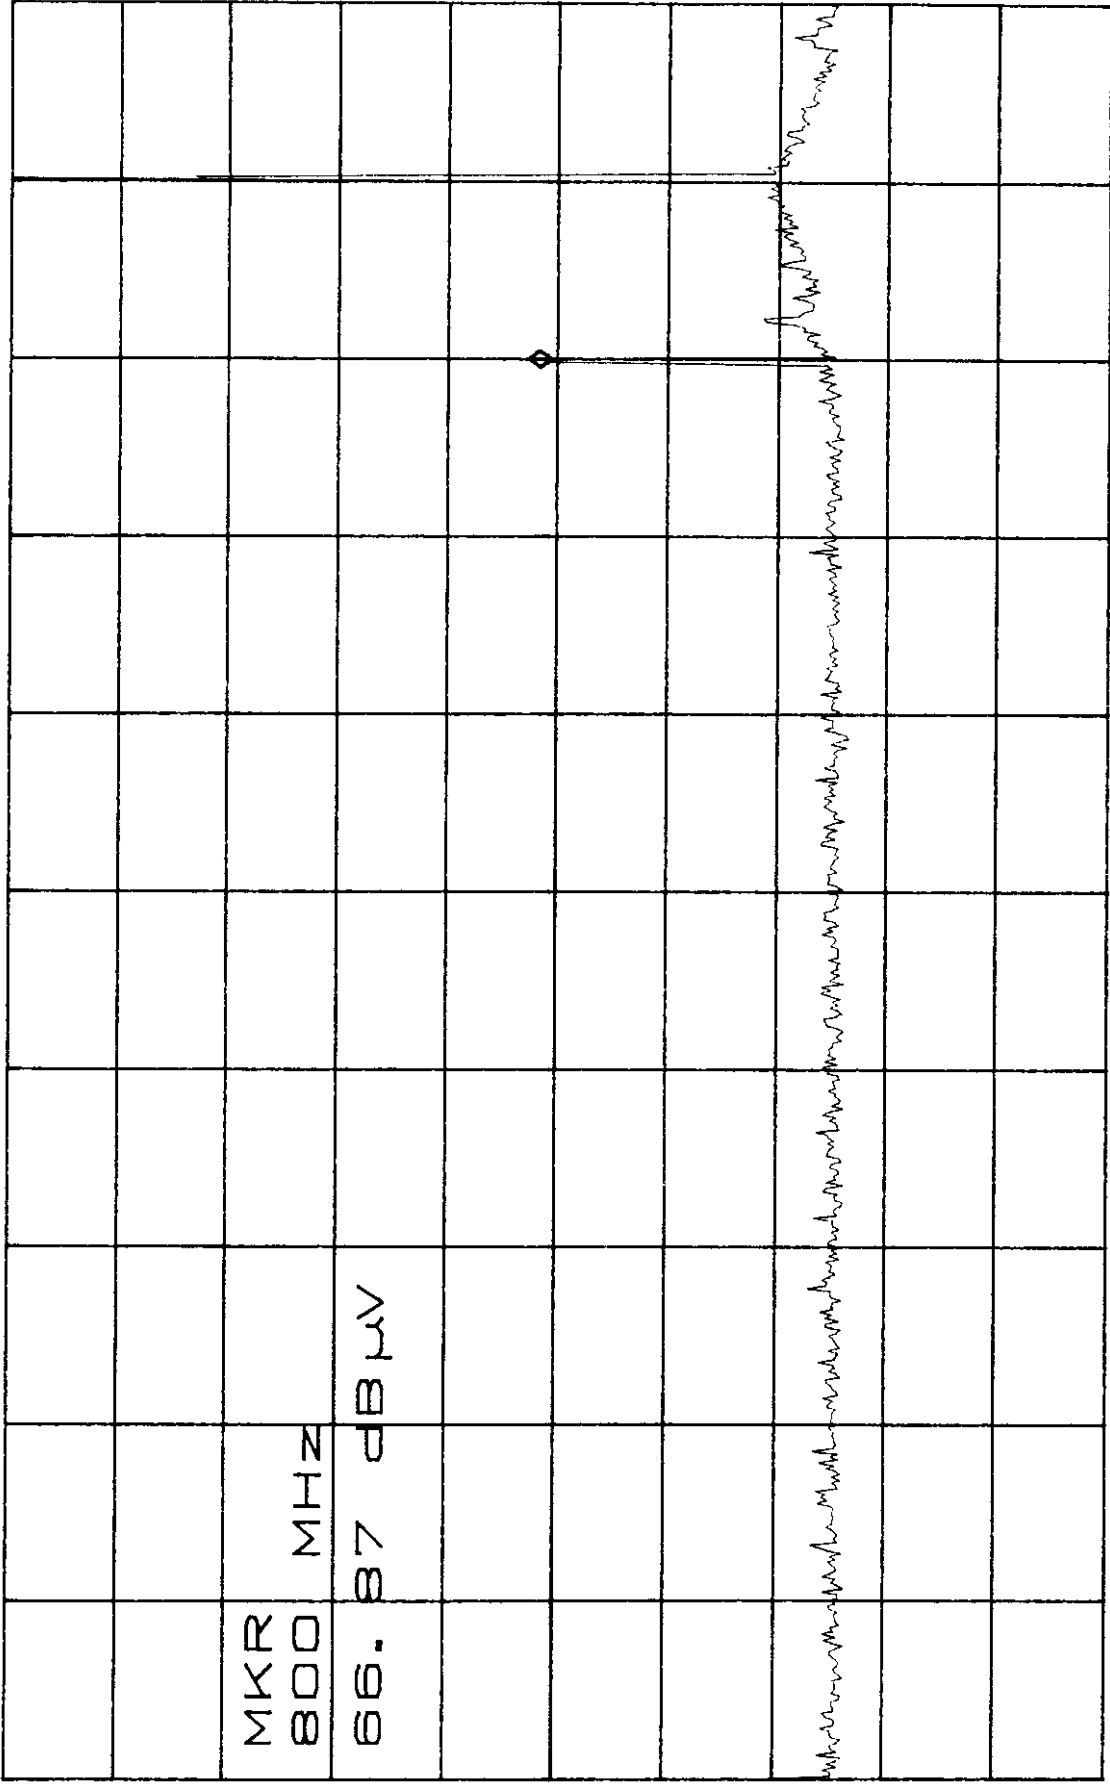


START 0Hz STOP 1.000GHz
 *RBW 100kHz *VBW 100kHz SWP 250ms
 A803004.DOC 41

ATTEN 20dB Out of Band Emissions 1-2.75 GHz 903.42 MHz 3.03dB μ V
 RL 116.2dB μ V 10dB/ 1.003GHz

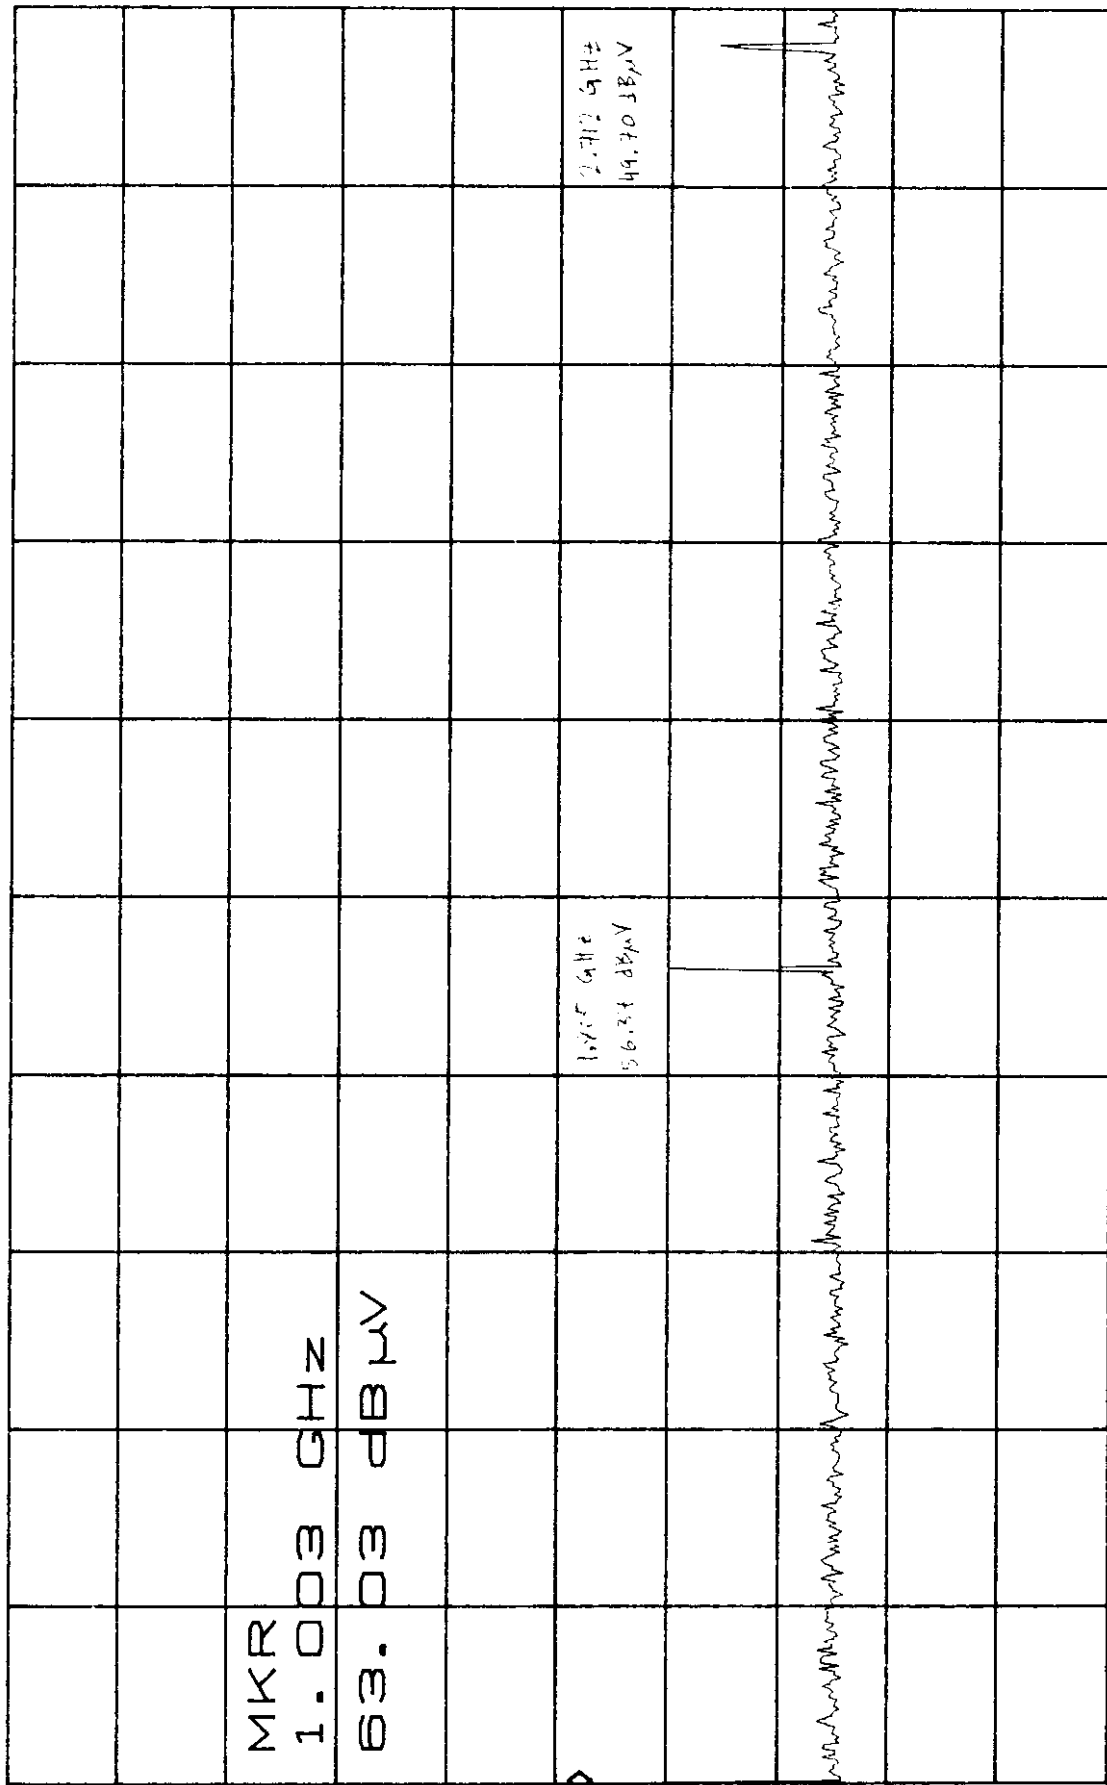


START 1.000GHz STOP 2.750GHz
 *RBW 100kHz *VBW 100kHz SWP 440ms
 A803004.DOC 42

ATTEN 20dB of Band Emissions 2.75 -26.5 GHz 90.342 MHz 0.3dB μ V
 RL 116.2dB μ V 10dB/ 19.65GHz

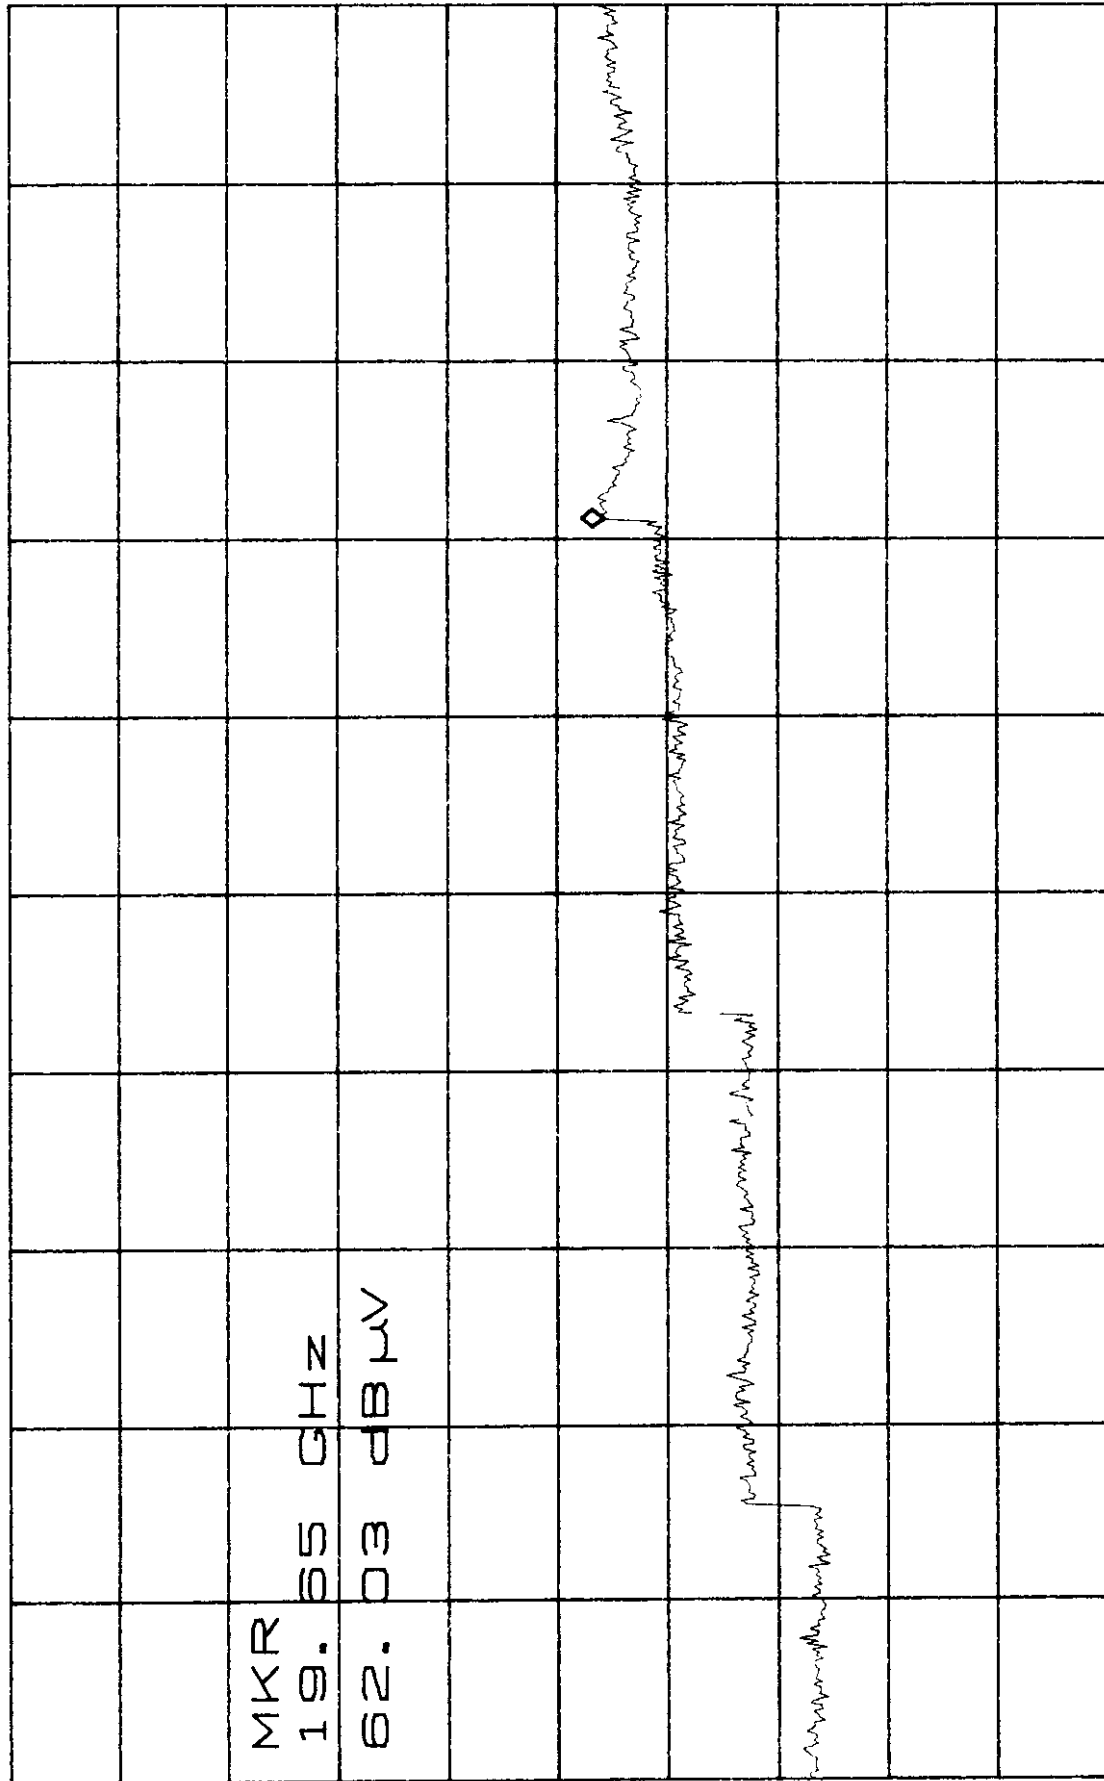


START 2.75GHz STOP 26.50GHz
 *RBW 100kHz *VBW 100kHz SWP 6.0sec
 A803004.DOC 43

ATTEN 20dB Out of Band Emissions 0Hz - 1GHz 14.94 MHz 6. 20dB μ V
 RL 116. 2dB μ V 10dB / 800MHz

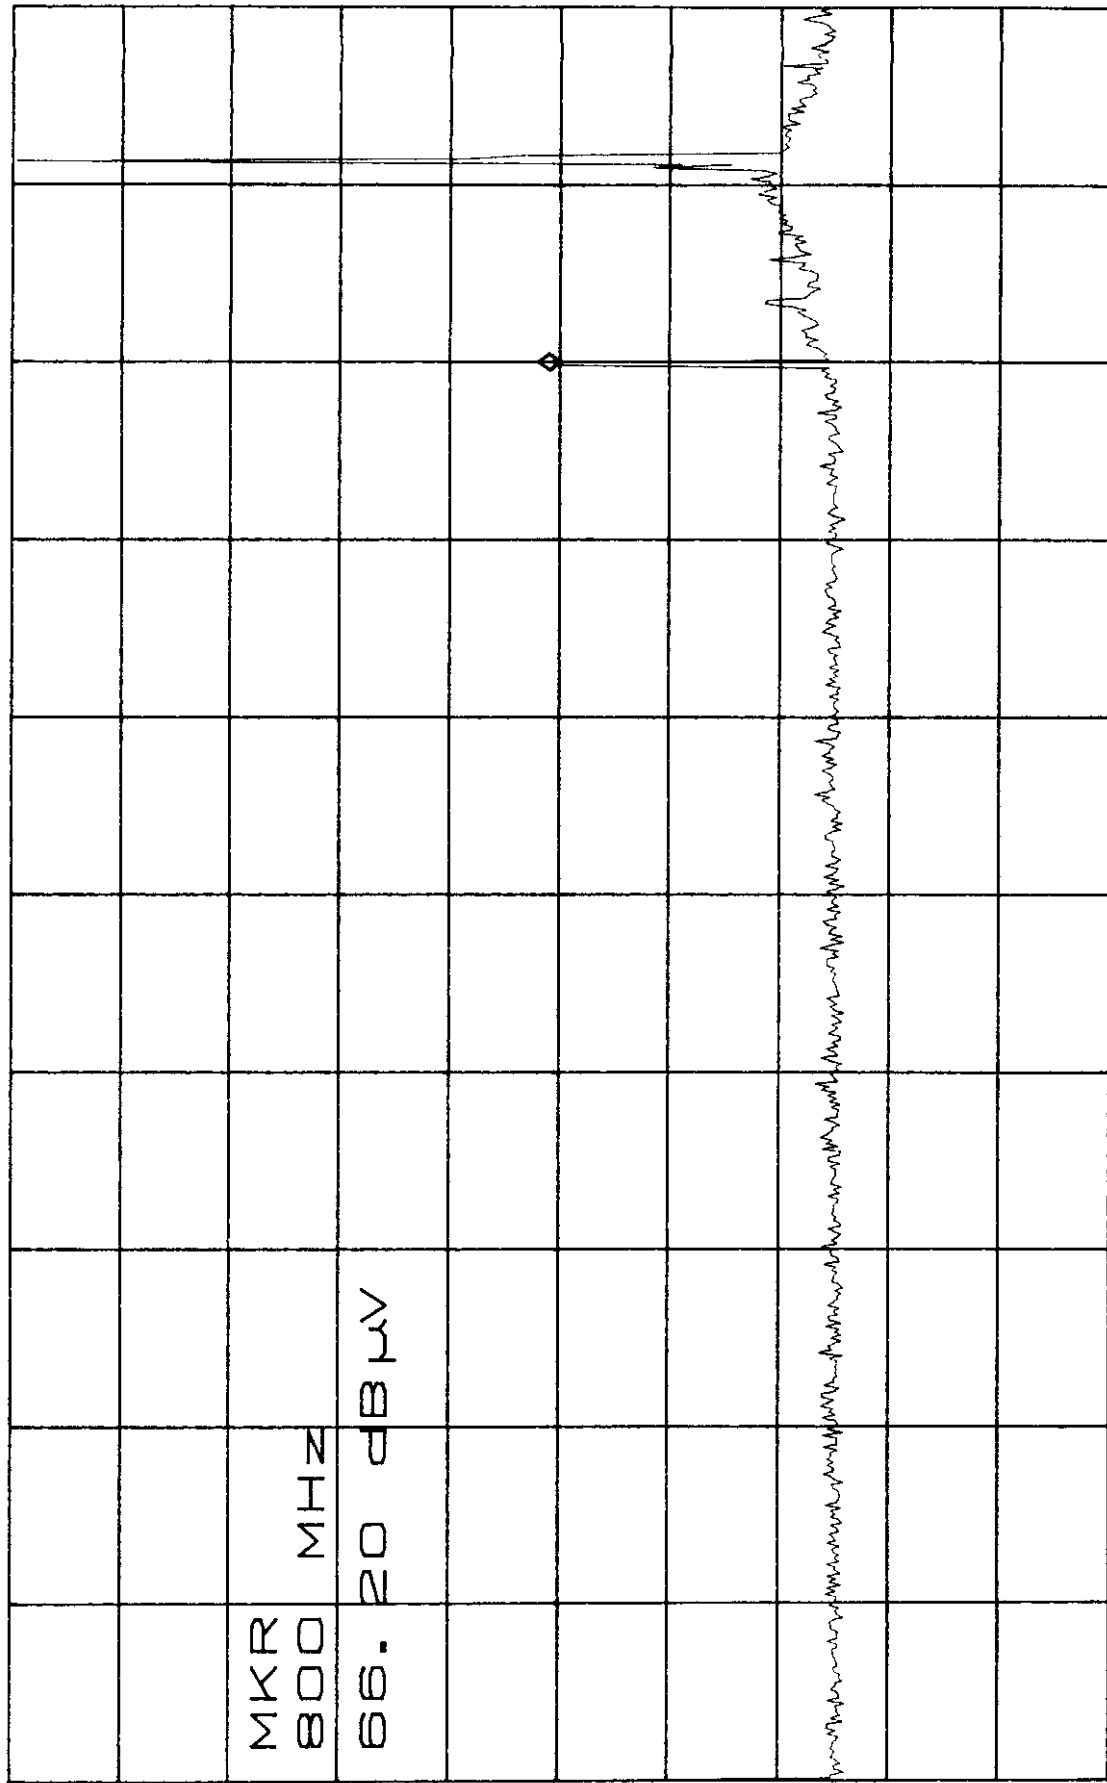


START 0Hz STOP 1.000GHz
 *RBW 100kHz *VBW 100kHz SWP 250ms⁴⁴
 A803004.DOC

ATTEN 20dB Out of Band Emissions 1-2.75 GHz 914.94 MHz 2.70dB μ V
 RL 116.2dB μ V 10dB/ 1.023GHz

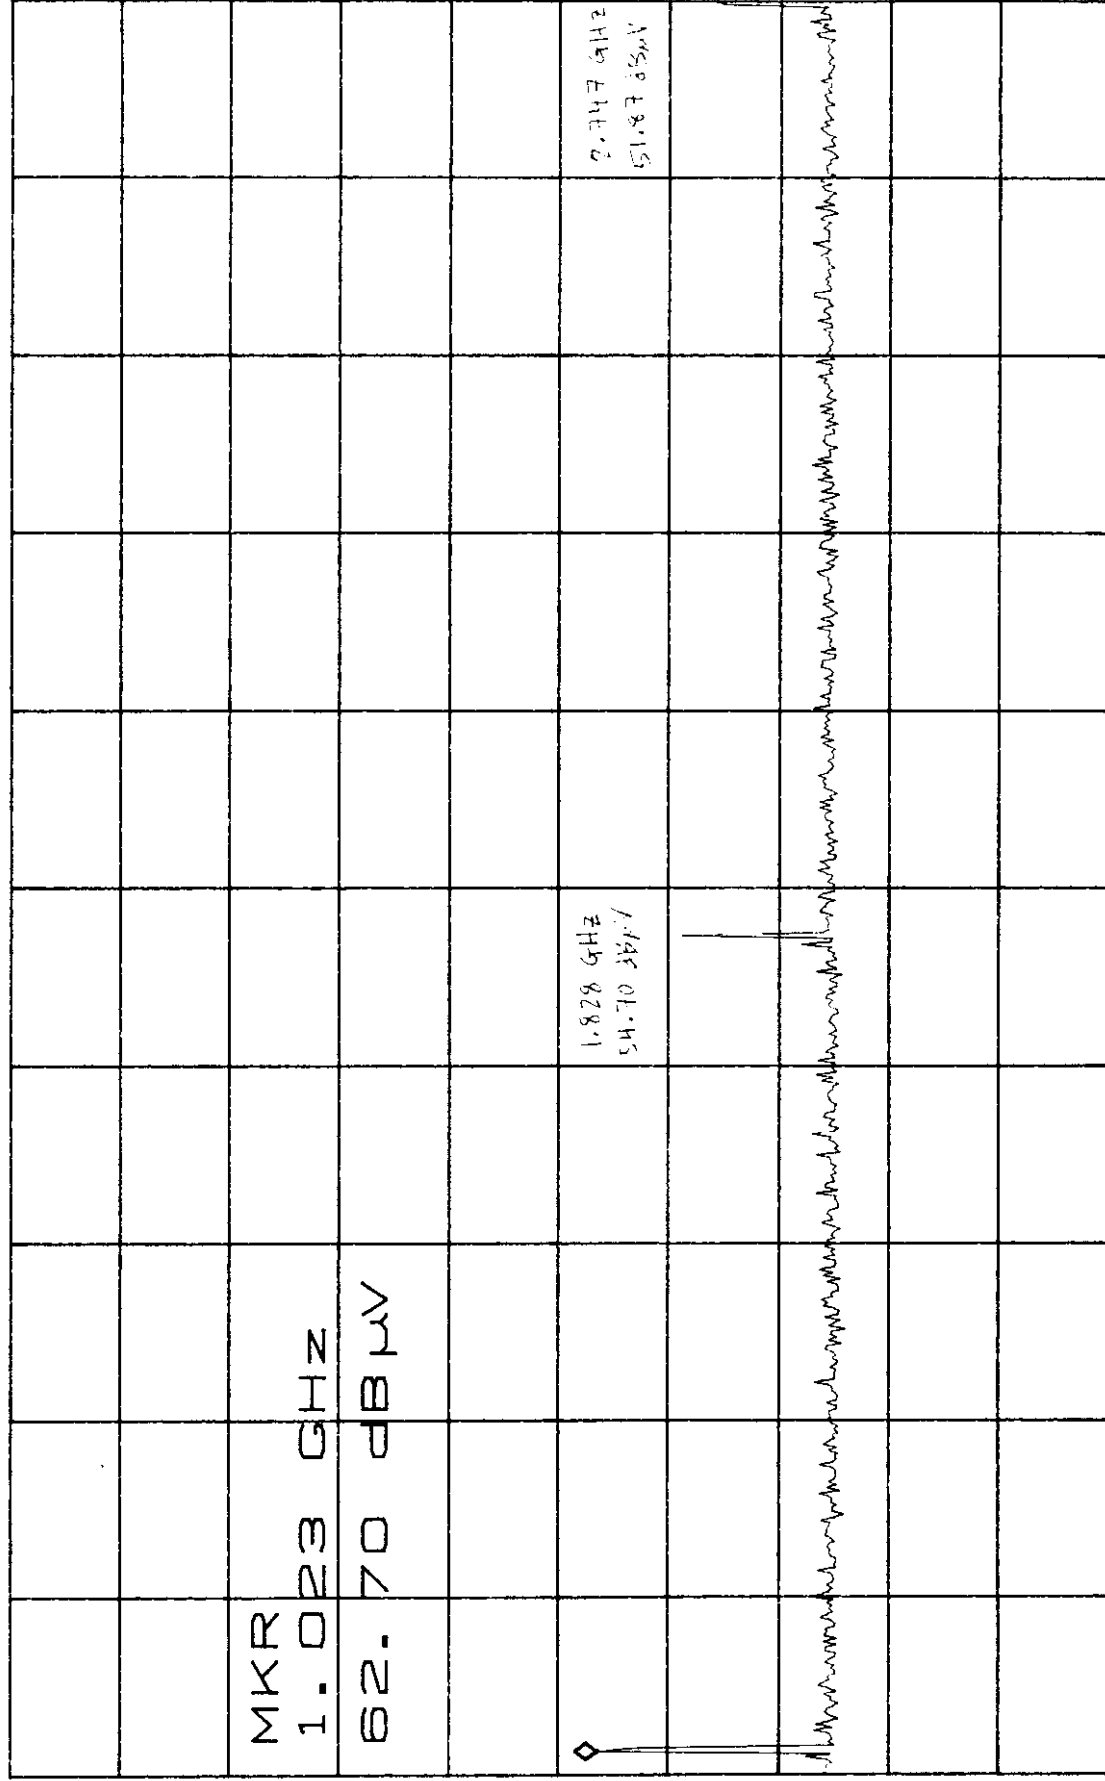


START 1.000GHz STOP 2.750GHz
 *RBW 100kHz *VBW 100kHz SWP 440mS
 A803004.DOC 45

ATTEN 20dB of Band Emissions 2.75 - 26.5 GHz ~~14.94 MHz~~ . 20dB μ V
 RL 116.2dB μ V 10dB / 26.46GHz

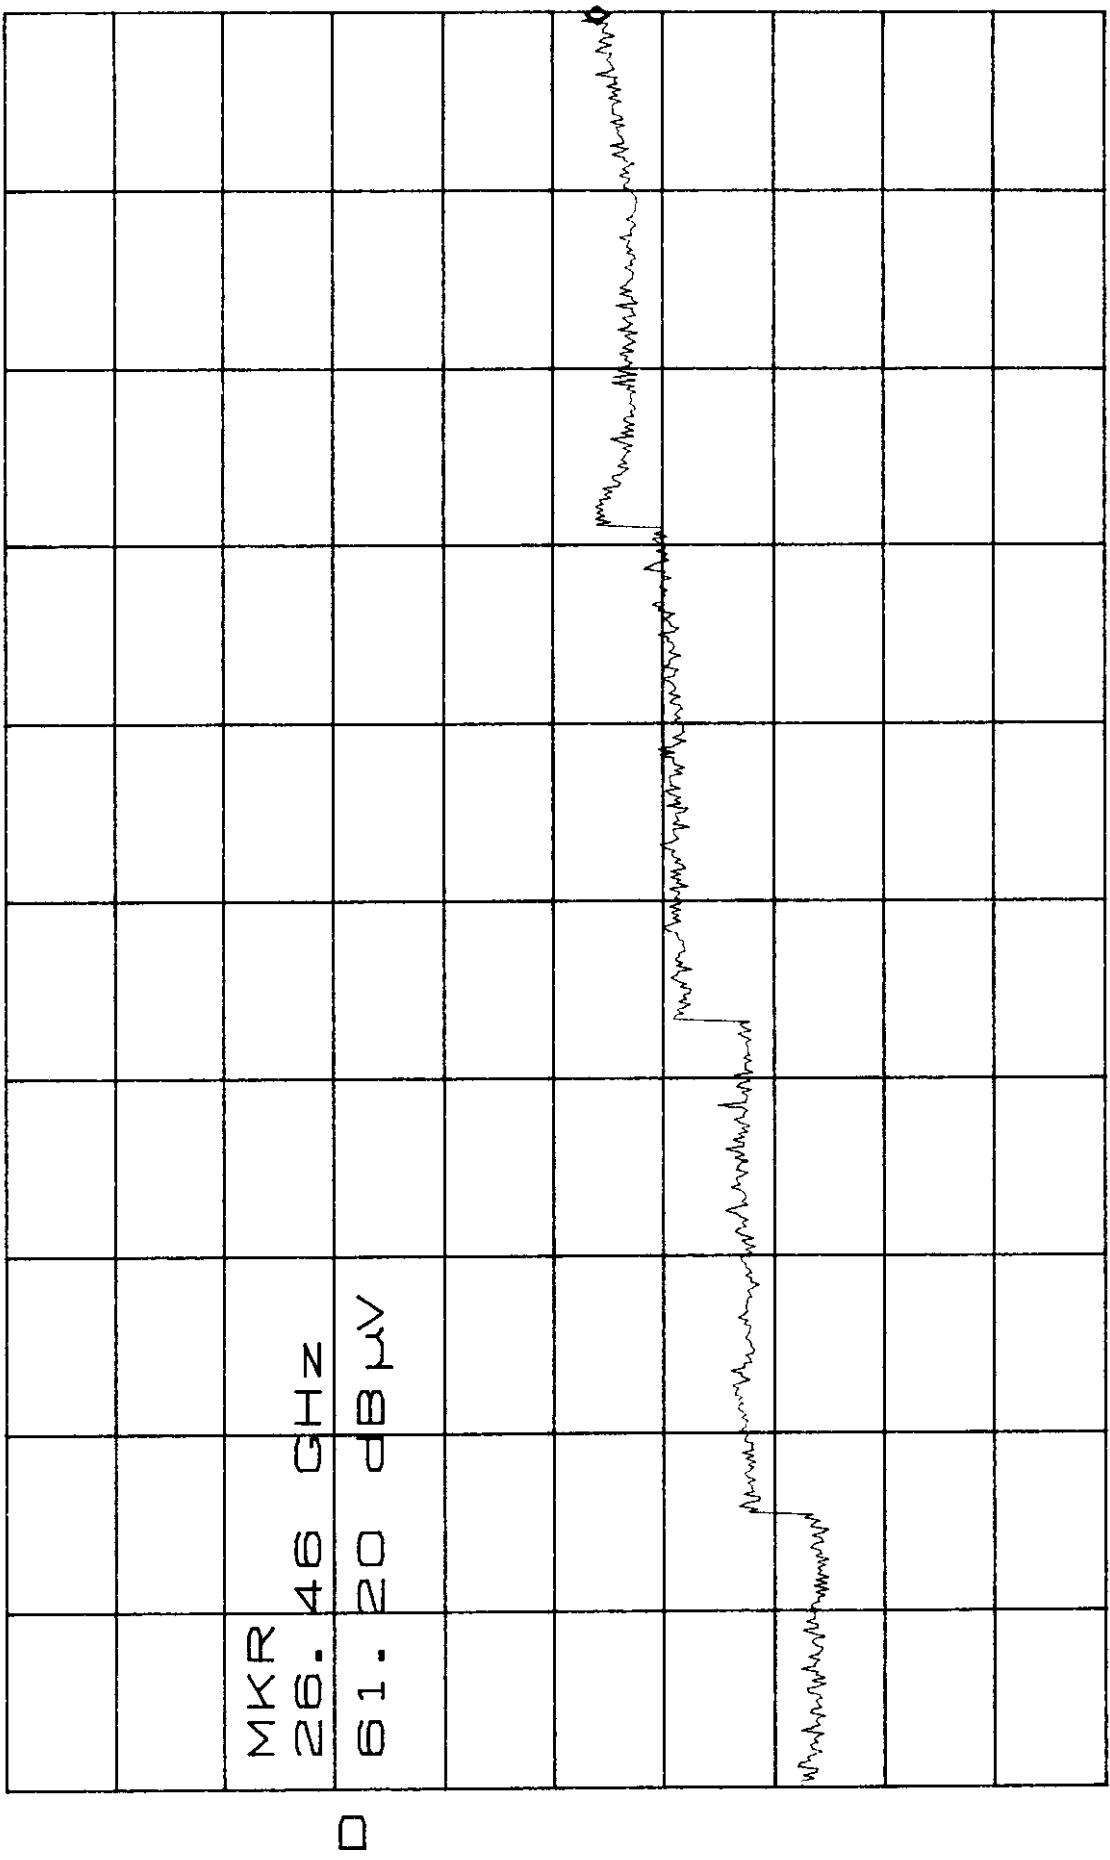


START 2.75GHz STOP 26.50GHz
 *RBW 100kHz *VBW 100kHz SWP 6.0sec
 A803004.DOC 46

ATTEN 20dB Out of Band Emissions 0Hz - 1GHz 926.28 MHz 6.87 dB μ V
 RL 116.2 dB μ V 10 dB / 800 MHz

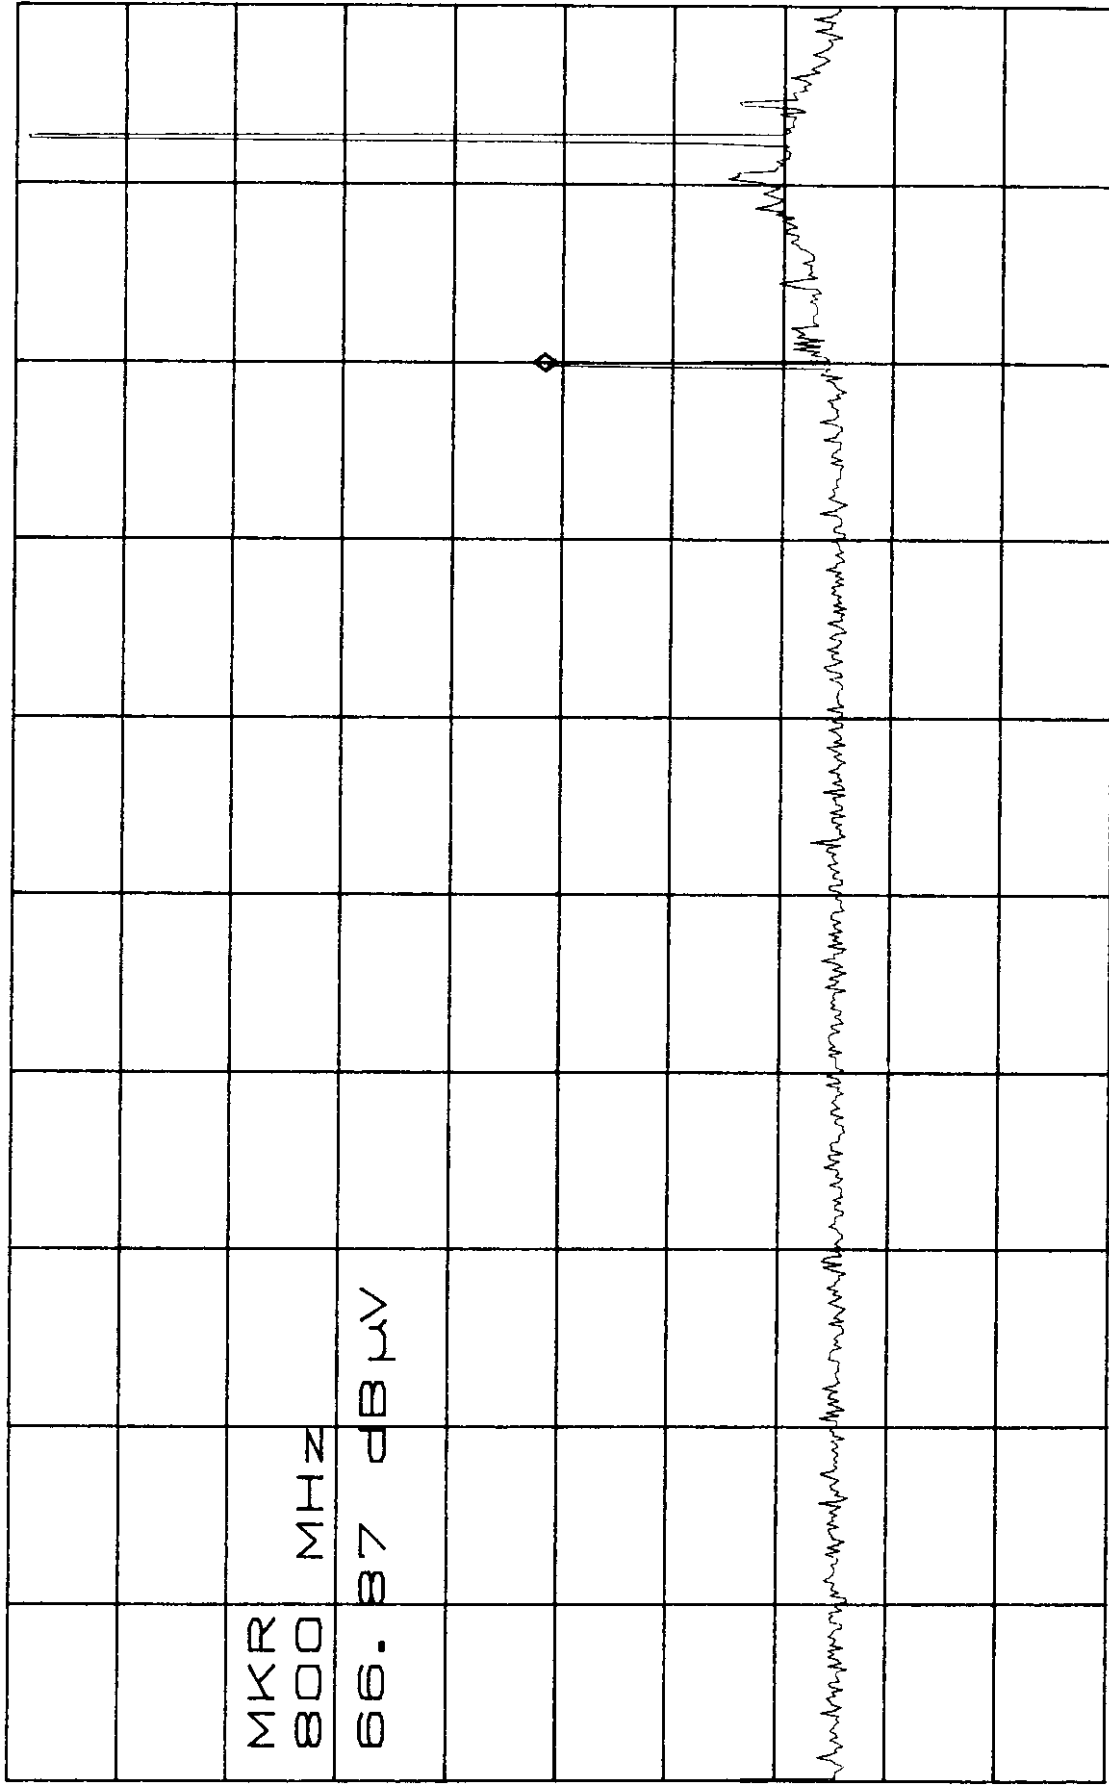


START 0Hz STOP 1.000GHz
 *RBW 100kHz *VBW 100kHz SWP 250ms
 A803004.DOC 47

ATTEN 20dB Out of Band Emissions 1-2.75 GHz 8.70dB μ V
 RL 116.2dB μ V 10dB/ 1.047GHz

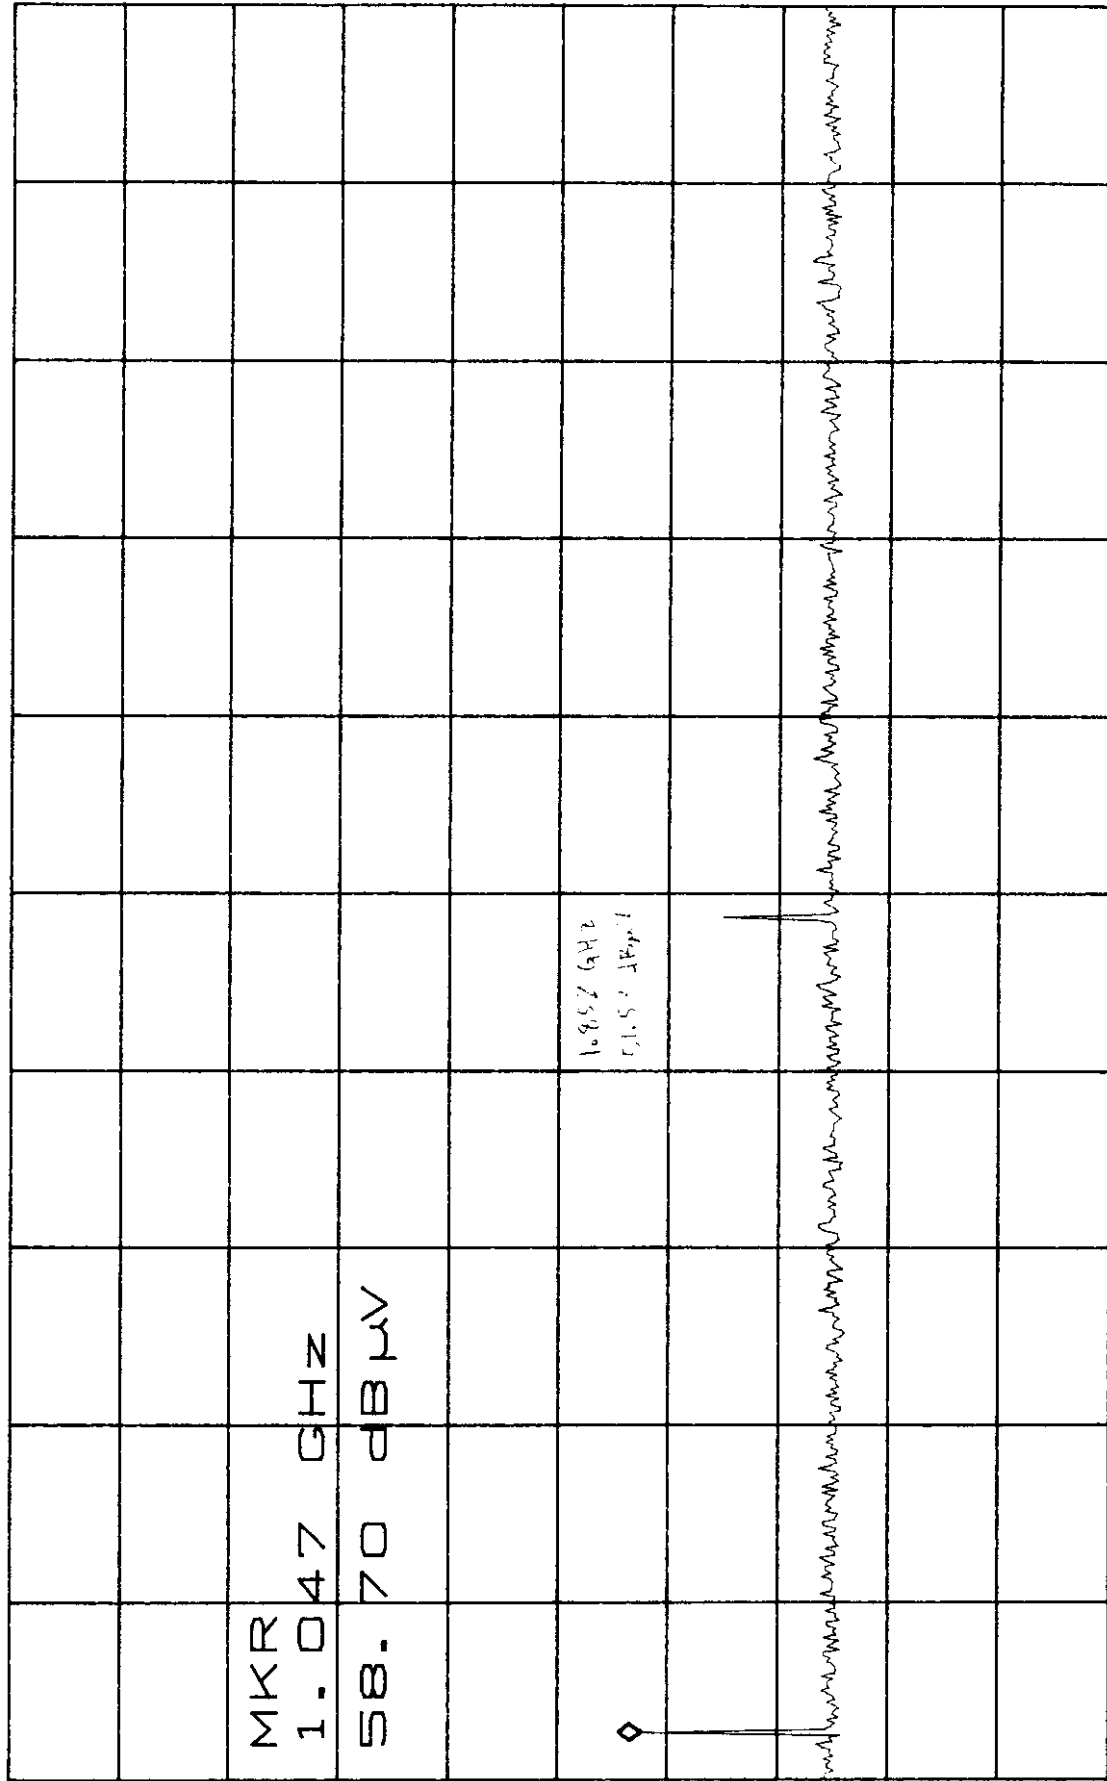

START 1.000GHz STOP 2.750GHz
 *RBW 100kHz *VBW 100kHz SWP 440ms
 A803004.DOC 48


ATTEN 20dB of Band Emissions 2.75 - 26.5 GHz 920-28 MHz 4. 53dB μ V
 RL 116.2dB μ V 10dB/ 14.31GHz

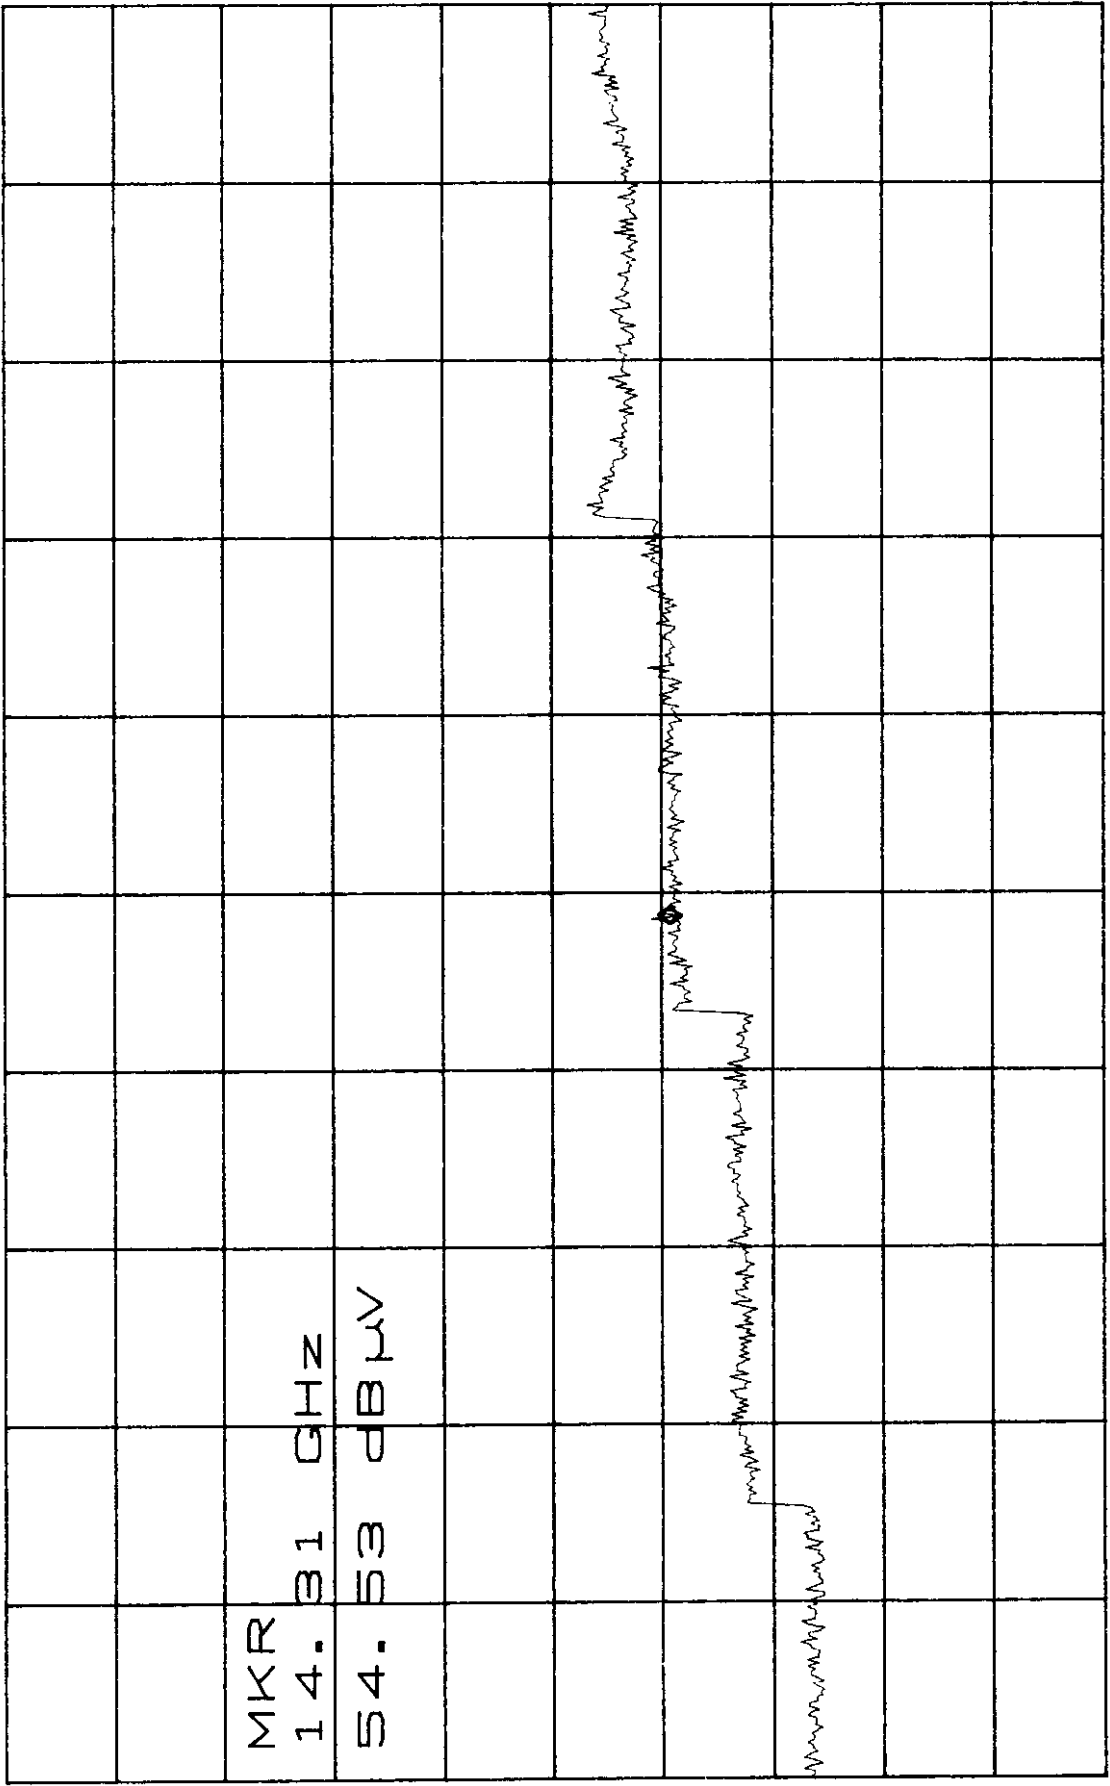

START 2.75GHz STOP 26.50GHz
 *RBW 100kHz *VBW 100kHz SWP 6.0sec
 A803004.DOC 49

ATTEN 30dB
RL 20.0dBm


Output Power 903.42 MHz
10dB/ MKR 9.67dBm
903.42MHz

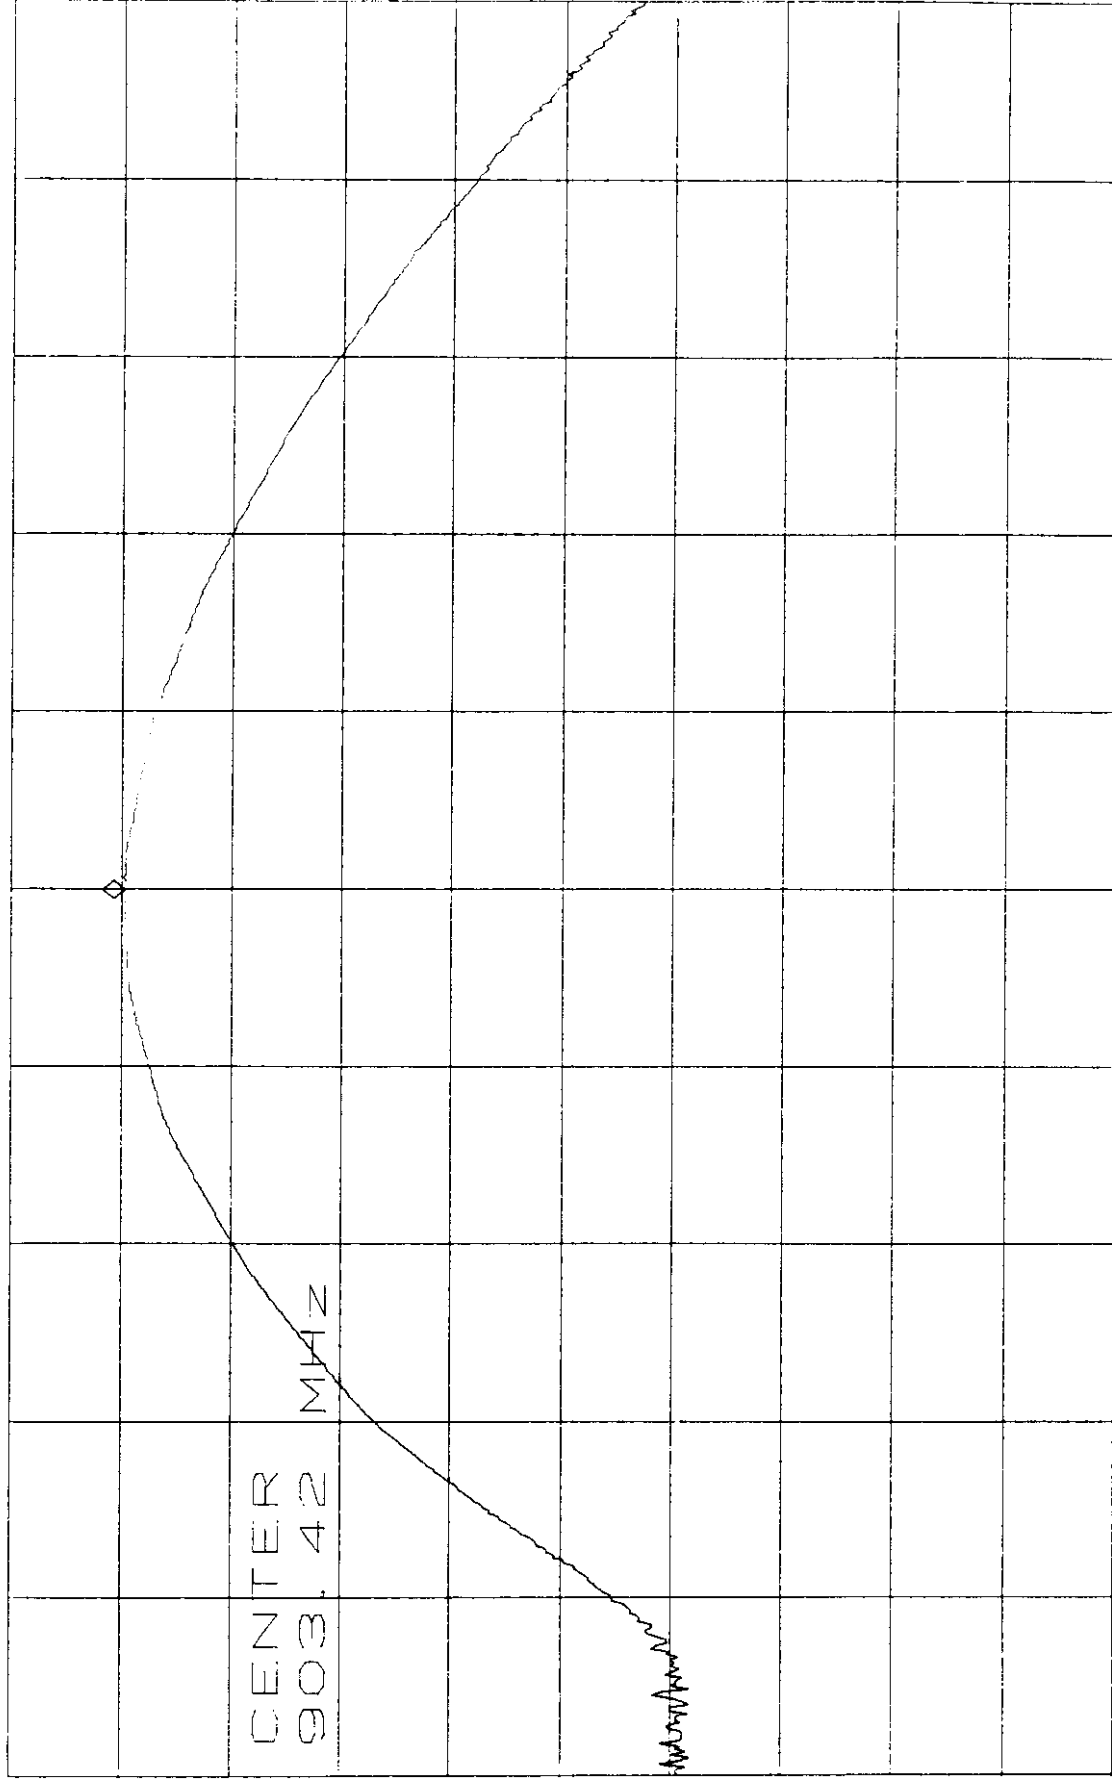

CENTER 903.42MHz SPAN 10.00MHz
* RBW 2.0MHz SWP 50.0ms
A803004.DOC 50

ATTEN 30dB
RL 20.0dBm

Output Power 914.94 MHz
10dB / MKR 9.67dBm
914.94MHz

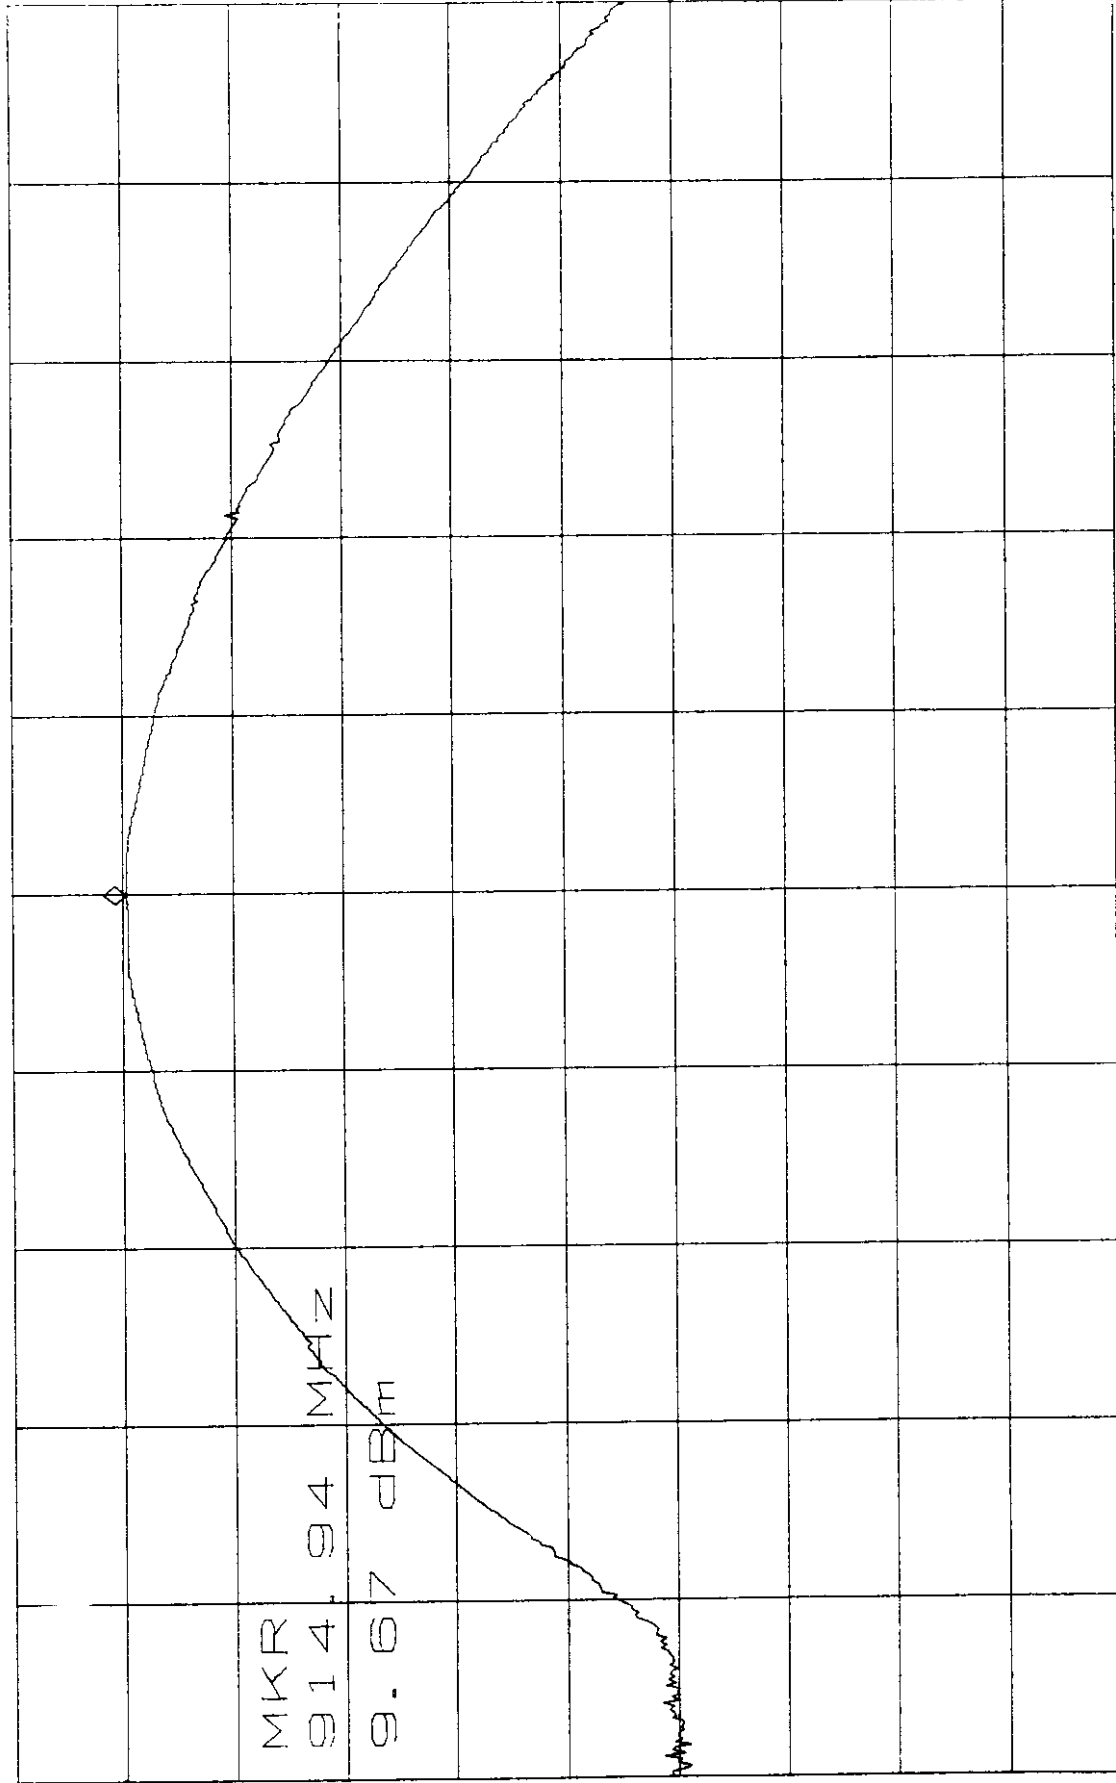

CENTER 914.94MHz

*RBW 2.0MHz

SPAN 10.00MHz


SWP 50.0ms

1. *Introduction*

Figure 1 consists of 12 sub-diagrams labeled (a) through (l), arranged vertically. Each diagram shows a coordinate system with a horizontal axis and a vertical axis. The diagrams illustrate the steps of an algorithm for finding the minimum value of a function. The steps are as follows:

- (a) A point x_0 is marked on the horizontal axis.
- (b) A point x_1 is marked on the horizontal axis, to the right of x_0 .
- (c) A point x_2 is marked on the horizontal axis, to the right of x_1 .
- (d) A point x_3 is marked on the horizontal axis, to the right of x_2 .
- (e) A point x_4 is marked on the horizontal axis, to the right of x_3 .
- (f) A point x_5 is marked on the horizontal axis, to the right of x_4 .
- (g) A point x_6 is marked on the horizontal axis, to the right of x_5 .
- (h) A point x_7 is marked on the horizontal axis, to the right of x_6 .
- (i) A point x_8 is marked on the horizontal axis, to the right of x_7 .
- (j) A point x_9 is marked on the horizontal axis, to the right of x_8 .
- (k) A point x_{10} is marked on the horizontal axis, to the right of x_9 .
- (l) A point x_{11} is marked on the horizontal axis, to the right of x_{10} .


The diagrams show a sequence of points $x_0, x_1, x_2, x_3, x_4, x_5, x_6, x_7, x_8, x_9, x_{10}, x_{11}$ on the horizontal axis, representing the iterative process of minimizing the function. The points are marked with dots and labeled with their respective subscripts. The horizontal axis is labeled with x at the right end. The vertical axis is labeled with y at the top end. The origin is marked with 0 . The diagrams are arranged in a vertical column, with each diagram showing a different step in the process.

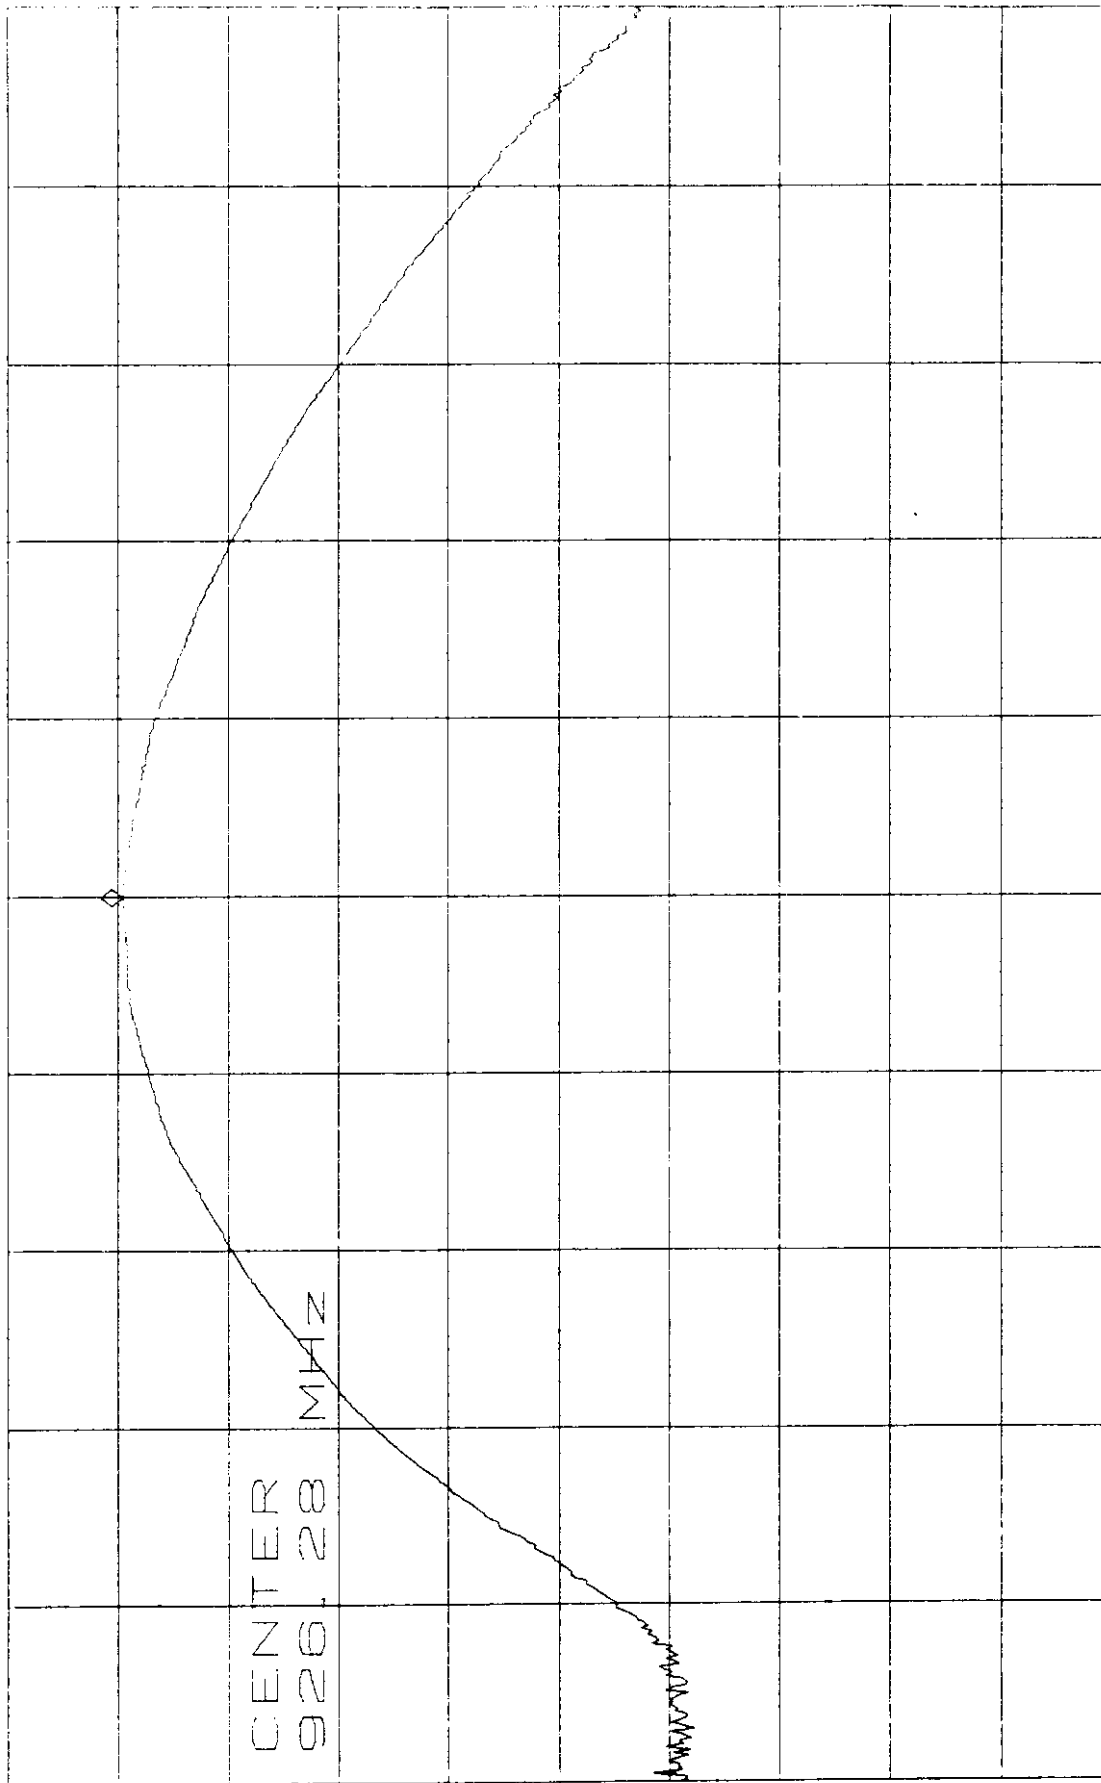[illegible]

* RBW	2.0 MHz	VBW	3.0 MHz	SWP	50.0 MHz
1	100	100	100	100	100
2	100	100	100	100	100
3	100	100	100	100	100
4	100	100	100	100	100
5	100	100	100	100	100
6	100	100	100	100	100
7	100	100	100	100	100
8	100	100	100	100	100
9	100	100	100	100	100
10	100	100	100	100	100
11	100	100	100	100	100
12	100	100	100	100	100
13	100	100	100	100	100
14	100	100	100	100	100
15	100	100	100	100	100
16	100	100	100	100	100
17	100	100	100	100	100
18	100	100	100	100	100
19	100	100	100	100	100
20	100	100	100	100	100
21	100	100	100	100	100
22	100	100	100	100	100
23	100	100	100	100	100
24	100	100	100	100	100
25	100	100	100	100	100
26	100	100	100	100	100
27	100	100	100	100	100
28	100	100	100	100	100
29	100	100	100	100	100
30	100	100	100	100	100
31	100	100	100	100	100
32	100	100	100	100	100
33	100	100	100	100	100
34	100	100	100	100	100
35	100	100	100	100	100
36	100	100	100	100	100
37	100	100	100	100	100
38	100	100	100	100	100
39	100	100	100	100	100
40	100	100	100	100	100
41	100	100	100	100	100
42	100	100	100	100	100
43	100	100	100	100	100
44	100	100	100	100	100
45	100	100	100	100	100
46	100	100	100	100	100
47	100	100	100	100	100
48	100	100	100	100	100
49	100	100	100	100	100
50	100	100	100	100	100
51	100	100	100	100	100
52	100	100	100	100	100
53	100	100	100	100	100
54	100	100	100	100	100
55	100	100	100	100	100
56	100	100	100	100	100
57	100	100	100	100	100
58	100	100	100	100	100
59	100	100	100	100	100
60	100	100	100	100	100
61	100	100	100	100	100
62	100	100	100	100	100
63	100	100	100	100	100
64	100	100	100	100	100
65	100	100	100	100	100
66	100	100	100	100	100
67	100	100	100	100	100
68</					


A803004.DOC

ATTEN 30dB 20dB Occupied Bandwidth 903.42MHz .83dB
 RL 20.0dBm 10dB/ 42.5kHz

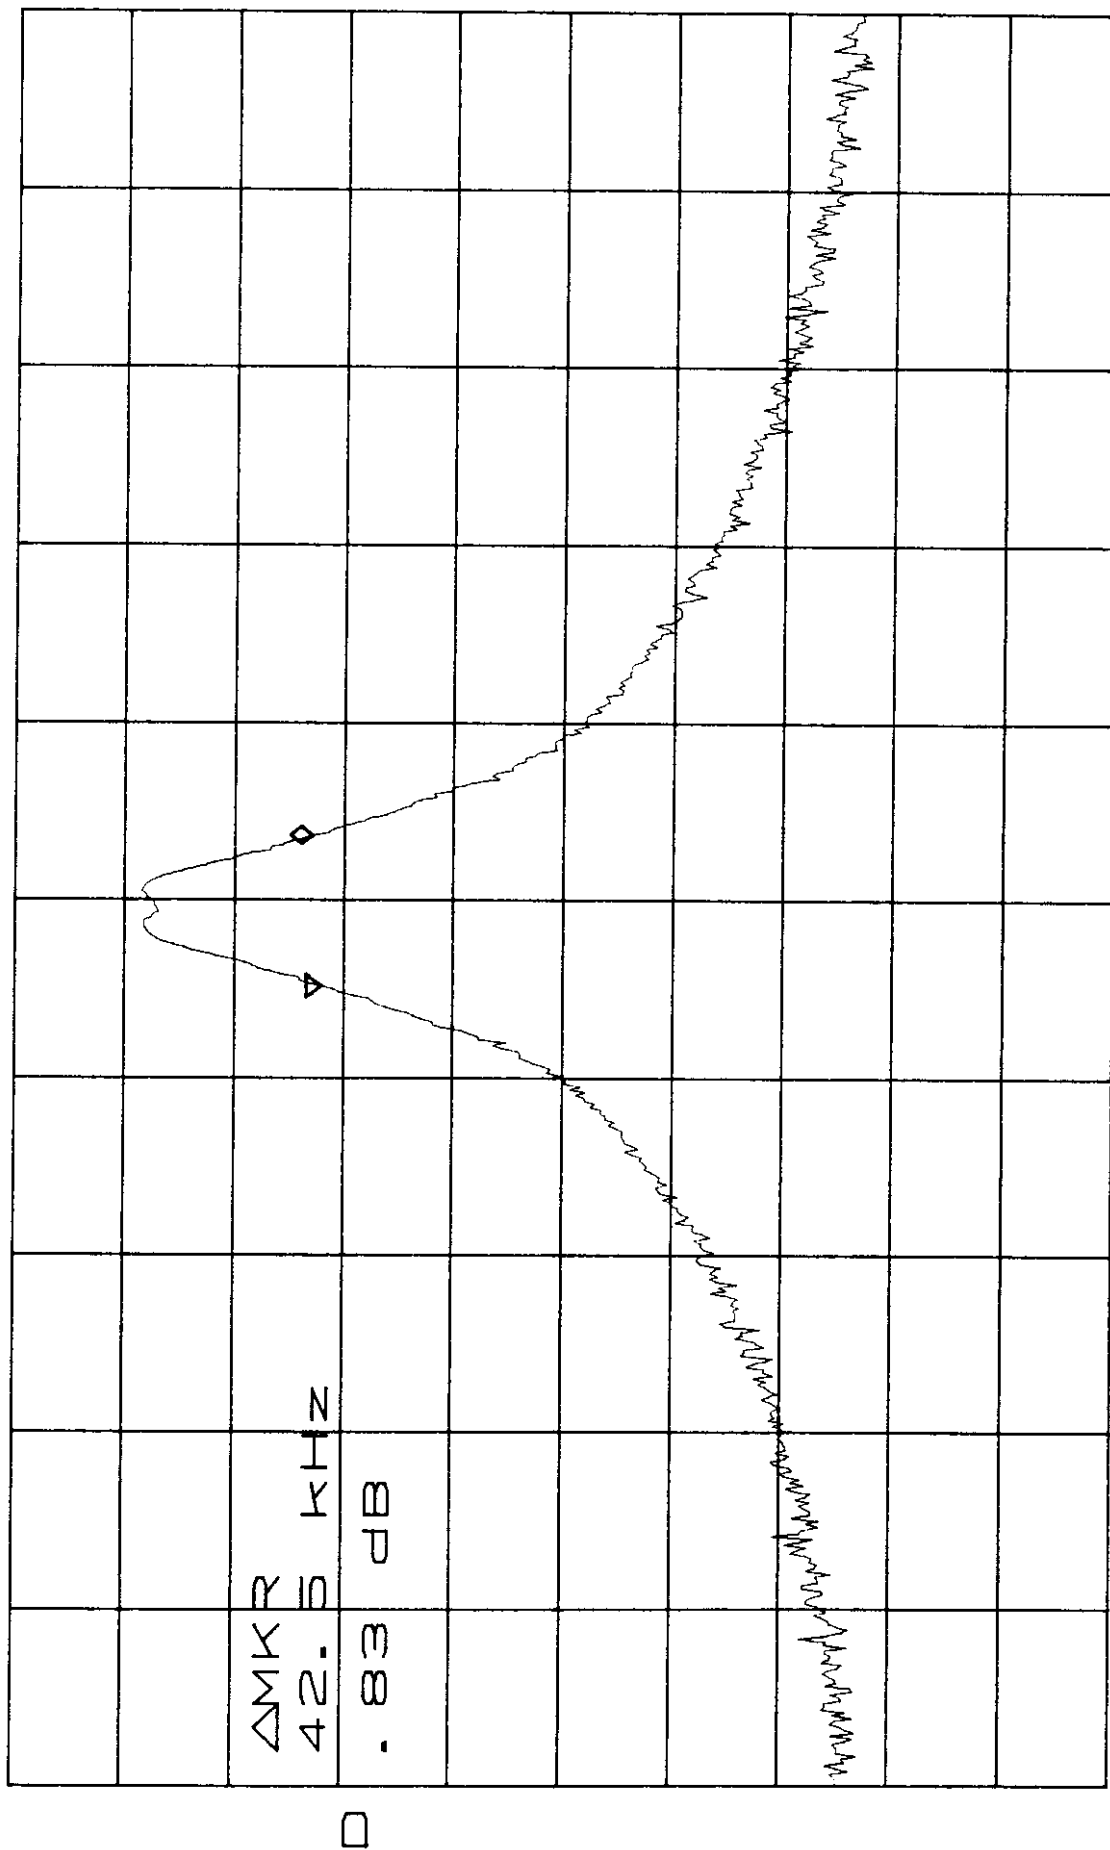


CENTER 903.4200MHz SPAN 500.0kHz
 *RBW 10kHz *VBW 100kHz SWP 50ms
 A803004.DOC 53

ATTEN 30dB 20dB Occupied Bandwidth 914.84 MHz .83dB
 RL 20.0dBm 10dB / 40.0KHz

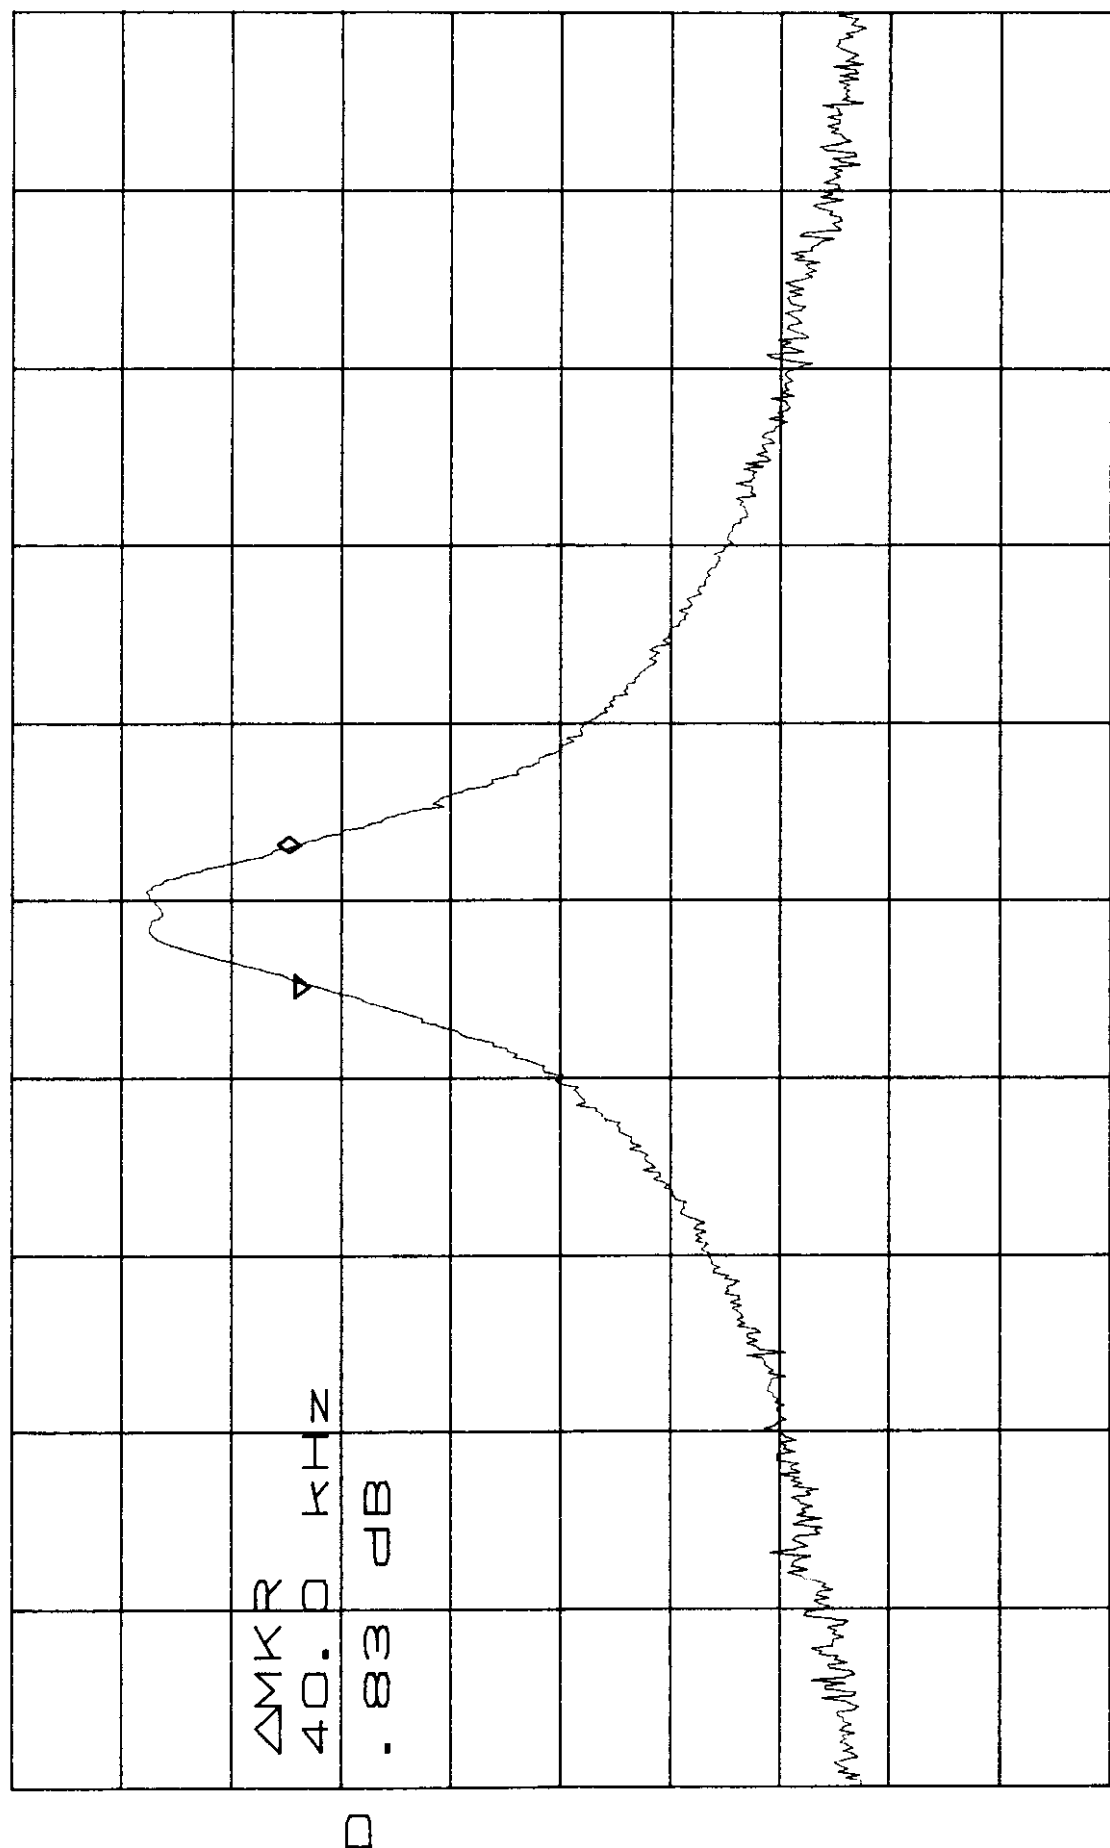

CENTER 914.8400 MHz SPAN 500.0 KHz
 *RBW 10 KHz *VBW 100 KHz SWP 50 ms
 A803004.DOC 54

ATTEN 30dB 20dB Occupied Bandwidth 926.28 MHz - .67 dB
 RL 20.0 dBm 10 dB / 42.5 kHz

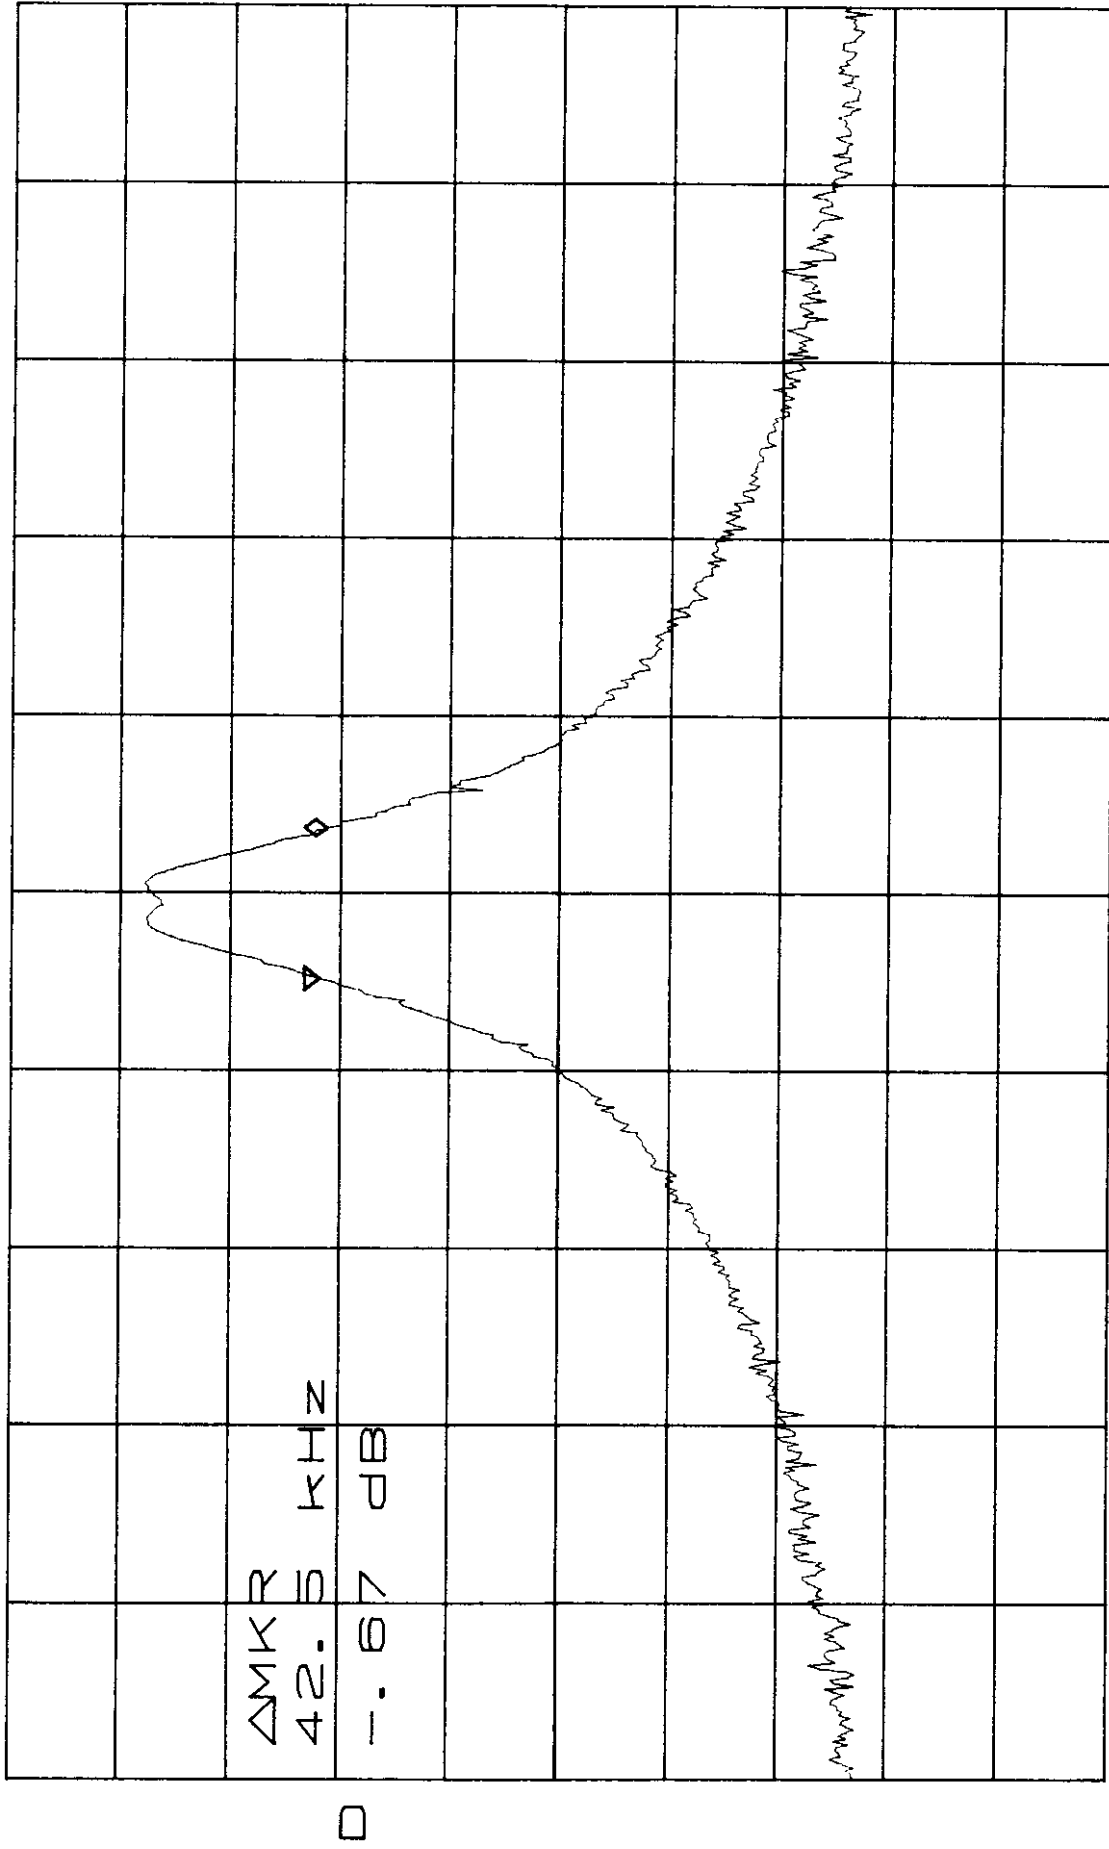

CENTER 926.2800 MHz SPAN 500.0 kHz
 * RBW 10 kHz * VBW 100 kHz SWP 50 ms
 A803004.DOC 55

APPENDIX B
RESTRICTED BAND DATA

EUT:		HIGH TEST BSR		CUSTOMER NAME:				DIABLO		
RULE PART:		FCC PART 15.205		WORK ORDER:				8022401		
				FILE:				8022401A.xls		
ANTENNA:		HORN		ATTN d 0						
POLARIZATION:		VERTICAL		DUTY d 0						
MODULATION TYPE:				HP IL d 0						
TESTED BY:		SURESH		DIST dB 0						
COMMENT:										
FREQ.	READING		Pk	A.F.	Cbl	FLTR	AMP	TOTAL,	LIMIT	DELTA
MHz	dB(uV)	NF	or Av	dB	dB	dB	dB	dB(uV/m)	dB(uV/m)	dB
Ch 0 / 902.08 MHz										
2706.24	44.50		Pk	28.6	-5.3	-0.4	35.6	43.2	74.0	-30.8
2706.24	33.17		Avg	28.6	-5.3	-0.4	35.6	31.8	54.0	-22.2
3608.32	44.50		Pk	32.4	-6.2	-0.4	35.1	48.4	74.0	-25.6
3608.32	26.67		Avg	32.4	-6.2	-0.4	35.1	30.5	54.0	-23.5
4510.40	45.33	*	Pk	32.8	-7.0	-0.4	35.1	50.4	74.0	-23.6
4510.40	25.33	*	Avg	32.8	-7.0	-0.4	35.1	30.4	54.0	-23.6
5412.48	44.83		Pk	33.6	-8.1	-0.4	35.0	51.9	74.0	-22.1
5412.48	24.50		Avg	33.6	-8.1	-0.4	35.0	31.6	54.0	-22.4
8118.72	49.00	*	Pk	37.0	-11.4	-0.4	35.5	62.3	74.0	-11.7
8118.72	26.50		Avg	37.0	-11.4	-0.4	35.5	39.8	54.0	-14.2
9020.80	48.50	*	Pk	37.8	-12.1	-0.4	35.5	63.3	74.0	-10.7
9020.80	26.00		Avg	37.8	-12.1	-0.4	35.5	40.8	54.0	-13.2
CH 75 / 914.08 MHz										
2742.24	45.67	*	Pk	28.6	-5.3	-0.4	35.5	44.4	74.0	-29.6
2742.24	34.17		Avg	28.6	-5.3	-0.4	35.5	32.9	54.0	-21.1
3656.32	44.67		Pk	32.4	-6.2	-0.4	35.1	48.5	74.0	-25.5
3656.32	26.67		Avg	32.4	-6.2	-0.4	35.1	30.5	54.0	-23.5
4570.40	44.67	*	Pk	32.8	-7.0	-0.4	35.1	49.7	74.0	-24.3
4570.40	24.33	*	Avg	32.8	-7.0	-0.4	35.1	29.4	54.0	-24.6
7312.64	48.67	*	Pk	36.0	-10.6	-0.4	35.4	60.3	74.0	-13.7
7312.64	26.17	*	Avg	36.0	-10.6	-0.4	35.4	37.8	54.0	-16.2
8226.72	49.17	*	Pk	37.0	-11.4	-0.4	35.5	62.4	74.0	-11.6
8226.72	27.33		Avg	37.0	-11.4	-0.4	35.5	40.6	54.0	-13.4
9140.80	48.33	*	Pk	37.8	-12.1	-0.4	35.5	63.1	74.0	-10.9
9140.80	27.33		Avg	37.8	-12.1	-0.4	35.5	42.1	54.0	-11.9
CH 161 / 927.84 MHz										
2783.52	44.67	*	Pk	28.6	-5.3	-0.4	35.5	43.5	74.0	-30.5
2783.52	33.67		Avg	28.6	-5.3	-0.4	35.5	32.5	54.0	-21.5
3711.36	44.17	*	Pk	32.4	-6.2	-0.4	35.1	48.0	74.0	-26.0
3711.36	33.33		Avg	32.4	-6.2	-0.4	35.1	37.2	54.0	-16.8
4639.20	42.50	*	Pk	32.8	-7.0	-0.4	35.1	47.6	74.0	-26.4
4639.20	22.00	*	Avg	32.8	-7.0	-0.4	35.1	27.1	54.0	-26.9
7422.72	47.17	*	Pk	36.0	-10.6	-0.4	35.4	58.8	74.0	-15.2
7422.72	25.50	*	Avg	36.0	-10.6	-0.4	35.4	37.1	54.0	-16.9
8350.56	47.50		Pk	37.0	-11.4	-0.4	35.4	60.9	74.0	-13.1
8350.56	36.00		Avg	37.0	-11.4	-0.4	35.4	49.4	54.0	-4.6

APPENDIX C

CONDUCTED EMISSIONS

Electronic Compliance Laboratories, Inc.
1249 Birchwood Ave.
Sunnyvale, CA

Conducted Emissions
Frequency range: 450KHz-30MHz

Government Agency and Limit: FCC Class B

QP = Quasi-Peak Note: Ignore peak readings when Quasi-Peak reading exists


PK = Peak

Customer: DIABLO Operator: Suresh
Date: 02-24-1998 Time: 10:30:57
Temperature Range: 55 Deg F Percent Humidity: 55
E.U.T.: BASE STATION REPEATER
Serial Number:
Support Devices:
Serial Number:
FCC ID:
Exercise Program: NONE
Modifications: NONE
Report File Name: F:\TESTDATA\8022401.F

TEST FREQ	TEST dBuV	CLASS B LIMIT	VERSUS B LIMIT	CONDUCTOR	TYPE
=====	=====	=====	=====	=====	=====
2.890	38.6	48.0	-9.4	LINE	PK
4.660	37.8	48.0	-10.2	LINE	PK
5.840	43.2	48.0	-4.8	LINE	PK
11.530	31.4	48.0	-16.6	LINE	PK
5.840	41.8	48.0	-6.3	LINE	QP
5.840	40.1	48.0	-7.9	LINE	AVG
0.450	39.7	48.0	-8.3	NEUTRAL	PK
2.890	36.6	48.0	-11.4	NEUTRAL	PK
4.590	37.0	48.0	-11.0	NEUTRAL	PK
5.990	40.3	48.0	-7.7	NEUTRAL	PK

[70] 11:29:58 FEB 24, 1998 DIABLO,
 8022401 LINE

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 11.53 MHz
 31.42 dBμV

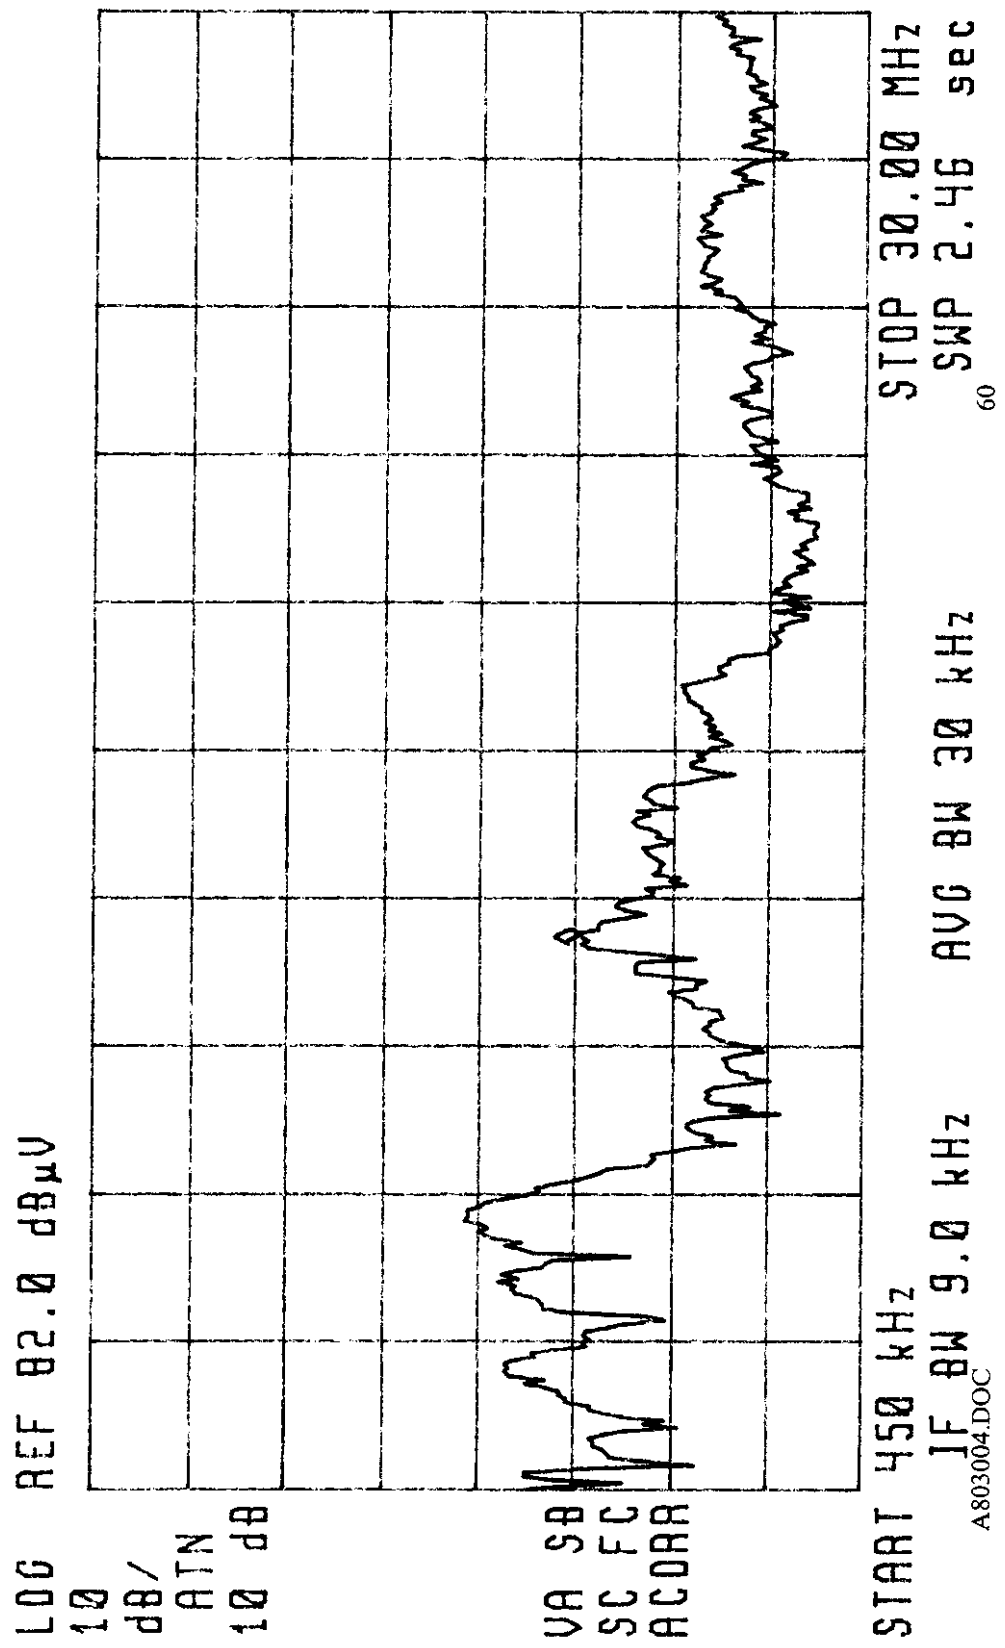


11:41:09 FEB 24, 1998 DIA8LD,
 8022401 NEUTRAL

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 5.99 MHz
 40.35 dBμV

LOG REF 62.0 dBμV

10
 dB/
 ATN
 10 dB

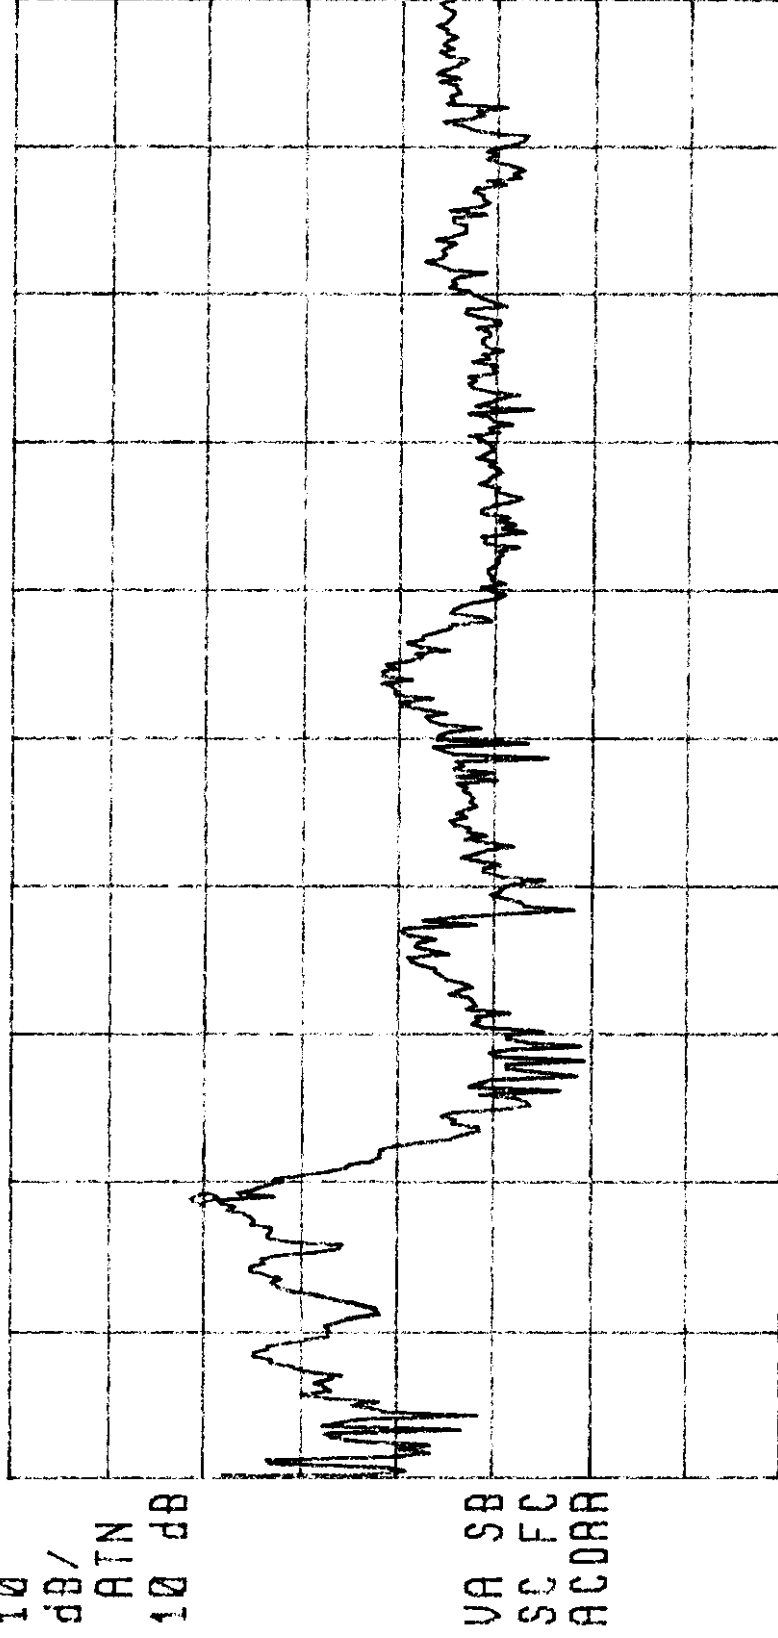

VA SB
 SC FC
 ACORR

START 450 kHz
 IF BW 9.0 kHz
 STOP 30.00 MHz
 SWP 2.46 sec
 AVG BW 30 kHz

APPENDIX D

RADIATED EMISSIONS

APPENDIX F
ANTENNA DATA SHEETS

Model ASPG916DRCNPRR K037REng. Approval 2/27Date: 2/7/97Prod. Mgr 2/27Date: 2/1/97

ANTENNA PRODUCT SALES DATA AND TECHNICAL SPECIFICATIONS

USE PRODUCT LINE CODE NO: PR53PRODUCT CODE NO: 0189

DESCRIPTION:

ELECTRICAL	MOBILE DATA	MECHANICAL (Base Station)
Frequency Range 902-928 MHz	Mount Type: Rooftop	Total Length in m
VSWR Bandwidth @ 1.5:1 26 MHz @ 2.0:1	Mounting Diameter in .750 mm 19.05	Mounting Length in mm Mounting mat'l Dia in mm
Power Rating (CW) 10 W	Cable Length in 9 mm 228.6	Weight lb kg
Input Impedance 50 ohms	Cable Type: RG-316	Cable Length ft m
Polarization: Vertical	Connector: SMB straight plug	Radiator Material:
Gain: 3.5 dBd omni (See Notes 2 & 3) dBd dir	Max-whip Length in 21.0 mm 533.4	Reflector Size x in x mm
Azimuthal Variation ± 1.5 dB	Whip Material: 17-7 PH St Steel	Reflector Material
RADIATION PATTERN	Whip Diameter in .100 mm 2.54	Weather Protection: Fiberglass Radome
E-Plane beamwidth @ -3 dB $24 \pm 2^\circ$	Spring Material: N/A	
H-Plane beamwidth @ -3dB omni ° Omnidirectional	Spring Diameter in N/A mm	Turning Radius ft m
Beamtilt @ bandwidth limits Low <u>-6</u> ° High <u>-1</u> °	Spring Length N/A in mm	RS-329 WINDLOAD DATA
Relative level of largest sidelobe from major lobe >5 dB	Mount Insulation: Teflon	NO ICE RS-329 Velocity mi/h km/h Fatal Velocity mi/h km/h Windload Area (EFP) ft ² m ²
Front-to-back ratio dB	SHIPPING WEIGHT lb (See Note #1) kg SHIPPING DIMENSIONS 9 in x 8 in x 22.75 in 229 mm x 204 mm x 578 mm (OR) dia x in dia x mm	NO ICE (At Rated Velocity) Lateral Thrust lb kg Bending Moment ft-lb N-m Torque Moment ft-lb N-m
Wide angle radiation level dB		NO ICE (At 100 mi/h (161 km/h): Lateral Thrust lb kg Bending Moment ft-lb N-m torque Moment ft-lb N-m
OPERATING PRINCIPLES: - 3 element collinear whip over ground plane. - 1/2 wave, over 1/2 wave, over 1/4 wave.		1/2" ICE RS-329 Velocity mi/h km/h Fatal Velocity mi/h km/h Windload Area (EFP) ft ² m ²
FEATURES:		1/2" ICE (At Rated Velocity) Lateral Thrust lb kg Bending Moment ft-lb N-m Torque Moment ft-lb N-m
		NO ICE (At 100 mi/h (161 km/h): Lateral Thrust lb kg Bending Moment ft-lb N-m Torque Moment ft-lb N-m

NOTES:


Antennas are individually sealed in poly bags and then bulk packed into master carton for shipment (approx. 25 antennas per carton, weighing approx. 20-25 lbs).

2. The antenna design intent is for usage with base housing, supplied by customer (Diablo), which serves as a ground plane and support structure (non-mobile application).

3. Maximum gain occurs at the horizon, in the long direction of the base housing. The gain in the short direction can be as much as 2 dB lower.

>Model Number: ASPG916
>Diablo Mount Horizontal
>Frequency: 915 MHz
>Gain: 4 dBd
>Date: 02-04-1997
>E Plane

Diskfile: S_6916VM.915

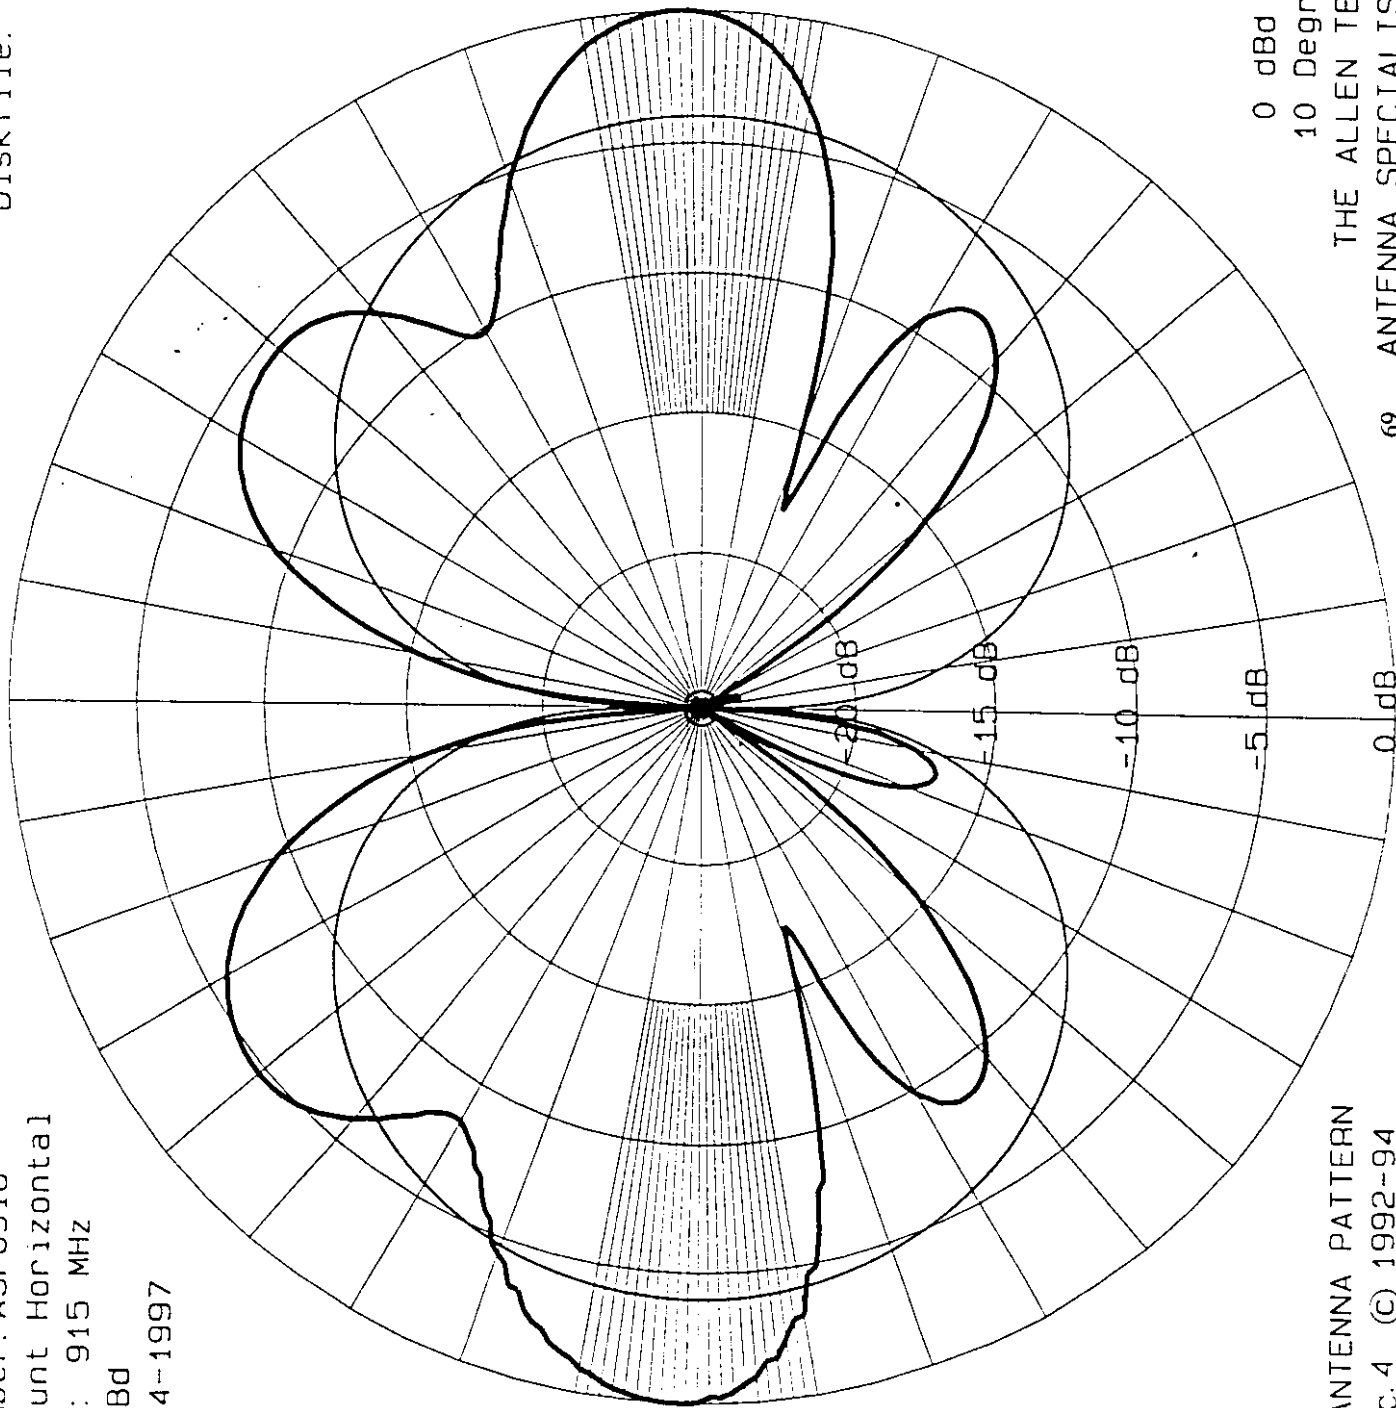


0 dBd Reference
10 Degree Radials
THE ALLEN TELECOM GROUP
69 ANTENNA SPECIALISTS DIVISION

02-04-1997
DIGITIZED ANTENNA PATTERN
PATR03504VDoc.4 (C) 1992-94

>Model Number: ASPG916
>Diablo Dual Coil
>Frequency: 915 MHz
>Gain: 4 dBd
>Date: 02-04-1997
>H Plane

Diskfile: S_G916HM.915

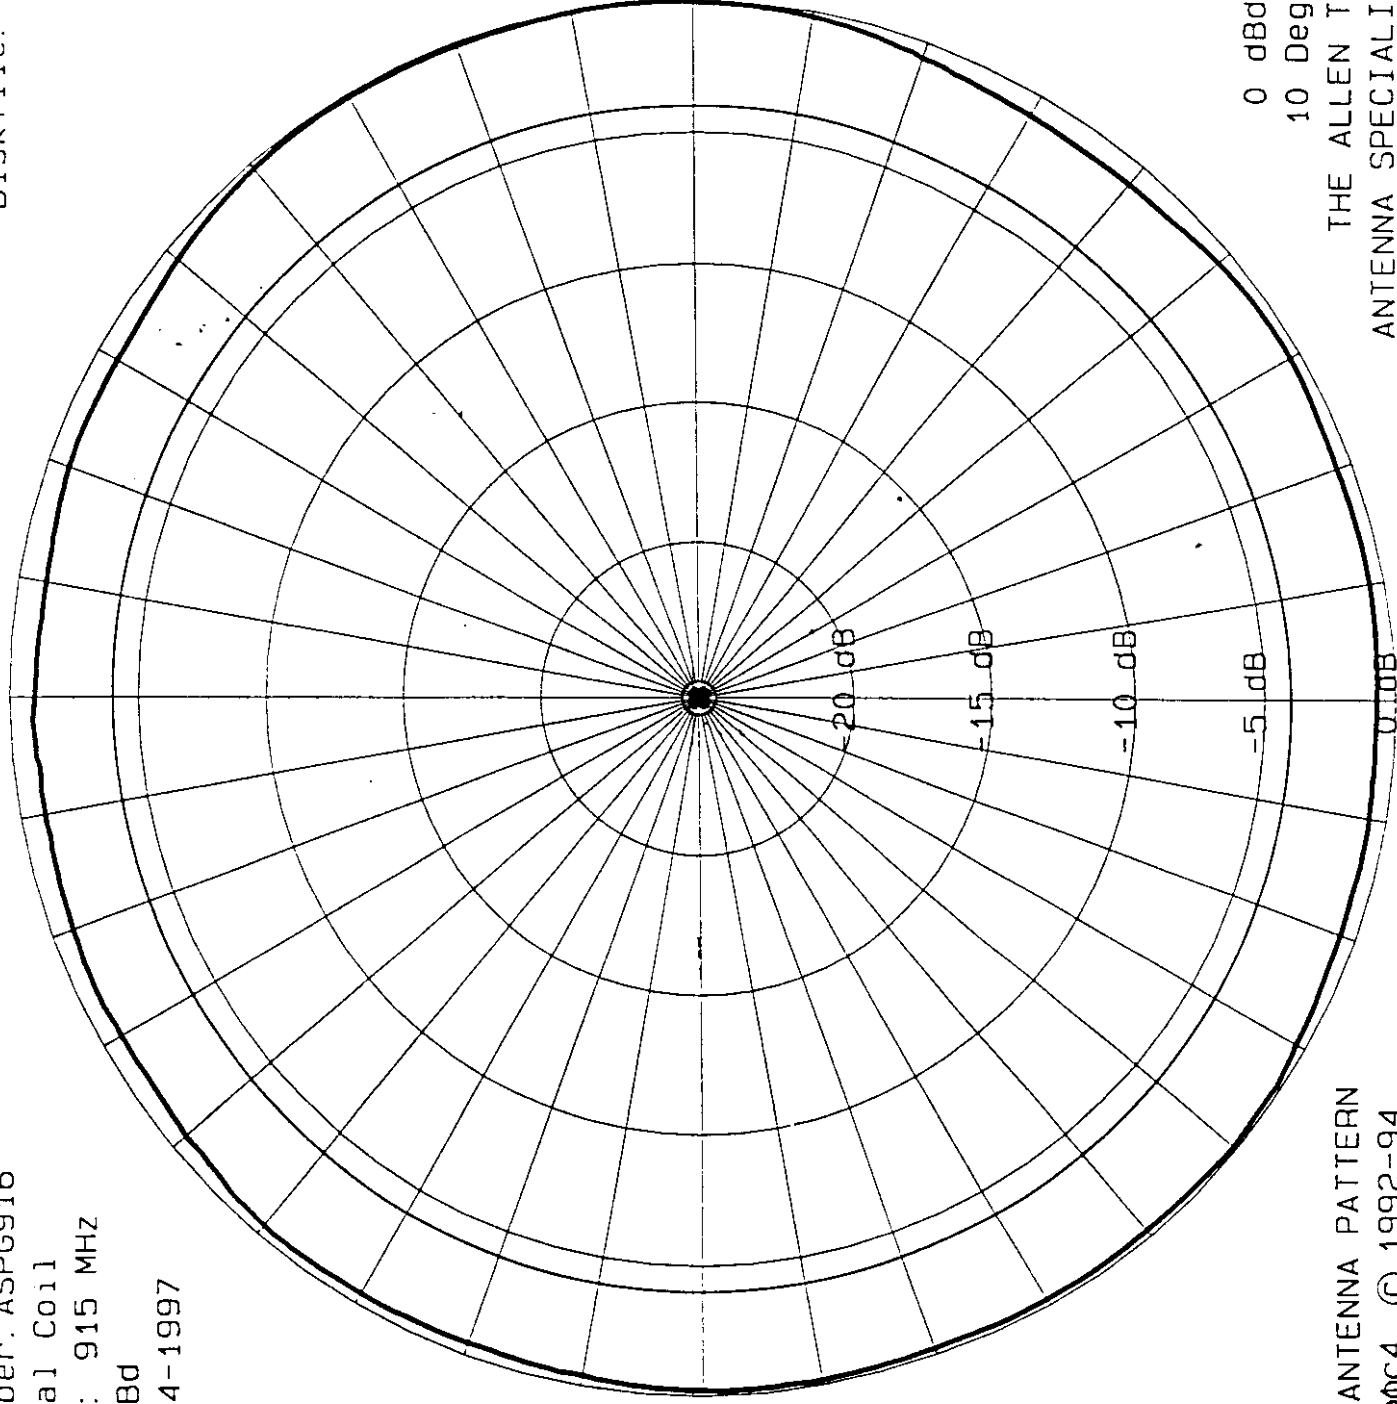

02-04-1997
DIGITIZED ANTENNA PATTERN
PATLAB0004.DOC4 © 1992-94

0 dBd Reference
10 Degree Radials
THE ALLEN TELECOM GROUP
ANTENNA SPECIALISTS, DIVISION