

Report on the FCC and IC Testing of the dormakaba Deutschland GmbH

Model: Legic on Module (LoM)

In accordance with FCC 47 CFR Part 15 C
and ISED RSS-247 and ISED RSS-GEN

Prepared for: dormakaba Deutschland GmbH
Albertstr. 3
78056 Villingen-Schwenningen
Germany

FCC ID: NVI-LOM63S
IC: 11038A-LOM63S

COMMERCIAL-IN-CONFIDENCE

Date: 2026-03-24

Document Number: TR-713351460-00 | Revision 2

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Alexander Deese	2026-03-24	 SIGN-ID 1116923
Authorised Signatory	Michael Ingerl	2026-03-25	 SIGN-ID 1117408

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15 C and ISED RSS-247 and RSS-GEN.

The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Alexander Deese	2026-03-24	 SIGN-ID 1116923

Laboratory Accreditation
DAkkS Reg. No. D-PL-11321-11-03
DAkkS Reg. No. D-PL-11321-11-04

Laboratory recognition
Registration No. BNetzA-CAB-16/21-15

Industry Canada test site registration
3050A-2

Executive Statement:

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15 C:2023 and ISED RSS247 Issue 4, 2025 and ISED RSS-Gen Issue 5, 2018 + A1:2019 + A2:2021

  Deutsche Akreditierungsstelle D-PL-11321-11-00	DISCLAIMER AND COPYRIGHT Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question. It does not imply a general statement regarding the quality of products from regular production. For further details please see Testing, Certification, Validation and Verification Regulations, chapter A-3.3. © 2025 TÜV SÜD Product Service.
---	---

Trade Register Munich
HRB 85742
VAT ID No. DE129484267
Information pursuant to Section 2(1)
DL-InfoV (Germany) at
www.tuvsud.com/imprint

Supervisory Board:
Holger Lindner (Chairman)
Board of Management:
Wolfgang Hübl (CEO)
Karl Meier
Patrick van Welij

Phone: +49 (0) 9421 56 82-0
Fax: +49 (0) 9421 56 82-199
www.tuvsud.com

TÜV SÜD Product Service GmbH
Äußere Frühlingsstraße 45
94315 Straubing
Germany



Content

1	Report Summary.....	2
1.1	Modification Report.....	2
1.2	Introduction	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Test Configuration	4
1.6	Modes of Operation	4
1.7	Deviations from Standard	4
1.8	EUT Modifications Record	5
1.9	Test Location	5
2	Test Details.....	6
2.1	Emission Bandwidth	6
2.2	Output Power.....	13
2.3	Power Spectral Density	15
2.4	Frequency Band Edge	19
2.5	Spurious emissions	22
2.6	Temperature Stability	36
3	Measurement Uncertainty	40
	TR-713351460-00 rev0 (BLE FCC) Annex A: Test setup photos	3 pages
	TR-713351460-00 rev0 (BLE FCC) Annex B: Internal photos	1 page



1 Report Summary

1.1 Modification Report

Alternations and additions to this report will be issued to the holders of each copy in the form of a complete document. The current version replaces all previous versions.

Revision	Description of changes	Date of Issue
0	First Issue	2025-02-25
1	Hardware and Software Version added.	2025-12-09
2	ISED RSS-247 updated to Issue 4. Antenna information updated, section 1.4.1. Chapter Antenna requirement added, section 2.1. Values for EIRP corrected, section 2.3.7.	2026-03-24

Table 1: Report of Modifications

1.2 Introduction

Applicant	dormakaba Deutschland GmbH
Manufacturer	dormakaba Deutschland GmbH
Model Number(s)	Legic on Module (LoM)
Serial Number(s)	---
Hardware Version(s)	Assembly:V00, SM-6310: V1.5
Software Version(s)	SM-6310: V1.8.2 / V3.x / V4.x
Number of Samples Tested	1
Test Specification(s) / Issue / Date	FCC 47 CFR Part 15 C : 2023 ISED RSS-247, Issue 4 : 2025 ISED RSS-Gen Issue 5, 2018 + A1:2019 + A2:2021
Test Plan/Issue/Date	---
Order Number	8082964
Date	2024-10-29
Date of Receipt of EUT	2024-10-14
Start of Test	2024-11-15
Finish of Test	2024-12-16
Name of Engineer(s)	Alexander Deese
Related Document(s)	ANSI C63.4: 2014 ANSI C63.10: 2020 FCC 47 CFR Part 2 J : 2023 KDB 558074 D01 V05R02 ISED RSS-102, Issue 6, 2023



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15 C, ISSED RSS-247 and ISSED RSS-GEN is shown below.

Section	Specification Clause	Test Description	Result
2.1	15.203, 15.247(b)	Antenna requirement	Pass
2.2	15.247(a)(2)	Emission Bandwidth	Pass
2.3	15.247(b)(3)	Output Power	Pass
2.4	15.247(e)	Power Spectral Density	Pass
2.5	15.247(d)	Frequency Band Edge	Pass
2.6	15.247(d), 15.205, 15.209	Spurious Emissions	Pass
---	15.207	Conducted Emissions on Mains Terminals	N/T

Table 2: Results according to FCC 47 CFR Part 15 C

Section	Specification Clause	Test Description	Result
2.2	6.3.1	Emission Bandwidth	Pass
2.3	6.3.2	Output Power	Pass
2.4	6.3.1	Power Spectral Density	Pass
2.5	6.6	Frequency Band Edge	Pass
2.6	6.6	Spurious Emissions	Pass

Table 3: Results according to ISSED RSS-247

Section	Specification Clause	Test Description	Result
2.2	6.7	Emission Bandwidth	Pass
2.6	8.9, 8.10	Spurious Emissions	Pass
2.7	8.11	Frequency Stability	Pass
---	8.8	Conducted Emissions on Mains Terminals	N/T

Table 4: Results according to RSS-Gen

N/T = not tested



1.4 Product Information

1.4.1 Technical Description

The EUT is a Radio Module with Bluetooth and RFID.

Frequency Band: 2400.0 MHz – 2483.5 MHz

Supply Voltage: 5 V

Supply Frequency: DC

*Highest clock frequency
(radio part):* 2480 MHz

*Highest clock frequency
(non-radio part):* ---

Antenna model name: LoM-BLE-antenna1

Type of antenna: Integrated PCB antenna

Maximum Antenna Gain: + 2 dBi at 2.4 GHz

1.5 Test Configuration

The EUT was 5V / DC power supplied. The radio module was transmitting continuously. Radio frequency and power was configured via test software “BLETesttool” provided by the customer.

1.6 Modes of Operation

Mode 1:

Ch 37; 2402 MHz; BW 2 MHz; Power setting 4 dBm; Modulated carrier

Mode 2:

Ch 17; 2440 MHz; BW 2 MHz; Power setting 4 dBm; Modulated carrier

Mode 3:

Ch 39; 2480 MHz; BW 2 MHz; Power setting 4 dBm; Modulated carrier

1.7 Deviations from Standard



1.8 EUT Modifications Record

The table below details modifications made to the EUT during the test program.
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable

Table 5

1.9 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing test laboratory:

Test Name	Name of Engineer(s)
Configuration according to 1.5 and 1.6	
Emission Bandwidth	Alexander Deese
Output Power	Alexander Deese
Power Spectral Density	Alexander Deese
Frequency Band Edge	Alexander Deese
Spurious Emissions	Alexander Deese
Temperature Stability	Alexander Deese

Office Address:

Äußere Frühlingstraße 45
94315 Straubing
Germany



2 Test Details

2.1 Antenna requirement

2.1.1 Specification Reference

FCC 47 CFR Part 15 C, Clauses 15.203

2.1.2 Equipment under Test and Modification State

Legic on Module (LoM); S/N ---; Modification state 0

2.1.3 Specification Limits

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some fields disturbance sensors, or to other intentional radiators which must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits are not exceeded.

2.1.4 Test Results

Antenna connector type: Integrated PCB antenna
Antenna connector impedance: 50 Ω

<i>Manufacturer</i>	<i>Model</i>	<i>Antenna gain</i>	<i>Result</i>
dormakaba Deutschland GmbH	LoM-BLE-antenna1	+ 2 dBi at 2.4 GHz	Pass



2.2 Emission Bandwidth

2.2.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.247(a)(2)
ISED RSS-247, Clause 6.3.1
ISED RSS-Gen, Clause 6.7

2.2.2 Equipment under Test and Modification State

Legic on Module (LoM); S/N ---; Modification state 0

2.2.3 Date of Test

2024-11-19

2.2.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	42 %

2.2.5 Specification Limits

For systems using digital modulation techniques, operating in the 902 MHz – 928 MHz, 2400 MHz – 2483.5 MHz and/or 5725 MHz – 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz

ISED RSS-GEN:

The occupied (99 %) bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSS.

2.2.6 Test Method


The test was performed according to ANSI C63.10, clauses 6.9.3 and 11.8.1



2.2.7 Test Results


Frequency Channel	6 dB Bandwidth (MHz)	Limit (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
37	0.752476	0.500	2401.643564	2402.396040
17	0.792080	0.500	2439.603960	2440.396040
39	0.792080	0.500	2479.643564	2480.435644

Table 6: 6 dB bandwidth

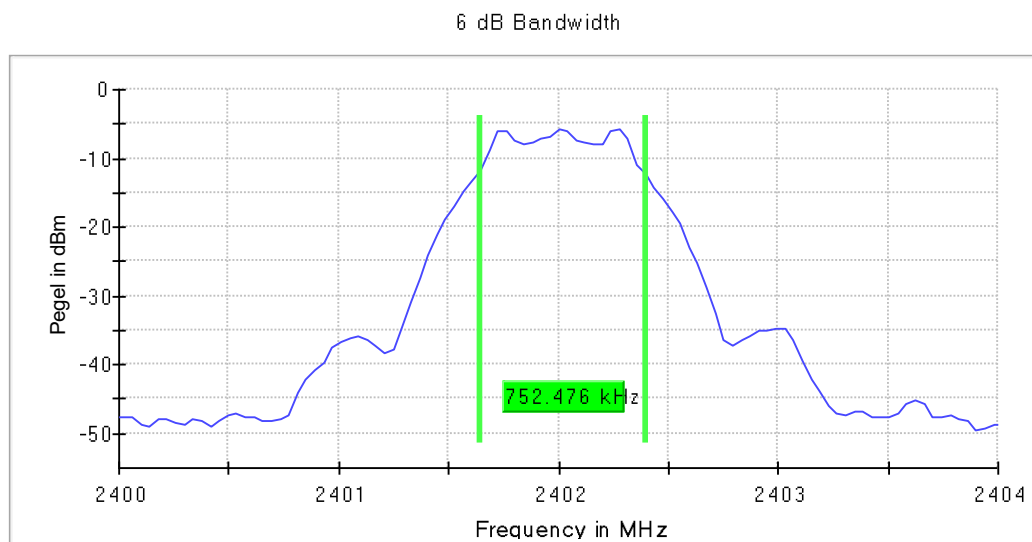




6 dB Bandwidth

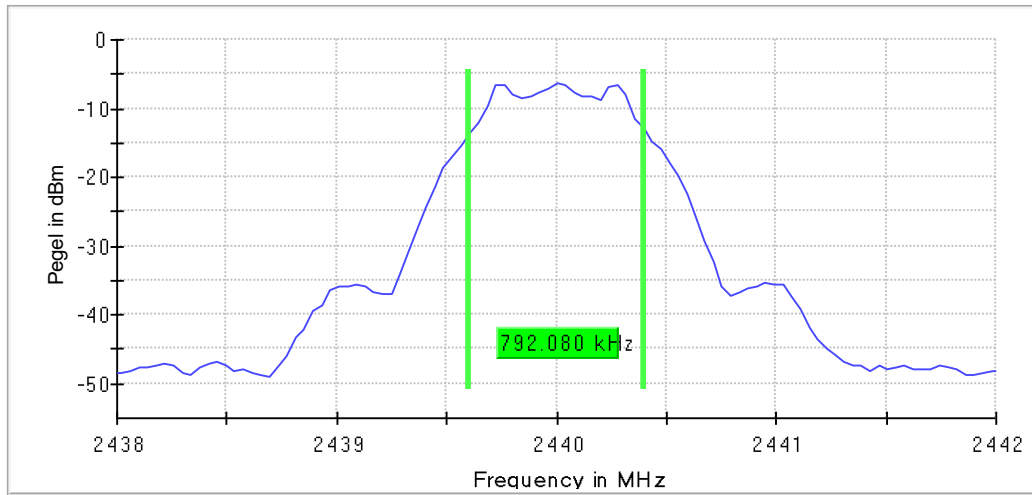


6 dB Bandwidth

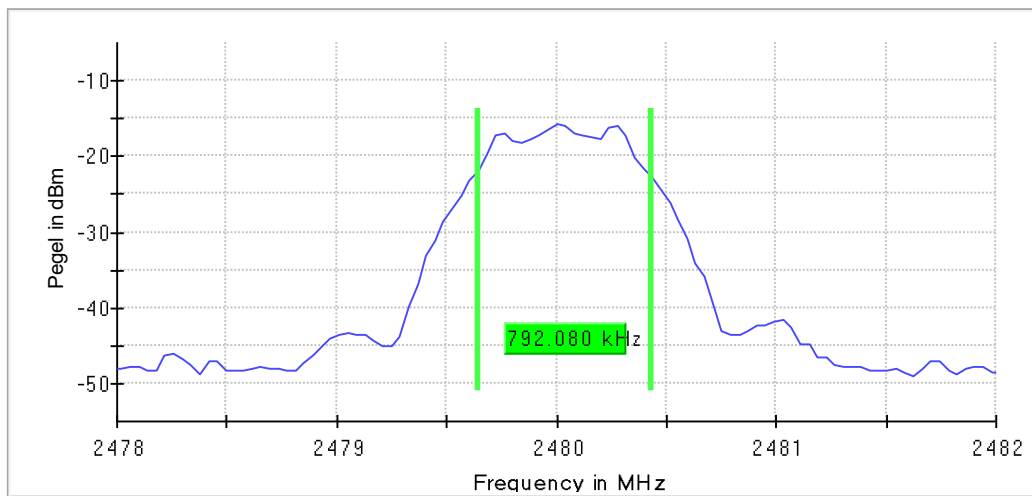




Frequency Channel	99% Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
37	1.050000	2401.485000	2402.535000
17	1.070000	2439.475000	2440.545000
39	1.110000	2479.465000	2480.575000

Table 7: 99% bandwidth

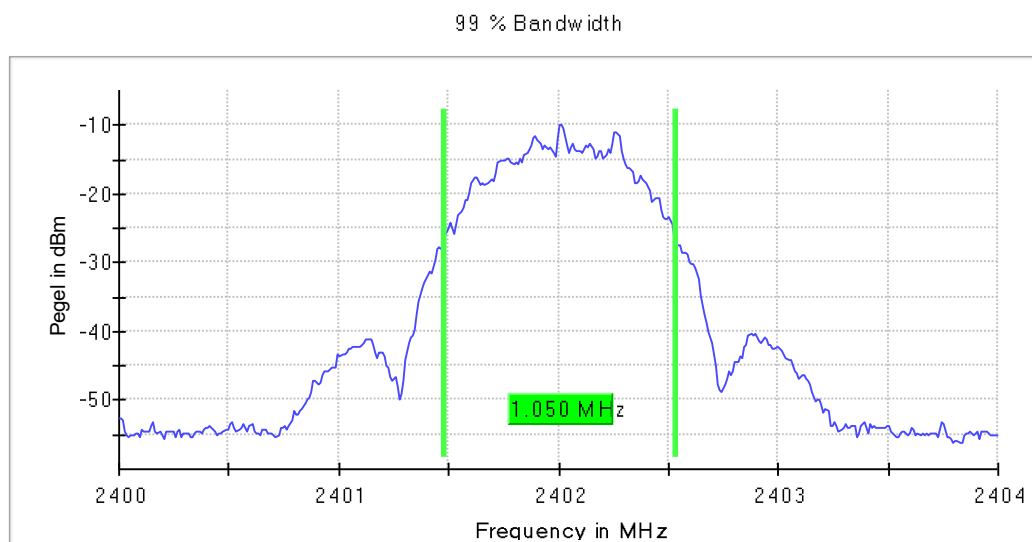




99 % Bandwidth

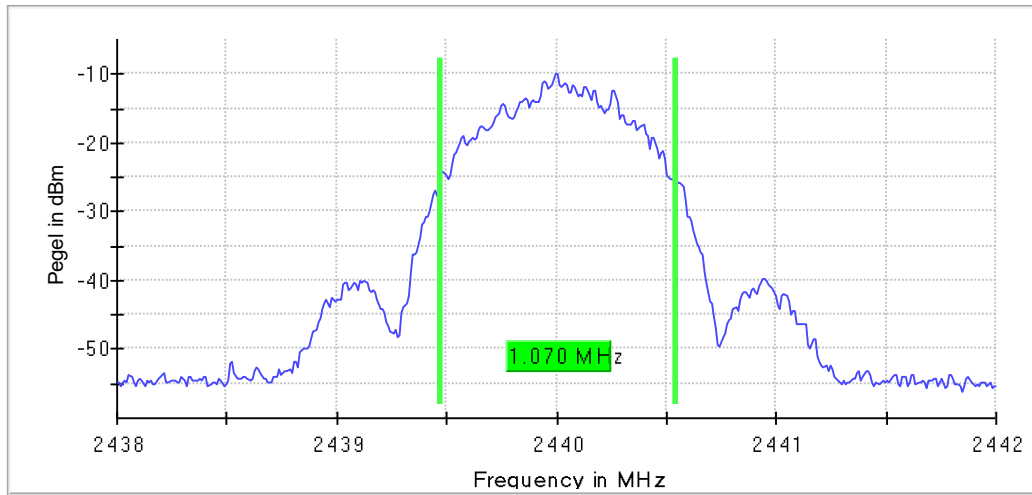

99 % Bandwidth

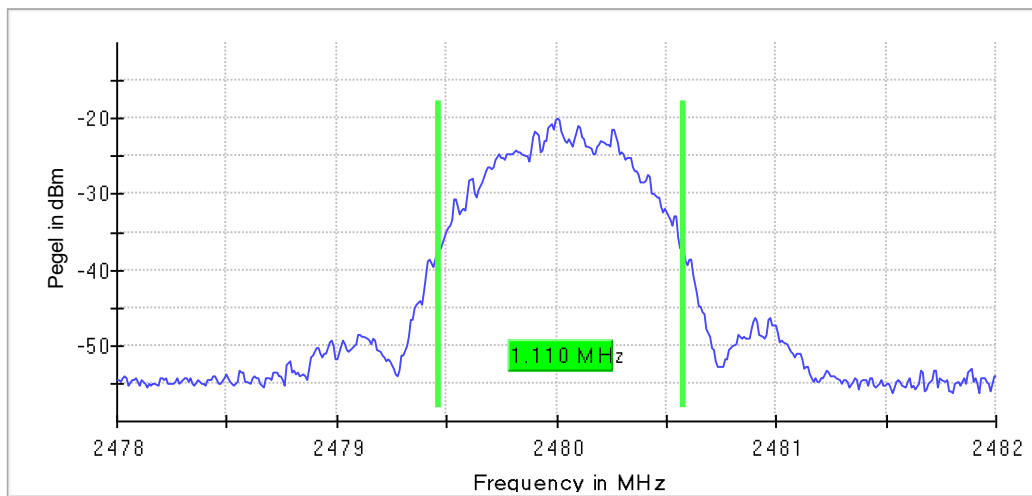



2.2.8 Test Location and Test Equipment

The test was carried out in a non-shielded room:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra- tion Pe- riod (months)</i>	<i>Calibration Due</i>
Climatic test chamber	ESPEC	PL-4 J	38958	18	2025-01-31
Switching device	Rohde & Schwarz	OSP120	20248	36	2026-07-31
Switching device	Rohde & Schwarz	OSP120	38807	36	2026-08-31
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31
EMC measurement software	Rohde & Schwarz	EMC32 TS8997 – V10.60.00	44381	---	---

Table 8



2.3 Output Power

2.3.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.247(b)(3)
ISED RSS-247, Clause 6.3.2

2.3.2 Equipment under Test and Modification State

Legic on Module (LoM); S/N ---; Modification state 0

2.3.3 Date of Test

2024-11-19

2.3.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	42 %

2.3.5 Specification Limits

The maximum conducted output power shall not exceed 1 W (30 dBm).
The e.i.r.p. shall not exceed 4 W (36 dBm).

2.3.6 Test Method

The test was performed according to ANSI C63.10, section 11.9



2.3.7 Test Results

<i>Frequency Channel</i>	<i>Detector</i>	<i>Output Power (dBm)</i>	<i>Limit (dBm)</i>
37	RMS	-2.959	30.0
17	RMS	-3.532	30.0
39	RMS	-12.932	30.0

Table 9: Conducted Output Power

<i>Frequency Channel</i>	<i>Detector</i>	<i>EIRP (dBm)</i>	<i>Limit (dBm)</i>
37	RMS	-0.959	36.0
17	RMS	-1.532	36.0
39	RMS	-10.932	36.0

Table 10: EIRP

2.3.8 Test Location and Test Equipment

The test was carried out in a non-shielded room:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra- tion Pe- riod (months)</i>	<i>Calibration Due</i>
Climatic test chamber	ESPEC	PL-4 J	38958	18	2025-01-31
Switching device	Rohde & Schwarz	OSP120	20248	36	2026-07-31
Switching device	Rohde & Schwarz	OSP120	38807	36	2026-08-31
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31
EMC measurement software	Rohde & Schwarz	EMC32 TS8997 – V10.60.00	44381	---	---

Table 11



2.4 Power Spectral Density

2.4.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.247(e)
ISED RSS-247, Clause 6.3.1

2.4.2 Equipment under Test and Modification State

Legic on Module (LoM); S/N ---; Modification state 0

2.4.3 Date of Test

2024-11-19

2.4.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	42 %

2.4.5 Specification Limits

FCC 47 CFR, section 15.257(e)
ISED RSS-247, Clause 5.2.(b)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

The same method (detector) of determining the conducted output power shall be used to determine the power spectral density.

2.4.6 Test Method


The test was performed according to ANSI C63.10, section 11.10




2.4.7 Test Results

Frequency Channel	Detector	Spectral Power Density (dBm)	Limit (dBm)
37	RMS	-14.374	8.0
17	RMS	-14.975	8.0
39	RMS	-23.840	8.0


Table 12: Spectral Power Density

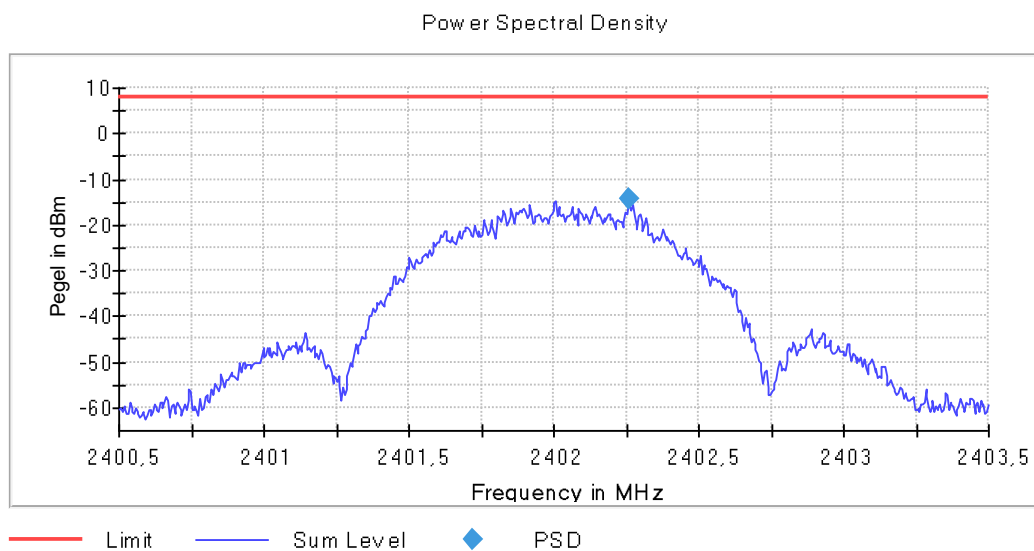

Power Spectral Density

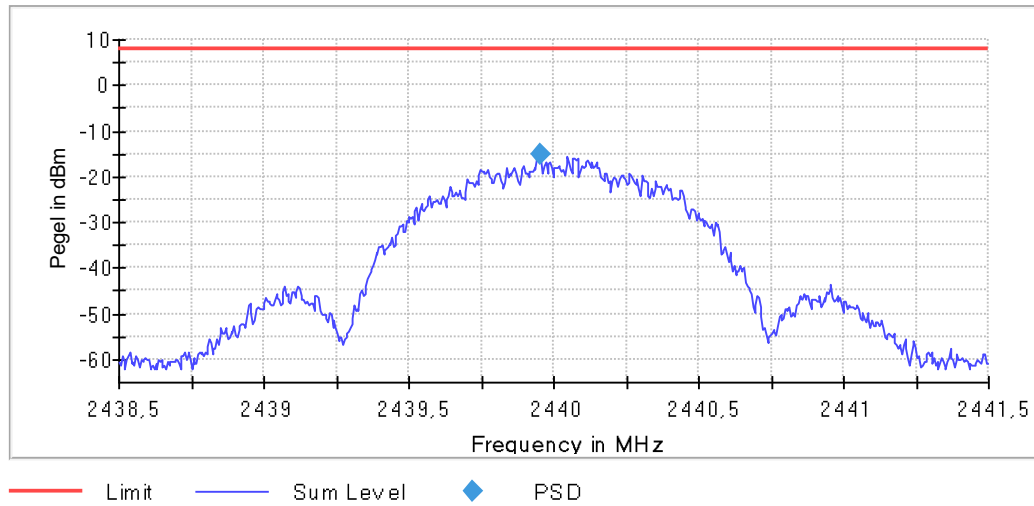

Power Spectral Density

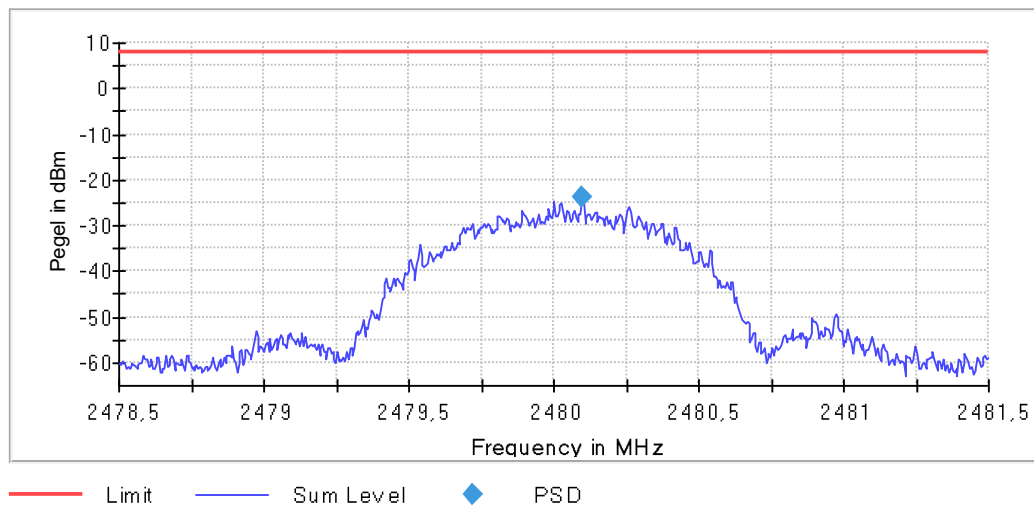



2.4.8 Test Location and Test Equipment

The test was carried out in a non-shielded room:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra- tion Pe- riod (months)</i>	<i>Calibration Due</i>
Climatic test chamber	ESPEC	PL-4 J	38958	18	2025-01-31
Switching device	Rohde & Schwarz	OSP120	20248	36	2026-07-31
Switching device	Rohde & Schwarz	OSP120	38807	36	2026-08-31
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31
EMC measurement software	Rohde & Schwarz	EMC32 TS8997 – V10.60.00	44381	---	---

Table 13



2.5 Frequency Band Edge

2.5.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.247(d)
ISED RSS-247, Clause 6.6

2.5.2 Equipment under Test and Modification State

Legic on Module (LoM); S/N ---; Modification state 0

2.5.3 Date of Test

2024-11-19

2.5.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	42 %

2.5.5 Specification Limits



In any 100 kHz bandwidth outside the frequency band in which the device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either conducted or radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits is not required.

In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

2.5.6 Test Method

The test was performed according to ANSI C63.10, sections 11.11

2.5.7 Test Results

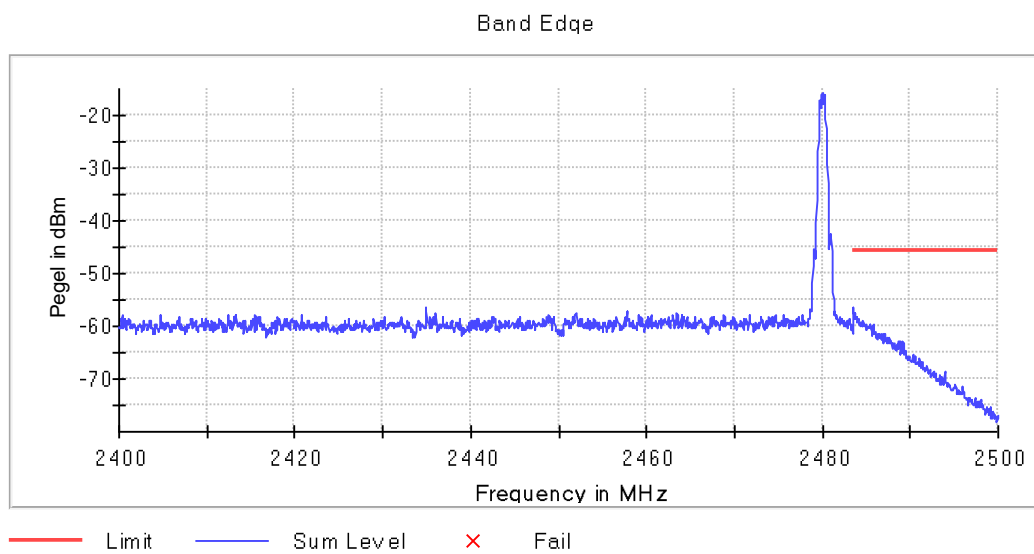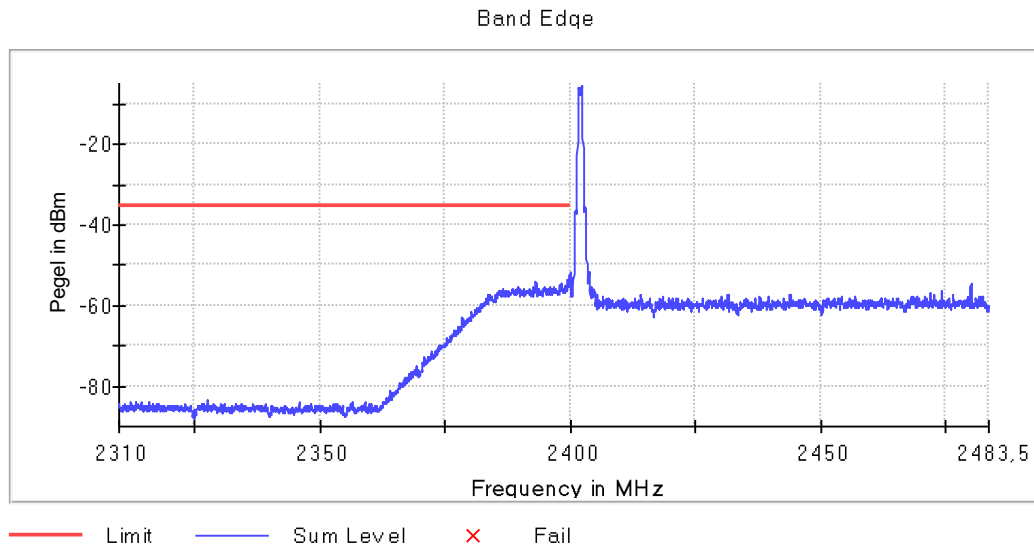



2.5.8 Test Location and Test Equipment

The test was carried out in a non-shielded room:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra- tion Pe- riod (months)</i>	<i>Calibration Due</i>
Climatic test chamber	ESPEC	PL-4 J	38958	18	2025-01-31
Switching device	Rohde & Schwarz	OSP120	20248	36	2026-07-31
Switching device	Rohde & Schwarz	OSP120	38807	36	2026-08-31
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31
EMC measurement software	Rohde & Schwarz	EMC32 TS8997 – V10.60.00	44381	---	---

Table 14



2.6 Spurious emissions

2.6.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.205, 15.209, 15.247(d)
ISED RSS-247, Clause 6.6
ISED RSS-Gen, Clauses 8.9 and 8.10

2.6.2 Equipment under Test and Modification State

Legic on Module (LoM); S/N ---; Modification state 0

2.6.3 Date of Test

2024-11-19 to 2024-12-16

2.6.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	42 %

2.6.5 Specification Limits

In any 100 kHz bandwidth outside the frequency band in which the device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either conducted or radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits is not required.

In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.



General radiated emission limits:					
Frequency Range (MHz)	Test distance (m)	Field strength		Field strength	
		($\mu\text{A}/\text{m}$)	($\text{dB}\mu\text{A}/\text{m}$)	($\mu\text{V}/\text{m}$)	($\text{dB}\mu\text{V}/\text{m}$)
0.009 – 0.49	300	$6.37 / f$	$20*\lg(6.37 / f)$	$2400 / f$	$20*\lg(2400 / f)$
0.49 – 1.705	30	$63.7 / f$	$20*\lg(63.7 / f)$	$24000 / f$	$20*\lg(24000 / f)$
1.705 – 30	30	0.08	$20*\lg(0.08 / f)$	30	$20*\lg(30 / f)$
30 – 88	3	---	--	100	40
88 – 216	3	--	--	150	43.5
126 – 960	3	--	--	200	46
above 960	3	--	--	500	54
Note 1: f in kHz					

Table 15 General radiated emission limits

At frequencies at or above 30 MHz, measurements may be performed at distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempts should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

2.6.6 Test Method

The test was performed according to ANSI C63.10, sections 11.11 and 11.12


Prescans are performed in six positions of the EUT to get the full spectrum of emission caused by the EUT with the measuring antenna raised and lowered from 1 m to 4 m with vertical and horizontal polarisation to find the combination of table position, antenna height and antenna polarisation for the maximum emission levels.

Data reduction is applied to these results to select those levels having less margin than 10 dB or exceeding the limit using subranges and limited number of maximums.

Further maximisation for adjusting the maximum position is following.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

2.6.6.1 Frequency range 9 kHz – 30 MHz

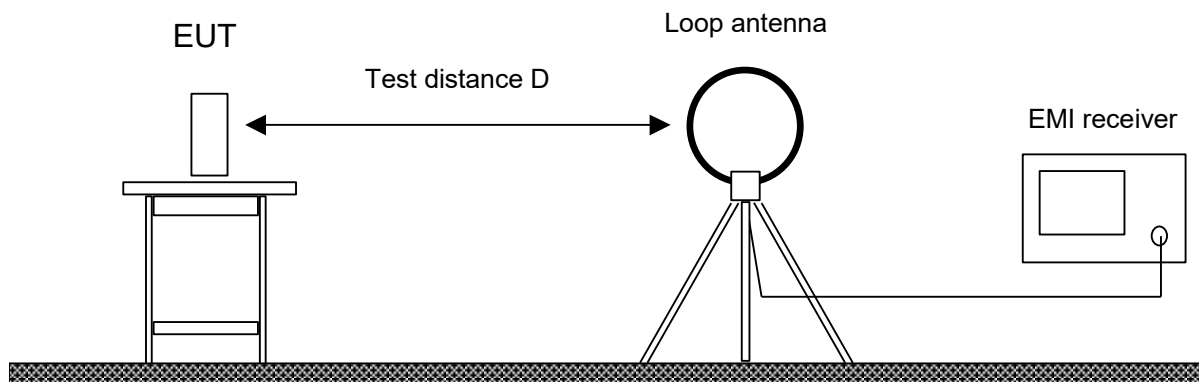


The EUT was placed on a non-conductive table, 0.8 m above the ground.

Radiated emissions in the frequency 9 kHz – 30 MHz is measured within a semi-anechoic room with an active loop antenna with the measurement detector set to peak. In addition in the frequency range 9 kHz to 490 kHz also an average detector was used. The measurement bandwidth of the receiver was set to 300 Hz in the frequency range 9 kHz to 150 kHz and 10 kHz in the frequency range 150 kHz to 30 MHz. Prescans were performed in six positions of the EUT.

For final measurements the detector was set to CISPR quasi-peak and in addition to CISPR average in the frequency range 9 kHz to 490 kHz with a resolution bandwidth 200 Hz in the frequency range 9 kHz to 150 kHz and 9 kHz in the frequency range 150 kHz to 30 MHz. Final tests were performed immediately after a final frequency and zoom (for drifting disturbances) and maximum adjustment.

2.6.6.2 Frequency range 30 MHz – 1 GHz

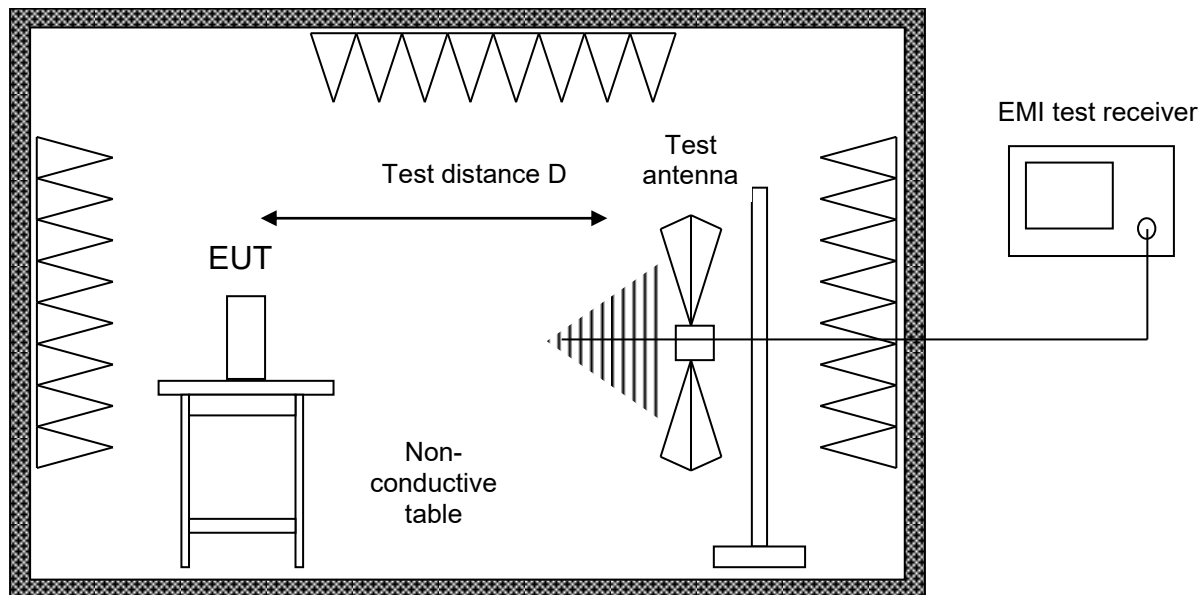

Alternate test site (semi anechoic room)


The EUT was placed on a non-conductive table, 0.8 m above the ground plane

Radiated emissions in the frequency range 30 MHz – 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4. for alternative test sites. A linear polarised logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used.

For prescan tests the test receiver is set to peak-detector with a bandwidth of 120 kHz.

With the measurement bandwidth of the test receiver set to 120 kHz CISPR quasi-peak detector is selected for final measurements following immediately after a final frequency zoom (for drifting disturbances) and maximum adjustment.

2.6.6.3 Frequency range above 1 GHz

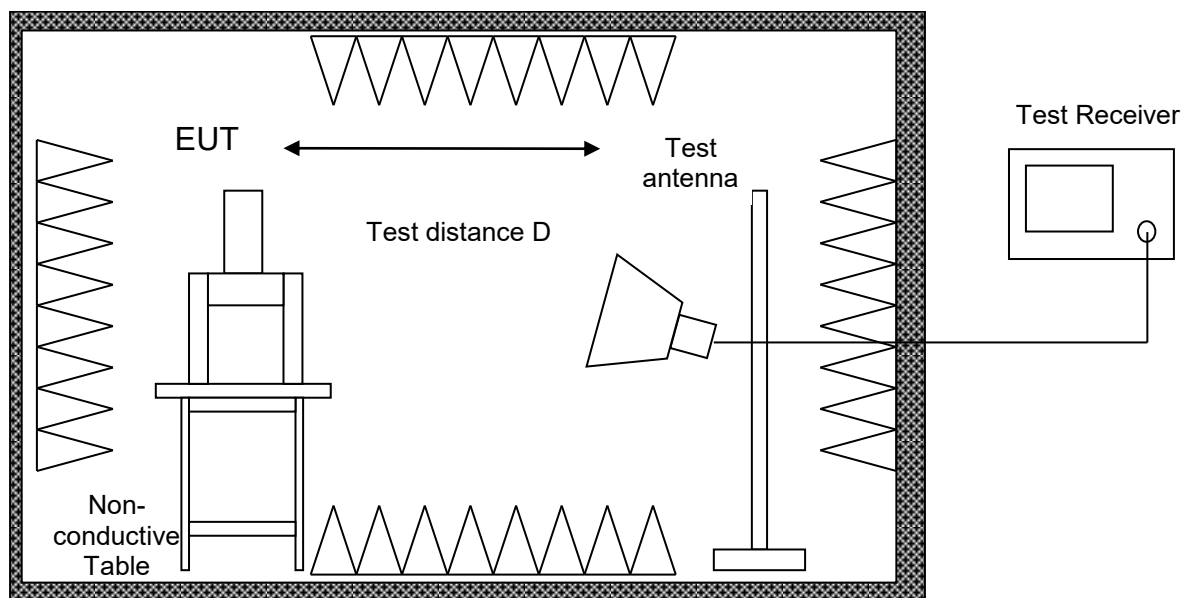

Fully anechoic room

The EUT was placed on a non-conductive table, 1.5 m above the ground plane

Radiated emission tests above 1 GHz are performed in a fully anechoic room with the S_{VSWR} requirements of ANSI C63.4. Measurements are performed both in the horizontal and vertical planes of polarisation using a test receiver with the detector function set to peak and average and the resolution bandwidth set to 1 MHz. Testing above 1 GHz is performed with horn antennas with the EUT in boresight of the antenna.

For prescan tests the test receiver is set to peak- and average-detector with a bandwidth of 1 MHz.

With the measurement bandwidth of the test receiver set to 1 MHz and peak- and CISPR average-detector is selected for final measurements following immediately after a final frequency zoom (for drifting disturbances) and maximum adjustment.



2.6.7 Test Results

<i>Frequency range</i>	<i>Limit applied</i>	<i>Test distance</i>
9 kHz – 30 MHz	15.209; RSS-Gen	3 m
30 MHz – 1 GHz	15.209; RSS-Gen	3 m
1 GHz – 18 GHz	15.209; RSS-Gen	1 m
18 GHz – 25 GHz	15.209; RSS-Gen	3 m

Table 16

Sample calculation:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + (\text{Cable attenuation (dB)} \\ + \text{Antenna Transducer (dB(1/m))})$$


Additional correction of limit in the frequency range 9 – 490 kHz (300 m to 3 m): +80.0 dB

Additional correction of limit in the frequency range 490 kHz – 30 MHz (30 m to 3 m): +40.0 dB

Additional correction of limit in the frequency ranges above 1 GHz (3 m to 1 m): +9.54 dB




Conducted Tx spurious emissions Mode 1:

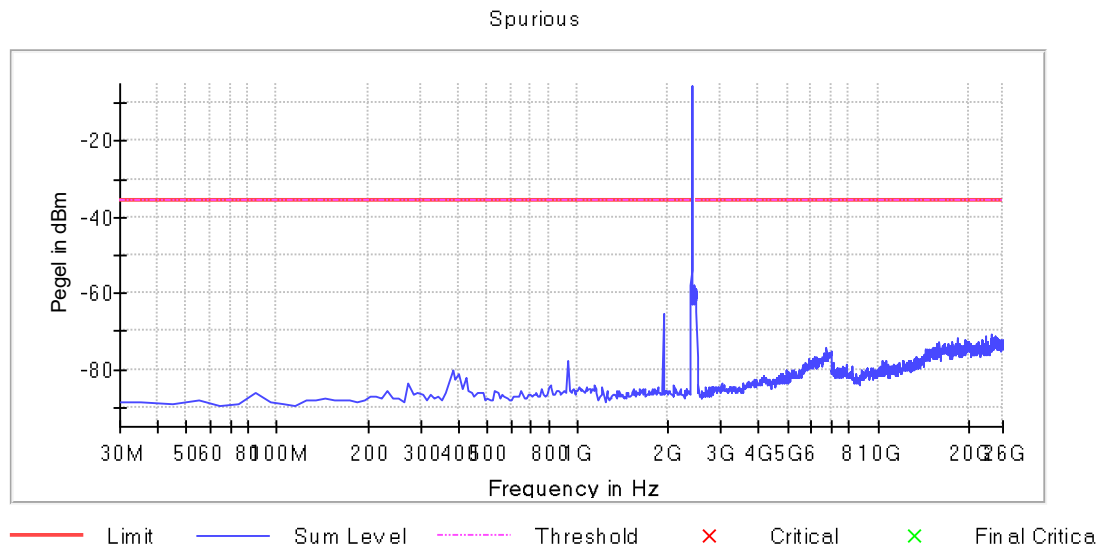

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2395.021008	-54.0	18.5	-35.5
2385.063025	-58.1	22.6	-35.5
2488.497131	-64.9	29.4	-35.5
1926.995798	-65.3	29.8	-35.5
24006.144603	-70.8	35.3	-35.5
2375.105042	-71.0	35.5	-35.5
24665.765937	-71.2	35.7	-35.5
22796.838823	-71.4	35.9	-35.5
23846.236400	-71.6	36.1	-35.5
24056.115916	-71.7	36.2	-35.5
24455.886422	-71.7	36.2	-35.5
24725.731513	-71.7	36.2	-35.5
23996.150340	-71.8	36.3	-35.5
24765.708564	-71.8	36.3	-35.5
24046.121653	-71.8	36.3	-35.5




Conducted Tx spurious emissions Mode 2:

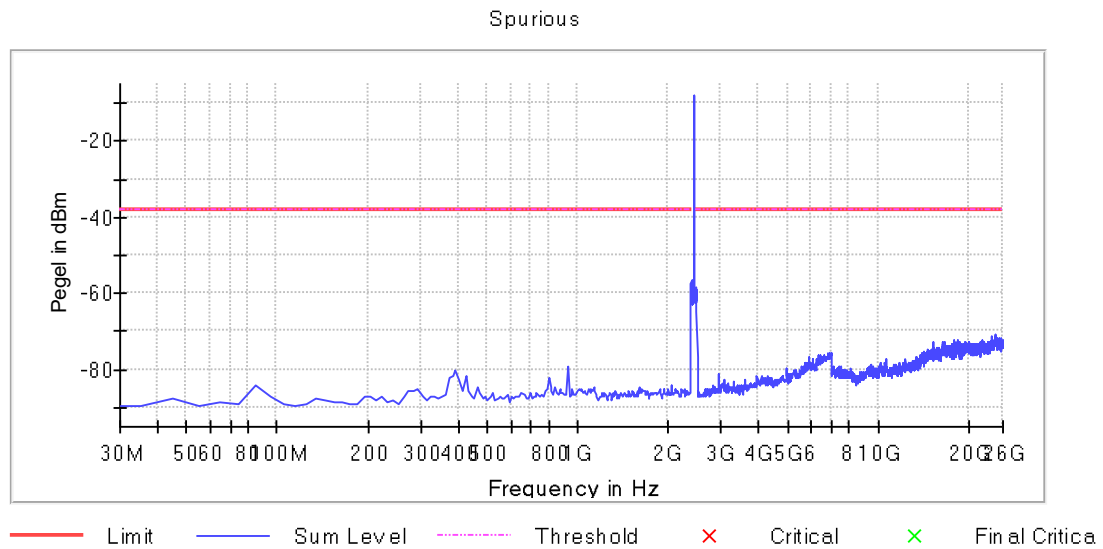

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2395.021008	-56.6	18.7	-37.9
2385.063025	-57.5	19.6	-37.9
2488.497131	-64.7	26.7	-37.9
2375.105042	-69.1	31.1	-37.9
24695.748725	-70.9	33.0	-37.9
24625.788887	-71.3	33.3	-37.9
23976.161815	-71.4	33.5	-37.9
24425.903634	-71.4	33.5	-37.9
24675.760200	-71.5	33.6	-37.9
24605.800361	-71.6	33.6	-37.9
24715.737250	-71.6	33.7	-37.9
24505.857735	-71.7	33.8	-37.9
24635.783149	-71.7	33.8	-37.9
24735.725776	-71.8	33.9	-37.9
25415.335635	-71.9	33.9	-37.9



Conducted Tx spurious emissions Mode 3:

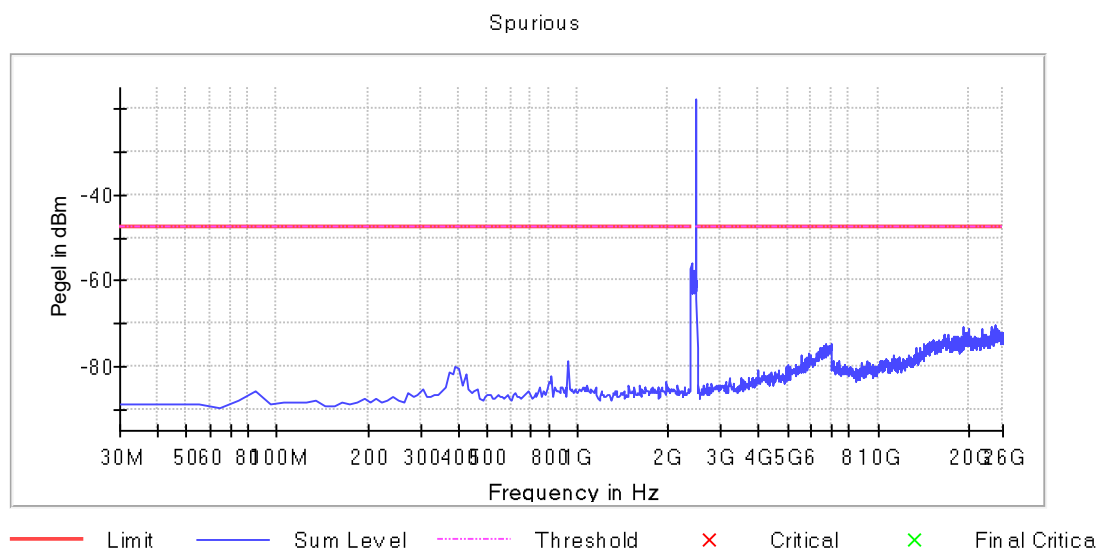


Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2395.021008	-56.1	8.5	-47.6
2385.063025	-57.4	9.8	-47.6
2488.497131	-64.1	16.5	-47.6
2375.105042	-69.3	21.7	-47.6
24675.760200	-70.2	22.6	-47.6
24016.138865	-70.8	23.2	-47.6
24565.823311	-70.9	23.3	-47.6
19328.829686	-70.9	23.4	-47.6
23946.179027	-71.0	23.4	-47.6
24785.697089	-71.0	23.5	-47.6
22277.137165	-71.1	23.5	-47.6
20038.422333	-71.3	23.7	-47.6
23826.247875	-71.6	24.0	-47.6
24695.748725	-71.6	24.0	-47.6
24545.834785	-71.7	24.1	-47.6

Mode 1 was found to be the most critical configuration according to chapter 2.2. Following radiated Tx spurious emissions were captured with Mode 2 active.



Radiated Tx spurious emissions Mode 1:

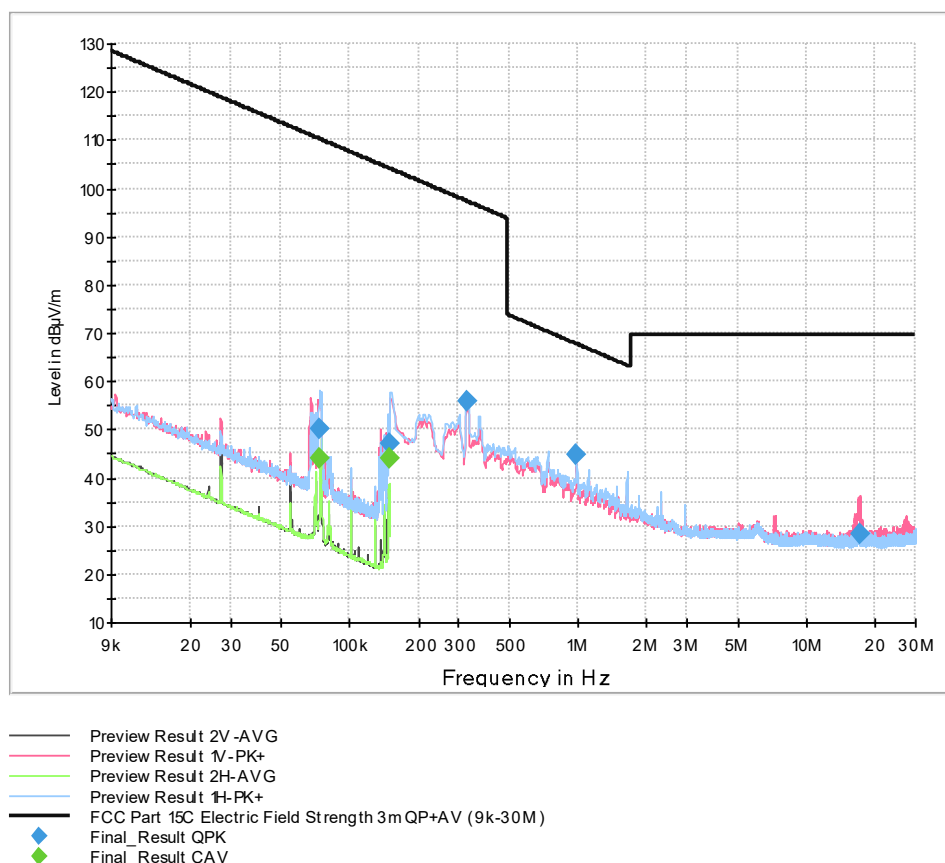


Final Results:

Frequency MHz	QuasiPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
0.074200	---	44.10	110.20	66.10	1000.0	0.200	100.0	H	-115.0	19.5
0.074200	50.28	---	110.20	59.92	1000.0	0.200	100.0	H	-115.0	19.5
0.150000	---	44.00	104.08	60.08	1000.0	0.200	100.0	H	-143.0	19.4
0.150000	47.11	---	104.08	56.97	1000.0	0.200	100.0	H	-143.0	19.4
0.327750	55.89	---	97.29	41.40	1000.0	9.000	100.0	H	194.0	19.4
0.980250	44.61	---	67.78	23.17	1000.0	9.000	100.0	H	184.0	19.4
17.022750	28.31	---	69.54	41.23	1000.0	9.000	100.0	V	178.0	19.2



Product Service

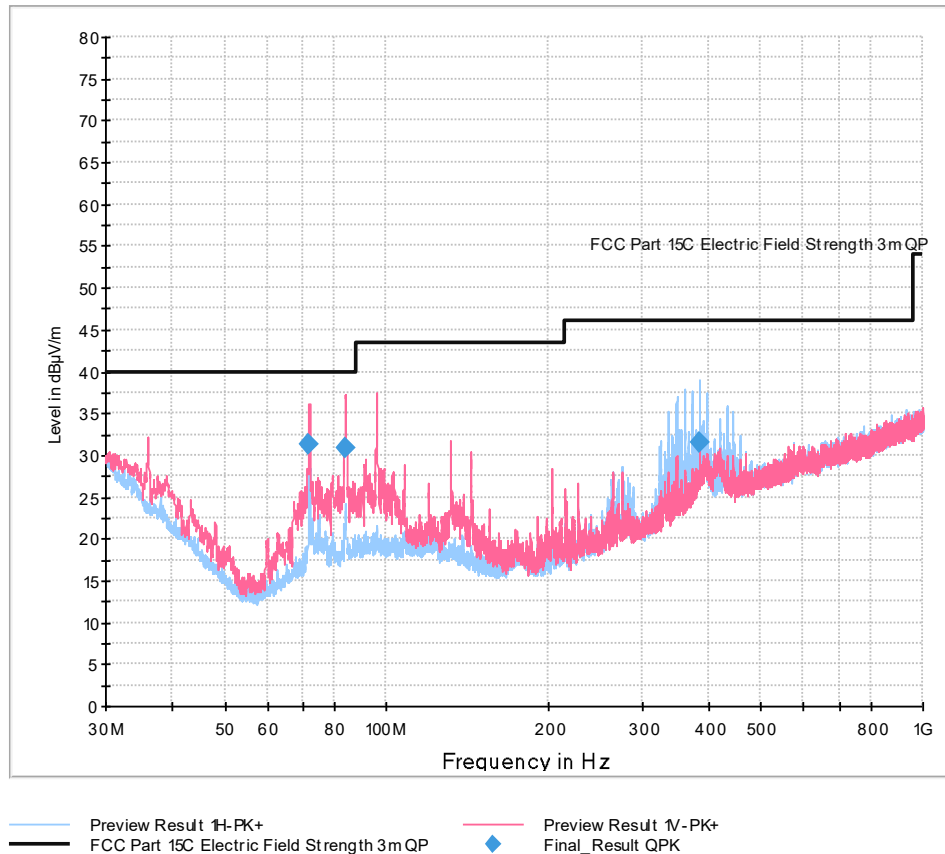


Final Results:

Frequency MHz	Qua- siPeak dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
71.940000	31.24	40.00	8.76	1000.0	120.000	117.0	V	-150.0	14.8
83.910000	30.92	40.00	9.08	1000.0	120.000	128.0	V	203.0	16.2
383.760000	31.53	46.02	14.49	1000.0	120.000	100.0	H	-25.0	21.7



Product Service

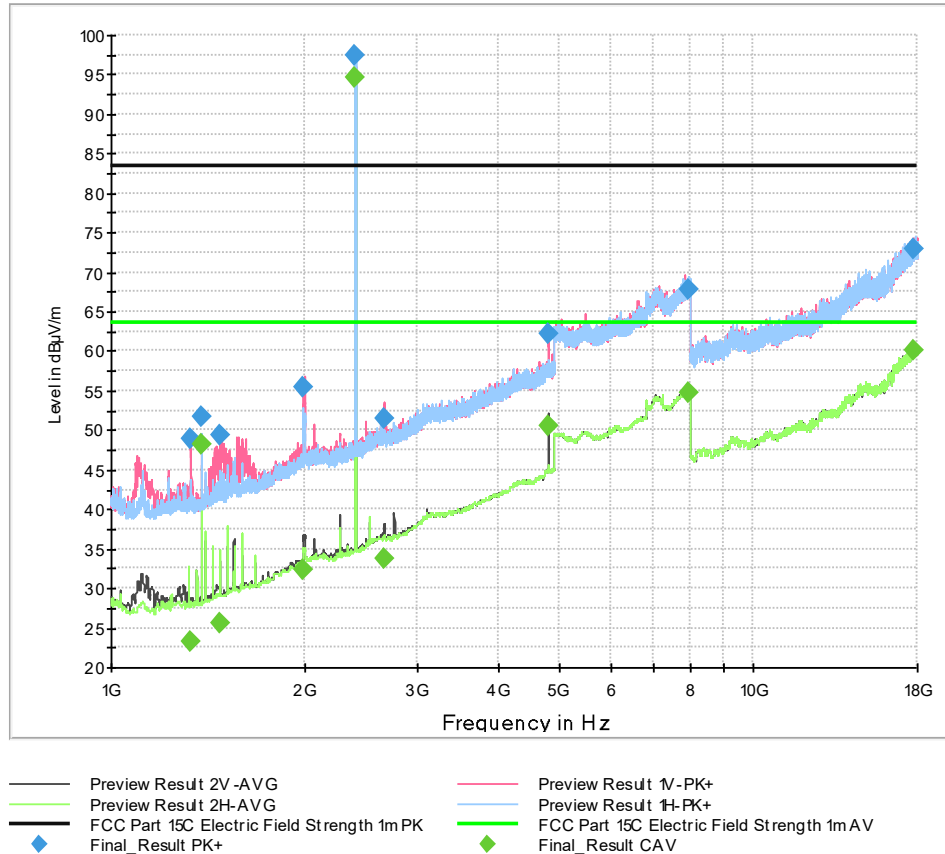


Final Results:

Frequency MHz	Max- Peak dBµV/m	CAver- age dBµV/m	Limit dBµV/m	Mar- gin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
1327.500000	---	23.28	63.50	40.22	1000.0	1000.000	102.0	V	159.0	28.5
1327.500000	48.88	---	83.50	34.62	1000.0	1000.000	102.0	V	159.0	28.5
1379.750000	51.80	---	83.50	31.70	1000.0	1000.000	104.0	H	140.0	28.8
1379.750000	---	48.31	63.50	15.19	1000.0	1000.000	104.0	H	140.0	28.8
1481.000000	49.35	---	83.50	34.15	1000.0	1000.000	100.0	V	-151.0	29.6
1481.000000	---	25.55	63.50	37.95	1000.0	1000.000	100.0	V	-151.0	29.6
1995.750000	---	32.27	63.50	31.23	1000.0	1000.000	150.0	V	175.0	32.9
1995.750000	55.51	---	83.50	28.00	1000.0	1000.000	150.0	V	175.0	32.9
2401.750000	---	94.74	63.50	-31.24	1000.0	1000.000	109.0	H	167.0	33.9
2401.750000	97.47	---	83.50	-13.97	1000.0	1000.000	109.0	H	167.0	33.9
2656.750000	51.58	---	83.50	31.92	1000.0	1000.000	104.0	V	-160.0	35.1
2656.750000	---	33.79	63.50	29.71	1000.0	1000.000	104.0	V	-160.0	35.1
4804.500000	62.14	---	83.50	21.36	1000.0	1000.000	138.0	V	-39.0	41.6
4804.500000	---	50.66	63.50	12.84	1000.0	1000.000	138.0	V	-39.0	41.6
7909.000000	67.75	---	83.50	15.75	1000.0	1000.000	116.0	H	-110.0	46.0
7909.000000	---	54.82	63.50	8.68	1000.0	1000.000	116.0	H	-110.0	46.0
17737.250000	72.88	---	83.50	10.62	1000.0	1000.000	122.0	V	55.0	58.6
17737.250000	---	60.07	63.50	3.43	1000.0	1000.000	122.0	V	55.0	58.6



Product Service

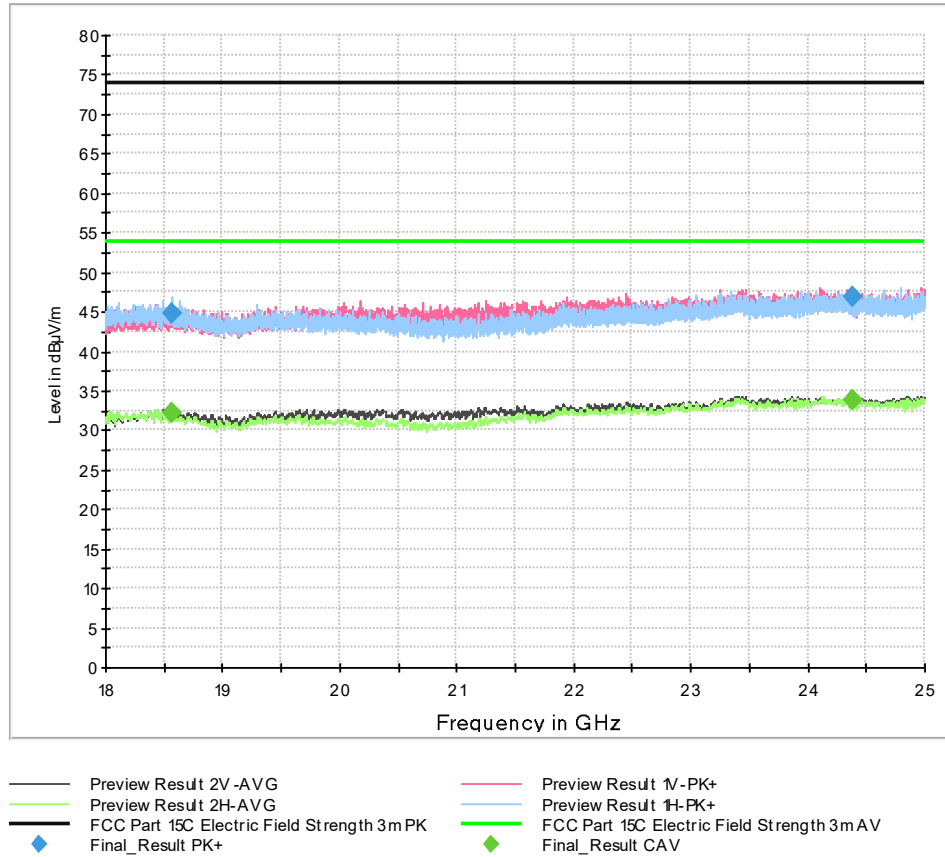

Final Results:

Frequency MHz	Max- Peak dBμV/m	CAver- age dBμV/m	Limit dBμV/m	Mar- gin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
18569.750000	---	32.09	53.98	21.89	1000.0	1000.000	122.0	H	9.0	24.1
18569.750000	44.69	---	73.98	29.29	1000.0	1000.000	122.0	H	9.0	24.1
24389.000000	---	33.92	53.98	20.06	1000.0	1000.000	250.0	V	176.0	29.2
24389.000000	46.87	---	73.98	27.11	1000.0	1000.000	250.0	V	176.0	29.2



2.6.8 Test Location and Test Equipment

The test was carried out in a non-shielded room and semi anechoic room no. 3:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra- tion Pe- riod (months)</i>	<i>Calibration Due</i>
Climatic test chamber	ESPEC	PL-4 J	38958	18	2025-01-31
Switching device	Rohde & Schwarz	OSP120	20248	36	2026-07-31
Switching device	Rohde & Schwarz	OSP120	38807	36	2026-08-31
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31
Signal and Spectrum Analyser	Rohde & Schwarz	FSW43	53496	12	2025-04-30
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	19691	36	2027-04-30
Double ridged horn antenna	Rohde & Schwarz	HF907	40089	24	2024-10-31
Horn Antenna with preamplifier	Rohde & Schwarz	A-INFOMW LB- 180400H-KF + TS-LNA 1840	43661	24	2025-01-17
Loop antenna	Schwarzbeck	FMZB 1519 B	44334	36	2026-06-30
EMI test receiver	Rohde & Schwarz	ESR7	61814	12	2025-06-30
Semi anechoic room	Frankonia	Cabin no. 3	56331	35	2025-07-07
EMC measurement software	Rohde & Schwarz	EMC32 TS8997 – V10.60.00	44381	---	---

Table 17



2.7 Temperature Stability

2.7.1 Specification Reference

ISED RSS-Gen, Clause 6.11, 8.11

2.7.2 Equipment under Test and Modification State

Legic on Module (LoM); S/N ---; Modification state 0

2.7.3 Date of Test

2024-11-19

2.7.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	42 %


2.7.5 Specification Limits

If the stability of the license-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80 % of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 85 MHz – 72 MHz, 76 MHz – 88 MHz, 174 MHz – 216 MHz, and 470 MHz – 602 MHz, unless otherwise indicated.



2.7.6 Test Method

The test was performed according to ANSI C63.10, section 6.8.

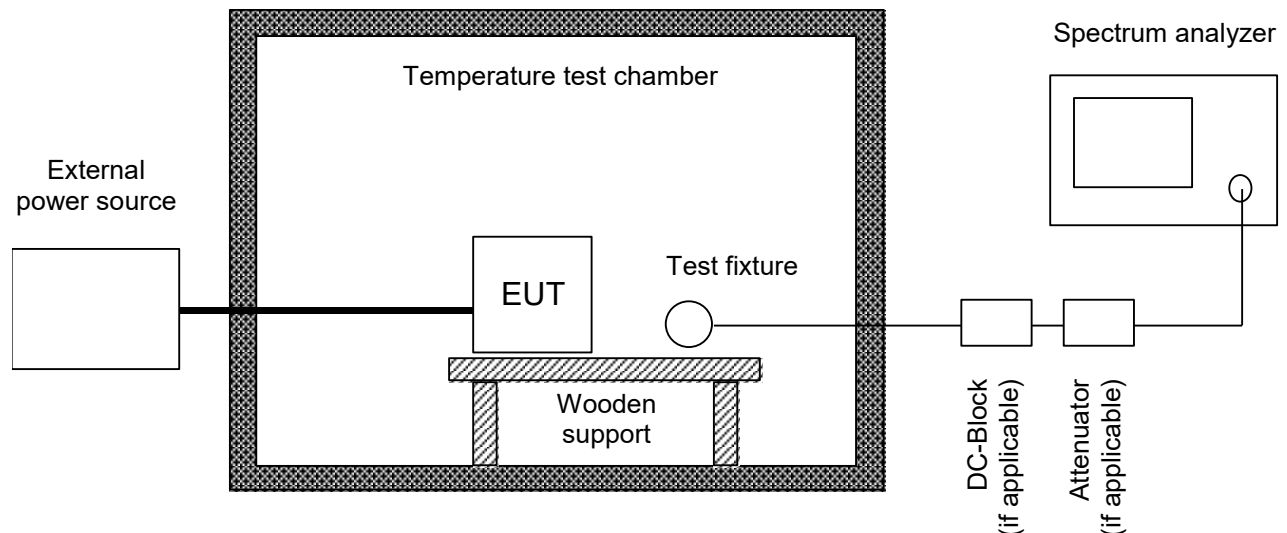

The frequency tolerance of the carrier signal is measured over a temperature variation of -20°C to $+50^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20°C . Temperature and voltage range may vary if the manufacturer states another temperature or voltage range.

If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as a DC block and appropriate (50 Ω) attenuators. In case where the EUT does not provide an antenna connector or a test fixture is used.

For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:

- The maximum battery voltage as delivered by a new battery or 115 % of the battery nominal voltage;
- The battery nominal voltage
- 85 % of the battery nominal voltage
- The battery operating end point voltage which shall be specified by the equipment manufacturer.

The EUT is operating providing an unmodulated carrier for frequency error tests. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.

If an unmodulated carrier is not available a significant and stable point of the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1 % of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance is larger than the uncertainty of the measured frequency tolerance.



2.7.7 Test Results

<i>Temperature</i>	<i>Channel</i>	<i>Supply Voltage</i>	<i>Band Edge Left (MHz)</i>	<i>Band Edge Right (MHz)</i>	<i>Center Frequency (MHz)</i>	<i>Frequency drift (%)</i>
20 °C	37	5 V	2401.485000	2402.535000	2402.010000	0
20 °C	17	5 V	2439.475000	2440.545000	2440.010000	0
20 °C	39	5 V	2479.465000	2480.575000	2480.020000	0
20 °C	37	4.5 V	2401.475000	2402.535000	2402.005000	-0.002081590002
20 °C	17	4.5 V	2439.475000	2440.535000	2440.005000	-0.002049171930
20 °C	39	4.5 V	2479.295000	2480.885000	2480.090000	0.02822557883
20 °C	37	5.5 V	2401.475000	2402.525000	2402.000000	-0.004163180004
20 °C	17	5.5 V	2439.465000	2440.535000	2440.000000	-0.004098343859
20 °C	39	5.5 V	2479.275000	2480.895000	2480.085000	0.02620946605
- 30 °C	37	5 V	2401.485000	2402.545000	2402.015000	0.002081590002
- 30 °C	17	5 V	2439.485000	2440.545000	2440.015000	0.002049171930
- 30 °C	39	5 V	2479.445000	2480.545000	2479.995000	-0.01008056387
85 °C	37	5 V	2401.455000	2402.515000	2401.985000	-0.01040795001
85 °C	17	5 V	2439.455000	2440.535000	2439.995000	-0.006147515789
85 °C	39	5 V	2479.455000	2480.535000	2479.995000	-0.01008056387

Table 18



2.7.8 Test Location and Test Equipment

The test was carried out in a non-shielded room:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra- tion Pe- riod (months)</i>	<i>Calibration Due</i>
Climatic test chamber	ESPEC	PL-4 J	38958	18	2025-01-31
Switching device	Rohde & Schwarz	OSP120	20248	36	2026-07-31
Switching device	Rohde & Schwarz	OSP120	38807	36	2026-08-31
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31
EMC measurement software	Rohde & Schwarz	EMC32 TS8997 – V10.60.00	44381	---	---

Table 19



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

<i>Radio Interference Emission Testing</i>		
<i>Test Name</i>	<i>kp</i>	<i>Expanded Uncertainty</i>
Conducted Voltage Emission		
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB
100 kHz to 200 MHz (50Ω/5μH AMN)	2	± 3.6 dB
Discontinuous Conducted Emission		
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB
Conducted Current Emission		
9 kHz to 200 MHz	2	± 3.5 dB
Magnetic Fieldstrength		
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB
Radiated Emission		
30 MHz to 300 MHz	2	± 4.9 dB
300 MHz to 1 GHz	2	± 5.0 dB
1 GHz to 6 GHz	2	± 4.6 dB
Test distance 10 m		
30 MHz to 300 MHz	2	± 4.9 dB
300 MHz to 1 GHz	2	± 4.9 dB
The expanded uncertainty reported according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$		

Table 20 Measurement uncertainty based on CISPR 16-4-2



<i>Radio Interference Emission Testing</i>		
<i>Test Name</i>	<i>kp</i>	<i>Expanded Uncertainty</i>
Occupied Bandwidth	2	± 5 %
Conducted Power		
9 kHz ≤ f < 30 MHz	2	± 1.0 dB
30 MHz ≤ f < 1 GHz	2	± 1.5 dB
1 GHz ≤ f ≤ 40 GHz	2	± 2.5 dB
1 MS/s power sensor (TS8997)	2	± 1.5 dB
Occupied Bandwidth	2	± 5 %
Power Spectral Density	2	± 3.0 dB
Radiated Power		
25 MHz – 6 GHz	1.96	±4.4 dB
1 GHz – 18 GHz	1.96	±4.7 dB
18 GHz – 40 GHz	1.96	±4.9 dB
40 GHz – 325 GHz	1.96	±6.1 dB
Conducted Spurious Emissions	2	± 3.0 dB
Radiated Spurious Emissions	2	± 6.0 dB
Voltage		
DC	2	± 1.0 %
AC	2	± 2.0 %
Time (automatic)	2	± 5 %
Frequency	2	± 10 ⁻⁷
The expanded uncertainty reported according to ETSI TR 100 028:2001 is based on a standard uncertainty multiplied by a coverage factor of kp = 2, providing a level of confidence of p = 95.45%		

Table 21 Measurement uncertainty based on ETSI TR 100 028

The measurement uncertainty in the laboratory is less than or equal to the maximum measurement uncertainty according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 (U_{CISPR}) and as specified in the test report below. This normative regulation means that the measured value is also the value to be assessed in relation to the limit value.



Test Name	Expanded Uncertainty
Occupied Bandwidth	±5 %
Conducted Power	
9 kHz ≤ f < 30 MHz	±1.0 dB
30 MHz ≤ f < 1 GHz	±1.5 dB
1 GHz ≤ f ≤ 40 GHz	±2.5 dB
1 MS/s power sensor (2.4 / 5 GHz band)	±1.5 dB
Power Spectral Density	±3.0 dB
Radiated Power	
25 MHz – 26.5 GHz	±6.0 dB
26.5 GHz – 66 GHz	±8.0 dB
40 GHz – 325 GHz	±10.0 dB
Conducted Spurious Emissions	±3.0 dB
Radiated Field Strength 9 kHz – 40 GHz	±6.0 dB
Voltage	
DC	± 1.0 %
AC	± 2.0 %
Time (automatic)	± 5 %
Frequency	± 10 ⁻⁷

Table 22 Decision Rule: Maximum allowed measurement uncertainty

END OF TEST REPORT