

08:50:03 OCT 23, 2002

REF 35.0 dBm

AT 30 dB

PEAK

LOG

10

dB/

OFFST


20.0

dB

VA VB

SC FC

CORR

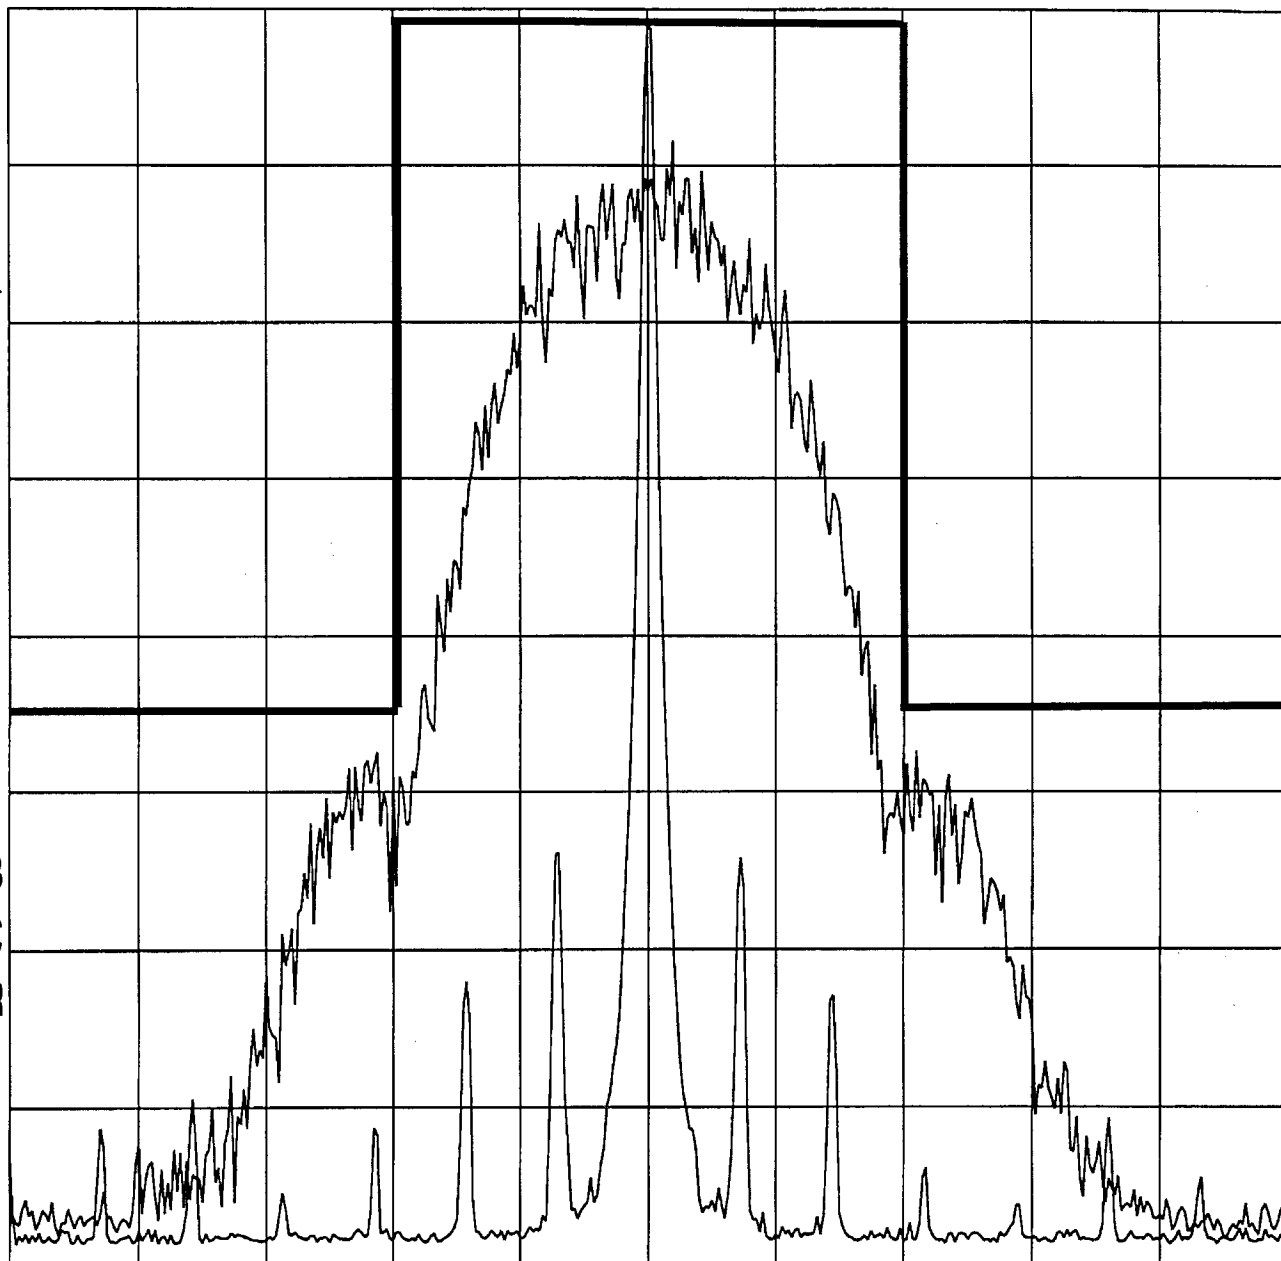

CENTER 1.880000 GHz

SPAN 1.000 MHz

#RES BW 3.0 kHz

#VBW 300 kHz

SWP 333 msec

Customer:
Test Sample:
Model No:
Test Method:
Notes:

Cellular Specialties, Inc.
Bidirectional Amplifier
610 PCS
Occupied Bandwidth, FCC Part 2, para 2.1049
Uplink Frequency 1880 MHz
Modulation: GSM

Date: 10/23/02

Tech: T. Hannemann

Sheet 1 of 2



Retlif Testing Laboratories

Report No. R-4023N

08:57:28 OCT 23, 2002

REF 35.0 dBm

AT 30 dB

PEAK

LOG

10

dB/

OFFST


20.0

dB

VA VB

SC FC

CORR

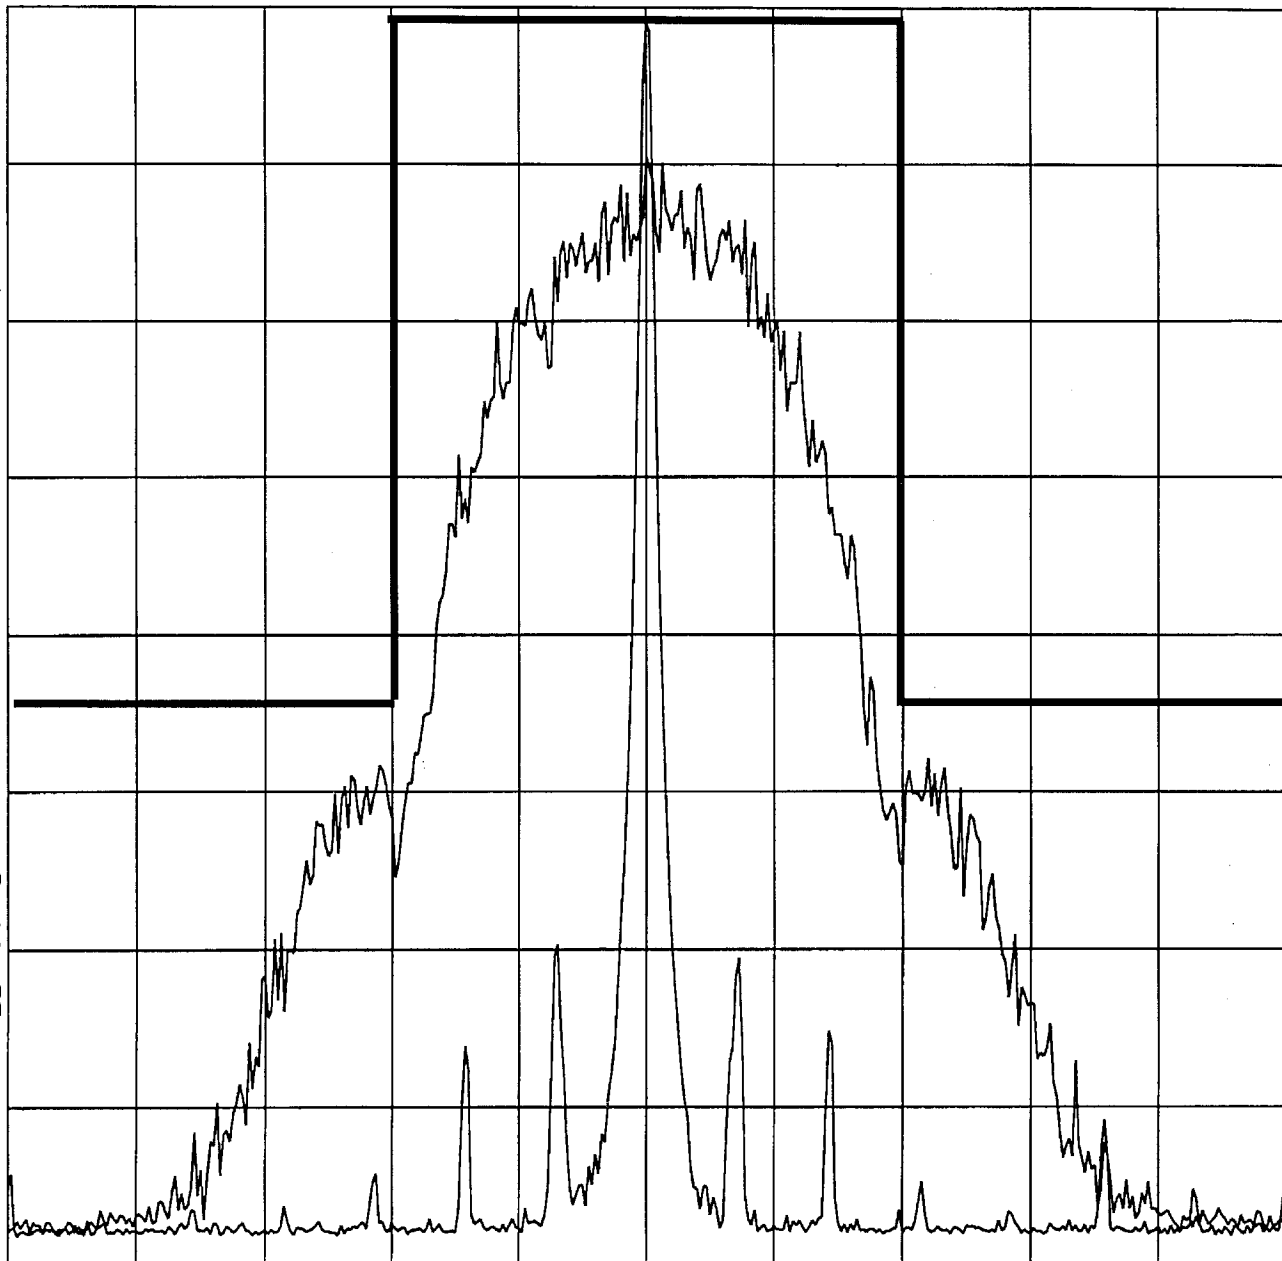

CENTER 1.960000 GHz

SPAN 1.000 MHz

#RES BW 3.0 kHz

#VBW 300 kHz

SWP 333 msec

Customer:
Test Sample:
Model No:
Test Method:
Notes:

Cellular Specialties, Inc.
Bidirectional Amplifier
610 PCS
Occupied Bandwidth, FCC Part 2, para 2.1049
Downlink Frequency 1960 MHz
Modulation: GSM

Date: 9/23/02

Tech: T. Hannemann

Sheet 2 of 2



Retlif Testing Laboratories

Report No. R-4023N