


Label Drawing

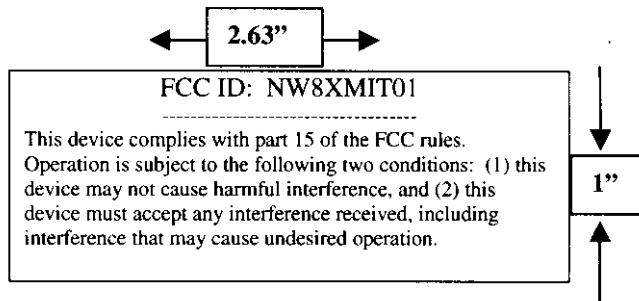

NOTES:

1. MATERIAL: 2MIL (.002) WHITE MYLAR-WHITE BACKGROUND.
2. PERMANENT ADHESIVE (3M-468 OR EQUIVALENT).
3. LAMINATED AFTER PRINTING WITH 1 MIL (.001) TRANSPARENT MATTE MYLAR.
4. LETTERING TO BE BLACK PERMANENT INK, 9 POINT MEGARON BOLD OR EQUIVALENT.
5. LABELS TO SUPPLIED ON ROLLS.
6. PLACE LABEL ON SOLDER SIDE OF BOARD IN ANY OPEN AREA.

SAMPLE OF ID LABEL & LOCATION DRAWING

Location Diagram for FCC Identifier

