



EMI – TEST REPORT

- FCC Part 15.225 -

Type / Model Name : SIMATIC RF285R

Product Description : RF-Long-Range Reader with external Antenna

Applicant : Siemens AG

Address : Gleiwitzer Str. 555

D-90475 Nürnberg

Manufacturer : Siemens AG

Address : Gleiwitzer Str. 555

D-90475 Nürnberg

Test Result according to the standards listed in clause 1 test standards:	POSITIVE
---	----------

Test Report No. :	T43141-00-01HU	10. July 2018 Date of issue
-------------------	----------------	--------------------------------



Deutsche
Akkreditierungsstelle
D-PL-12030-01-00

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test results
without the written permission of the test laboratory.

Contents

1	<u>TEST STANDARDS</u>	3
2	<u>SUMMARY</u>	4
3	<u>EQUIPMENT UNDER TEST</u>	5
3.1	Photo documentation of the EUT – See attachment A	5
3.2	Power supply system utilised	5
3.3	Short description of the equipment under test (EUT)	5
4	<u>TEST ENVIRONMENT</u>	6
4.1	Address of the test laboratory	6
4.2	Environmental conditions	6
4.3	Statement of the measurement uncertainty	6
4.1	Measurement Protocol for FCC, VCCI and AUSTEL	7
5	<u>TEST CONDITIONS AND RESULTS</u>	8
5.1	Conducted emissions	8
5.2	Field strength of the fundamental wave	16
5.3	Spurious emissions	20
5.4	Frequency tolerance	26
5.5	20 dB Bandwidth	28
5.6	Transmitter spectrum mask	31
5.7	Receiver radiated emissions	38
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	39

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (October, 2017)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths
Part 15, Subpart A, Section 15.38	Incorporation by reference

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (October, 2017)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.215	Additional provisions to the general radiated emission limitations
Part 15, Subpart C, Section 15.225	Operation within the band 13.110 - 14.010 MHz

FCC Rules and Regulations Part 1, Subpart I - Procedures Implementing the National Environmental Policy Act of 1969

Part 1, Subpart I, Section 1.1310	Radiofrequency radiation exposure limits
Part 1, Subpart 2, Section 2.1093	Radiofrequency radiation exposure evaluation: portable device

OET Bulletin 65, 65A, 65B, 65C Edition 97-01, August 1997 – Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.

ANSI C63.10: 2013	Testing Unlicensed Wireless Devices
ANSI C95.1:2005	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
CISPR 16-4-2: 2003	Uncertainty in EMC measurement

2 SUMMARY

GENERAL REMARKS:

The EuT is a RF-Long-Range Reader with external antenna which is working at 13.56 MHz.
For testing, the Reader was set in TX-continuous mode. The test software is available for testing only.

All radiated measurements were made with the device positioned in table top orientation.
Such as orientations X, Y and Z (Lying flat, lying on its end and lying on its side).
The values in the test report shows only the maximum measured value.

The receiver is permanently co-located within the transmitter. Therefore the receive mode is too short and was tested together with the transmitter in operating mode.

Following antennas are provided with the RF285R:

- Antenna D1
- Antenna D2
- Antenna D5
- Antenna D6

For detailed information about the different antennas please refer to the user manual.

FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 09. May 2018

Testing concluded on : 14. June 2018

Checked by:

Tested by:

Klaus Gegenfurtner
Teamleader Radio

Markus Huber

3 EQUIPMENT UNDER TEST

3.1 Photo documentation of the EUT – See attachment A

3.2 Power supply system utilised

Power supply voltage : 24.0 V / DC

3.3 Short description of the equipment under test (EUT)

The EuT is a RF-Long-Range Reader with external antenna. The reader is used for wireless identification of a variety of objects.

Number of tested samples: 1
Serial number: Prototype

EUT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- Cont. tag reading mode at 13.56 MHz, Power setting: 2.0 W

- Standby

EUT configuration:

The following peripheral devices and interface cables were connected during the measurements:

- Laptop and test software	Model : Laptop and test software
- Test tag	Model : Test tag
- Power supply - 6GT2898-0AC81, Ser.Nr.:1737S175265	Model : Power supply - 6GT2898-0AC81, Ser.Nr.:1737S175265

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	$\pm 3.29 \text{ dB}$
20 dB Bandwidth	Center frequency of EuT	95%	$\pm 2.5 \times 10^{-7}$
99% Occupied Bandwidth	Center frequency of EuT	95%	$\pm 2.5 \times 10^{-7}$
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	$\pm 3.53 \text{ dB}$
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	$\pm 3.71 \text{ dB}$
Radiated Spurious Emissions	1000 MHz to 10000 MHz	95%	$\pm 2.34 \text{ dB}$
Peak conducted output power	902 MHz to 928 MHz	95%	$\pm 0.35 \text{ dB}$
Conducted Spurious Emissions	9 kHz to 10000 MHz	95%	$\pm 2.15 \text{ dB}$

4.1 Measurement Protocol for FCC

4.1.1 GENERAL INFORMATION

4.1.1.1 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

4.2 Deviations or Exclusions from the Requirements and Standards

Conducted emission test was performed with maximum possible output power and 50 Ohm load, to have no influence to the measurement.

Following tests were performed with all antennas which were provided with the EuT:

- Field strength of the fundamental wave
- Spurious emissions

Following tests were performed conducted with maximum possible output power:

- Frequency tolerance
- Bandwidth measurement

Following test was performed conducted, related to the measured radiated output power from the fundamental wave:

- Transmitter spectrum mask

5 TEST CONDITIONS AND RESULTS

5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up



5.1.3 Applicable standard

According to FCC Part 15, Section 15.107(a):

Except for Class A devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the given limits.

5.1.4 Description of Measurement

The measurements are performed following the procedures set out in ANSI C63.10 described under item 4.4.3. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

5.1.5 Test result

Frequency range:	0.15 MHz - 30 MHz
Min. limit margin	3.89 dB at 0.294 MHz

FCC ID: NXW-RF285R

Limit according to FCC Part 15, Section 15.107(a):

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

The requirements are **FULFILLED**.


Remarks:

FCC ID: NXW-RF285R

5.1.6 Test protocol

Test point: L1
 Operation mode: Tag reading mode
 Remarks: Power supply - 6GT2898-0AC81
 Tested by: Huber Markus

Result: passed

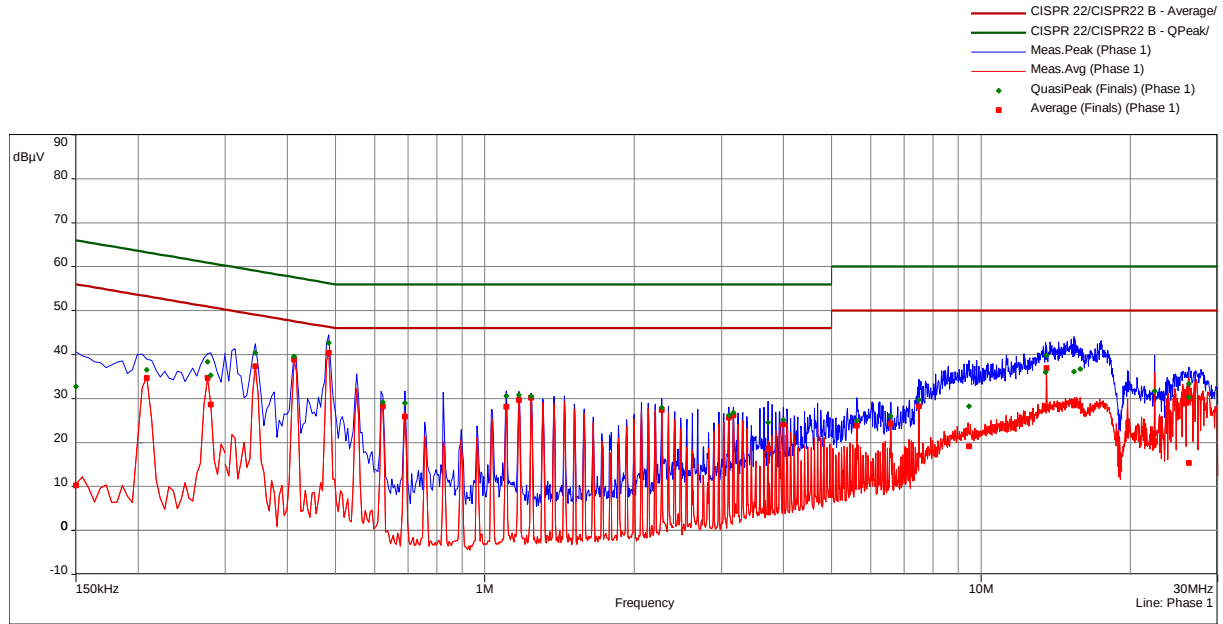


freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
0.15	1	32.74	33.26	66.00	10.23	45.77	56.00	Phase 1	10.07
0.2085	1	36.51	26.76	63.26	34.70	18.57	53.26	Phase 1	10.09
0.276	1	38.40	22.54	60.94	34.66	16.27	50.94	Phase 1	10.11
0.345	2	40.47	18.62	59.08	37.37	11.71	49.08	Phase 1	10.13
0.4125	2	39.60	17.99	57.60	38.84	8.76	47.60	Phase 1	10.14
0.4845	2	42.66	13.60	56.26	40.38	5.88	46.26	Phase 1	10.14
0.6225	3	29.19	26.81	56.00	28.26	17.74	46.00	Phase 1	10.16
0.69	3	28.94	27.06	56.00	25.94	20.06	46.00	Phase 1	10.17
1.104	3	30.60	25.40	56.00	28.11	17.89	46.00	Phase 1	10.20
1.1715	3	30.82	25.18	56.00	29.64	16.36	46.00	Phase 1	10.21
1.2405	4	30.50	25.50	56.00	30.24	15.76	46.00	Phase 1	10.22
2.2755	4	27.93	28.07	56.00	27.45	18.55	46.00	Phase 1	10.29
3.102	5	26.26	29.74	56.00	25.73	20.27	46.00	Phase 1	10.35
3.1695	5	26.77	29.23	56.00	26.23	19.77	46.00	Phase 1	10.35
3.723	5	24.58	31.42	56.00	18.50	27.50	46.00	Phase 1	10.37
3.9975	5	25.22	30.78	56.00	24.18	21.82	46.00	Phase 1	10.40
7.5	6	29.72	30.28	60.00	28.23	21.77	50.00	Phase 1	10.64
9.4665	6	28.28	31.72	60.00	19.17	30.83	50.00	Phase 1	10.72
13.4925	7	36.01	23.99	60.00	28.00	22.00	50.00	Phase 1	11.05
13.56	7	39.78	20.22	60.00	36.95	13.05	50.00	Phase 1	11.06
15.3915	7	36.12	23.88	60.00	28.50	21.50	50.00	Phase 1	11.20
15.8415	7	36.72	23.28	60.00	28.33	21.67	50.00	Phase 1	11.23
22.3905	8	31.75	28.25	60.00	22.08	27.92	50.00	Phase 1	11.57
26.229	8	33.35	26.65	60.00	29.85	20.15	50.00	Phase 1	11.70
26.2425	8	30.33	29.67	60.00	15.39	34.61	50.00	Phase 1	11.70

FCC ID: NXW-RF285R

Test point: N
 Operation mode: Tag reading mode
 Remarks: Power supply
 6GT2898-0AC81
 Tested by: Huber Markus

Result: passed

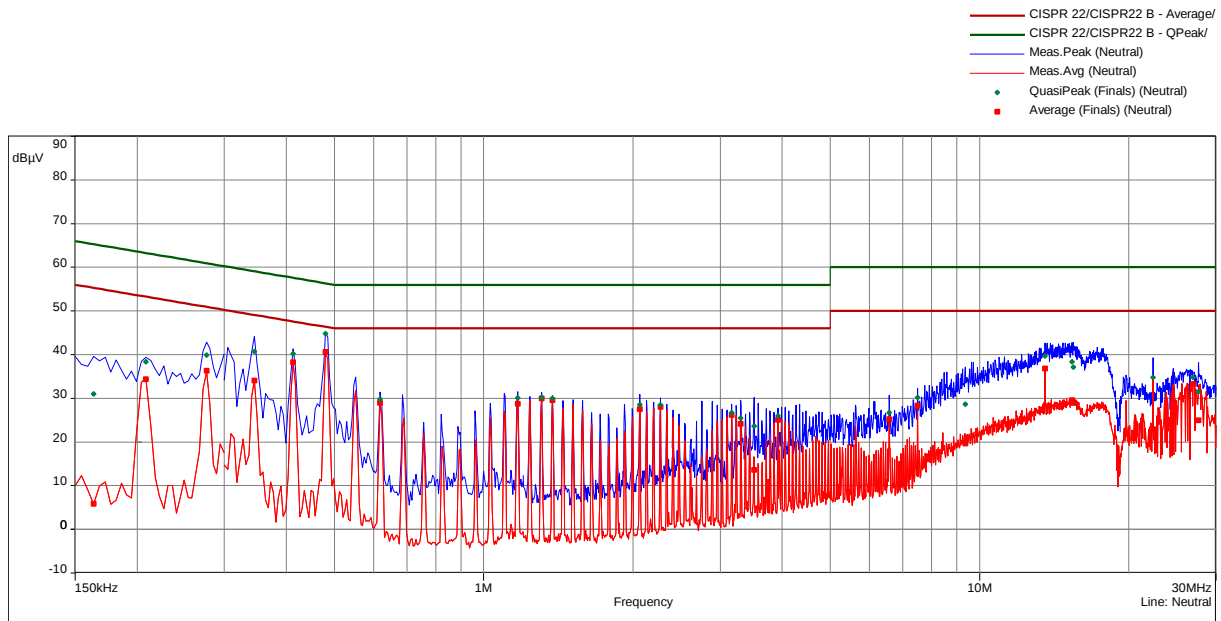


CISPR 22/CISPR22B

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
0.1635	9	31.03	34.25	65.28	5.81	49.47	55.28	Neutral	10.08
0.2085	9	38.35	24.92	63.26	34.42	18.85	53.26	Neutral	10.11
0.276	9	39.95	20.99	60.94	36.33	14.60	50.94	Neutral	10.12
0.345	10	40.74	18.34	59.08	34.11	14.98	49.08	Neutral	10.13
0.4125	10	40.20	17.39	57.60	38.27	9.33	47.60	Neutral	10.14
0.48	10	44.76	11.58	56.34	40.67	5.67	46.34	Neutral	10.14
0.618	11	29.75	26.25	56.00	28.93	17.07	46.00	Neutral	10.16
1.1715	11	30.13	25.87	56.00	28.76	17.24	46.00	Neutral	10.21
1.308	12	30.24	25.76	56.00	30.00	16.00	46.00	Neutral	10.23
1.3755	12	29.95	26.05	56.00	29.59	16.41	46.00	Neutral	10.24
2.064	12	28.56	27.44	56.00	27.55	18.45	46.00	Neutral	10.27
2.271	12	28.42	27.58	56.00	28.03	17.97	46.00	Neutral	10.29
3.165	13	26.76	29.24	56.00	26.22	19.78	46.00	Neutral	10.35
3.3	13	25.49	30.51	56.00	24.13	21.87	46.00	Neutral	10.35
3.5115	13	23.68	32.32	56.00	13.60	32.40	46.00	Neutral	10.35
3.921	13	26.00	30.00	56.00	25.08	20.92	46.00	Neutral	10.38
6.582	14	26.67	33.33	60.00	25.23	24.77	50.00	Neutral	10.55
7.5	14	30.20	29.80	60.00	28.39	21.61	50.00	Neutral	10.60
9.363	14	28.68	31.32	60.00	19.68	30.32	50.00	Neutral	10.65
13.56	15	39.75	20.25	60.00	36.89	13.11	50.00	Neutral	10.91
15.369	15	38.38	21.62	60.00	29.60	20.40	50.00	Neutral	11.02
15.4545	15	37.13	22.87	60.00	29.01	20.99	50.00	Neutral	11.02
22.377	16	34.84	25.16	60.00	22.92	27.08	50.00	Neutral	11.26
26.949	16	34.78	25.22	60.00	33.28	16.72	50.00	Neutral	11.20
27.642	16	31.47	28.53	60.00	24.97	25.03	50.00	Neutral	11.17

FCC ID: NXW-RF285R

Test point: L1
 Operation mode: Standby mode
 Remarks: Power supply
 6GT2898-0AC81
 Tested by: Huber Markus

Result: passed

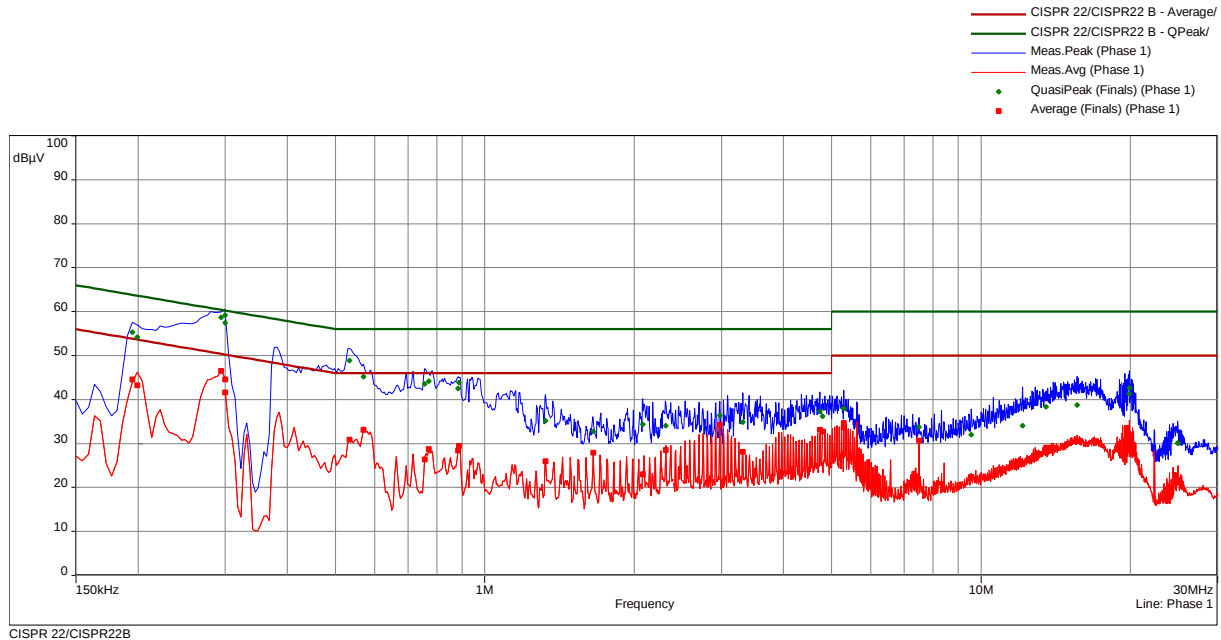

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
0.195	1	55.29	8.53	63.82	44.55	9.28	53.82	Phase 1	10.09
0.1995	1	54.21	9.42	63.63	43.25	10.38	53.63	Phase 1	10.09
0.294	1	58.70	1.71	60.41	46.52	3.89	50.41	Phase 1	10.12
0.3	1	59.20	1.04	60.24	44.55	5.70	50.24	Phase 1	10.12
0.3	2	57.45	2.79	60.24	41.61	8.63	50.24	Phase 1	10.12
0.534	2	48.85	7.15	56.00	30.87	15.13	46.00	Phase 1	10.14
0.57	2	45.20	10.80	56.00	33.19	12.81	46.00	Phase 1	10.15
0.7575	3	43.56	12.44	56.00	26.38	19.62	46.00	Phase 1	10.18
0.771	3	44.15	11.85	56.00	28.75	17.25	46.00	Phase 1	10.18
0.8835	3	42.55	13.45	56.00	28.40	17.60	46.00	Phase 1	10.18
0.888	3	43.87	12.13	56.00	29.43	16.57	46.00	Phase 1	10.18
1.326	4	35.20	20.80	56.00	25.96	20.04	46.00	Phase 1	10.24
1.6545	4	32.70	23.30	56.00	27.92	18.08	46.00	Phase 1	10.26
2.082	4	34.33	21.67	56.00	22.97	23.03	46.00	Phase 1	10.27
2.316	4	34.07	21.93	56.00	28.53	17.47	46.00	Phase 1	10.30
2.976	5	36.44	19.56	56.00	34.22	11.78	46.00	Phase 1	10.34
3.309	5	34.86	21.14	56.00	28.17	17.83	46.00	Phase 1	10.35


FCC ID: NXW-RF285R

freq MHz	SR	QP dB(μV)	margin dB	limit dB	AV dB(μV)	margin dB	limit dB	line	corr dB
4.74	5	37.29	18.71	56.00	33.16	12.84	46.00	Phase 1	10.44
4.794	5	36.16	19.84	56.00	32.69	13.31	46.00	Phase 1	10.44
5.2905	6	37.92	22.08	60.00	34.63	15.37	50.00	Phase 1	10.48
5.295	6	38.03	21.97	60.00	33.67	16.33	50.00	Phase 1	10.48
7.5	6	33.75	26.25	60.00	30.68	19.32	50.00	Phase 1	10.64
9.552	6	31.97	28.03	60.00	22.45	27.55	50.00	Phase 1	10.72
12.1245	7	34.01	25.99	60.00	25.35	24.65	50.00	Phase 1	10.93
13.524	7	38.38	21.62	60.00	29.02	20.98	50.00	Phase 1	11.06
15.612	7	38.78	21.22	60.00	30.57	19.43	50.00	Phase 1	11.22
19.902	8	41.35	18.65	60.00	28.49	21.51	50.00	Phase 1	11.45
19.911	8	42.63	17.37	60.00	30.72	19.28	50.00	Phase 1	11.45
24.888	8	30.11	29.89	60.00	21.16	28.84	50.00	Phase 1	11.67
24.987	8	30.21	29.79	60.00	21.79	28.21	50.00	Phase 1	11.68

FCC ID: NXW-RF285R

Test point: N
Operation mode: Standby mode
Remarks: Power supply
6GT2898-0AC81
Tested by: Huber Markus

Result: passed

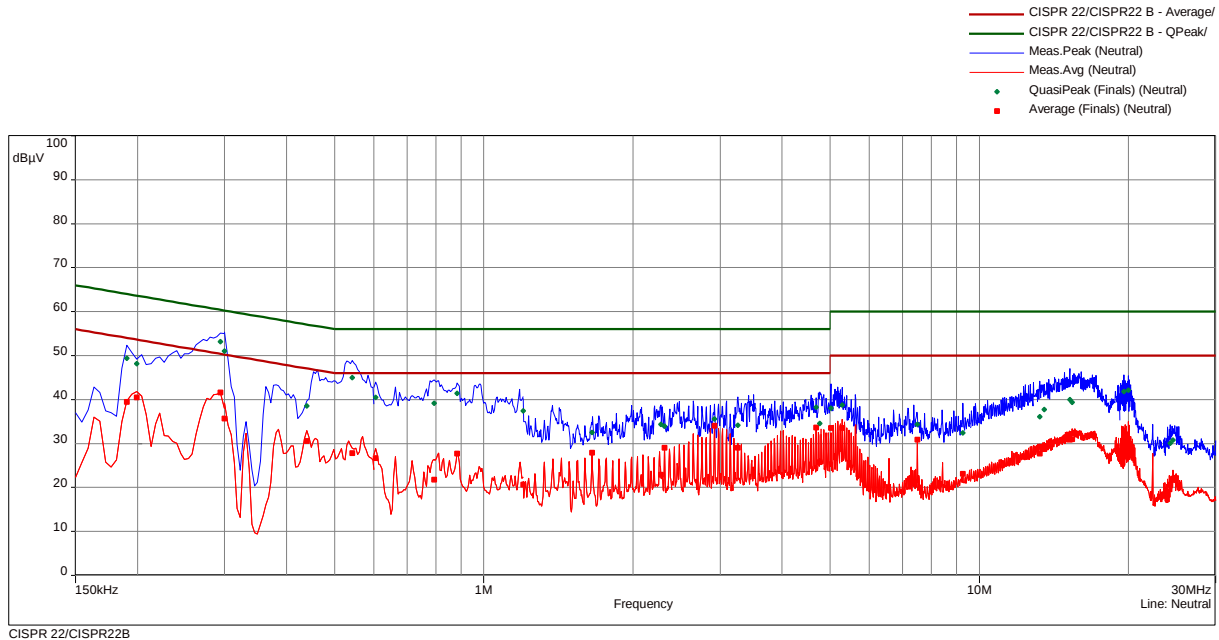

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
0.1905	9	49.43	14.58	64.01	39.44	14.57	54.01	Neutral	10.10
0.1995	9	48.15	15.48	63.63	40.54	13.09	53.63	Neutral	10.11
0.294	9	53.16	7.25	60.41	41.62	8.79	50.41	Neutral	10.12
0.3	10	51.04	9.20	60.24	35.72	14.52	50.24	Neutral	10.12
0.4395	10	38.52	18.55	57.07	30.63	16.44	47.07	Neutral	10.14
0.543	10	44.95	11.05	56.00	27.83	18.17	46.00	Neutral	10.15
0.6045	11	40.52	15.48	56.00	26.70	19.30	46.00	Neutral	10.16
0.7935	11	39.21	16.79	56.00	21.75	24.25	46.00	Neutral	10.18
0.8835	11	41.46	14.54	56.00	27.75	18.25	46.00	Neutral	10.18
1.2	12	37.43	18.57	56.00	20.65	25.35	46.00	Neutral	10.22
1.6545	12	32.51	23.49	56.00	27.92	18.08	46.00	Neutral	10.26
2.28	12	34.37	21.63	56.00	22.88	23.12	46.00	Neutral	10.29
2.316	12	33.94	22.06	56.00	29.06	16.94	46.00	Neutral	10.30
2.922	13	35.57	20.43	56.00	34.04	11.96	46.00	Neutral	10.34
3.255	13	34.13	21.87	56.00	29.07	16.93	46.00	Neutral	10.35
4.686	13	38.27	17.73	56.00	33.70	12.30	46.00	Neutral	10.43
4.7625	13	34.61	21.39	56.00	25.73	20.27	46.00	Neutral	10.43

FCC ID: NXW-RF285R

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
5.016	14	38.07	21.93	60.00	33.57	16.43	50.00	Neutral	10.45
5.295	14	38.72	21.28	60.00	33.56	16.44	50.00	Neutral	10.46
7.5	14	34.33	25.67	60.00	30.86	19.14	50.00	Neutral	10.60
9.264	14	32.45	27.55	60.00	23.10	26.90	50.00	Neutral	10.65
13.245	15	36.10	23.90	60.00	27.73	22.27	50.00	Neutral	10.89
13.5195	15	37.73	22.27	60.00	28.70	21.30	50.00	Neutral	10.91
15.225	15	39.98	20.02	60.00	30.93	19.07	50.00	Neutral	11.01
15.4095	15	39.41	20.59	60.00	30.96	19.04	50.00	Neutral	11.02
19.605	16	41.85	18.15	60.00	29.43	20.57	50.00	Neutral	11.23
20.001	16	42.11	17.89	60.00	30.84	19.16	50.00	Neutral	11.25
24.2805	16	30.06	29.94	60.00	20.64	29.36	50.00	Neutral	11.26
24.5775	16	30.75	29.25	60.00	21.79	28.21	50.00	Neutral	11.26

5.2 Field strength of the fundamental wave

For test instruments and accessories used see section 6 Part CPR 1.

5.2.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

5.2.2 Photo documentation of the test set-up

Antenna D1:



Antenna D2:



FCC ID: NXW-RF285R**Antenna D5:****Antenna D6:****5.2.3 Applicable standard**

According to FCC Part 15, Section 15.225(a):

The field strength of any emission within the band 13.553 – 13.567 MHz shall not exceed 15848 $\mu\text{V/m}$ at 30 m.

5.2.4 Description of Measurement

The transmitted field strength of the EUT has to be measured at an open area test site using a tuned receiver and a shielded loop antenna. The setup of the equipment under test will be in accordance with ANSI C63.4. The measurement has been performed at 3 m. The results have been compared to the limits defined at 30 m distances according to FCC Part 15C, Section 15.31(f)(2) using an inverse linear distance extrapolation factor of 40 dB/decade.

5.2.5 Test result
- Antenna D1:
a) Result at a measurement distance of 3m

Frequency (MHz)	Level (dB μ V)	Ant. factor (dB 1/m)	Field strength dB(μ V/m)
13.56	49.9	20.0	69.9

b) Result extrapolated to a distance of 30 m

Frequency (MHz)	Level (dB μ V)	Ant. factor (dB 1/m)	Field strength dB(μ V/m)	Limit dB(μ V/m)	Delta (dB)
13.56	9.9	20.0	29.9	84.0	-51.4

- Antenna D2:
a) Result at a measurement distance of 3m

Frequency (MHz)	Level (dB μ V)	Ant. factor (dB 1/m)	Field strength dB(μ V/m)
13.56	58.3	20.0	78.3

b) Result extrapolated to a distance of 30 m

Frequency (MHz)	Level (dB μ V)	Ant. factor (dB 1/m)	Field strength dB(μ V/m)	Limit dB(μ V/m)	Delta (dB)
13.56	18.3	20.0	38.3	84.0	-45.7

- Antenna D5:
a) Result at a measurement distance of 3m

Frequency (MHz)	Level (dB μ V)	Ant. factor (dB 1/m)	Field strength dB(μ V/m)
13.56	84.6	20.0	104.6

b) Result extrapolated to a distance of 30 m

Frequency (MHz)	Level (dB μ V)	Ant. factor (dB 1/m)	Field strength dB(μ V/m)	Limit dB(μ V/m)	Delta (dB)
13.56	44.6	20.0	64.6	84.0	-19.4

- Antenna D6:
a) Result at a measurement distance of 3m

Frequency (MHz)	Level (dB μ V)	Ant. factor (dB 1/m)	Field strength dB(μ V/m)
13.56	91.9	20.0	111.9

b) Result extrapolated to a distance of 30 m

Frequency (MHz)	Level (dB μ V)	Ant. factor (dB 1/m)	Field strength dB(μ V/m)	Limit dB(μ V/m)	Delta (dB)
13.56	51.9	20.0	71.9	84.0	-12.1

FCC ID: NXW-RF285R

Limit according to FCC Part 15, Section 15.225(a):

Frequency (MHz)	Field strength of fundamental wave		Measurement distance
	($\mu\text{V/m}$)	$\text{dB}(\mu\text{V/m})$	(metres)
13.553 - 13.567	15848	84.0	30

The requirements are **FULFILLED**.

Remarks: Test was performed which all antennas which are provide with the RF285R.

Test set-up pictures are for example to see how the test was performed.

5.3 Spurious emissions

For test instruments and accessories used see section 6 Part SER 1, SER 2.

5.3.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

5.3.2 Photo documentation of the test set-up

Antenna D1:



FCC ID: NXW-RF285R

Antenna D2:



FCC ID: NXW-RF285R

Antenna D5:



FCC ID: NXW-RF285R

Antenna D6:



FCC ID: NXW-RF285R

5.3.3 Applicable standard

According to FCC Part 15C, Section 15.209:

The emissions from an intentional radiator shall not exceed the field strength levels specified in the table below.

5.3.4 Description of Measurement

The spurious emissions of the EUT have to be measured at an open area test site in the frequency range from 9 kHz to 1000 MHz using a tuned EMI receiver. The setup of the equipment under test will be in accordance with ANSI C63.4. The measurement has been performed at 3 m. The results have been compared to the limits defined at 30 m or 300 m distances according to FCC Part 15C, Section 15.31(f)(2) using an inverse linear distance extrapolation factor of 40 dB/decade. The final measurement has been performed with the EMI receiver using Quasi peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used, according to Section 15.209(d).

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz:	RBW:	200 Hz
150 kHz – 30 MHz:	RBW:	9 kHz
30 MHz – 1000 MHz:	RBW:	120 kHz

5.3.5 Test result

Results at a measurement distance of 3m

Frequency [kHz]	L: QP [dBµV]	L: AV [dBµV]	Bandwidth [kHz]	Correct. [dB]	L: QP [dBµV/m]	L: AV [dBµV/m]	Limit [dBµV/m]	Delta [dB]
536.8	24.1	19.7	9.0	20	44.1	39.7	73.0	-33.3
1073.6	23.4	18.0	9.0	20	43.4	38.0	67.0	-29.0
1342.0	21.6	15.9	9.0	20	41.6	35.9	65.0	-29.1

Frequency [MHz]	L: QP [dBµV]	Correct. [dB]	L: QP [dBµV/m]	Limit [dBµV/m]	Delta [dB]
33.78	3.7	13.4	17.1	40.0	-22.9
118.54	9.3	12.9	22.2	43.5	-21.3
517.43	4.8	21.9	26.7	46.0	-19.3

Note: No unwanted emissions from the EuT could be measured in the relevant frequency ranges.
Only ambient noises could be detected!

Test was performed with all antennas which are provided with the RF285R.

FCC ID: NXW-RF285R

Limit according to FCC Part 15 Subpart 15.209(a):

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (metres)
	($\mu\text{V/m}$)	dB($\mu\text{V/m}$)	
0.009 - 0.490	2400/F(kHz)	--	300
0.490 - 1.705	24000/F (kHz)	--	30
1.705 - 30.0	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

The requirements are **FULFILLED**.

Remarks: Measurement has been performed up to 1 GHz.

No undesired emissions occurred in the frequency range from 9 kHz up to 135.6 MHz

5.4 Frequency tolerance

For test instruments and accessories used see section 6 Part FE.

5.4.1 Description of the test location

Test location: AREA4 (Climatic Chamber)

5.4.2 Photo documentation of the test set-up



5.4.3 Applicable standard

According to FCC Part 15, Section 15.225(e):

The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % of the operating frequency over a temperature range of -20 °C to $+50$ °C at normal supply voltage and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 °C. For battery operated equipment, the equipment shall be performed using a new battery.

5.4.4 Description of Measurement

The frequency tolerance has been measured radiated using a spectrum analyser. The center frequency of the spectrum analyser has been set to the fundamental frequency. This is an alternative test method because the EuT cannot be operated in un-modulated mode. The limit line was set to 10 dB below the carrier. The frequencies of the upper (f_U) and lower (f_L) points, where the displayed power envelope of the modulation including frequency drift is equal to the appropriate level, have been recorded. The centre frequency is calculated as $f_c = (f_U + f_L)/2$. The measurement has been performed at normal and extreme test conditions from -20 °C to $+50$ °C in steps of 10 degrees (According to FCC Part 2.1055).

FCC ID: NXW-RF285R

5.4.5 Test result

Test conditions		Test result
		Frequency (MHz)
$T_{min} (-20)^{\circ}C$	$V_{nom} (24.0 V)$	13.56027
$T (-10)^{\circ}C$	$V_{nom} (24.0 V)$	13.56027
$T (0)^{\circ}C$	$V_{nom} (24.0 V)$	13.56027
$T (10)^{\circ}C$	$V_{nom} (24.0 V)$	13.55913
$T_{nom} (20)^{\circ}C$	$V_{min} (20.4 V)$	13.56027
	$V_{nom} (24.0 V)$	13.56027
	$V_{max} (27.6 V)$	13.56027
$T (30)^{\circ}C$	$V_{nom} (24.0 V)$	13.56027
$T (40)^{\circ}C$	$V_{nom} (24.0 V)$	13.56015
$T_{max} (50)^{\circ}C$	$V_{nom} (24.0 V)$	13.56015
Measurement uncertainty		$\pm 10 \text{ Hz}$

Carrier frequency: $f_c = 13.56 \text{ MHz}$

Max. tolerance: $\pm 0.01 \% \text{ of } 13.56 \text{ MHz} = \pm 1.356 \text{ kHz}$

Lowest frequency: $f_l = 13.55913 \text{ MHz}$

Lowest tolerance: $f_l - f_c = -0.87 \text{ kHz} < -1.356 \text{ kHz}$

Limit according to FCC Part 15, Section 15.225(e):

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01 \%$ of the operating frequency.

The requirements are **FULFILLED**.

Remarks:

5.5 20 dB Bandwidth

For test instruments and accessories used see section 6 Part MB.

5.5.1 Description of the test location

Test location: AREA4 (Climatic Chamber)

5.5.2 Photo documentation of the test set-up



5.5.3 Applicable standard

According to FCC Part 15C, Section 15.215(c):

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in section 15.217 to 15.257, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed.

FCC ID: NXW-RF285R

5.5.4 Description of Measurement

The frequency range has been measured radiated using a test fixture and a spectrum analyser. The limit line is set to 20 dB below the carrier. The frequency of the upper (F_H) and lower (F_L) points, where the displayed power envelope of the modulation including frequency drift is equal to the appropriate level, is recorded as the modulation bandwidth. The measurement has been performed at normal and extreme test conditions in modulated transmitting mode.

Spectrum analyzer settings:

RBW: 1 kHz
VBW: 3 kHz
Detector Peak

5.5.5 Test result

Carrier Frequency (MHz)	(F_L) (MHz)	(F_H) (MHz)	Bandwidth (kHz)	Limit (kHz)
13.56	13.55746875	13.56221250	4.74375	14.0

Limit according to FCC Part 15C, Section 15.215(c):


Frequency band (MHz)	Limit 20 dB bandwidth (kHz)
13.553 - 13.567	14.0

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

FCC ID: NXW-RF285R

5.5.6 Test protocol

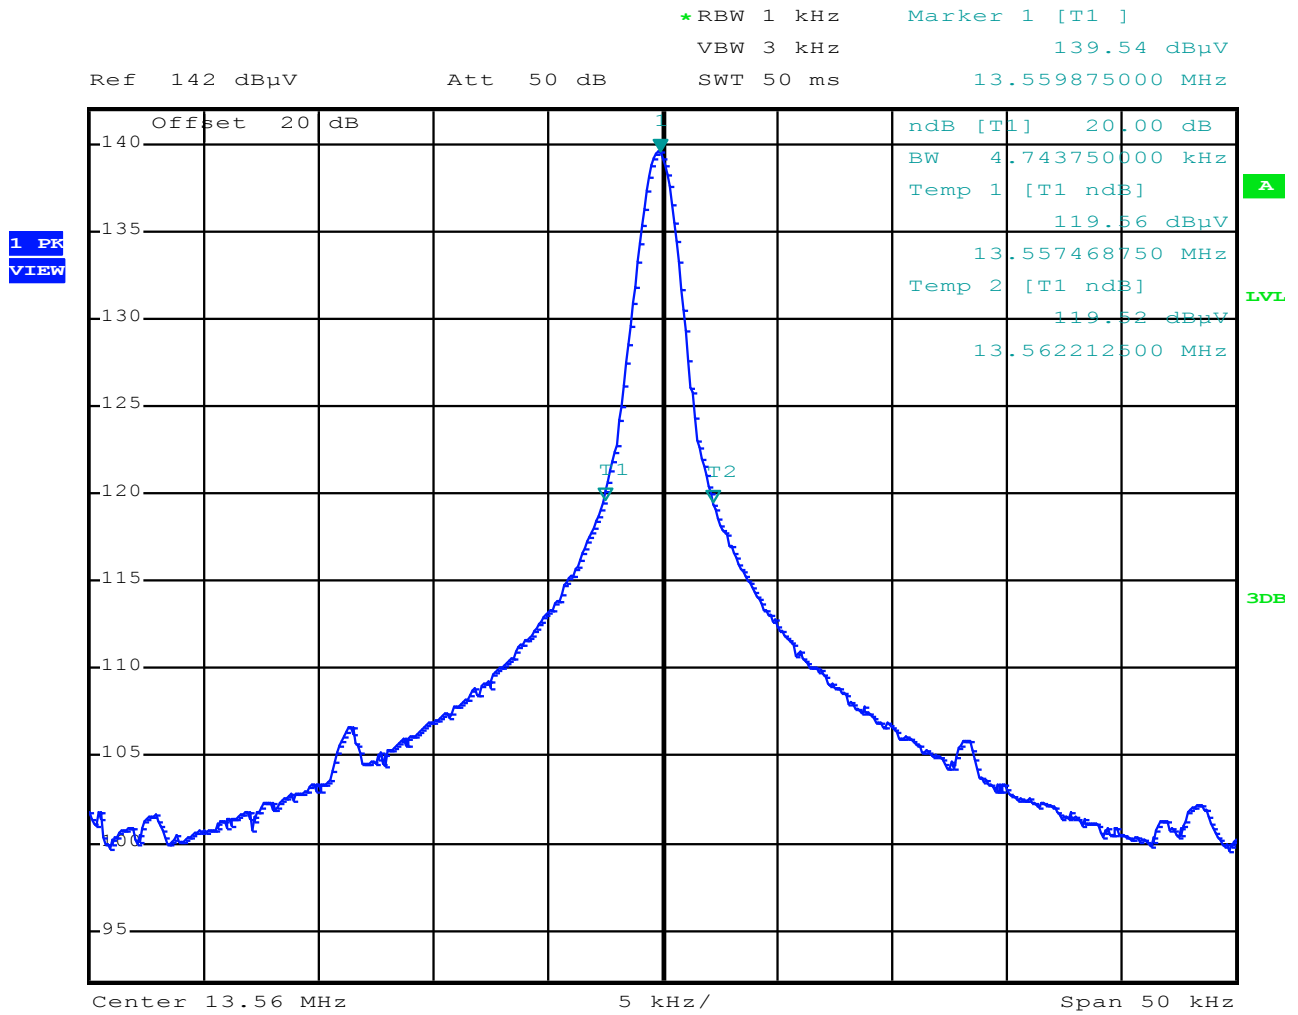

FCC ID: NXW-RF285R

5.6 Transmitter spectrum mask

For test instruments and accessories used see section 6 Part MB.

5.6.1 Description of the test location

Test location: AREA4

5.6.2 Photo documentation of the test set-up



5.6.3 Applicable standard

According to FCC Part 15C, Section 15.225 (a-d):

The field strength of any emission shall not exceed the limits given in FCC Part 15C, Section 15.225 (a-d)

FCC ID: NXW-RF285R

5.6.4 Description of Measurement

The spectrum mask is measured using a spectrum analyser. The profile of the spectrum mask is displayed on analyser and have to be adjusted to the reference level given as maximum output power measured in OATS. The marker is set up manually to the particular maximum level at the effective limit in the frequency range and recorded. The measurement was performed radiated.

5.6.5 Test result

Antenna D6:

Frequency band (MHz)	Emission level (dB μ V/m)	Limit (dB μ V/m)
13.110 – 13.410	≤ 28.0	40.5
13.410 - 13.553	≤ 34.0	50.5
13.553 - 13.567	71.9	84.0
13.567 – 13.710	≤ 34.0	50.5
13.710 – 14.010	≤ 28.0	40.5
outside of 13.110 – 14.010	≤ 10	29.5

Antenna D5:

Frequency band (MHz)	Emission level (dB μ V/m)	Limit (dB μ V/m)
13.110 – 13.410	≤ 17	40.5
13.410 - 13.553	≤ 34.0	50.5
13.553 - 13.567	64.6	84.0
13.567 – 13.710	≤ 32.0	50.5
13.710 – 14.010	≤ 19	40.5
outside of 13.110 – 14.010	≤ 10	29.5

Antenna D2:

Frequency band (MHz)	Emission level (dB μ V/m)	Limit (dB μ V/m)
13.110 – 13.410	≤ 10	40.5
13.410 - 13.553	≤ 10	50.5
13.553 - 13.567	38.3	84.0
13.567 – 13.710	≤ 10	50.5
13.710 – 14.010	≤ 10	40.5
outside of 13.110 – 14.010	≤ 10	29.5

Antenna D1:

Frequency band (MHz)	Emission level (dB μ V/m)	Limit (dB μ V/m)
13.110 – 13.410	≤ 10	40.5
13.410 - 13.553	≤ 10	50.5
13.553 - 13.567	29.9	84.0
13.567 – 13.710	≤ 10	50.5
13.710 – 14.010	≤ 10	40.5
outside of 13.110 – 14.010	≤ 10	29.5

FCC ID: NXW-RF285R

Limits according to FCC Part 15C, Section 15.225(a-d):

The absolute levels of RF power at any frequency shall not exceed the limits defined in the following table:

Frequency band (MHz)	Emission level limit at 30 m (μ V/m)
13.110 – 13.410	106
13.410 - 13.553	334
13.553 - 13.567	15.848
13.567 – 13.710	334
13.710 – 14.010	106
outside of 13.110 – 14.010	30


The requirements are **FULFILLED**.

Remarks:

FCC ID: NXW-RF285R

5.6.6 Test protocol


Spectrum mask of modulated signal – Antenna D6

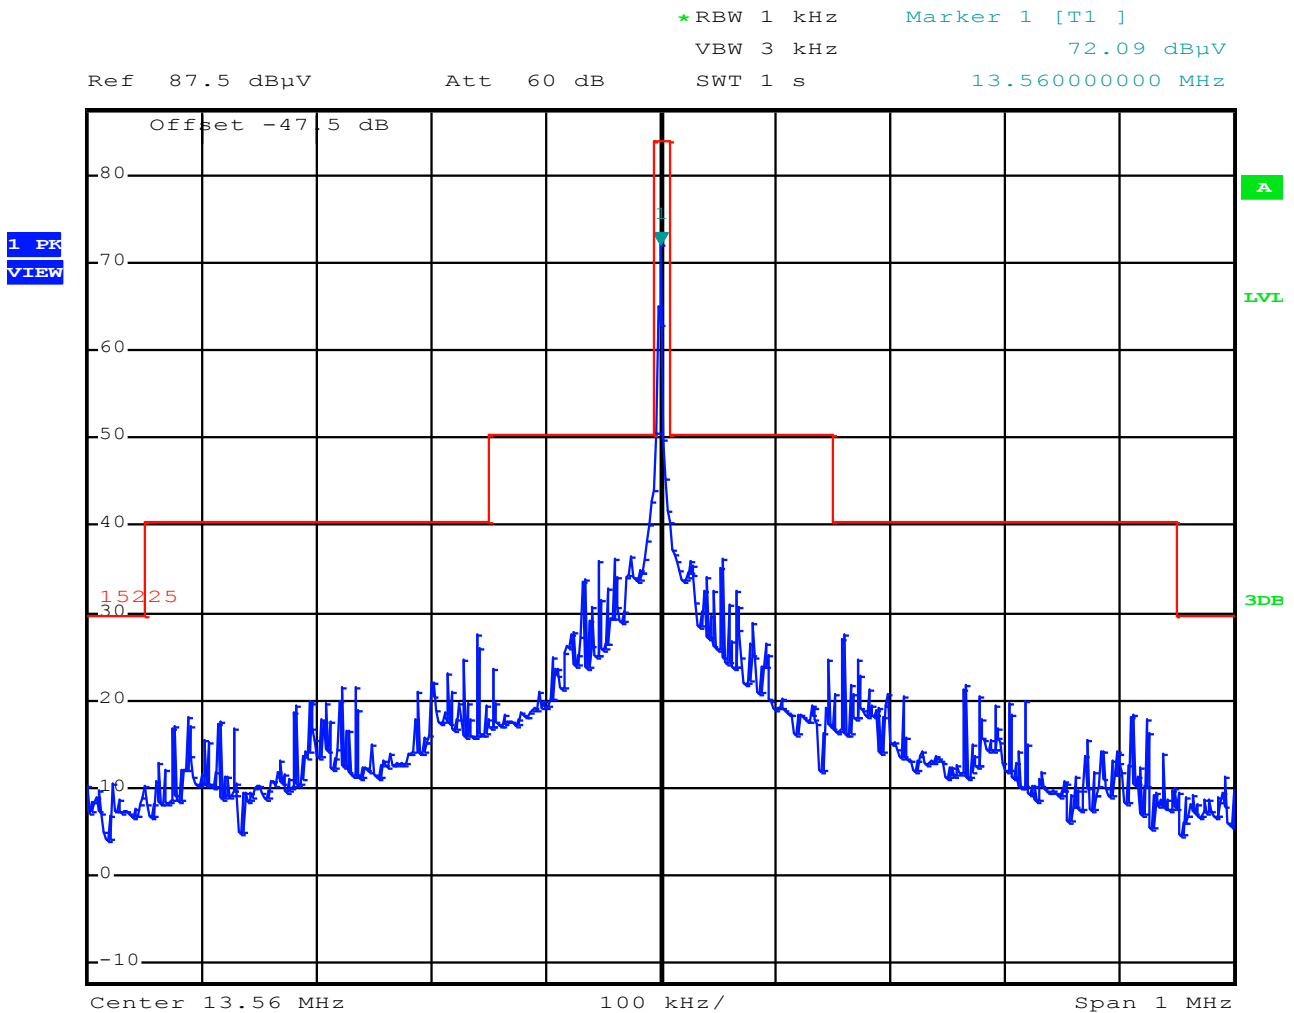

The values of the plot are extrapolated to a measurement distance of 3 m.
(Calculated limit @ 3m: 84 dBμV/m)

FCC ID: NXW-RF285R


Spectrum mask of modulated signal – Antenna D5

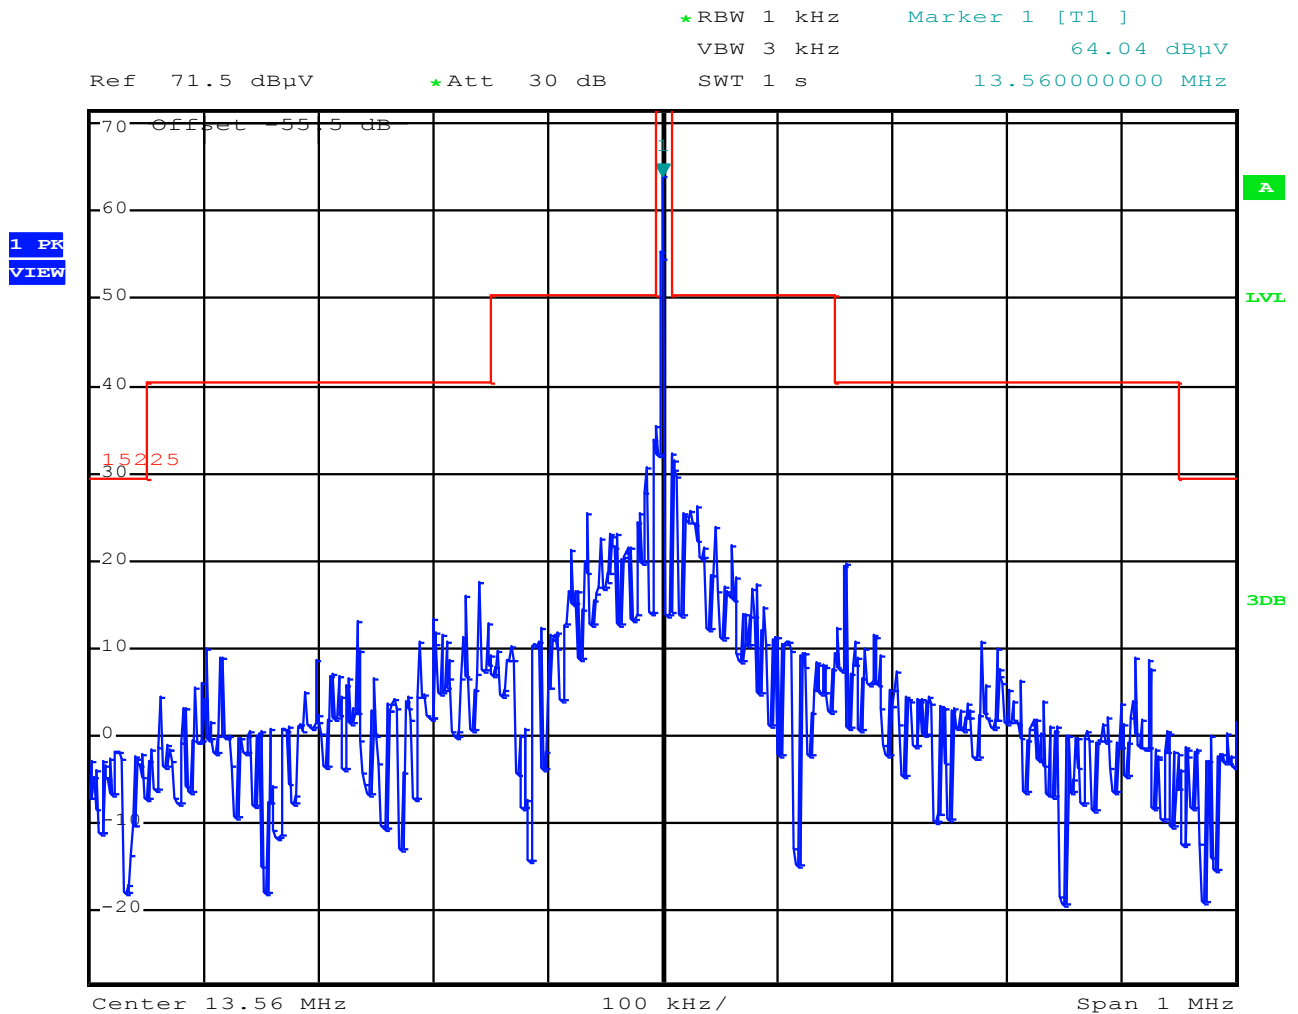

The values of the plot are extrapolated to a measurement distance of 3 m.
(Calculated limit @ 3m: 84 dBμV/m)

FCC ID: NXW-RF285R


Spectrum mask of modulated signal – Antenna D2

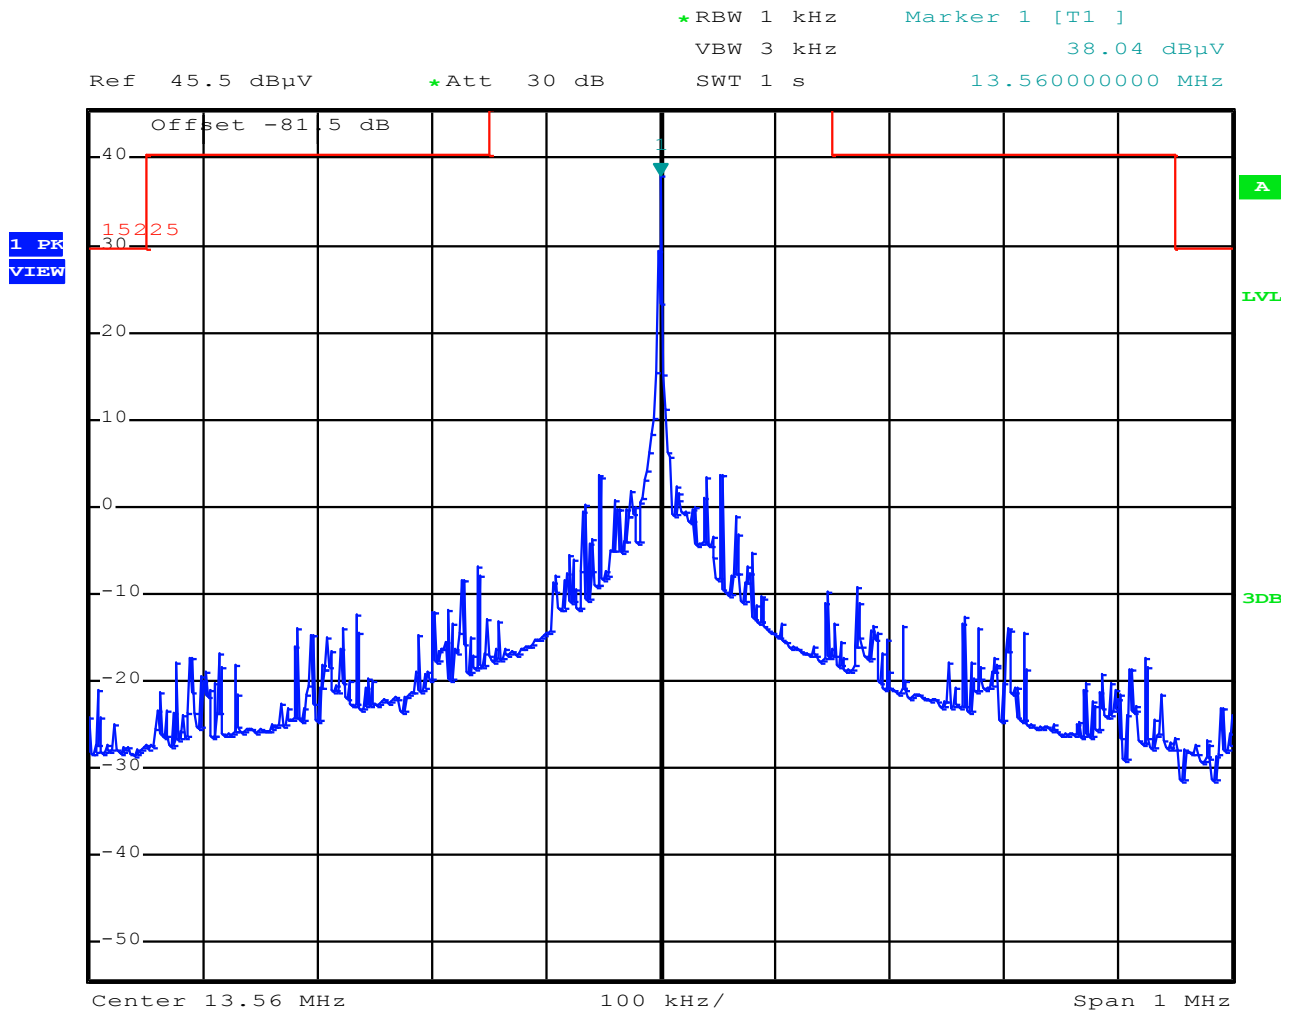

The values of the plot are extrapolated to a measurement distance of 3 m.
(Calculated limit @ 3m: 84 dBμV/m)

FCC ID: NXW-RF285R

Spectrum mask of modulated signal – Antenna D1

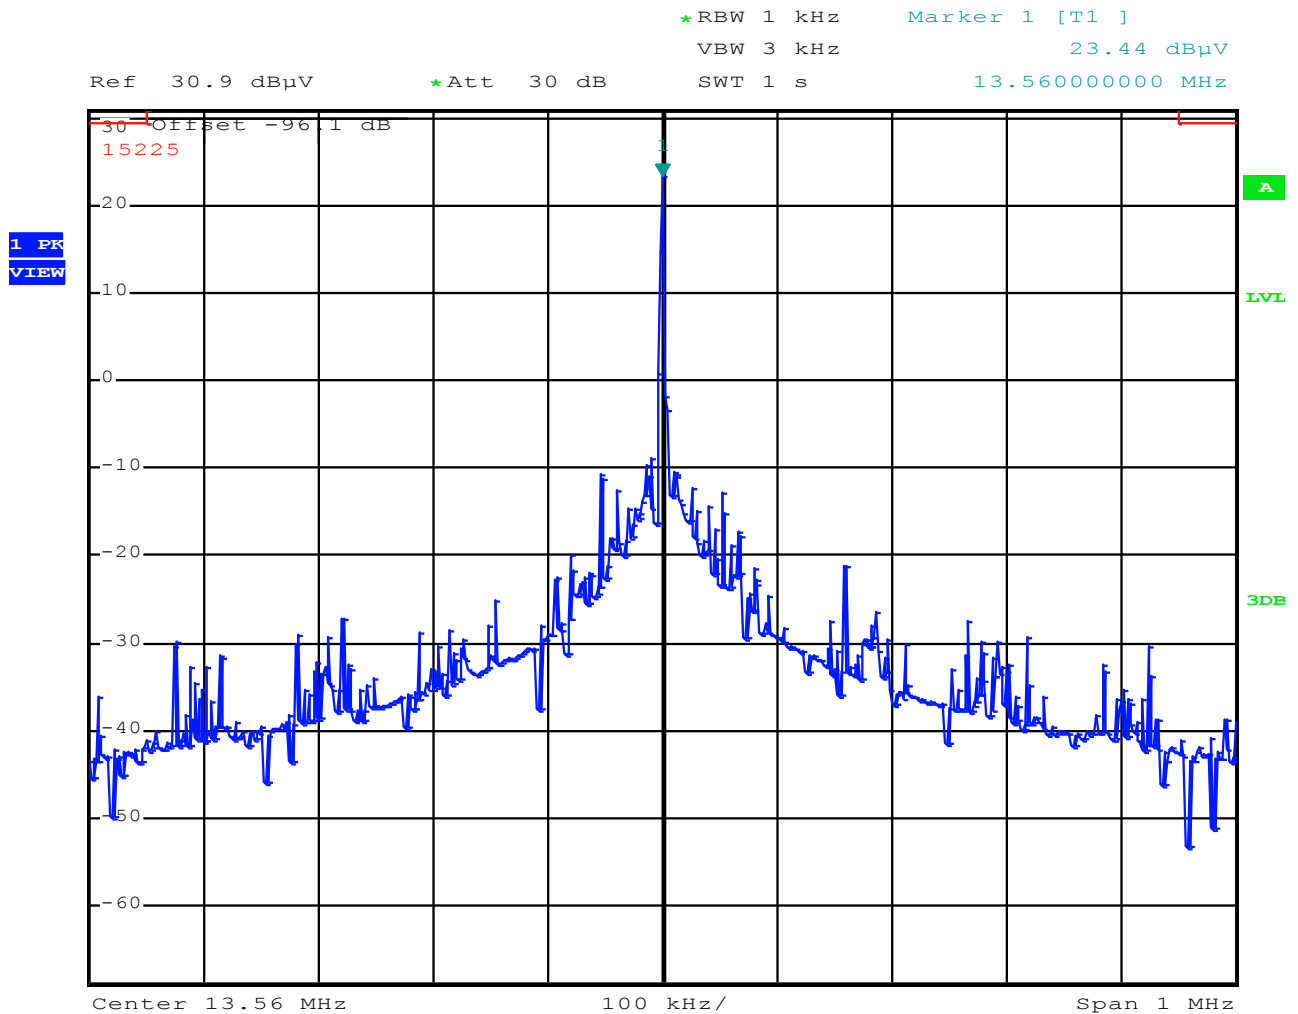

The values of the plot are extrapolated to a measurement distance of 3 m.
(Calculated limit @ 3m: 84 dBμV/m)

5.7 Receiver radiated emissions

5.7.1 Description of the test location

Test location: None

5.7.2 Applicable standard

According to FCC Part 15, Section 15.109(a):

The emission of an unintentional radiator shall not exceed the specified field strength level at 3 m.

Remarks: This test is not applicable. In practical operation the receive mode is too short
to make an assessment.

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
CPR 1	ESCI	02-02/03-05-005	14/12/2018	14/12/2017		
	HFH 2 - Z 2	02-02/24-15-001	22/03/2019	22/03/2018		
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
FE	FSP 30	02-02/11-05-001	04/10/2018	04/10/2017		
	HFRAE 5161 _ 50 kHz-120	02-02/24-11-004				
	METRA HIT World	02-02/32-10-001	17/10/2018	17/10/2017		
	WK-340/40	02-02/45-05-001	06/04/2019	06/04/2018		
	6543A	02-02/50-05-157				
MB	FSP 30	02-02/11-05-001	04/10/2018	04/10/2017		
	HFRAE 5161 _ 50 kHz-120	02-02/24-11-004				
	METRA HIT World	02-02/32-10-001	17/10/2018	17/10/2017		
	WK-340/40	02-02/45-05-001	06/04/2019	06/04/2018		
	6543A	02-02/50-05-157				
SER 1	ESCI	02-02/03-05-005	14/12/2018	14/12/2017		
	HFH 2 - Z 2	02-02/24-15-001	22/03/2019	22/03/2018		
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
SER 2	ESVS 30	02-02/03-05-006	06/06/2019	06/06/2018		
	VULB 9168	02-02/24-05-005	18/04/2019	18/04/2018	21/09/2018	21/03/2018
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				