


Report on the FCC and IC Testing of the
Siemens AG
SIMATIC RF615R
In accordance with FCC 47 CFR Part 1.1310 and
Industry Canada RSS-102


Prepared for: Siemens AG
Gleiwitzer Str. 555
90475 Nürnberg
Germany

FCC ID: NXW-RF615R
IC: 267X-RF615R

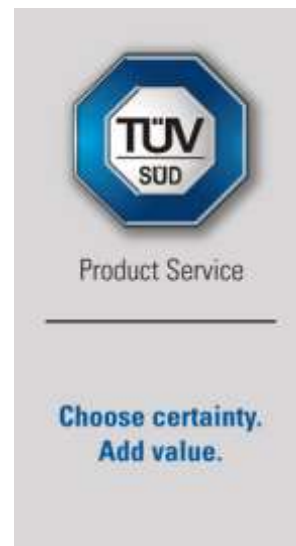

COMMERCIAL-IN-CONFIDENCE

Date: 2020-02-14
Document Number: TR-72654-66388-04 | Issue: 01

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Alex Fink	2002-04-09	 SIGN-ID 346847
Authorised Signatory	Martin Steindl	2002-04-09	 SIGN-ID 346857

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 1.1310 and Industry Canada RSS-102, Issue 5, (4), Table 6. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Alex Fink	2002-04-09	 SIGN-ID 346847

Laboratory Accreditation

DAkS Reg. No. D-PL-11321-11-02

Laboratory recognition

Registration No. BNetzA-CAB-16/21-15

ISED Canada test site registration

3050A-2

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 1.1310 and Industry Canada RSS-102, Issue 5, (4), Table 6.

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2020 TÜV SÜD Product Service.

ACCREDITATION

Our BNetzA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our BNetzA Accreditation. Results of tests not covered by our BNetzA Accreditation Schedule are marked NBA (Not BNetzA Accredited).

Trade Register Munich
HRB 85742
VAT ID No. DE129484267
Information pursuant to Section 2(1)
DL-InfoV (Germany) at
www.tuev-sued.com/im

Managing Directors:
Dr. Peter Havel (CEO)
Dr. Jens Butenandt
Patrick van Welij

Phone: +49 (0) 9421 55 22-0
Fax: +49 (0) 9421 55 22-99
www.tuev-sued.de

TÜV SÜD Product Service GmbH
Äußere Frühlingstraße 45
94315 Straubing
Germany

Contents

1 **Report Summary2**
1.1 Report Modification Record.....2
1.2 Introduction.....2
1.3 Technical Description2
1.4 Brief Summary of Results3
2 **Test Details4**

1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	2020-04-09

Table 1

1.2 Introduction

Applicant	Siemens AG
Manufacturer	Siemens AG
Model Number(s)	SIMATIC RF615R
Serial Number(s)	Prototype
Hardware Version(s)	FS 02
Software Version(s)	---
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 1.1310 Industry Canada RSS-102, Issue 5, (4), Table 6
Test Plan/Issue/Date	---
Order Number	9704939264
Date	2019-07-30
Date of Receipt of EUT	---
Start of Test	---
Finish of Test	---
Name of Engineer(s)	Alex Fink
Related Document(s)	KDB 447498 D01 General RF Exposure Guidance v06 ANSI C63.10 (2013)

1.3 Technical Description

The SIMATIC RF 615 are suitable for reading and writing tasks in the UHF range and very long ranges up to 8m.
The readers are especially well-suited for use in production environments where a high protection class and integration into SIMATIC controllers are required. These readers also come with an extensive toolset for commissioning and diagnostics.



Product Service

1.4 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 1.1310 and RSS-102 is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: Continuously transmitting				
2.1	1.1310 RSS-102	RF Exposure Evaluation	Pass	---

Table 2



2 Test Details

2.1 RF Exposure Assessment

2.1.1 Specification Reference

CFR 47 § 1.1310, Table 1 (B) and RSS-102, Issue 5, (4) Table 4

2.1.2 Equipment Under Test and Modification State

SIMATIC RF615R, S/N: Prototype - Modification State 0

2.1.3 Test Method

RF Exposure calculation is based on the measurements in the test report “28111932_009” and test report “28111932_010” of TÜV Rheinland Italia S.r.l.

$$S = \frac{P * G}{4 * \pi * r^2}$$

with P = Conducted Power (mW)
G = Numeric Gain (10(dBi/10))
r = distance (cm) = 20 cm



2.1.4 Test Results

In accordance with § 1.1310, Table 1 (B):

Operating frequency [MHz]	Conducted output power [dBm]	Conducted output power (P) [mW]	Numeric gain (G) [dB]	Power Density (S) [mW/cm ²]	Limits (f/1500) [mw/cm ²]
902.75	+ 27.42	552.077	2.239	0.24588	0.602
915.25	+ 27.47	558.470	2.239	0.24873	0.610
927.25	+ 26.72	469.894	2.239	0.20928	0.618

Table 3 – RF Exposure calculation for antenna with 3.5 dBi gain

Operating frequency [MHz]	Conducted output power [dBm]	Conducted output power (P) [mW]	Numeric gain (G) [dB]	Power Density (S) [mW/cm ²]	Limits (f/1500) [mw/cm ²]
902.75	+ 27.42	552.077	3.981	0.43725	0.602
915.25	+ 27.47	558.470	3.981	0.44231	0.610
927.25	+ 26.72	469.894	3.981	0.37216	0.618

Table 4 – RF Exposure calculation for antenna with 6.0 dBi gain

Operating frequency [MHz]	Conducted output power [dBm]	Conducted output power (P) [mW]	Numeric gain (G) [dB]	Power Density (S) [mW/cm ²]	Limits (f/1500) [mw/cm ²]
902.75	+ 27.42	552.077	5.012	0.55047	0.602
915.25	+ 27.47	558.470	5.012	0.55684	0.610
927.25	+ 26.72	469.894	5.012	0.46852	0.618

Table 5 – RF Exposure calculation for antenna with 7.0 dBi gain

The EUT Radiated Power density complies with the Limits for General Population/Uncontrolled Exposure in § 1.1310, Table 1 (B).



In accordance with RSS-102, Issue 5, (4), Table 6:

Operating frequency [MHz]	Conducted output power [dBm]	Conducted output power (P) [mW]	Numeric gain (G) [dB]	Power Density (S) [mW/cm ²]	Limits controlled environment [mw/cm ²]
902.75	+ 27.42	552.077	2.239	0.24588	1.939
915.25	+ 27.47	558.470	2.239	0.24873	1.952
927.25	+ 26.72	469.894	2.239	0.20928	1.965

Table 6 – RF Exposure calculation for antenna with 3.5 dBi gain

Operating frequency [MHz]	Conducted output power [dBm]	Conducted output power (P) [mW]	Numeric gain (G) [dB]	Power Density (S) [mW/cm ²]	Limits controlled environment [mw/cm ²]
902.75	+ 27.42	552.077	3.981	0.43725	1.939
915.25	+ 27.47	558.470	3.981	0.44231	1.952
927.25	+ 26.72	469.894	3.981	0.37216	1.965

Table 7 – RF Exposure calculation for antenna with 6.0 dBi gain

Operating frequency [MHz]	Conducted output power [dBm]	Conducted output power (P) [mW]	Numeric gain (G) [dB]	Power Density (S) [mW/cm ²]	Limits controlled environment [mw/cm ²]
902.75	+ 27.42	552.077	5.012	0.55047	1.939
915.25	+ 27.47	558.470	5.012	0.55684	1.952
927.25	+ 26.72	469.894	5.012	0.46852	1.965

Table 8 – RF Exposure calculation for antenna with 7.0 dBi gain

The EUT Radiated Power density complies with the RF Field Strength Limits for Controlled Use Devices (Controlled Environment) in RSS-102, Issue 5, (4) Table 6.