eurofins | Product Service

EMC TEST REPORT

FCC 47 CFR Part 15B
Industry Canada RSS-Gen

Electromagnetic compatibility - Unintentional radiators

Report Reference No. ..... :	G0M-1410-4241-EF01-V01
Testing Laboratory ..... :	Eurofins Product Service GmbH
Address ..... :	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation ..... :	A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A
Applicant's name ..... :	Kieback und Peter GmbH & Co. KG
Address ..... :	Tempelhofer Weg 50 12347 Berlin GERMANY
Test specification:	
Standard..... :	47 CFR Part 15 Subpart B RSS-Gen, Issue 3, 2010-12 ANSI C63.4:2009
Equipment under test (EUT):	
Product description	Raumbediengerät
Model No.	RBW322-FTL-902
Additional Models	None
Hardware version	66735001/01
Firmware / Software version	GWC2.8.2.0-TCM300HW_TCM320HW-902Mhz
Contains	FCC-ID: NY3RBW322MES IC: N/A
Test result	**Passed**

Possible test case verdicts:		
- not applicable to test object ..... :		N/A
- test object does meet the requirement..... :		P (Pass)
- test object does not meet the requirement..... :		F (Fail)
Testing:		
Date of receipt of test item ..... :		2014-12-10
Date (s) of performance of tests ..... :		2014-12-12
Compiled by..... :	Marcus Klein	
Tested by (+ signature)..... :	Andreas Pflug	
Approved by (+ signature) ..... :	Marcus Klein	
Date of issue..... :	2014-12-17	
Total number of pages..... :	21	

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
V01	2014-12-16	Initial Release	

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

REPORT INDEX

1	**EQUIPMENT (TEST ITEM) DESCRIPTION**	**5**
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	7
1.3	Photos – Test setup	8
1.4	Supporting Equipment Used During Testing	9
1.5	Input / Output Ports	9
1.6	Operating Modes and Configurations	10
1.7	Test Equipment Used During Testing	11
1.8	Sample emission level calculation	12
2	**RESULT SUMMARY**	**13**
3	**TEST CONDITIONS AND RESULTS**	**14**
3.1	Test Conditions and Results – Radiated emissions	14

1 Equipment (Test item) Description

Description	Raumbediengerät	
Model	RBW322-FTL-902	
Additional Models	None	
Serial number	None	
Hardware version	66735001/01	
Software / Firmware version	GWC2.8.2.0-TCM300HW_TCM320HW-902Mhz	
Contains FCC-ID	NY3RBW322MES	
Contains IC	N/A	
Power supply	3.6 VDC Battery	
Radio module	Type	SRD Modul
	Model	RBW322-FTL-902
	Manufacturer	Kieback & Peter GmbH
	HW Version	66735001/01
	SW Version	GWC2.8.2.0_TCM300HW_TCM320HW-902MHz
Manufacturer	Kieback und Peter GmbH & Co. KG Tempelhofer Weg 50 12347 Berlin GERMANY	
Highest emission frequency	902.875 MHz	
Device classification	Class B	
Equipment type	Tabletop	
Number of tested samples	1	

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
None				

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments
No relevant ports available					

***Note:** Use the following abbreviations:

AC : AC power port

DC : DC power port

N/E : Non electrical

I/O : Signal input or output port

TP : Telecommunication port

1.6 Operating Modes and Configurations

Mode #	Description
1	EUT powered with 3.6 VDC from battery. Permanent transmit @ 902.875 MHz.

Configuration #	EUT Configuration
1	Fully configured

1.7 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

Radiated emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2013-09	2016-09
EMI Test Receiver	R&S	ESU8	EF00379	2014-03	2015-03
EMI Test Receiver	R&S	ESCS30	EF00295	2014-10	2015-10

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBµV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

Reading on Analyzer (dBµV) + A.F. (dB) = Net field strength (dBµV/m)

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

Limit (dBµV/m) = 20*log (µV/m)

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading	+	AF	=	Net Reading	:	Net reading - FCC limit	= Margin
21.5 dBµV	+	26 dB	=	47.5 dBµV/m	:	47.5 dBµV/m - 57.0 dBµV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen				
Product Specific Standard	**Requirement – Test**	**Reference Method**	**Result**	**Remarks**
47 CFR 15.109 RSS-Gen 4.9 & 4.10	Radiated emissions	ANSI C 63.4	PASS	-
47 CFR 15.107 RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	N/A	No relevant port available
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / IC RSS-Gen		**Verdict: PASS**
Laboratory Parameters:	Required prior to the test	During the test
Ambient Temperature	15 to 35 °C	23°C
Relative Humidity	30 to 60 %	41%
Test according referenced standards	Reference Method	
	ANSI C63.4	
Sample is tested with respect to the requirements of the equipment class	Equipment class	
	Class B	
Test frequency range determined from highest emission frequency	Highest emission frequency	
	902.875 MHz	
Fully configured sample scanned over the following frequency range	Frequency range	
	30 MHz to 5 GHz	
Operating mode configuration	1	

Limits and results Class B

Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS

Comments:

Test Procedure:

The test site is in accordance with ANSI C63-4:2009 requirements and is listed by FCC.
The measurement procedure is as follows:


1) The EUT was placed on a 0.8 m non conductive table at a 3 m distance from the receive antenna (ANSI C63.4: 2009 item 6.2)
2) The antenna output was connected to the measurement receiver
3) A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
4) Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1410-4241

Manufacturer:	Kieback und Peter GmbH & Co. KG
EUT Name:	Raumbediengerät
Model:	RBW322-FTL-902
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: battery(3.6VDC)
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	transmit-902.875Mhz
Test Date:	2014-12-10
Note:	

Index 7

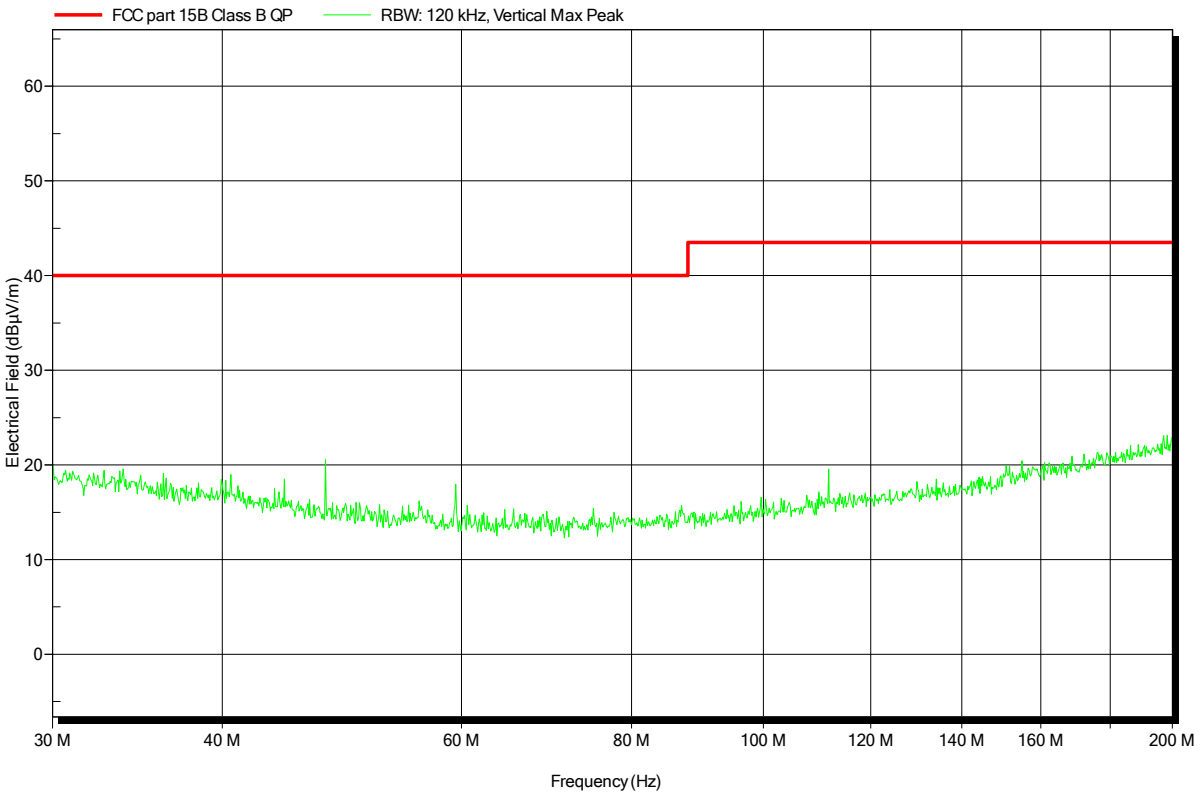


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1410-4241

Manufacturer:	Kieback und Peter GmbH & Co. KG
EUT Name:	Raumbediengerät
Model:	RBW322-FTL-902
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: battery(3.6VDC)
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	transmit-902.875Mhz
Test Date:	2014-12-10
Note:	


Index 8

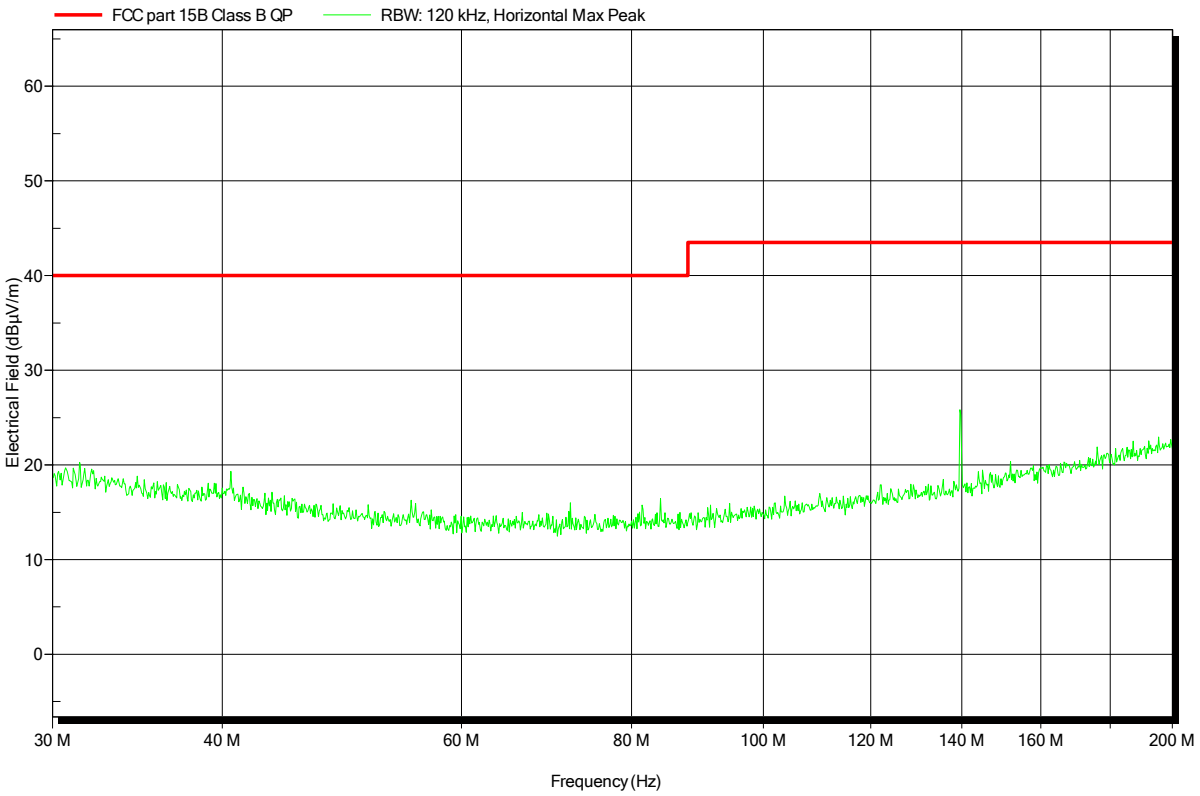

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1410-4241

Manufacturer:	Kieback und Peter GmbH & Co. KG
EUT Name:	Raumbediengerät
Model:	RBW322-FTL-902
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: battery(3.6VDC)
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3m
Mode:	transmit-902.875Mhz
Test Date:	2014-12-10
Note:	

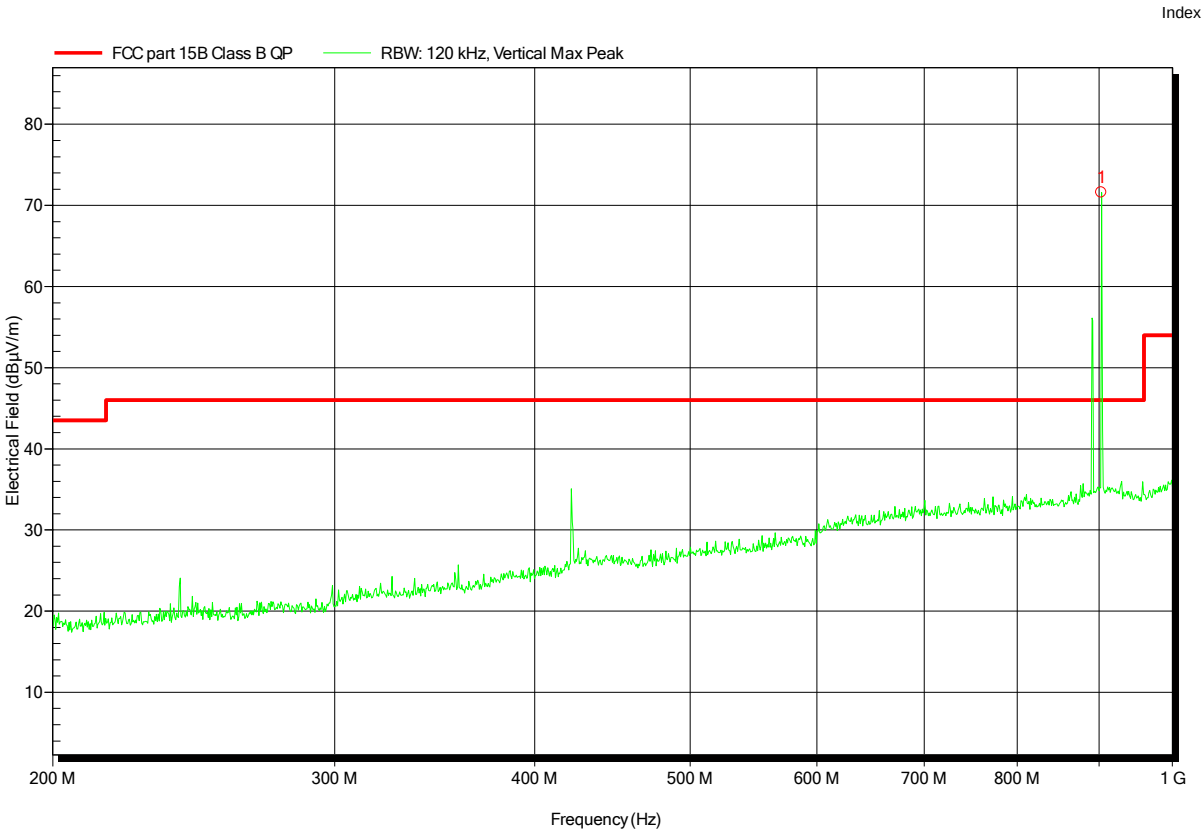


Frequency
TX - 902.9 MHz

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1410-4241

Manufacturer:	Kieback und Peter GmbH & Co. KG
EUT Name:	Raumbediengerät
Model:	RBW322-FTL-902
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: battery(3.6VDC)
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3m
Mode:	transmit-902.875Mhz
Test Date:	2014-12-10
Note:	

Index 4

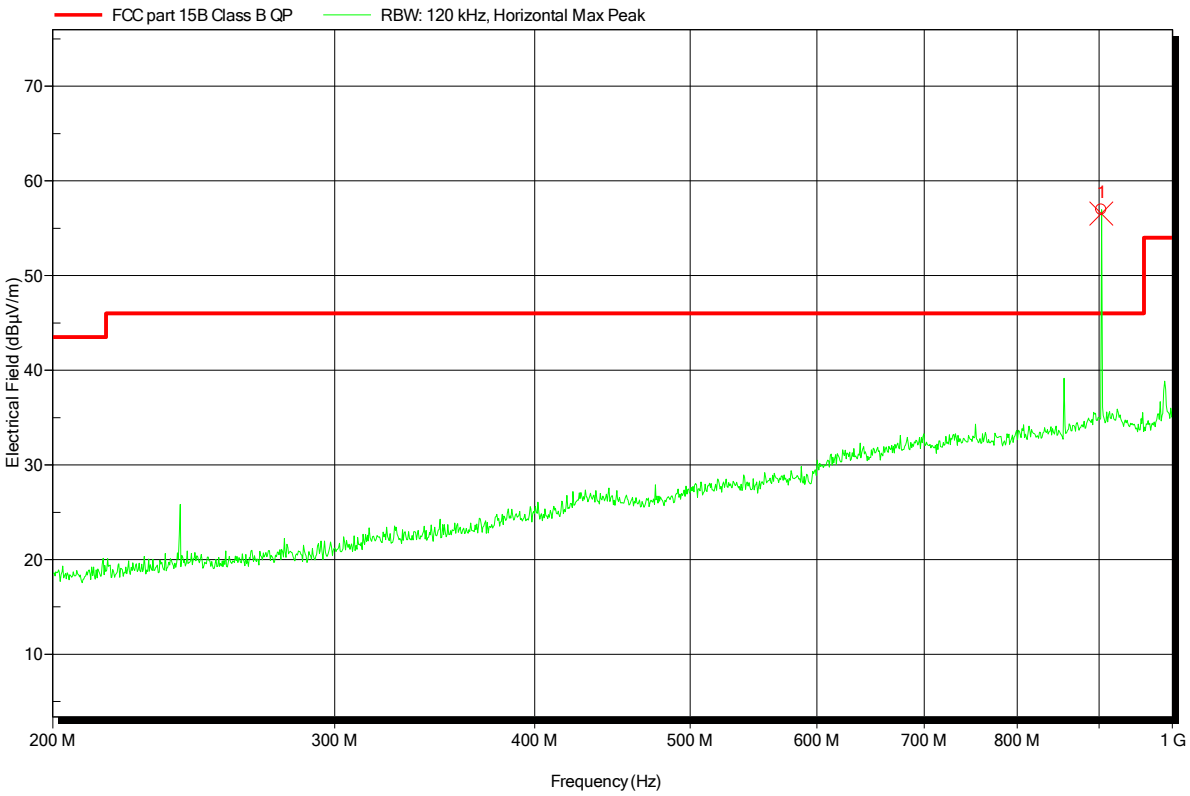


Frequency
TX - 902.875 MHz

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1410-4241

Manufacturer:	Kieback und Peter GmbH & Co. KG
EUT Name:	Raumbediengerät
Model:	RBW322-FTL-902
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: battery(3.6VDC)
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	transmit-902.875Mhz
Test Date:	2014-12-10
Note:	

Index 6

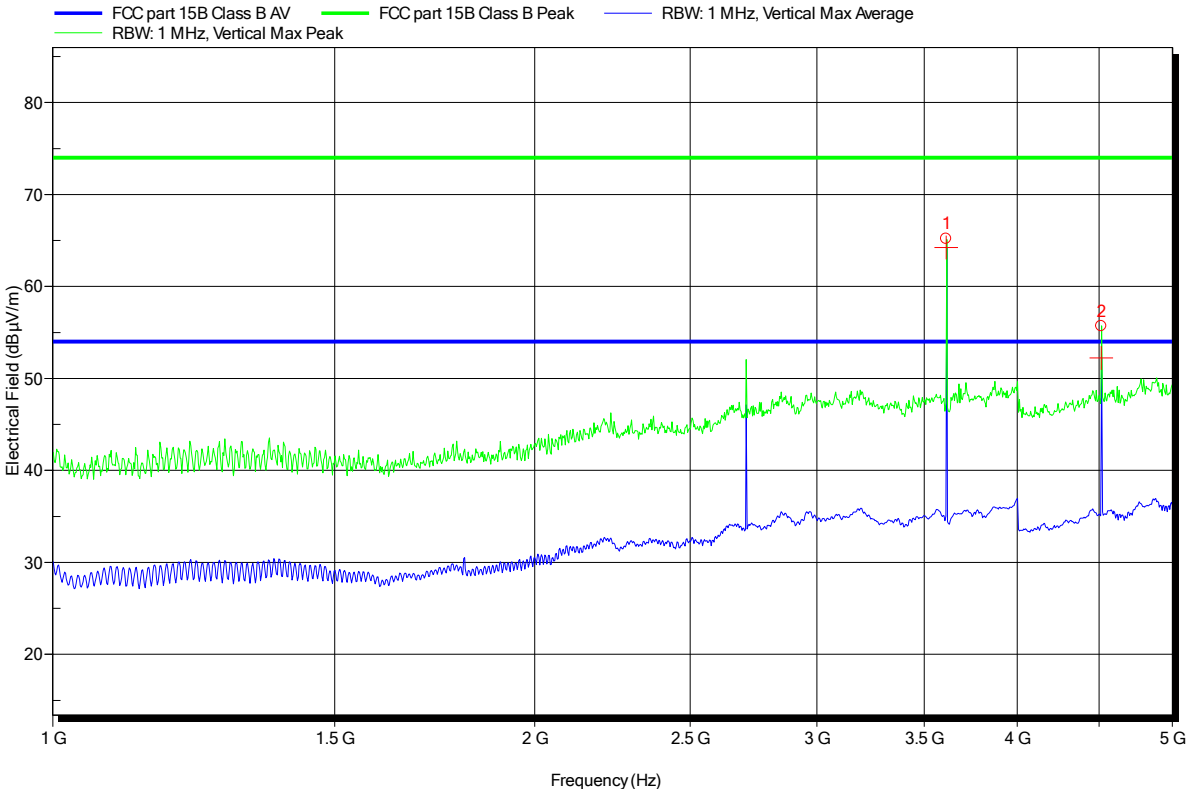


Frequency
Harmonics - 3.612 GHz
Harmonics 4.515 GHz

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1410-4241

Manufacturer:	Kieback und Peter GmbH & Co. KG
EUT Name:	Raumbediengerät
Model:	RBW322-FTL-902
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: battery(3.6VDC)
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	transmit-902.875Mhz
Test Date:	2014-12-10
Note:	

Index 5

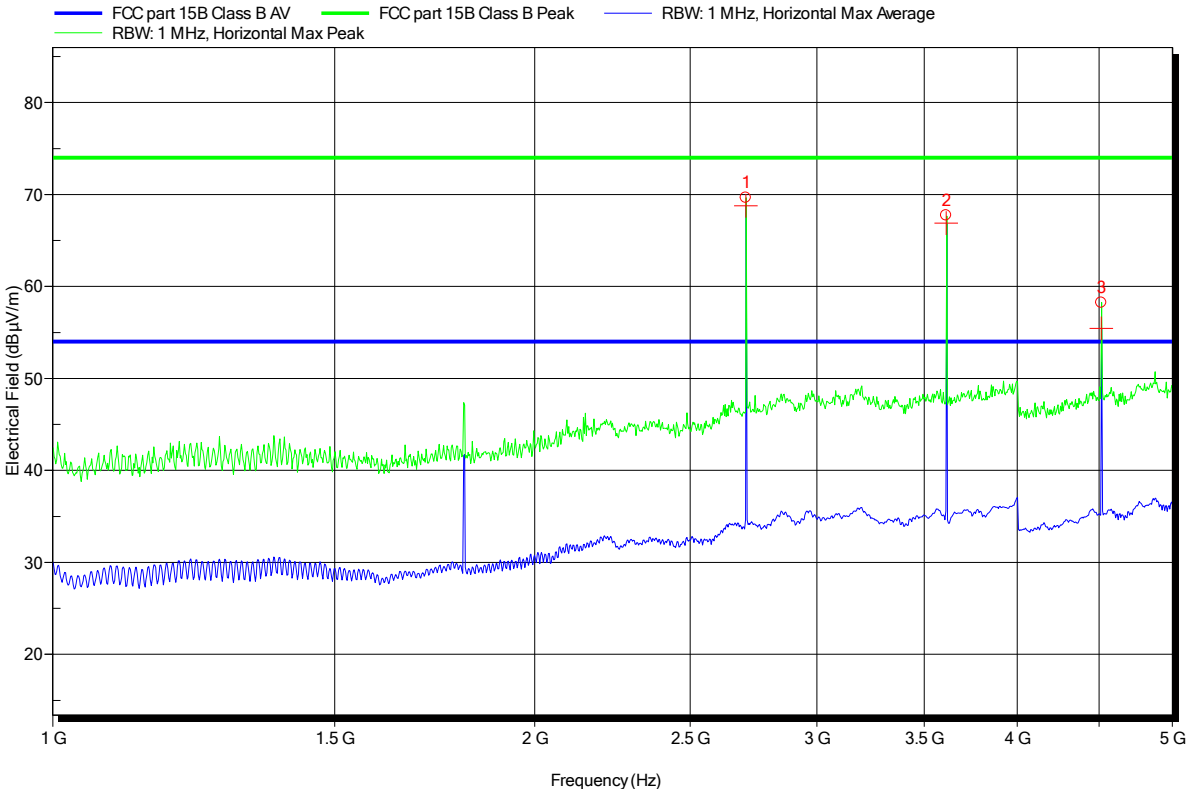

Frequency
Harmonics - 2.709 GHz
Harmonics - 3.612 GHz
Harmonics - 4.515 GHz