

Report No.SH15030055W40

# FCC RF TESTREPORT

*Issued to*

**TRIMBLE EUROPE B.V.**

*For*

**Rugged Smart Phone**

Model Name : TDC100\_4G  
Trade Name : Trimble  
Brand Name : Trimble  
Standard : 47 CFR Part 2  
47 CFR Part 22 Subpart H  
47 CFR Part 24 Subpart E  
RSS-132 issue 3  
RSS-133 issue 6  
FCC ID : NZI-10900320  
IC ID : 9288A-10900320  
Test date : Apr.4,2016 to May.6,2016  
Issue date : Jul.12,2016

*by*

**Shanghai Skylabs Co., Ltd.**

Tested by


*Wu Hongfei*

Approved by

*Guo Yefeng*

Review by

*Leonard Bao*

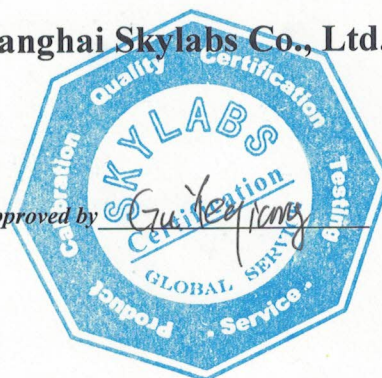

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shanghai Skylabs Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shanghai Skylabs Co., Ltd to his customer. Supplier or others persons directly concerned. Shanghai Skylabs Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shanghai Skylabs Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



## DIRECTORY

|           |                                             |           |
|-----------|---------------------------------------------|-----------|
| <b>1.</b> | <b>General Information .....</b>            | <b>4</b>  |
| 1.1       | Applicant .....                             | 4         |
| 1.2       | Manufacturer .....                          | 4         |
| 1.3       | Description of EUT .....                    | 4         |
| <b>2.</b> | <b>Facilities and Accreditations .....</b>  | <b>6</b>  |
| 2.1       | Test Facility .....                         | 6         |
| 2.2       | Environmental Conditions .....              | 6         |
| 2.3       | List of Equipments Used .....               | 7         |
| <b>3.</b> | <b>Test Standards and Results .....</b>     | <b>8</b>  |
| <b>4.</b> | <b>Test Result .....</b>                    | <b>9</b>  |
| 4.1       | Conducted Output Power .....                | 9         |
| 4.2       | Occupied Bandwidth .....                    | 11        |
| 4.3       | Peak-to-Average Ratio .....                 | 25        |
| 4.4       | Frequency Stability .....                   | 39        |
| 4.5       | Conducted Out of Band Emissions .....       | 44        |
| 4.6       | Band Edge .....                             | 51        |
| 4.7       | Transmitter Radiated Power (EIRP/ERP) ..... | 60        |
| 4.8       | Radiated Out of Band Emissions .....        | 63        |
|           | <b>Photos of the EUT .....</b>              | <b>66</b> |

**Change History**

| Issue | Date        | Reason for change |
|-------|-------------|-------------------|
| 1.0   | May.7,2016  | First edition     |
| 2.0   | Jul.12,2016 | Second edition    |
|       |             |                   |
|       |             |                   |
|       |             |                   |
|       |             |                   |



## 1. General Information

### 1.1 Applicant

**TRIMBLE EUROPE B.V.**

European Regional Fulfilment Centre  
Meerheide, 45  
5521DZ Eersel  
THE NETHERLANDS

### 1.2 Manufacturer

**TRIMBLE EUROPE B.V.**

European Regional Fulfilment Centre  
Meerheide, 45  
5521DZ Eersel  
THE NETHERLANDS

### 1.3 Description of EUT

EUT Type .....: Rugged Smart Phone  
Brand Name.....: TDC100\_4G  
Trade Name .....: Trimble  
Model Name.....: Trimble  
Hardware Version.....: TDC100.4G\_V1.0  
Software Version .....: TDC100.4G.16.22.08  
Antenna type.....: ABS Frame and FPC antenna  
Antenna gain.....: WCDMA Band II: 1.03 dBi  
WCDMA Band V: -2.56 dBi  
Frequency Range..... WCDMA Band II  
Tx: 1852.4 - 1907.6MHz (at intervals of 200kHz);  
Rx: 1932.4 - 1987.6MHz (at intervals of 200kHz)  
WCDMA Band V  
Tx: 826.4 - 846.6MHz (at intervals of 200kHz);  
Rx: 871.4 - 891.6MHz (at intervals of 200kHz)  
Modulation Type .....: QPSK,  
Battery .....: 3.8V

**NOTE:**

(1) The transmitter (Tx) frequency arrangement of the WCDMA 850MHz band used by the EUT can be represented with the formula  $F(n)=826.4+0.2*(n-4132)$ ,  $4132 \leq n \leq 4233$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 4132 (826.4MHz), 4182(836.4MHz) and 4233 (846.6MHz).

(2) The transmitter (Tx) frequency arrangement of the WCDMA 1900MHz band used by the EUT can



be represented with the formula  $F(n)=1852.4+0.2*(n-9262)$ ,  $9262 \leq n \leq 9538$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).

(3) For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



## **2. Facilities and Accreditations**

### **2.1 Test Facility**

Shanghai Skylabs Co., Ltd. Skylabs Laboratory is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6644. A 9\*6\*6(m) fully anechoic chamber was used for the radiated spurious emissions test.

### **2.2 Environmental Conditions**

Ambient temperature: 20~25°C

Relative humidity: 40~60%

Atmosphere pressure: 86-102kPa



## 2.3 List of Equipments Used

| Description                              | Manufacturer                    | Model          | Serial No.   | Cal. Date  | Cal. Due |
|------------------------------------------|---------------------------------|----------------|--------------|------------|----------|
| System Simulator                         | Agilent                         | E5515C         | GB46040102   | 2015.9.22  | 1year    |
| Spectrum Analyzer                        | Rohde&Schwarz                   | FSU26          | 200880       | 2016.2.25  | 1year    |
| Power Splitter                           | Weinschel                       | 1506A          | NW521        | (n.a.)     | (n.a.)   |
| Power Splitter                           | Mini-Circuits                   | ZFRSC-183-S+   | 765001016    | (n.a.)     | (n.a.)   |
| Attenuator 1                             | Mini-Circuits                   | 10dB           | (n.a.)       | (n.a.)     | (n.a.)   |
| Attenuator 2                             | Resnet                          | 10dB           | (n.a.)       | (n.a.)     | (n.a.)   |
| Attenuator 3                             | Resnet                          | 3dB            | (n.a.)       | (n.a.)     | (n.a.)   |
| DC Power Supply                          | Good Will                       | GPS-3030DD     | EF920938     | 2015.10.12 | 2year    |
| Temperature Chamber                      | YinHe<br>Experimental<br>Equip. | HL4003T        | (n.a.)       | 2015.9.20  | 1year    |
| Full/Half-Anechoic<br>Chamber            | CHENGYU                         | 9.2×6.25×6.15m | SAR          | 2015.9.14  | 3year    |
| Singal Generator                         | Rohde&Schwarz                   | SMF100A        | 101935       | 2015.9.22  | 1year    |
| Broadband Trilog Antenna                 | Schwarzbeck                     | VULB 9163      | 9163-561     | 2015.9.25  | 1year    |
| Substitution Broadband<br>Trilog Antenna | Schwarzbeck                     | VULB 9163      | 9163-572     | 2015.9.25  | 1year    |
| Broadband Horn Antenna                   | Schwarzbeck                     | BBHA 9120D     | 9120D-1033   | 2015.7.25  | 1year    |
| Substitution Broadband Horn<br>Antenna   | Schwarzbeck                     | BBHA 9120D     | 9120D-1034   | 2015.7.25  | 1year    |
| Broadband Horn Antenna                   | Schwarzbeck                     | BBHA 9170      | BBHA91970171 | 2015.9.22  | 1year    |
| Substitution Broadband Horn<br>Antenna   | Schwarzbeck                     | BBHA 9170      | BBHA91970208 | 2015.9.22  | 1year    |
| Test Antenna-Loop                        | Rohde&Schwarz                   | HFH2-Z2        | 860004/001   | 2015.9.22  | 1year    |
| Temporary Antenna<br>Connector           | Farpu                           | SMA-K          | (n.a.)       | (n.a.)     | (n.a.)   |
| RF Cable                                 | (n.a.)                          | (n.a.)         | (n.a.)       | (n.a.)     | (n.a.)   |

**NOTE:**

*Equipments listed above have been calibrated and are in the period of validation.*



### 3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24 for the EUT FCC ID Certification:

| No. | Identity        | Document Title                                                                |
|-----|-----------------|-------------------------------------------------------------------------------|
| 1   | 47 CFR Part 2   | Frequency Allocations and Radio Treaty Matters; General Rules and Regulations |
| 2   | 47 CFR Part 22  | Public Mobile Services                                                        |
| 3   | 47 CFR Part 24  | Personal Communications Services                                              |
| 4   | RSS-132 issue 3 | Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz |
| 5   | RSS-133 issue 6 | 2 GHz Personal Communications Services                                        |

Test detailed items/section required by FCC rules& IC rules and results are as below:

| No. | FCC Rules                            | IC Rules                       | Description                           | Result |
|-----|--------------------------------------|--------------------------------|---------------------------------------|--------|
| 1   | 2.1046                               | RSS-132 (5.4)<br>RSS-133 (6.4) | Conducted Output Power                | PASS   |
| 2   | 2.1049<br>22.917<br>24.238           | RSS-GEN (6.6)                  | Occupied Bandwidth                    | PASS   |
| 3   | 2.1055<br>22.355<br>24.235           | RSS-132 (5.3)<br>RSS-133 (6.3) | Frequency Stability                   | PASS   |
| 4   | 24.232                               | RSS-133 (6.4)                  | Peak-to-Average Ratio                 | PASS   |
| 5   | 2.1051<br>2.1057<br>22.917<br>24.238 | RSS-132 (5.5)<br>RSS-133 (6.5) | Conducted Out of Band Emissions       | PASS   |
| 6   | 2.1051<br>2.1057<br>22.917<br>24.238 | RSS-GEN (6.6)                  | Band Edge                             | PASS   |
| 7   | 22.913<br>24.232                     | RSS-132(5.4)<br>RSS-133 (6.4)  | Transmitter Radiated Power (EIPR/ERP) | PASS   |
| 8   | 2.1053<br>2.1057<br>22.917<br>24.238 | RSS-132 (5.5)<br>RSS-133 (6.5) | Radiated Out of Band Emissions        | PASS   |

NOTE: Measurement method according to TIA/EIA 603.D-2010




## 4. Test Result

### 4.1 Conducted Output Power

#### 4.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

#### 4.1.2 Test Description

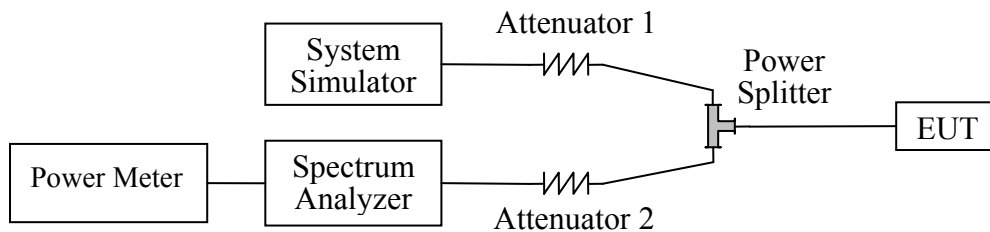

The EUT, which is powered by battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.



## 4.1.3 Test Result

| Band          | Channel | Frequency (MHz) | Measured Output Power(dBm) | Limited (dBm) | Verdict |
|---------------|---------|-----------------|----------------------------|---------------|---------|
| WCDMA Band V  | 4132    | 826.4           | 22.56                      | 38.5          | PASS    |
|               | 4182    | 836.4           | 22.64                      | 38.5          | PASS    |
|               | 4233    | 846.6           | 22.41                      | 38.5          | PASS    |
| HSDPA Band V  | 4132    | 826.4           | 22.41                      | 38.5          | PASS    |
|               | 4182    | 836.4           | 22.58                      | 38.5          | PASS    |
|               | 4233    | 846.6           | 22.56                      | 38.5          | PASS    |
| HSUPA Band V  | 4132    | 826.4           | 22.55                      | 38.5          | PASS    |
|               | 4182    | 836.4           | 22.52                      | 38.5          | PASS    |
|               | 4233    | 846.6           | 22.47                      | 38.5          | PASS    |
| HSPA+ Band V  | 4132    | 826.4           | 22.47                      | 38.5          | PASS    |
|               | 4182    | 836.4           | 22.61                      | 38.5          | PASS    |
|               | 4233    | 846.6           | 22.48                      | 38.5          | PASS    |
| WCDMA Band II | 9262    | 1852.4          | 21.23                      | 38.5          | PASS    |
|               | 9400    | 1880            | 21.62                      | 38.5          | PASS    |
|               | 9538    | 1907.6          | 21.40                      | 38.5          | PASS    |
| HSDPA Band II | 9262    | 1852.4          | 21.29                      | 38.5          | PASS    |
|               | 9400    | 1880            | 21.57                      | 38.5          | PASS    |
|               | 9538    | 1907.6          | 21.47                      | 38.5          | PASS    |
| HSUPA Band II | 9262    | 1852.4          | 21.26                      | 38.5          | PASS    |
|               | 9400    | 1880            | 21.73                      | 38.5          | PASS    |
|               | 9538    | 1907.6          | 21.44                      | 38.5          | PASS    |
| HSPA+ Band II | 9262    | 1852.4          | 21.23                      | 38.5          | PASS    |
|               | 9400    | 1880            | 21.67                      | 38.5          | PASS    |
|               | 9538    | 1907.6          | 21.36                      | 38.5          | PASS    |

*Note: The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA/HSPA+ was tested by power meter.*



## 4.2 Occupied Bandwidth

### 4.2.1 Definition

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth, or 26dB bandwidth taking the total RF output power as reference.

### 4.2.2 Test Description

See section 4.2.1 of this report.


### 4.2.3 Test Results

Here the lowest, middle and highest channels are tested to record the 99% and -26dB occupied bandwidth


| Band         | Channel | Frequency (MHz) | -26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Refer to Plot |
|--------------|---------|-----------------|-----------------------|------------------------------|---------------|
| WCDMA Band V | 4132    | 826.4           | 4.631                 | 4.166                        | Plot A1       |
|              | 4182    | 836.4           | 4.615                 | 4.182                        | Plot A2       |
|              | 4233    | 846.6           | 4.647                 | 4.134                        | Plot A3       |
| HSDPA Band V | 4132    | 826.4           | 4.647                 | 4.166                        | Plot B1       |
|              | 4182    | 836.4           | 4.631                 | 4.150                        | Plot B2       |
|              | 4233    | 846.6           | 4.631                 | 4.150                        | Plot B3       |
| HSUPA Band V | 4132    | 826.4           | 4.631                 | 4.150                        | Plot C1       |
|              | 4182    | 836.4           | 4.647                 | 4.105                        | Plot C2       |
|              | 4233    | 846.6           | 4.631                 | 4.134                        | Plot C3       |
| HSPA+ Band V | 4132    | 826.4           | 4.663                 | 4.166                        | Plot D1       |
|              | 4182    | 836.4           | 4.599                 | 4.134                        | Plot D2       |
|              | 4233    | 846.6           | 4.631                 | 4.150                        | Plot D3       |



Test Plots:




Page 12 of 66

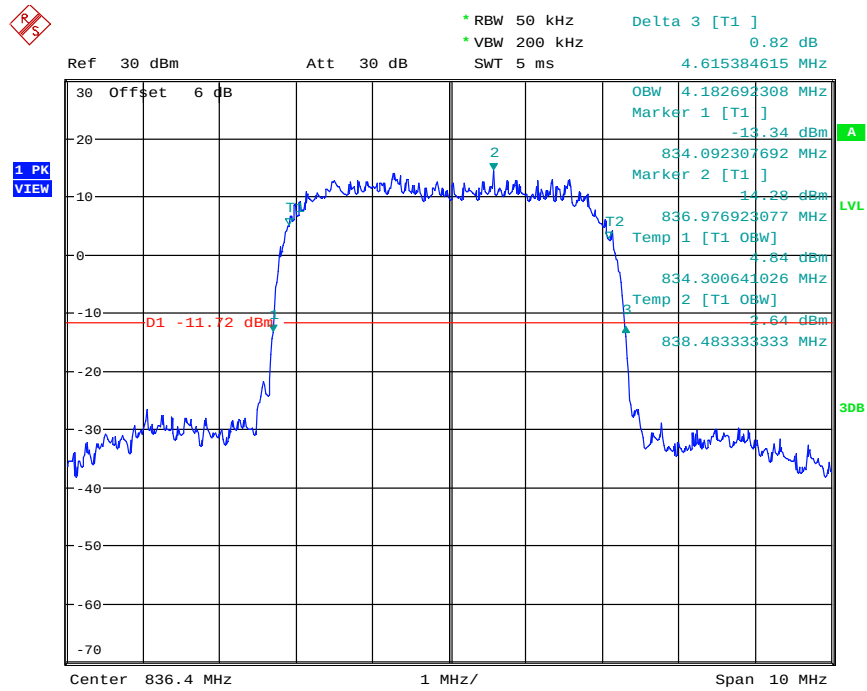


Date: 3.MAY.2016 20:28:51

(Plot A2:WCDMA Band V Channel=4182)

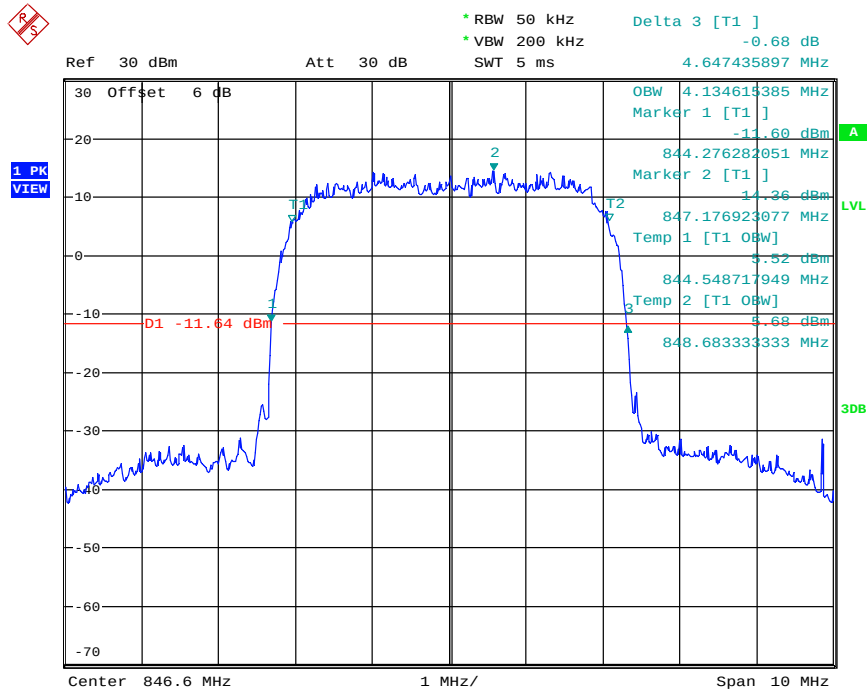


Date: 3.MAY.2016 20:34:19

(Plot A3:WCDMA Band V Channel=4233)

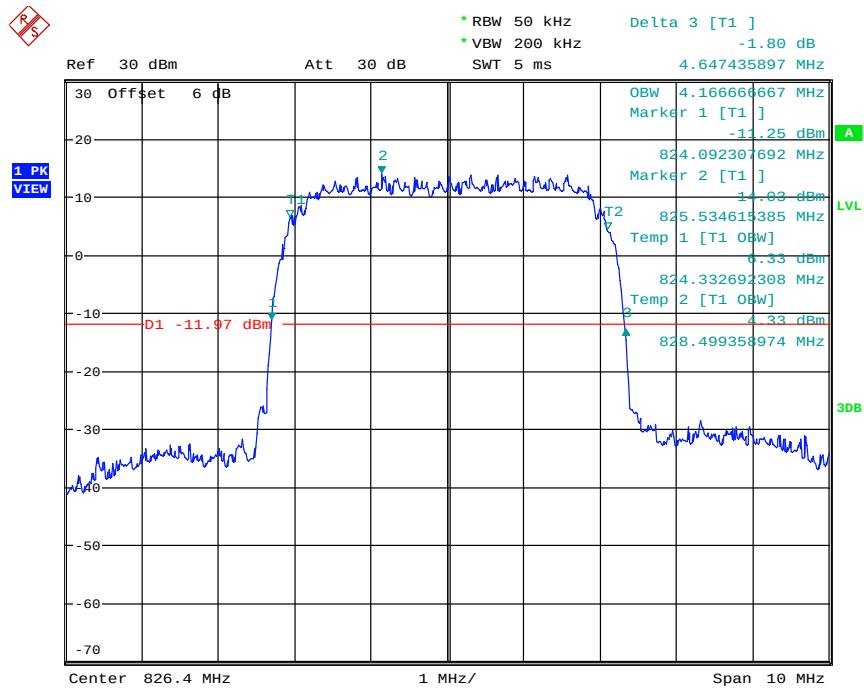


Date: 3.MAY.2016 20:24:46

(Plot B1: HSDPA Band V Channel=4132)

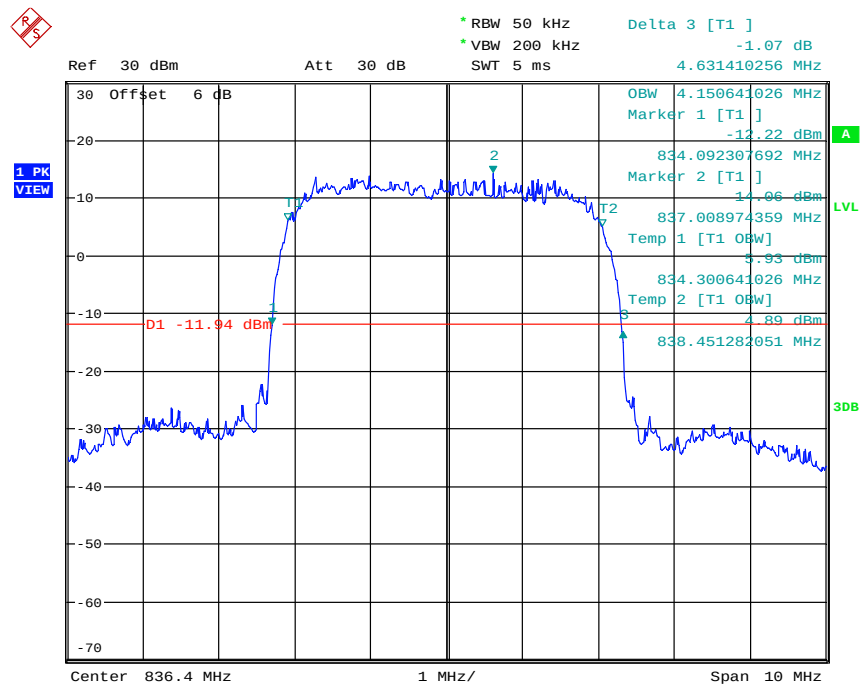


Date: 3.MAY.2016 20:30:13

(Plot B2: HSDPA Band V Channel=4182)

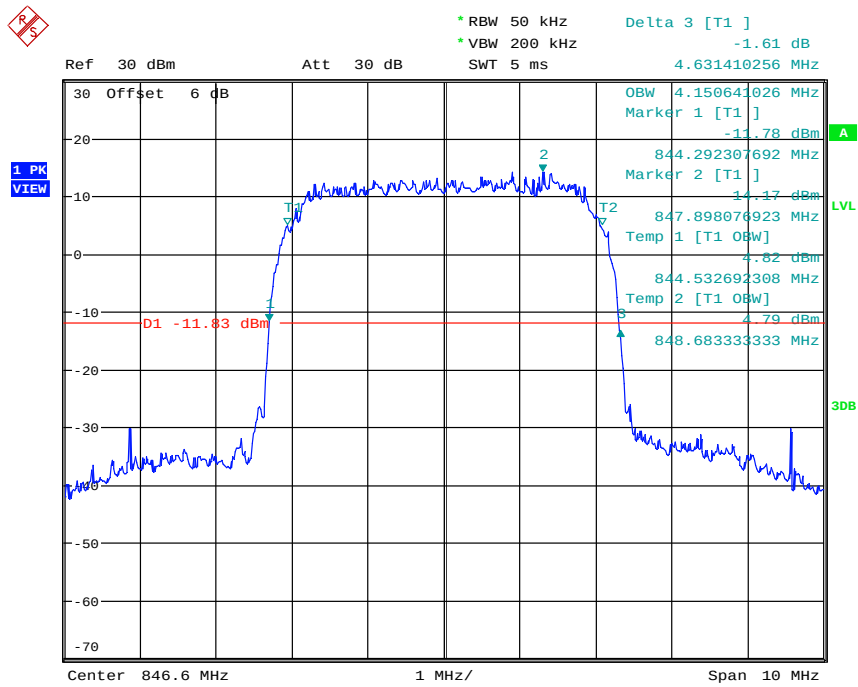


Date: 3.MAY.2016 20:35:26

(Plot B3: HSDPA Band V Channel=4233)

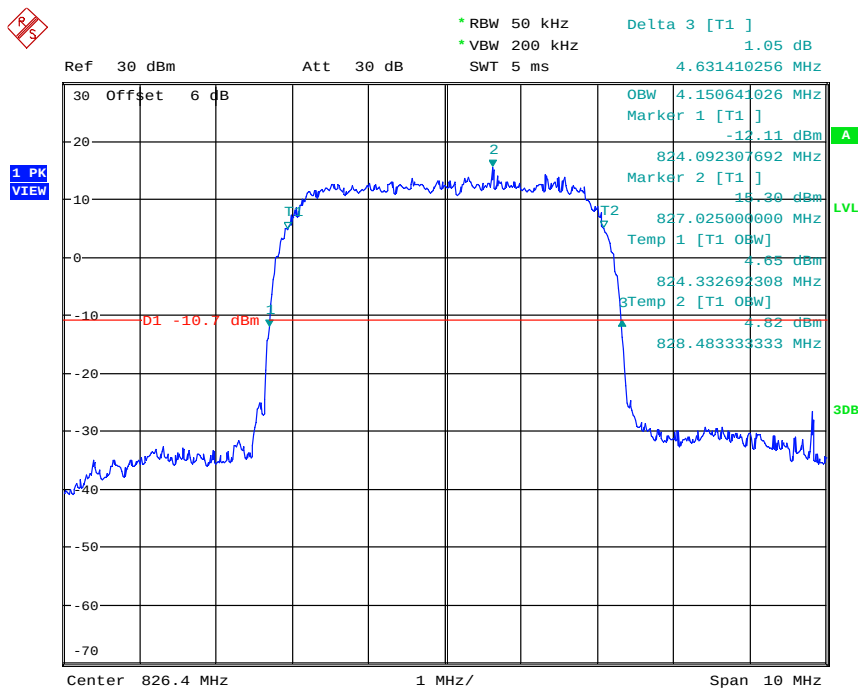


Date: 3.MAY.2016 20:25:50

(Plot C1: HSUPA Band V Channel=4132)

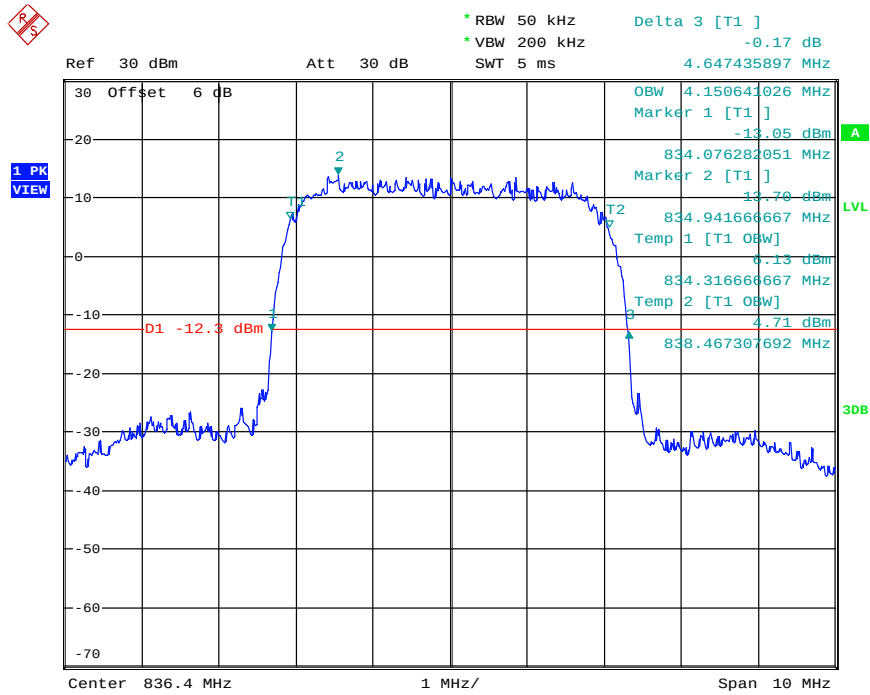


Date: 3.MAY.2016 20:31:09

(Plot C2: HSUPA Band V Channel=4182)

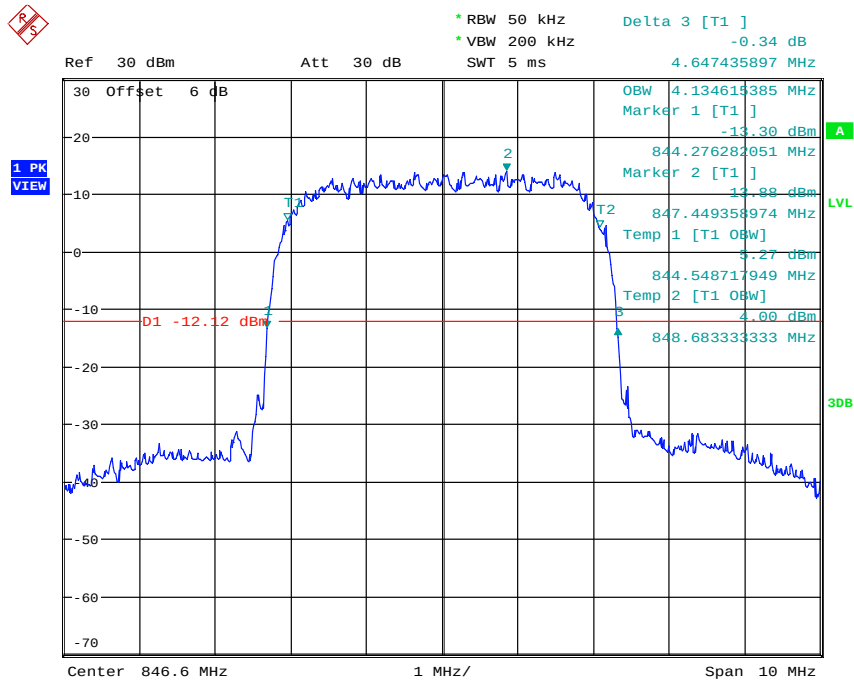


Date: 3.MAY.2016 20:36:20

(Plot C3: HSUPA Band V Channel=4233)

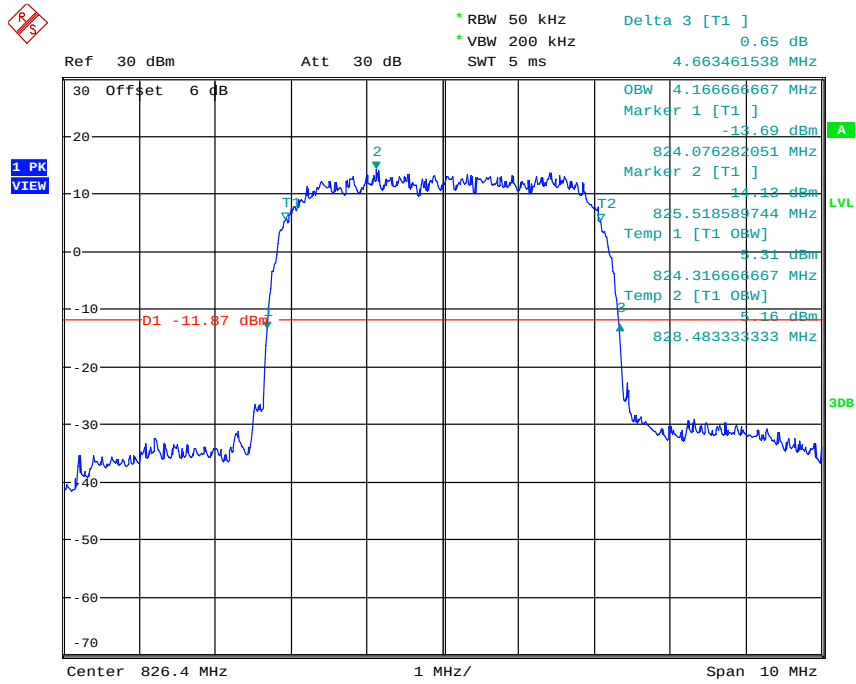


Date: 3.MAY.2016 20:26:46

(Plot D1: HSPA+ Band V Channel=4132)

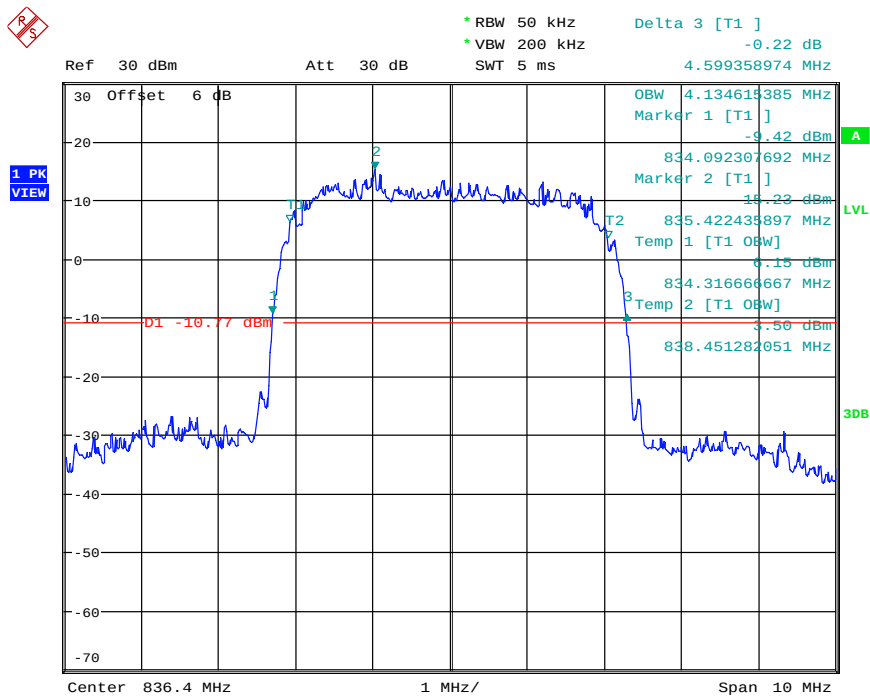


Date: 3.MAY.2016 20:32:13

(Plot D2: HSPA+ Band V Channel=4182)

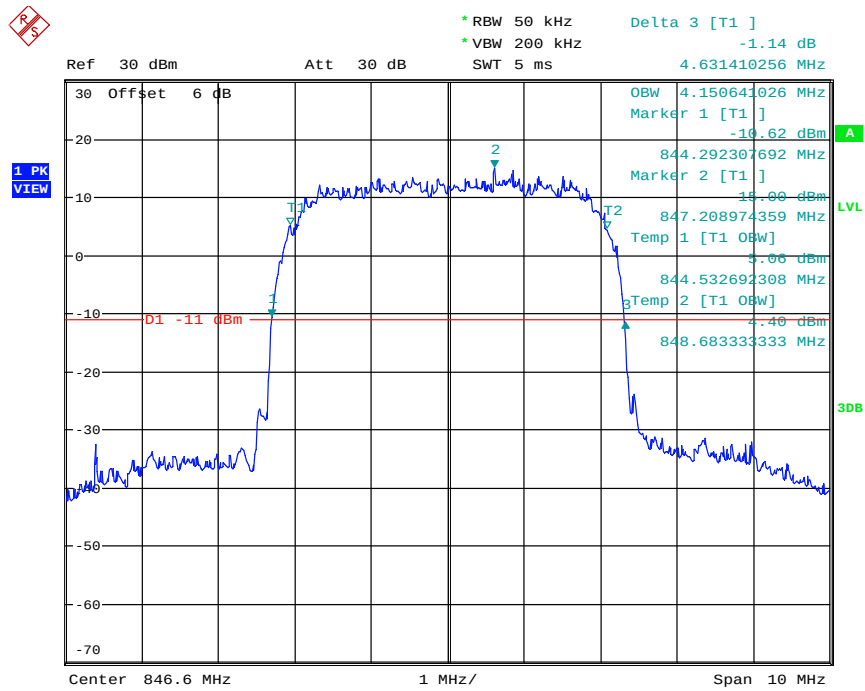


Date: 3.MAY.2016 20:37:17

(Plot D3: HSPA+ Band V Channel=4233)

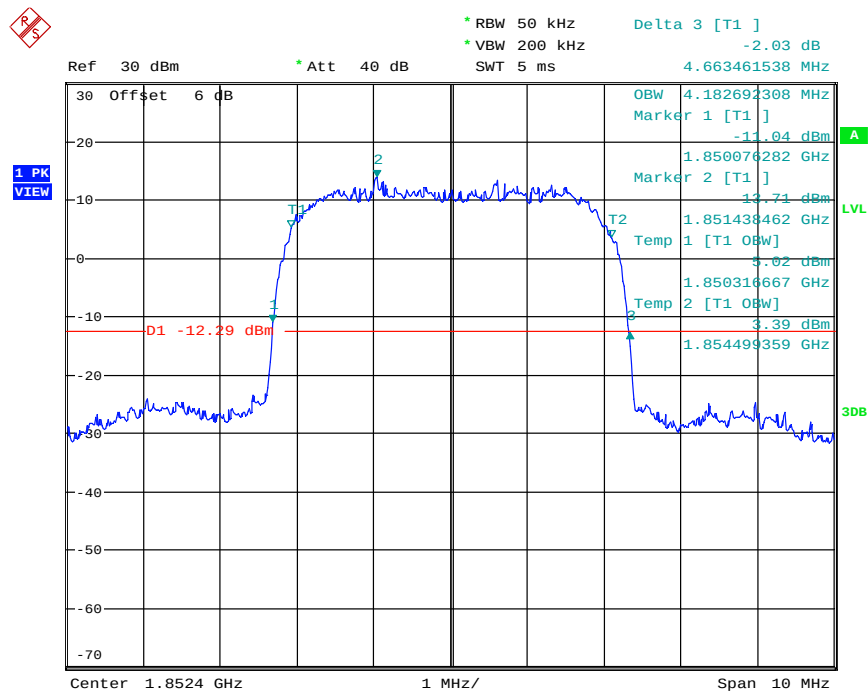


Date: 4.MAY.2016 13:37:25

(Plot E1: WCDMA Band II Channel=9262)

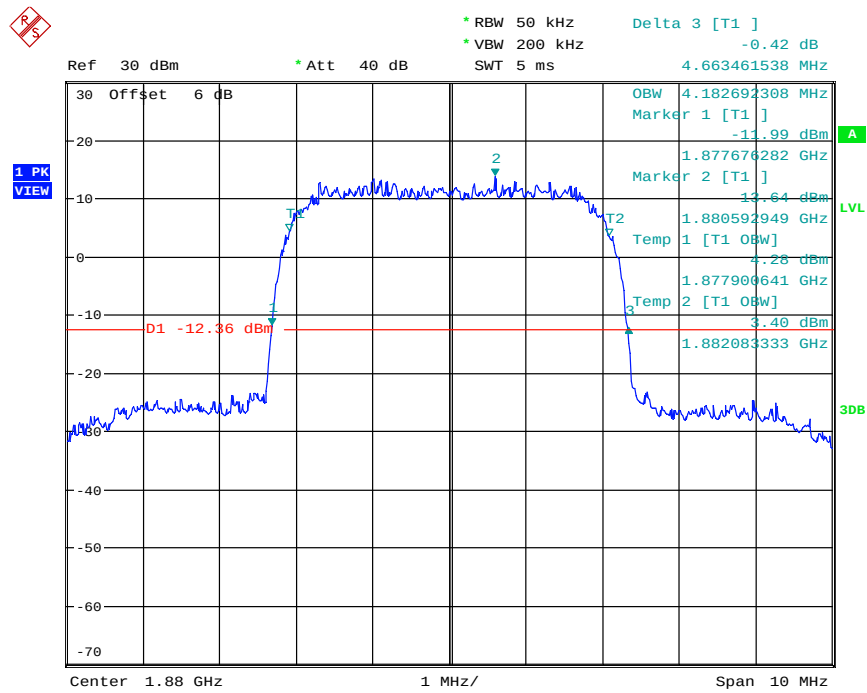


Date: 4.MAY.2016 13:41:12

(Plot E2: WCDMA Band II Channel=9400)

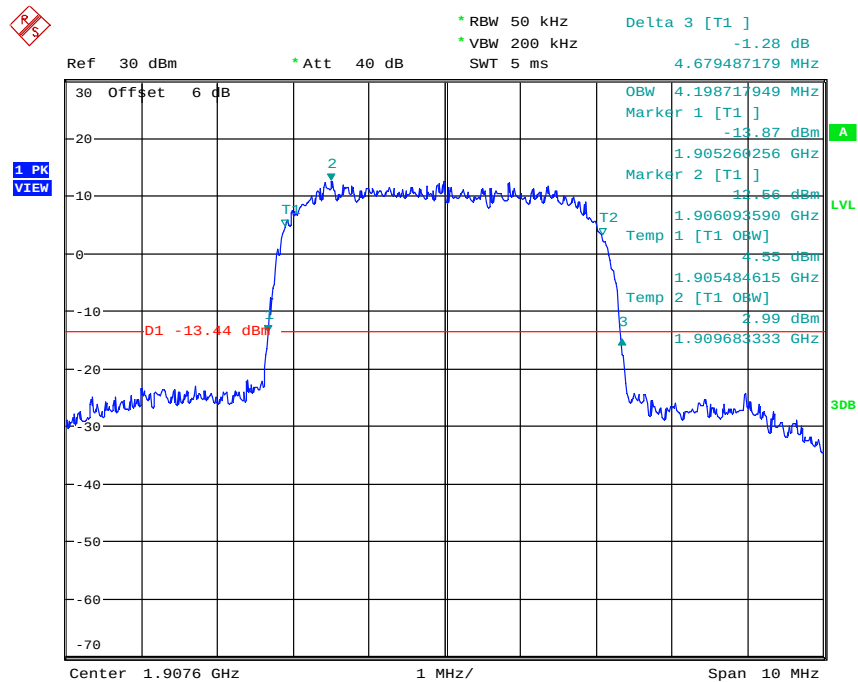


Date: 4.MAY.2016 13:45:00

(Plot E3: WCDMA Band II Channel=9538)

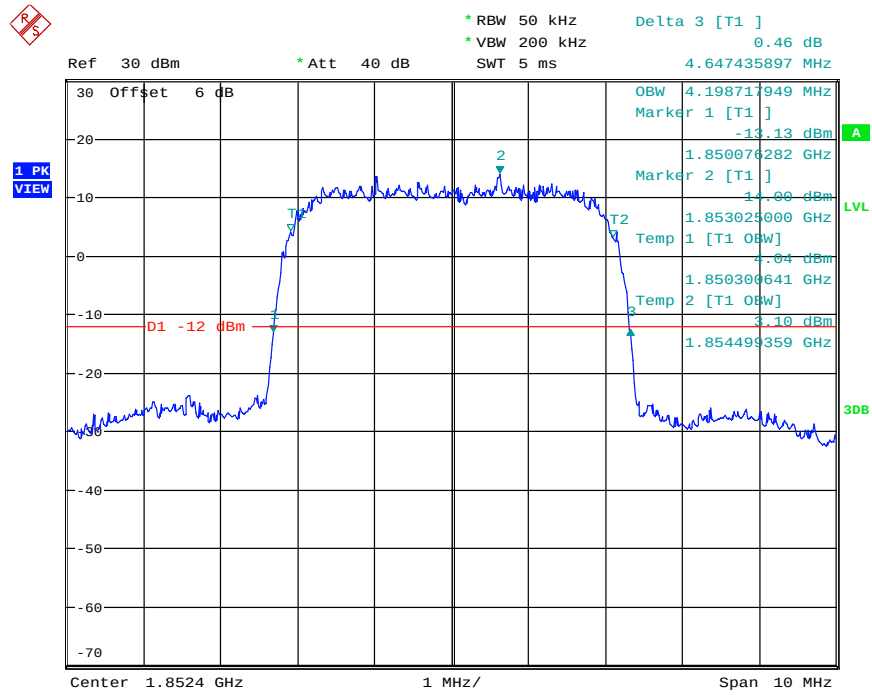


Date: 4.MAY.2016 13:38:12

(Plot F1:HSDPA Band II Channel=9262)

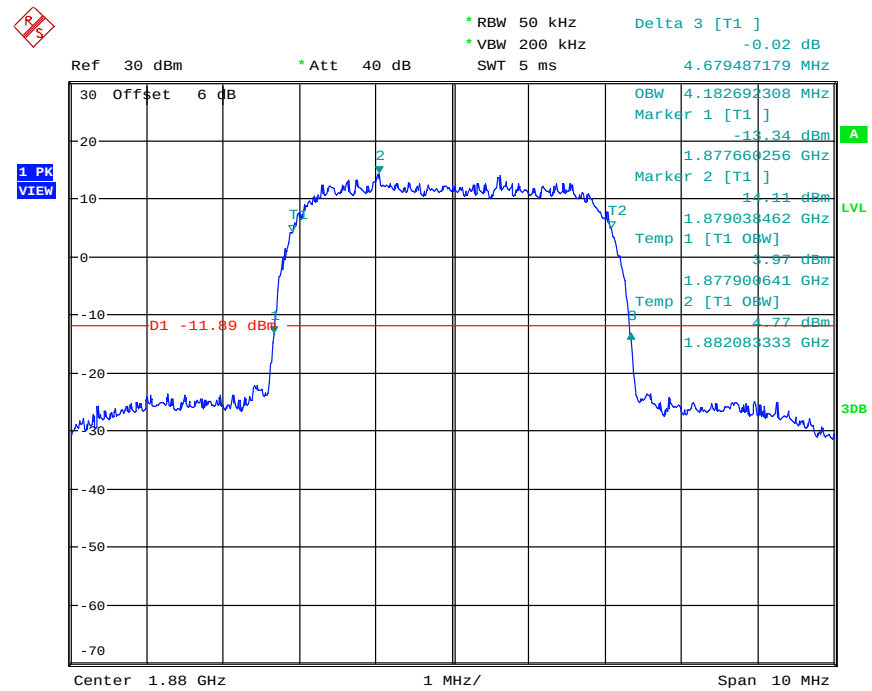


Date: 4.MAY.2016 13:42:14

(Plot F2: HSDPA Band II Channel=9400)

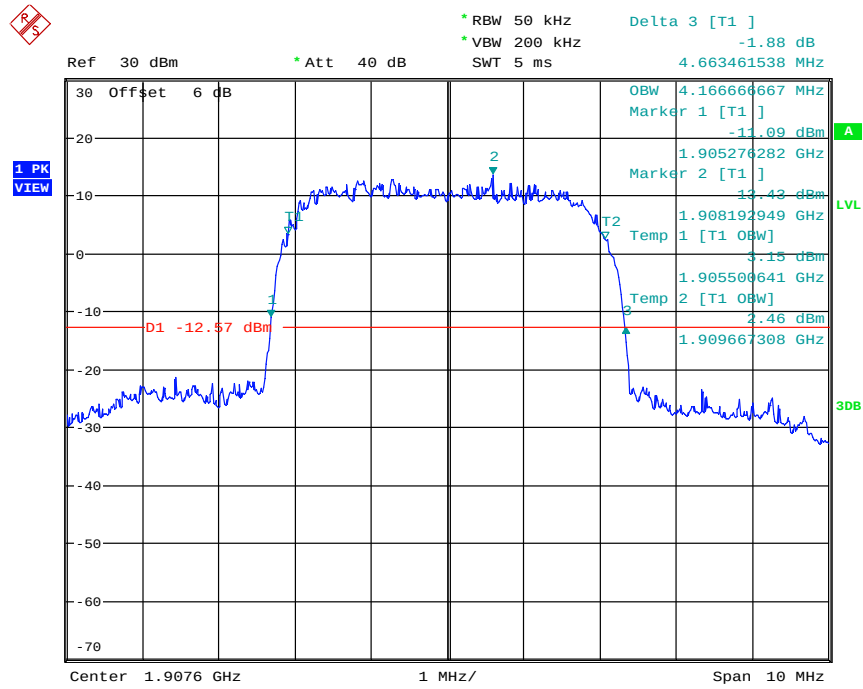


Date: 4.MAY.2016 13:45:40

(Plot F3: HSDPA Band II Channel=9538)

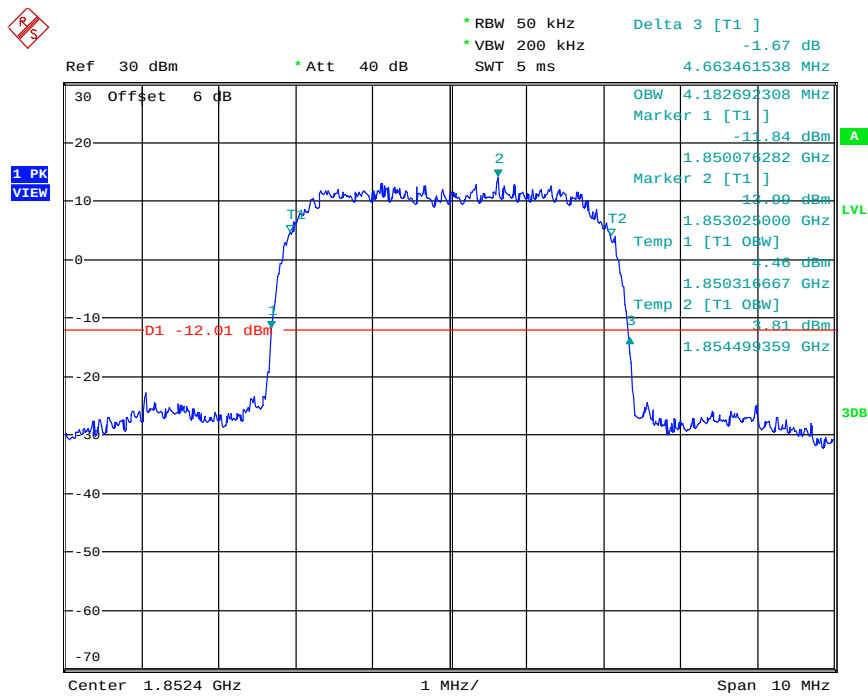


Date: 4.MAY.2016 13:39:05

(Plot G1: HSUPA Band II Channel=9262)

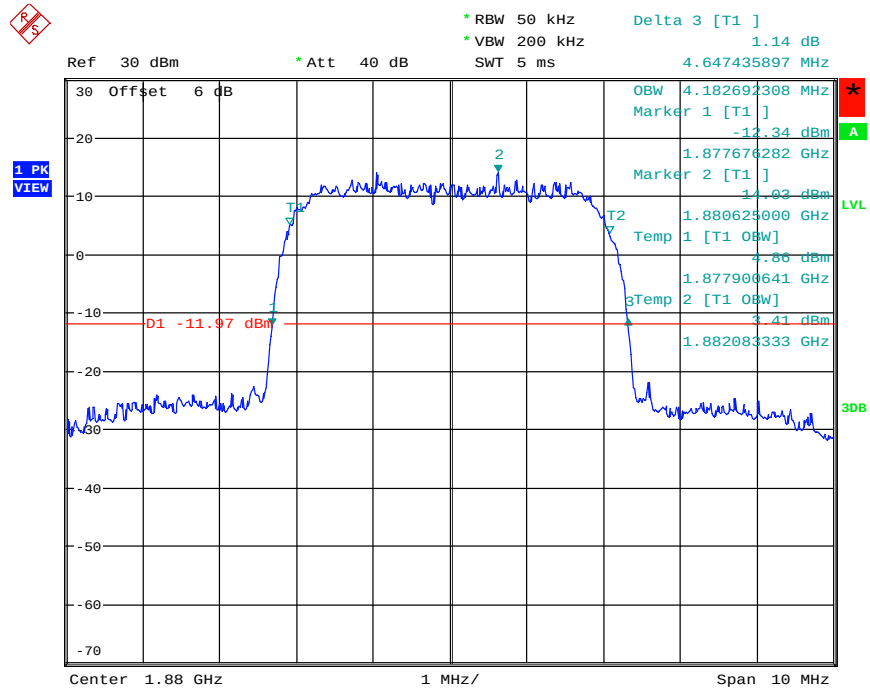


Date: 4.MAY.2016 13:43:07

(Plot G2: HSUPA Band V Channel=9400)

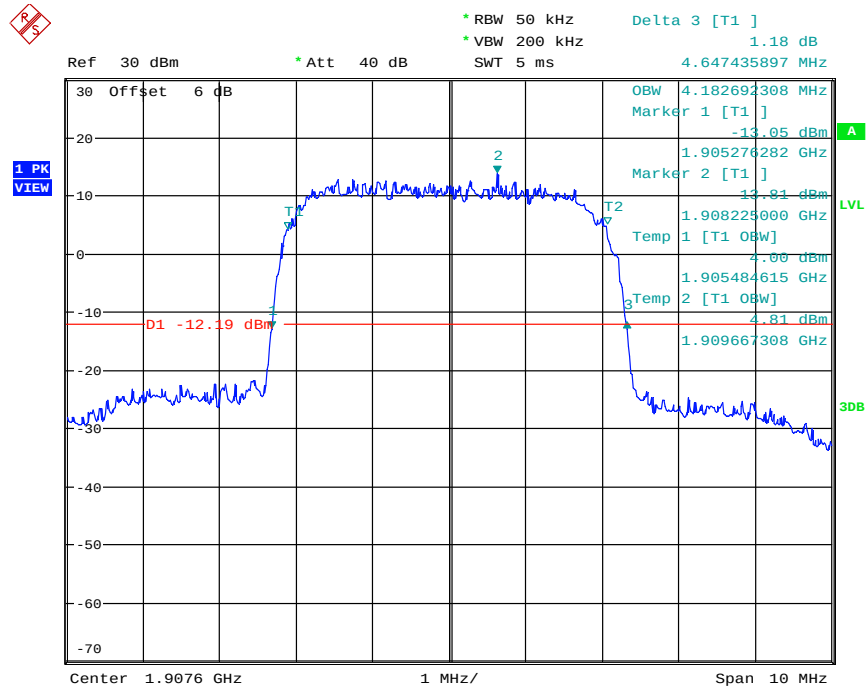


Date: 4.MAY.2016 13:46:27

(Plot G3: HSUPA Band II Channel=9538)

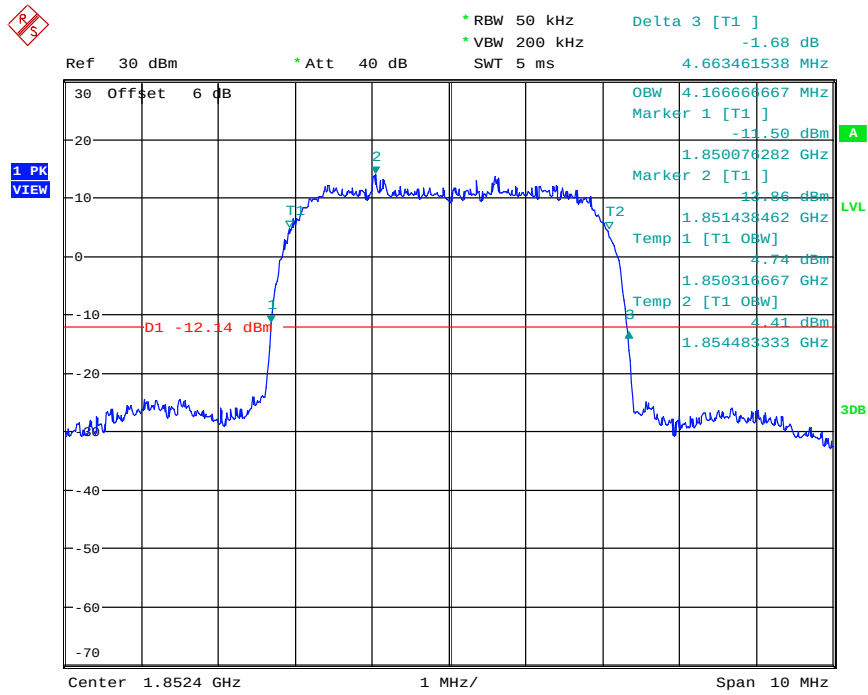


Date: 4.MAY.2016 13:39:50

(Plot H1: HSPA+ Band II Channel=9262)

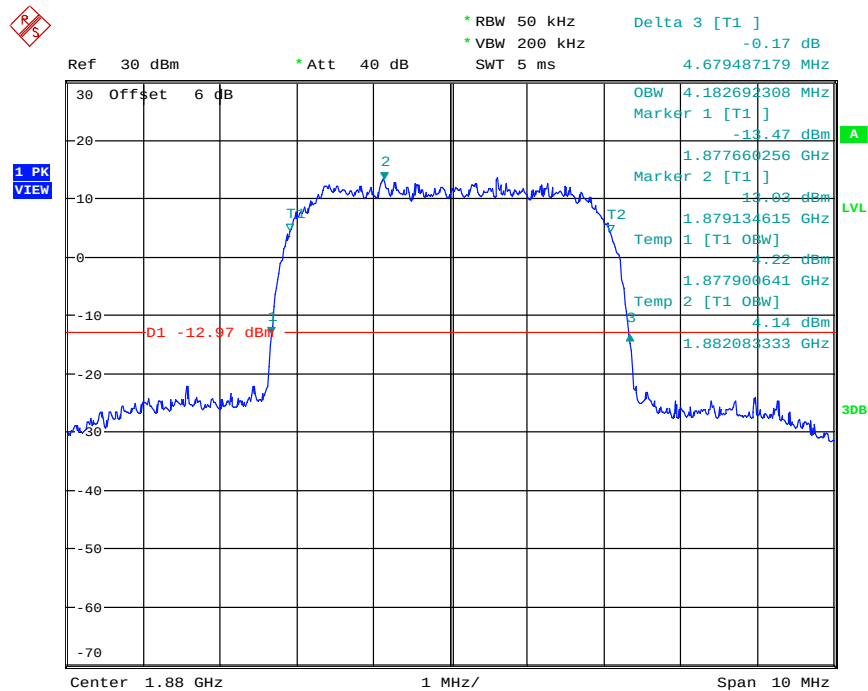

Date: 4.MAY.2016 13:43:50

(Plot H2: HSPA+ Band II Channel=9400)

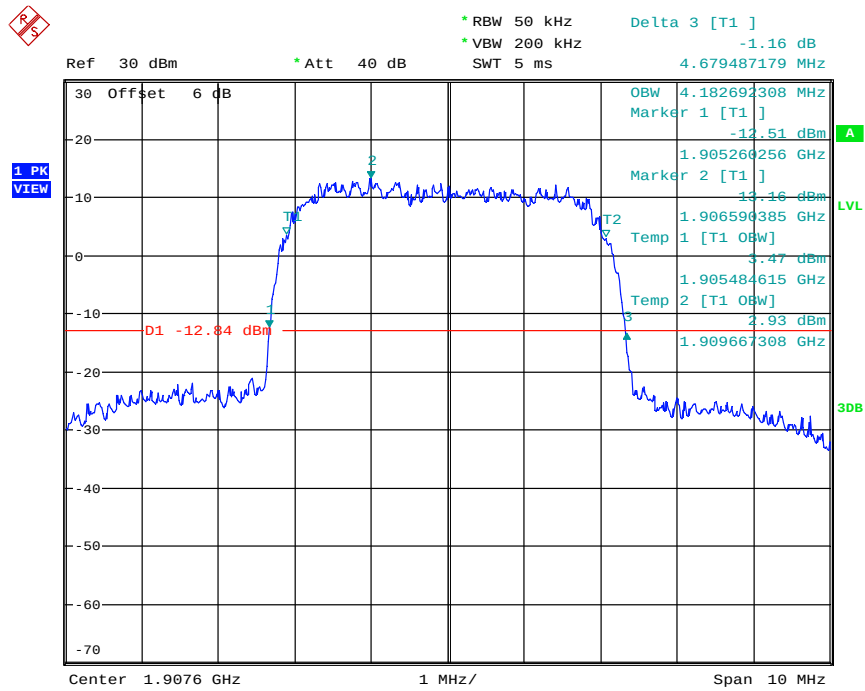

Date: 4.MAY.2016 13:47:06

(Plot H3: HSPA+ Band II Channel=9538)




## 4.3 Peak-to-Average Ratio

### 4.3.1 Requirement

According to FCC section 24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 4.3.2 Test Description

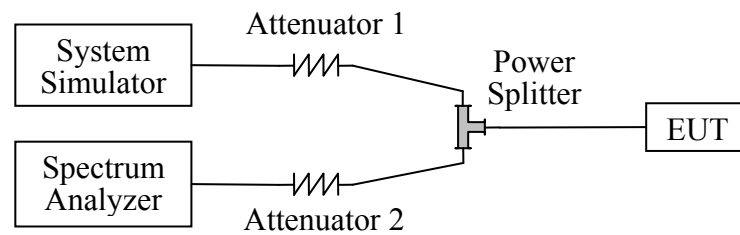


### 4.3.3 Test Result

| Band         | Channel | Frequency (MHz) | Peak-to-Average Ratio (dB) | Refer to Plot |
|--------------|---------|-----------------|----------------------------|---------------|
| WCDMA Band V | 4132    | 826.4           | 3.37                       | A1            |
|              | 4182    | 836.4           | 3.43                       | A2            |
|              | 4233    | 846.6           | 3.43                       | A3            |
| HSDPA Band V | 4132    | 826.4           | 3.33                       | B1            |
|              | 4182    | 836.4           | 3.43                       | B2            |
|              | 4233    | 846.6           | 3.46                       | B3            |
| HSUPA Band V | 4132    | 826.4           | 3.40                       | C1            |
|              | 4182    | 836.4           | 3.40                       | C2            |
|              | 4233    | 846.6           | 3.40                       | C3            |
| HSPA+ Band V | 4132    | 826.4           | 3.40                       | D1            |
|              | 4182    | 836.4           | 3.40                       | D2            |
|              | 4233    | 846.6           | 3.43                       | D3            |




| Band          | Channel | Frequency (MHz) | Peak-to-Average Ratio (dB) | Refer to Plot |
|---------------|---------|-----------------|----------------------------|---------------|
| WCDMA Band II | 9262    | 1852.4          | 3.01                       | E1            |
|               | 9400    | 1880            | 2.40                       | E2            |
|               | 9538    | 1907.6          | 2.40                       | E3            |
| HSDPA Band II | 9262    | 1852.4          | 2.95                       | F1            |
|               | 9400    | 1880            | 2.40                       | F2            |
|               | 9538    | 1907.6          | 2.18                       | F3            |
| HSUPA Band II | 9262    | 1852.4          | 2.98                       | G1            |
|               | 9400    | 1880            | 2.40                       | G2            |
|               | 9538    | 1907.6          | 2.18                       | G3            |
| HSPA+ Band II | 9262    | 1852.4          | 2.95                       | H1            |
|               | 9400    | 1880            | 2.44                       | H2            |
|               | 9538    | 1907.6          | 2.34                       | H3            |

## Test Plots:

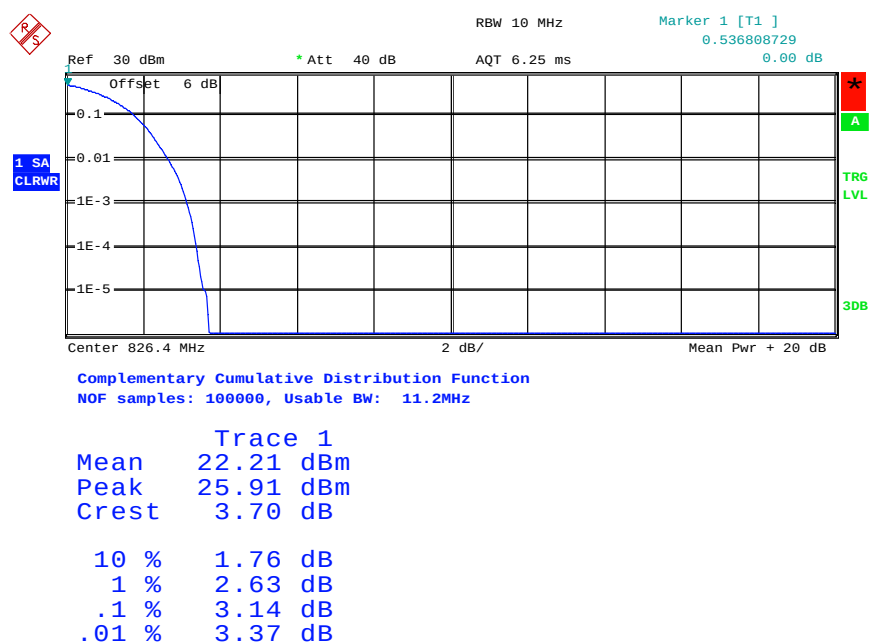

Date: 4.MAY.2016 13:18:59

(Plot A1:WCDMA Band V Channel=4132)

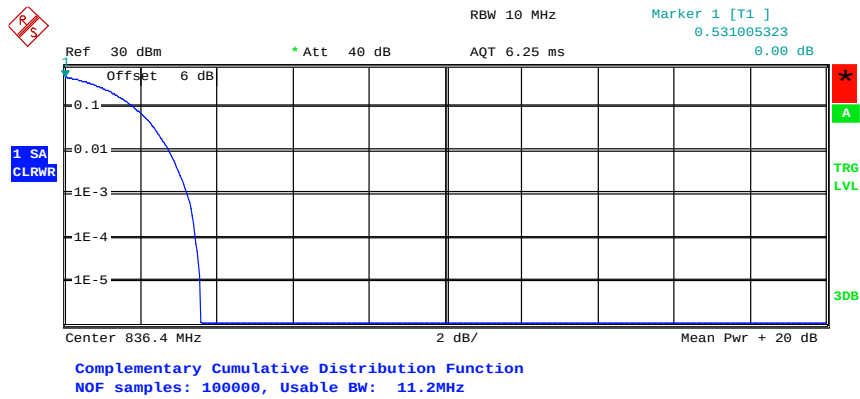


Trace 1

|       |           |
|-------|-----------|
| Mean  | 22.18 dBm |
| Peak  | 25.77 dBm |
| Crest | 3.58 dB   |
| 10 %  | 1.83 dB   |
| 1 %   | 2.76 dB   |
| .1 %  | 3.24 dB   |
| .01 % | 3.43 dB   |

Date: 4.MAY.2016 13:16:53

(Plot A2:WCDMA Band V Channel=4182)

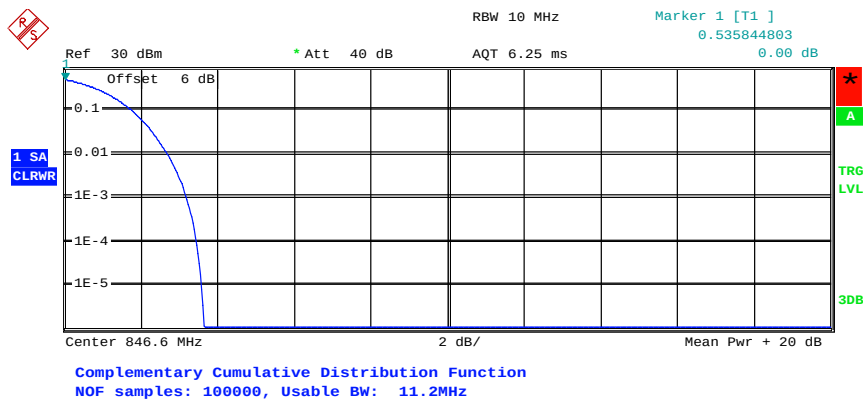


Trace 1

|       |           |
|-------|-----------|
| Mean  | 22.21 dBm |
| Peak  | 25.85 dBm |
| Crest | 3.64 dB   |
| 10 %  | 1.76 dB   |
| 1 %   | 2.69 dB   |
| .1 %  | 3.17 dB   |
| .01 % | 3.43 dB   |

Date: 4.MAY.2016 13:14:18

(Plot A3:WCDMA Band V Channel=4233)

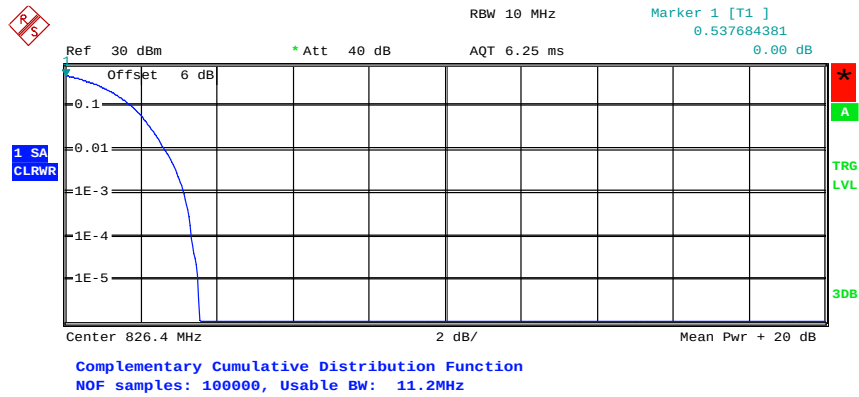


Trace 1  
Mean 22.30 dBm  
Peak 25.83 dBm  
Crest 3.53 dB

10 % 1.76 dB  
1 % 2.63 dB  
.1 % 3.14 dB  
.01 % 3.33 dB

Date: 4.MAY.2016 13:19:12

(Plot B1: HSDPA Band V Channel=4132)

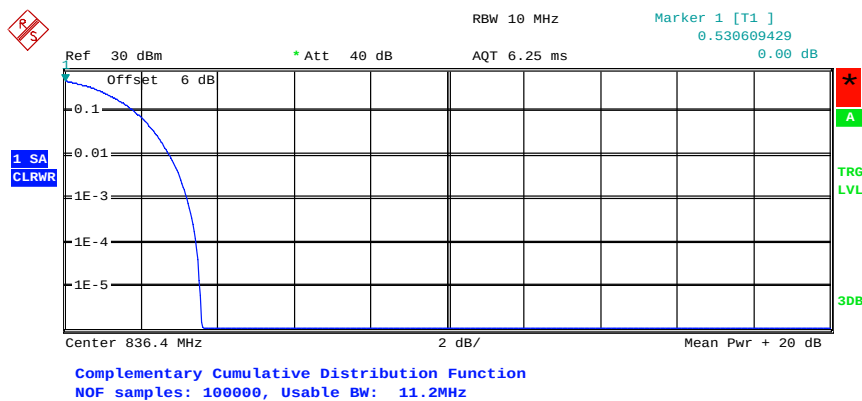


Trace 1  
Mean 22.24 dBm  
Peak 25.84 dBm  
Crest 3.59 dB

10 % 1.83 dB  
1 % 2.72 dB  
.1 % 3.21 dB  
.01 % 3.43 dB

Date: 4.MAY.2016 13:17:10

(Plot B2: HSDPA Band V Channel=4182)

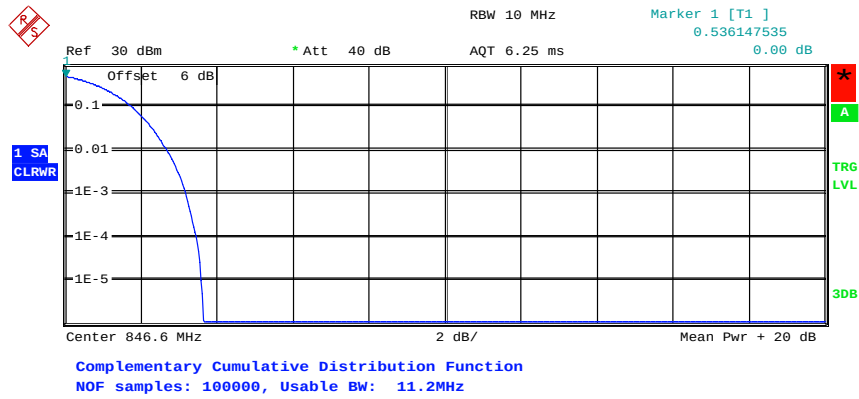


Trace 1

|       |           |
|-------|-----------|
| Mean  | 22.20 dBm |
| Peak  | 25.85 dBm |
| Crest | 3.65 dB   |
| 10 %  | 1.76 dB   |
| 1 %   | 2.69 dB   |
| .1 %  | 3.17 dB   |
| .01 % | 3.46 dB   |

Date: 4.MAY.2016 13:14:55

(Plot B3: HSDPA Band V Channel=4233)

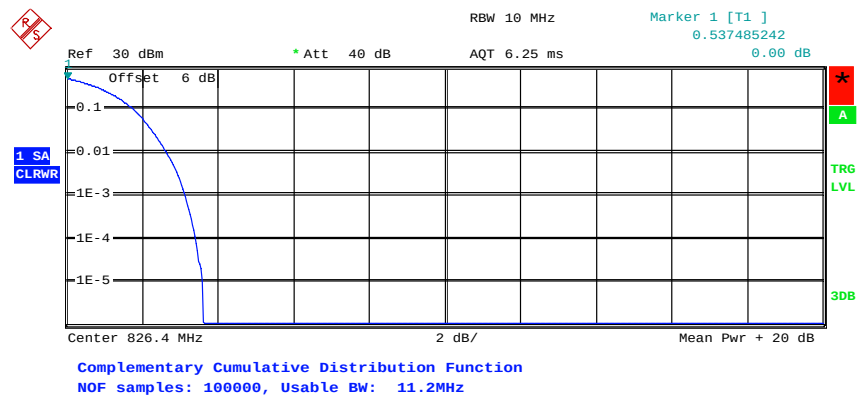


Trace 1

|       |           |
|-------|-----------|
| Mean  | 22.29 dBm |
| Peak  | 25.91 dBm |
| Crest | 3.62 dB   |
| 10 %  | 1.76 dB   |
| 1 %   | 2.63 dB   |
| .1 %  | 3.14 dB   |
| .01 % | 3.40 dB   |

Date: 4.MAY.2016 13:19:53

(Plot C1: HSUPA Band V Channel=4132)

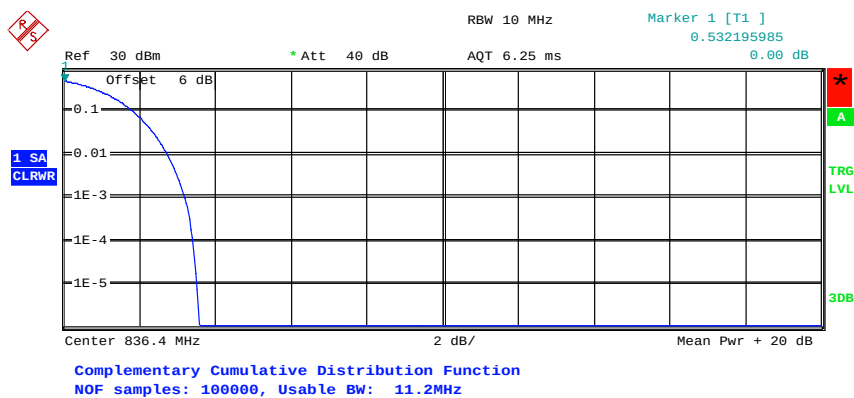


Trace 1

|       |           |
|-------|-----------|
| Mean  | 22.34 dBm |
| Peak  | 25.91 dBm |
| Crest | 3.57 dB   |

|       |         |
|-------|---------|
| 10 %  | 1.83 dB |
| 1 %   | 2.72 dB |
| .1 %  | 3.21 dB |
| .01 % | 3.40 dB |

Date: 4.MAY.2016 13:17:34

(Plot C2: HSUPA Band V Channel=4182)

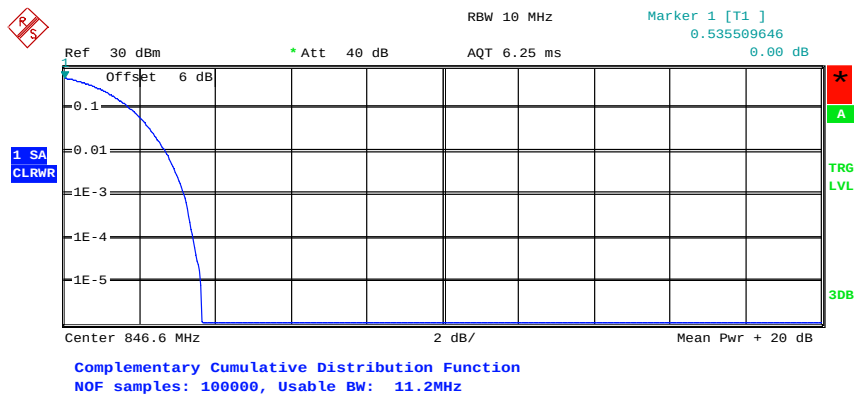


Trace 1

|       |           |
|-------|-----------|
| Mean  | 22.21 dBm |
| Peak  | 25.85 dBm |
| Crest | 3.64 dB   |

|       |         |
|-------|---------|
| 10 %  | 1.76 dB |
| 1 %   | 2.69 dB |
| .1 %  | 3.17 dB |
| .01 % | 3.40 dB |

Date: 4.MAY.2016 13:15:19

(Plot C3: HSUPA Band V Channel=4233)

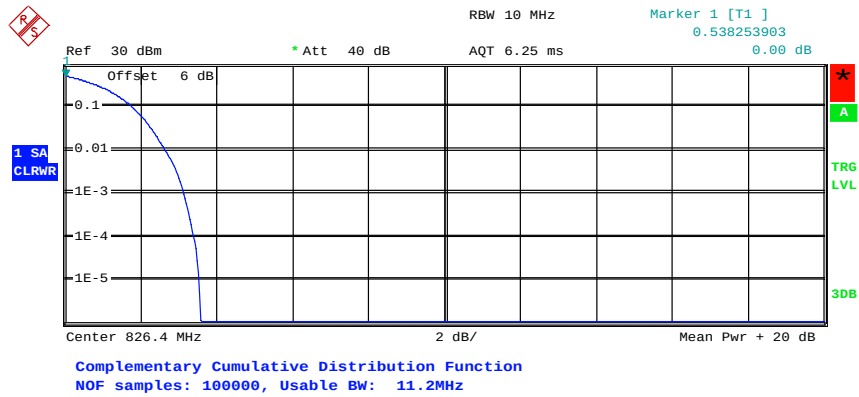


Trace 1

|       |           |
|-------|-----------|
| Mean  | 22.27 dBm |
| Peak  | 25.83 dBm |
| Crest | 3.57 dB   |

|       |         |
|-------|---------|
| 10 %  | 1.76 dB |
| 1 %   | 2.63 dB |
| .1 %  | 3.14 dB |
| .01 % | 3.40 dB |

Date: 4.MAY.2016 13:20:06

(Plot D1: HSPA+ Band V Channel=4132)

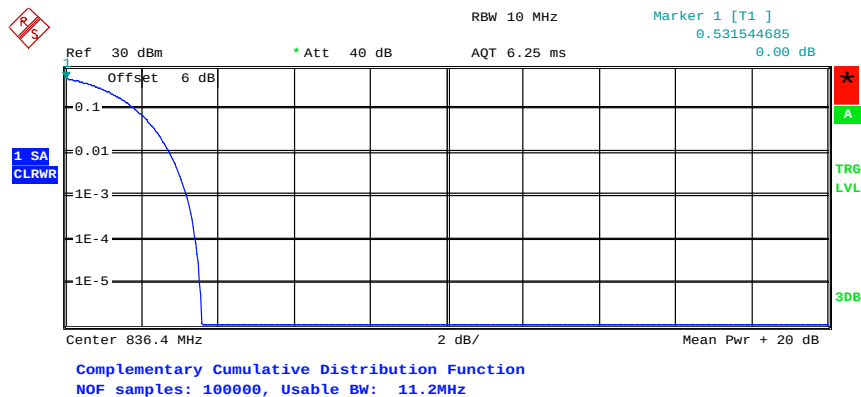


Trace 1

|       |           |
|-------|-----------|
| Mean  | 22.32 dBm |
| Peak  | 25.91 dBm |
| Crest | 3.59 dB   |

|       |         |
|-------|---------|
| 10 %  | 1.83 dB |
| 1 %   | 2.72 dB |
| .1 %  | 3.17 dB |
| .01 % | 3.40 dB |

Date: 4.MAY.2016 13:17:56

(Plot D2: HSPA+ Band V Channel=4182)

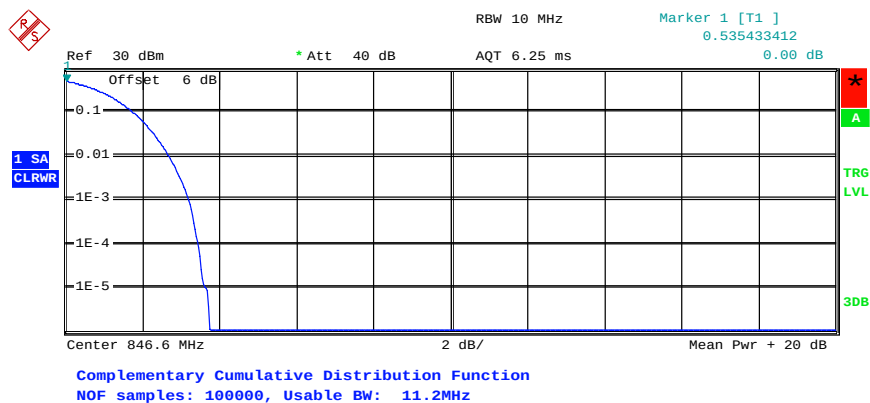


Trace 1  
Mean 22.19 dBm  
Peak 25.92 dBm  
Crest 3.74 dB

10 % 1.76 dB  
1 % 2.69 dB  
.1 % 3.21 dB  
.01 % 3.43 dB

Date: 4.MAY.2016 13:15:35

(Plot D3: HSPA+ Band V Channel=4233)

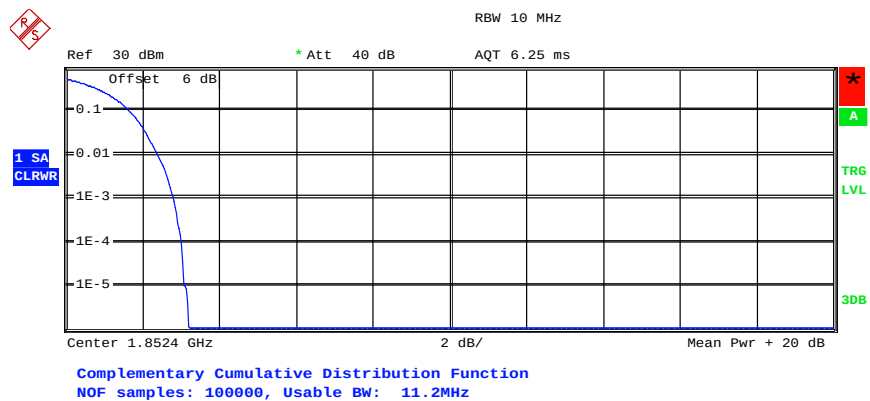


Trace 1  
Mean 20.96 dBm  
Peak 24.16 dBm  
Crest 3.20 dB

10 % 1.63 dB  
1 % 2.37 dB  
.1 % 2.79 dB  
.01 % 3.01 dB

Date: 4.MAY.2016 14:17:37

(Plot E1: WCDMA Band II Channel=9262)

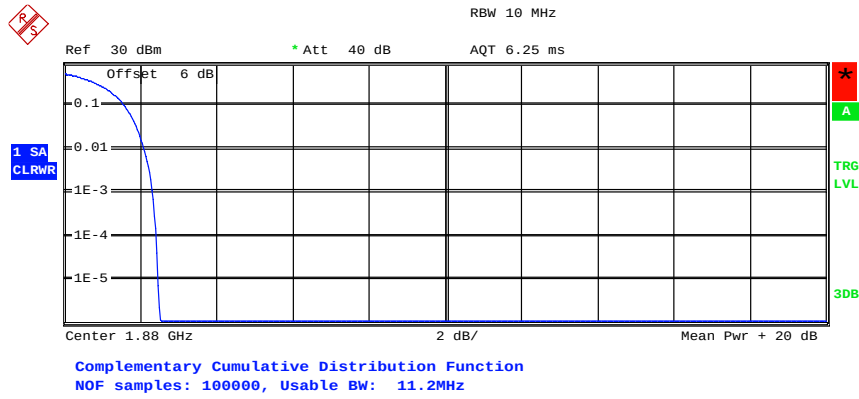


Trace 1

|       |           |
|-------|-----------|
| Mean  | 21.28 dBm |
| Peak  | 23.79 dBm |
| Crest | 2.51 dB   |

|       |         |
|-------|---------|
| 10 %  | 1.57 dB |
| 1 %   | 2.08 dB |
| .1 %  | 2.31 dB |
| .01 % | 2.40 dB |

Date: 4.MAY.2016 14:21:28

(Plot E2: WCDMA Band II Channel=9400)

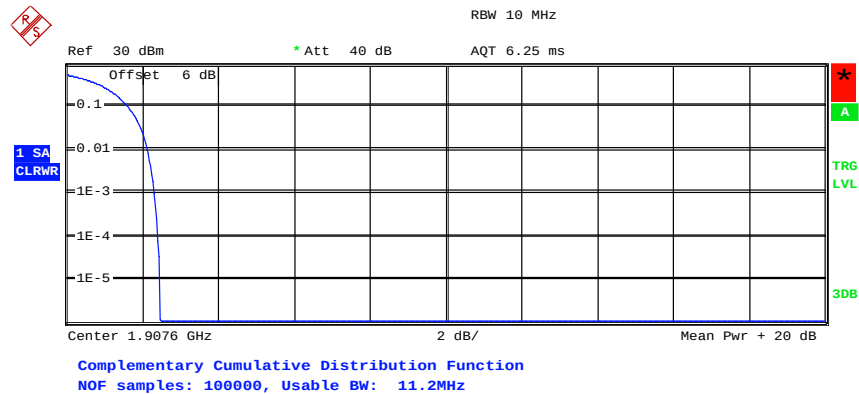


Trace 1

|       |           |
|-------|-----------|
| Mean  | 21.26 dBm |
| Peak  | 23.72 dBm |
| Crest | 2.46 dB   |

|       |         |
|-------|---------|
| 10 %  | 1.60 dB |
| 1 %   | 2.12 dB |
| .1 %  | 2.31 dB |
| .01 % | 2.40 dB |


Date: 4.MAY.2016 14:15:15

(Plot E3: WCDMA Band II Channel=9538)

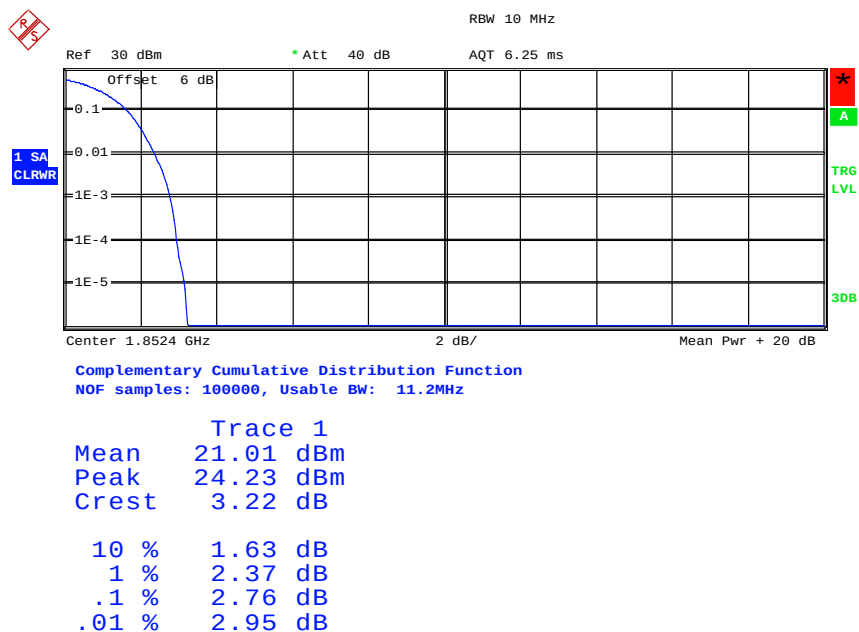


Date: 4.MAY.2016 14:18:00

(Plot F1:HSDPA Band II Channel=9262)

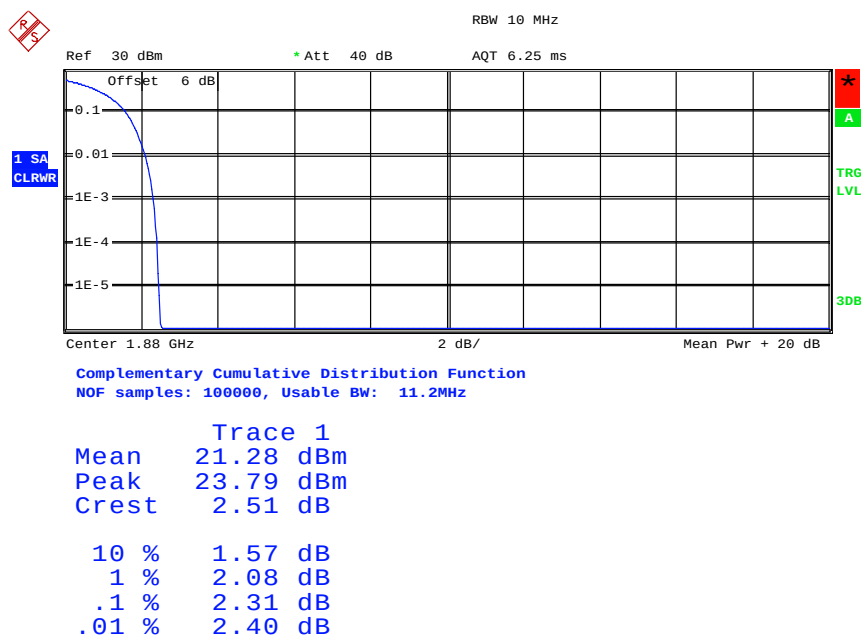


Date: 4.MAY.2016 14:21:46

(Plot F2: HSDPA Band II Channel=9400)

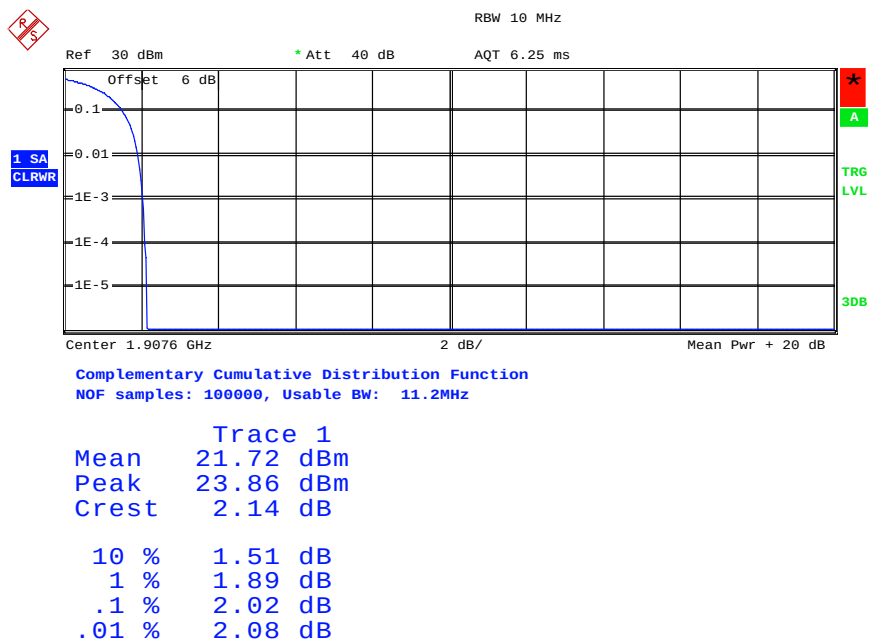


Date: 4.MAY.2016 14:15:35

(Plot F3: HSDPA Band II Channel=9538)

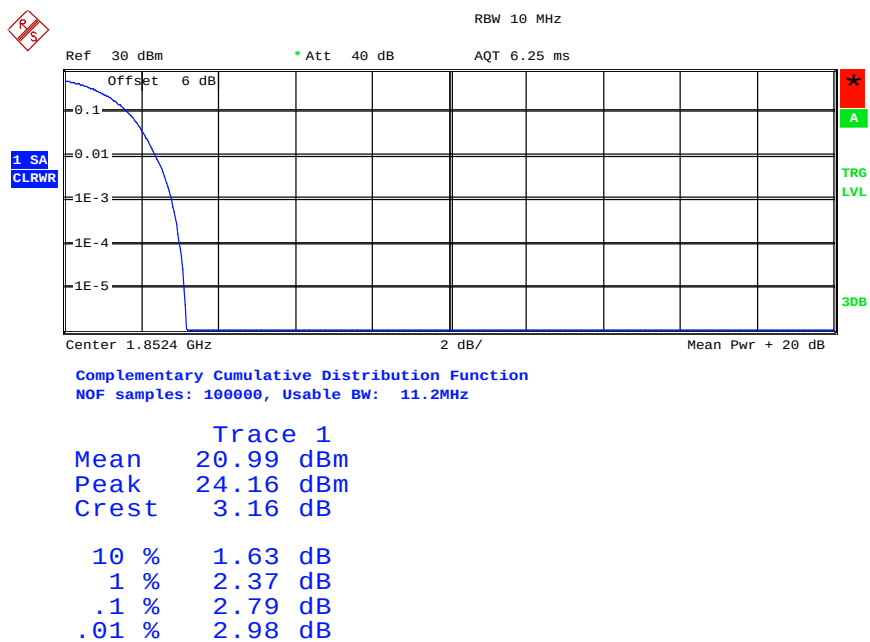

Date: 4.MAY.2016 14:18:14

(Plot G1: HSUPA Band II Channel=9262)

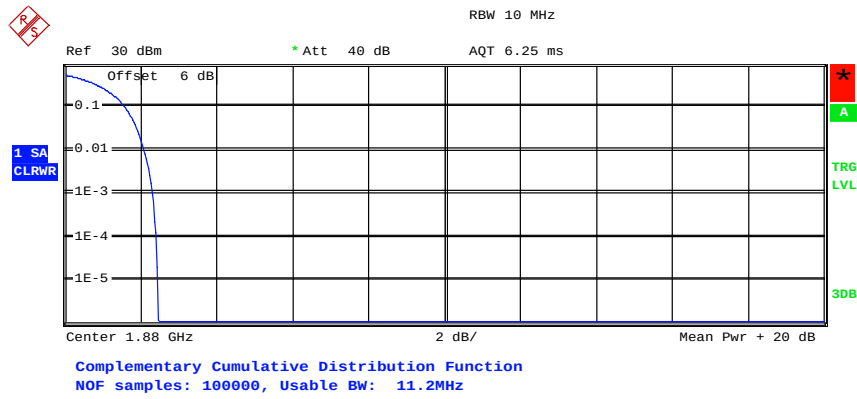


Trace 1

|       |           |
|-------|-----------|
| Mean  | 21.28 dBm |
| Peak  | 23.72 dBm |
| Crest | 2.44 dB   |

|       |         |
|-------|---------|
| 10 %  | 1.57 dB |
| 1 %   | 2.08 dB |
| .1 %  | 2.31 dB |
| .01 % | 2.40 dB |

Date: 4.MAY.2016 14:22:06

(Plot G2: HSUPA Band V Channel=9400)

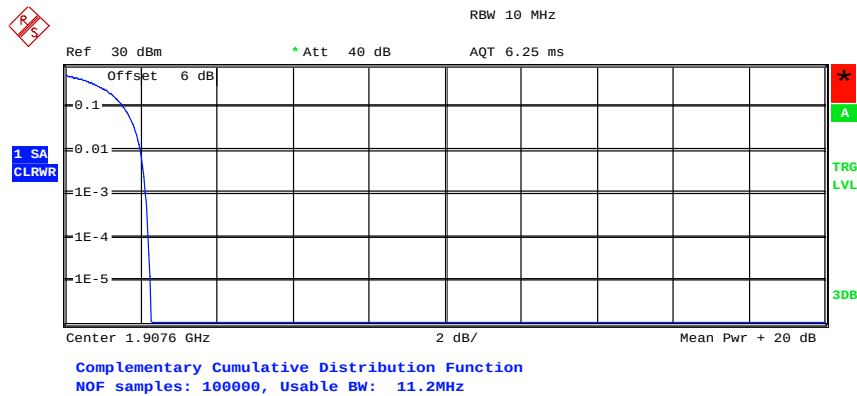


Trace 1

|       |           |
|-------|-----------|
| Mean  | 21.61 dBm |
| Peak  | 23.86 dBm |
| Crest | 2.25 dB   |

|       |         |
|-------|---------|
| 10 %  | 1.54 dB |
| 1 %   | 1.99 dB |
| .1 %  | 2.12 dB |
| .01 % | 2.18 dB |


Date: 4.MAY.2016 14:16:00

(Plot G3: HSUPA Band II Channel=9538)

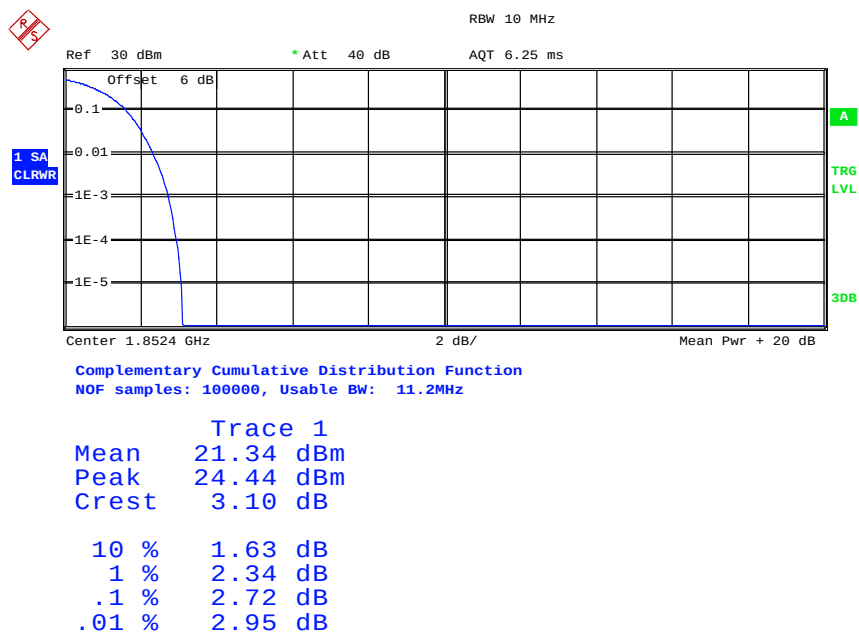


Date: 4.MAY.2016 14:18:59

(Plot H1: HSPA+ Band II Channel=9262)

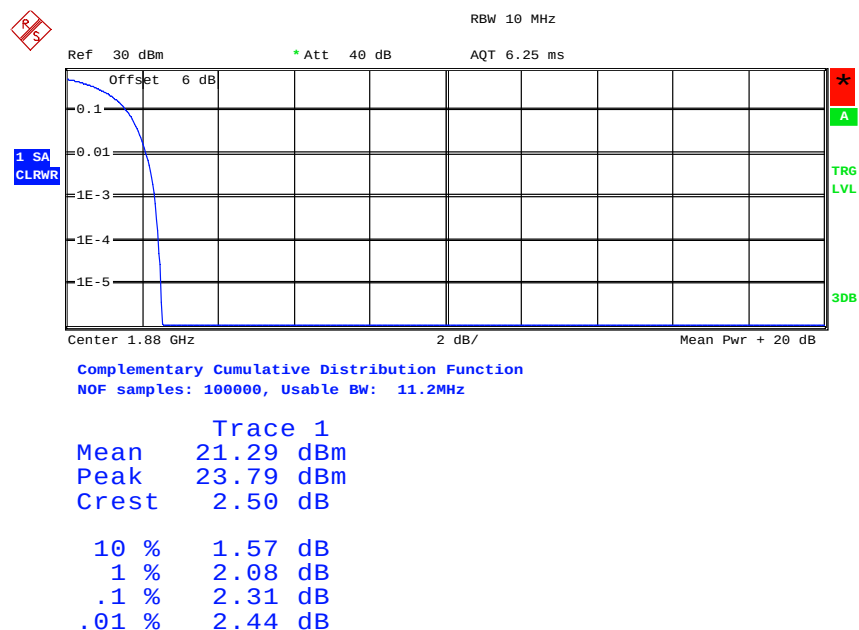

Date: 4.MAY.2016 14:22:28

(Plot H2: HSPA+ Band II Channel=9400)

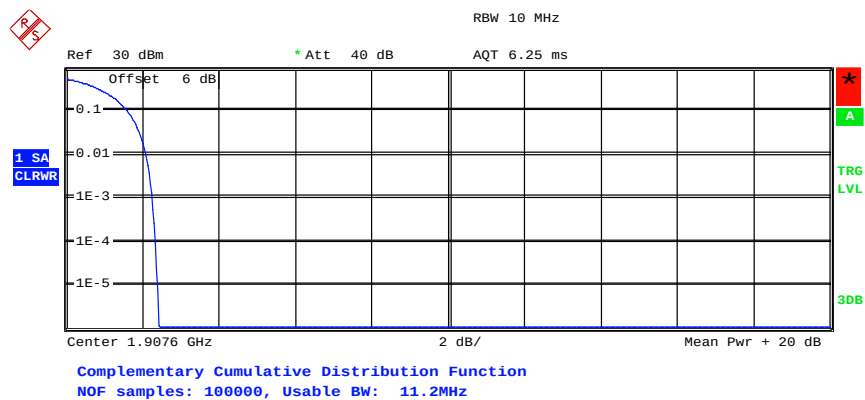

Trace 1

|       |           |
|-------|-----------|
| Mean  | 21.44 dBm |
| Peak  | 23.86 dBm |
| Crest | 2.42 dB   |

|       |         |
|-------|---------|
| 10 %  | 1.60 dB |
| 1 %   | 2.08 dB |
| .1 %  | 2.24 dB |
| .01 % | 2.34 dB |

Date: 4.MAY.2016 14:16:12

(Plot H3: HSPA+ Band II Channel=9538)




## 4.4 Frequency Stability

### 4.4.1 Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  at intervals of not more than  $10^{\circ}\text{C}$ .
- (b) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

### 4.4.2 Test Description

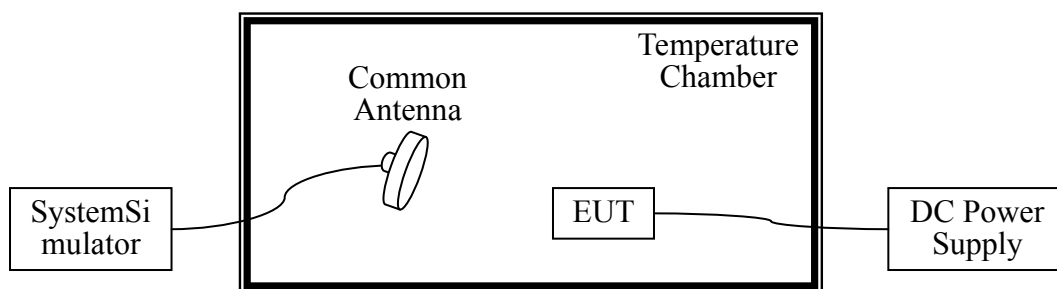

### 4.4.3 Test Setup

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.



#### 4.4.4 Test Results

For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer; the normal temperature here used is 25°C. The frequency deviation limit is  $\pm 2.5$ ppm.

| Band           | Test Conditions |           | Frequency Deviation |                 |                |                 |               |                 | Limit/Verdict             |
|----------------|-----------------|-----------|---------------------|-----------------|----------------|-----------------|---------------|-----------------|---------------------------|
|                | Power (VDC)     | Temp (°C) | Low Channel         |                 | Middle Channel |                 | High Channel  |                 | ±2.5ppm 850<br>±1ppm 1900 |
|                |                 |           | Dev. Freq. Hz       | Deviation (ppm) | Dev. Freq. Hz  | Deviation (ppm) | Dev. Freq. Hz | Deviation (ppm) |                           |
| WCDMA 850 MHz  | 3.8             | -30       | ---                 | ---             | ---            | ---             | ---           | ---             | PASS                      |
|                |                 | -20       | -12                 | -0.015          | 49             | 0.059           | 77            | 0.091           |                           |
|                |                 | -10       | 55                  | 0.067           | 41             | 0.050           | -60           | -0.071          |                           |
|                |                 | 0         | 40                  | 0.049           | 55             | 0.066           | 0             | 0.001           |                           |
|                |                 | 10        | 42                  | 0.051           | 49             | 0.059           | 35            | 0.041           |                           |
|                |                 | 20        | 53                  | 0.065           | -76            | -0.091          | -76           | -0.090          |                           |
|                |                 | 30        | -29                 | -0.035          | 59             | 0.070           | 51            | 0.060           |                           |
|                |                 | 40        | -38                 | -0.046          | -8             | -0.009          | -54           | -0.064          |                           |
|                |                 | 50        | 42                  | 0.051           | -69            | -0.082          | 27            | 0.032           |                           |
|                |                 | 60        | 25                  | 0.030           | 19             | 0.022           | -60           | -0.071          |                           |
|                |                 | 70        | ---                 | ---             | ---            | ---             | ---           | ---             |                           |
|                | 4.2             | 25        | 34                  | 0.041           | 61             | 0.073           | 47            | 0.056           |                           |
|                | 3.6             | 25        | 9                   | 0.010           | -60            | -0.072          | -29           | -0.034          |                           |
| WCDMA 1900 MHz | 3.8             | -30       | ---                 | ---             | ---            | ---             | ---           | ---             | PASS                      |
|                |                 | -20       | 11                  | 0.006           | 20             | 0.011           | -65           | -0.034          |                           |
|                |                 | -10       | 26                  | 0.014           | 43             | 0.051           | 22            | 0.011           |                           |
|                |                 | 0         | 63                  | 0.034           | -71            | -0.085          | -11           | -0.006          |                           |
|                |                 | 10        | 47                  | 0.025           | 48             | 0.058           | -46           | -0.024          |                           |
|                |                 | 20        | -54                 | -0.029          | 63             | 0.076           | 24            | 0.013           |                           |
|                |                 | 30        | 4                   | 0.002           | 20             | 0.024           | 41            | 0.021           |                           |
|                |                 | 40        | -63                 | -0.034          | 66             | 0.079           | 4             | 0.002           |                           |
|                |                 | 50        | 71                  | 0.038           | 60             | 0.072           | -80           | -0.042          |                           |
|                |                 | 60        | 38                  | 0.020           | -28            | -0.033          | 53            | 0.028           |                           |
|                |                 | 70        | ---                 | ---             | ---            | ---             | ---           | ---             |                           |
|                | 4.2             | 25        | -13                 | -0.007          | 14             | 0.017           | 14            | 0.008           |                           |
|                | 3.6             | 25        | 61                  | 0.033           | -78            | -0.093          | 71            | 0.037           |                           |



| Band                 | Test Conditions |           | Frequency Deviation |                 |                |                 |               |                 | Limit/Verdict             |
|----------------------|-----------------|-----------|---------------------|-----------------|----------------|-----------------|---------------|-----------------|---------------------------|
|                      | Power (VDC)     | Temp (°C) | Low Channel         |                 | Middle Channel |                 | High Channel  |                 | ±2.5ppm 850<br>±1ppm 1900 |
|                      |                 |           | Dev. Freq. Hz       | Deviation (ppm) | Dev. Freq. Hz  | Deviation (ppm) | Dev. Freq. Hz | Deviation (ppm) |                           |
| HSDPA<br>850<br>MHz  | 3.8             | -30       | ---                 | ---             | ---            | ---             | ---           | ---             | PASS                      |
|                      |                 | -20       | 26                  | 0.032           | -64            | -0.076          | 21            | 0.025           |                           |
|                      |                 | -10       | 28                  | 0.034           | 28             | 0.034           | 37            | 0.044           |                           |
|                      |                 | 0         | 43                  | 0.053           | 70             | 0.083           | -76           | -0.089          |                           |
|                      |                 | 10        | 31                  | 0.038           | -12            | -0.015          | -58           | -0.068          |                           |
|                      |                 | 20        | -8                  | -0.009          | 56             | 0.067           | -3            | -0.004          |                           |
|                      |                 | 30        | 28                  | 0.034           | 57             | 0.068           | 22            | 0.025           |                           |
|                      |                 | 40        | -53                 | -0.064          | 33             | 0.039           | -41           | -0.049          |                           |
|                      |                 | 50        | 58                  | 0.070           | -49            | -0.059          | 8             | 0.009           |                           |
|                      |                 | 60        | 16                  | 0.019           | -72            | -0.087          | 30            | 0.035           |                           |
|                      |                 | 70        | ---                 | ---             | ---            | ---             | ---           | ---             |                           |
|                      | 4.2             | 25        | 41                  | 0.050           | 55             | 0.065           | 12            | 0.015           |                           |
|                      | 3.6             | 25        | -72                 | -0.088          | 45             | 0.053           | 33            | 0.038           |                           |
| HSDPA<br>1900<br>MHz | 3.8             | -30       | ---                 | ---             | ---            | ---             | ---           | ---             | PASS                      |
|                      |                 | -20       | -41                 | -0.022          | 29             | 0.015           | -40           | -0.021          |                           |
|                      |                 | -10       | 17                  | 0.009           | -51            | -0.060          | 30            | 0.016           |                           |
|                      |                 | 0         | 54                  | 0.029           | -22            | -0.026          | 54            | 0.028           |                           |
|                      |                 | 10        | 60                  | 0.032           | -38            | -0.045          | -48           | -0.025          |                           |
|                      |                 | 20        | -1                  | -0.001          | 7              | 0.009           | -11           | -0.006          |                           |
|                      |                 | 30        | -9                  | -0.005          | -44            | -0.052          | -49           | -0.026          |                           |
|                      |                 | 40        | -5                  | -0.003          | 44             | 0.053           | -27           | -0.014          |                           |
|                      |                 | 50        | -28                 | -0.015          | 78             | 0.093           | -70           | -0.036          |                           |
|                      |                 | 60        | -42                 | -0.023          | -26            | -0.031          | 44            | 0.023           |                           |
|                      |                 | 70        | ---                 | ---             | ---            | ---             | ---           | ---             |                           |
|                      | 4.2             | 25        | -27                 | -0.014          | 9              | 0.011           | 43            | 0.023           |                           |
|                      | 3.6             | 25        | -47                 | -0.026          | -45            | -0.053          | -22           | -0.011          |                           |



| Band                 | Test Conditions |           | Frequency Deviation |                 |                |                 |               |                 | Limit/Verdict             |
|----------------------|-----------------|-----------|---------------------|-----------------|----------------|-----------------|---------------|-----------------|---------------------------|
|                      | Power (VDC)     | Temp (°C) | Low Channel         |                 | Middle Channel |                 | High Channel  |                 | ±2.5ppm 850<br>±1ppm 1900 |
|                      |                 |           | Dev. Freq. Hz       | Deviation (ppm) | Dev. Freq. Hz  | Deviation (ppm) | Dev. Freq. Hz | Deviation (ppm) |                           |
| HSUPA<br>850<br>MHz  | 3.8             | -30       | ---                 | ---             | ---            | ---             | ---           | ---             | PASS                      |
|                      |                 | -20       | 78                  | 0.095           | 57             | 0.068           | -40           | -0.048          |                           |
|                      |                 | -10       | -38                 | -0.046          | -22            | -0.026          | -54           | -0.064          |                           |
|                      |                 | 0         | -27                 | -0.033          | -6             | -0.007          | -3            | -0.003          |                           |
|                      |                 | 10        | 67                  | 0.082           | -37            | -0.045          | -71           | -0.084          |                           |
|                      |                 | 20        | 24                  | 0.028           | -50            | -0.060          | 78            | 0.092           |                           |
|                      |                 | 30        | -24                 | -0.029          | -67            | -0.080          | 74            | 0.088           |                           |
|                      |                 | 40        | 17                  | 0.020           | 35             | 0.042           | 17            | 0.020           |                           |
|                      |                 | 50        | -41                 | -0.050          | -42            | -0.050          | -18           | -0.022          |                           |
|                      |                 | 60        | -67                 | -0.082          | 30             | 0.036           | 54            | 0.064           |                           |
|                      |                 | 70        | ---                 | ---             | ---            | ---             | ---           | ---             |                           |
|                      | 4.2             | 25        | -41                 | -0.050          | -54            | -0.064          | -76           | -0.090          |                           |
|                      | 3.6             | 25        | 74                  | 0.090           | -70            | -0.083          | 52            | 0.062           |                           |
| HSUPA<br>1900<br>MHz | 3.8             | -30       | ---                 | ---             | ---            | ---             | ---           | ---             | PASS                      |
|                      |                 | -20       | 44                  | 0.024           | 10             | 0.005           | 73            | 0.038           |                           |
|                      |                 | -10       | 60                  | 0.032           | 53             | 0.063           | -77           | -0.040          |                           |
|                      |                 | 0         | 37                  | 0.020           | -40            | -0.048          | -33           | -0.017          |                           |
|                      |                 | 10        | -15                 | -0.008          | -37            | -0.044          | -74           | -0.039          |                           |
|                      |                 | 20        | 1                   | 0.000           | -59            | -0.070          | -11           | -0.006          |                           |
|                      |                 | 30        | -44                 | -0.024          | 21             | 0.025           | -47           | -0.025          |                           |
|                      |                 | 40        | 21                  | 0.011           | 3              | 0.004           | 26            | 0.014           |                           |
|                      |                 | 50        | 22                  | 0.012           | 35             | 0.041           | 27            | 0.014           |                           |
|                      |                 | 60        | 33                  | 0.018           | 44             | 0.053           | 15            | 0.008           |                           |
|                      |                 | 70        | ---                 | ---             | ---            | ---             | ---           | ---             |                           |
|                      | 4.2             | 25        | -41                 | -0.022          | -39            | -0.047          | -43           | -0.023          |                           |
|                      | 3.6             | 25        | 48                  | 0.026           | -36            | -0.043          | -26           | -0.013          |                           |



| Band           | Test Conditions |           | Frequency Deviation |                 |                |                 |               |                 | Limit/Verdict             |
|----------------|-----------------|-----------|---------------------|-----------------|----------------|-----------------|---------------|-----------------|---------------------------|
|                | Power (VDC)     | Temp (°C) | Low Channel         |                 | Middle Channel |                 | High Channel  |                 | ±2.5ppm 850<br>±1ppm 1900 |
|                |                 |           | Dev. Freq. Hz       | Deviation (ppm) | Dev. Freq. Hz  | Deviation (ppm) | Dev. Freq. Hz | Deviation (ppm) |                           |
| HSPA+ 850 MHz  | 3.8             | -30       | ---                 | ---             | ---            | ---             | ---           | ---             | PASS                      |
|                |                 | -20       | 61                  | 0.074           | 16             | 0.020           | 35            | 0.041           |                           |
|                |                 | -10       | -23                 | -0.028          | -72            | -0.086          | -15           | -0.017          |                           |
|                |                 | 0         | 71                  | 0.085           | -6             | -0.007          | -36           | -0.043          |                           |
|                |                 | 10        | 24                  | 0.029           | -67            | -0.080          | -32           | -0.038          |                           |
|                |                 | 20        | -37                 | -0.045          | -46            | -0.055          | -64           | -0.075          |                           |
|                |                 | 30        | 62                  | 0.075           | 38             | 0.045           | -57           | -0.067          |                           |
|                |                 | 40        | 23                  | 0.028           | 52             | 0.062           | -74           | -0.087          |                           |
|                |                 | 50        | -18                 | -0.021          | 25             | 0.030           | 77            | 0.091           |                           |
|                |                 | 60        | 24                  | 0.029           | 46             | 0.055           | 47            | 0.056           |                           |
|                |                 | 70        | ---                 | ---             | ---            | ---             | ---           | ---             |                           |
|                | 4.2             | 25        | 50                  | 0.061           | -4             | -0.005          | 52            | 0.062           |                           |
|                | 3.6             | 25        | 9                   | 0.011           | -65            | -0.078          | 77            | 0.091           |                           |
| HSPA+ 1900 MHz | 3.8             | -30       | ---                 | ---             | ---            | ---             | ---           | ---             | PASS                      |
|                |                 | -20       | 63                  | 0.034           | 13             | 0.007           | -70           | -0.037          |                           |
|                |                 | -10       | 26                  | 0.014           | -29            | -0.034          | 34            | 0.018           |                           |
|                |                 | 0         | 63                  | 0.034           | -75            | -0.090          | 4             | 0.002           |                           |
|                |                 | 10        | 47                  | 0.025           | -58            | -0.069          | -15           | -0.008          |                           |
|                |                 | 20        | -69                 | -0.037          | -19            | -0.023          | 44            | 0.023           |                           |
|                |                 | 30        | -40                 | -0.022          | -71            | -0.085          | 64            | 0.034           |                           |
|                |                 | 40        | 3                   | 0.002           | -6             | -0.007          | 25            | 0.013           |                           |
|                |                 | 50        | 68                  | 0.036           | 18             | 0.021           | 44            | 0.023           |                           |
|                |                 | 60        | 44                  | 0.024           | -53            | -0.063          | -48           | -0.025          |                           |
|                |                 | 70        | ---                 | ---             | ---            | ---             | ---           | ---             |                           |
|                | 4.2             | 25        | -8                  | -0.005          | -40            | -0.048          | -13           | -0.007          |                           |
|                | 3.6             | 25        | 30                  | 0.016           | 41             | 0.049           | -30           | -0.016          |                           |

**NOTE:**

(1) The EUT stops transmitting at temperatures -30°C, 70°C

(2) The manufacturer declared that the EUT could work properly between temperatures -20°C~60°C.

(3) Normal Voltage = 3.6V; Max Voltage= 3.8V; Min Voltage=4.2V.



## 4.5 Conducted Out of Band Emissions

### 4.5.1 Requirement

According to FCC section 22.917(a) and FCC section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \cdot \log(P)$  dB. This calculated to be -13 dBm.

### 4.5.2 Test Description

See section 4.2.1 of this report.


### 4.5.3 Test Results

The measurement frequency range is from 30 MHz to the 10<sup>th</sup> harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.


Test Plots:

*NOTE:*

- 1) the power of the EUT transmitting frequency should be ignored.*
- 2) All of WCDMA/HSDPA/HSUPA/HSPA+ mode were tested, and just the worst data was record in this report.*

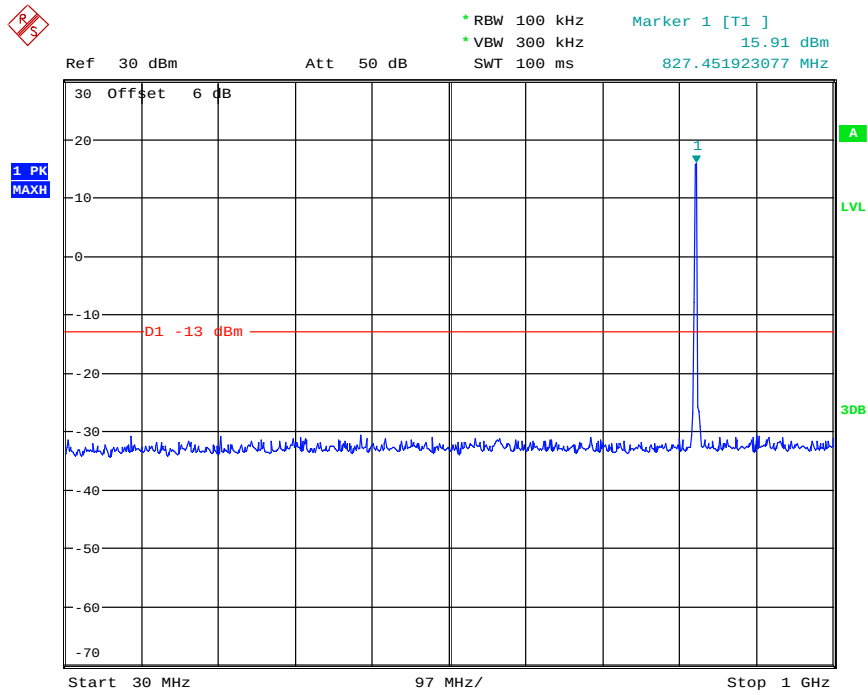


Date: 3.MAY.2016 20:53:59

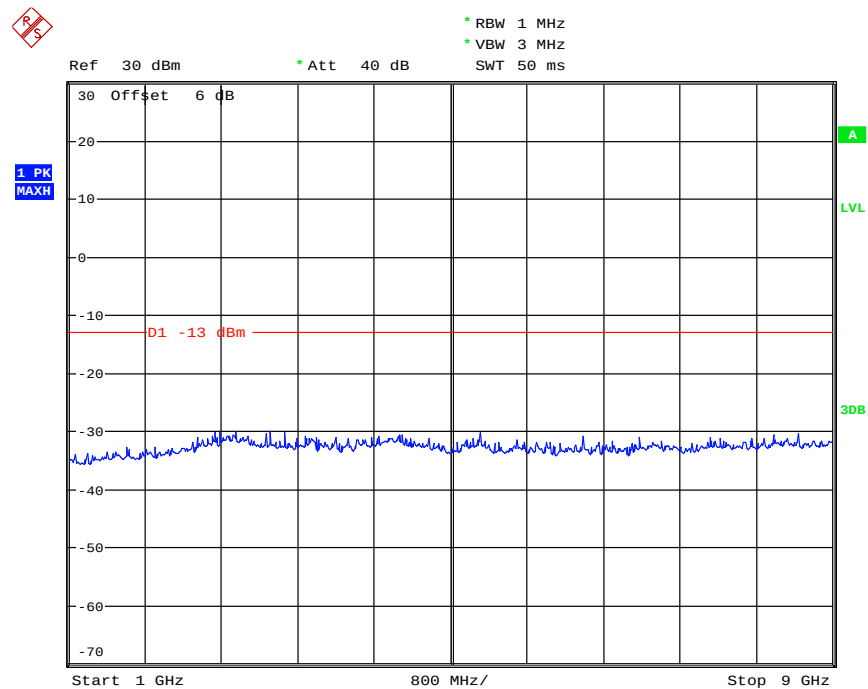


Date: 3.MAY.2016 20:57:10

(WCDMA Band V, Channel = 4132, 30MHz to 9GHz)

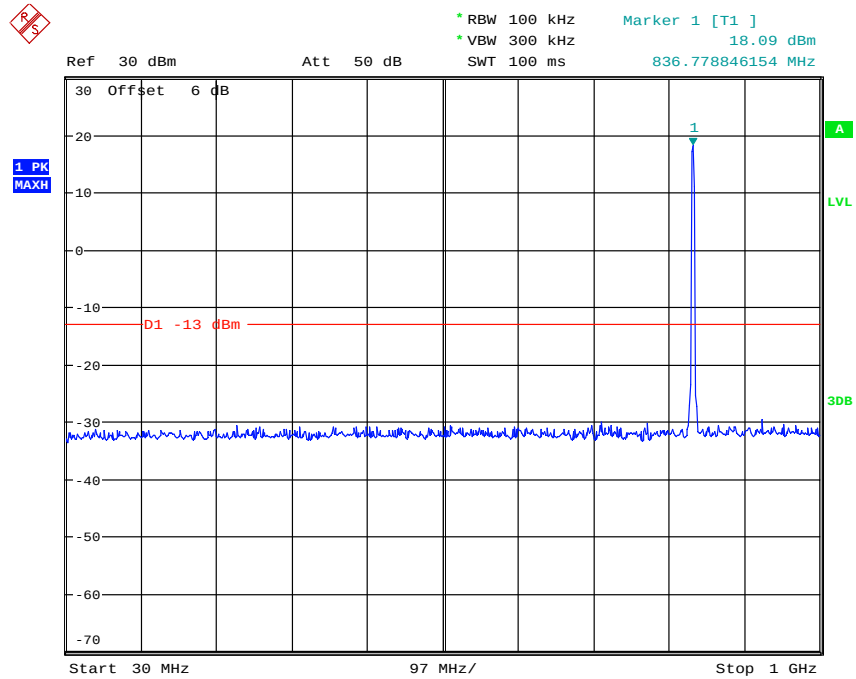


Date: 3.MAY.2016 20:48:34

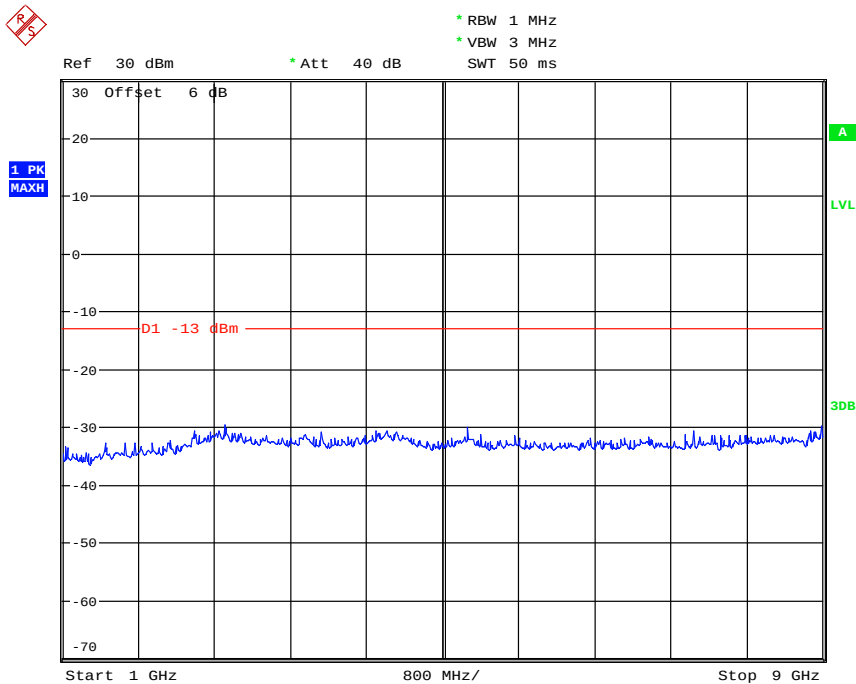


Date: 3.MAY.2016 20:58:00

(WCDMA BandV Channel = 4182, 30MHz to 9GHz)

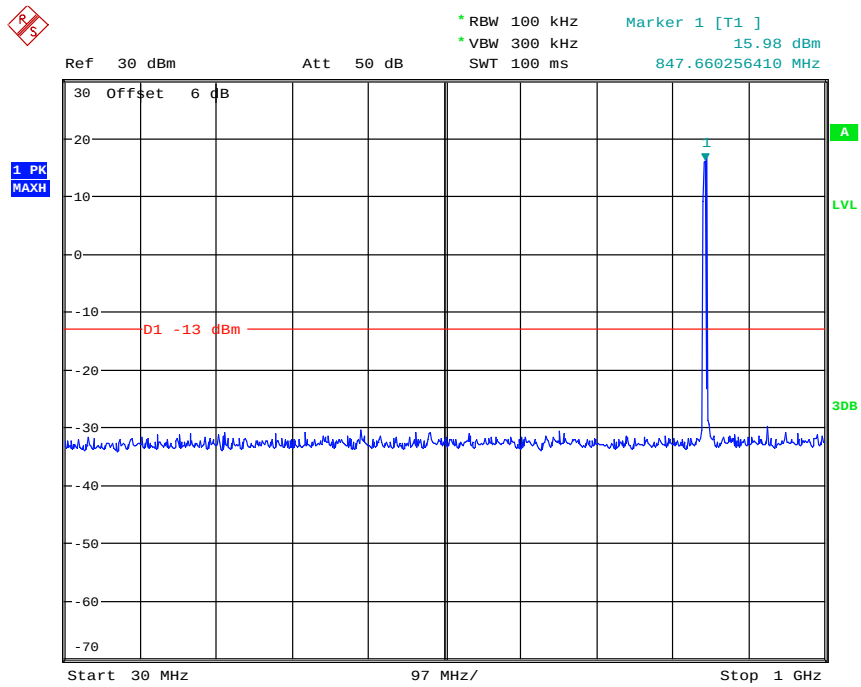


Date: 3.MAY.2016 20:54:56

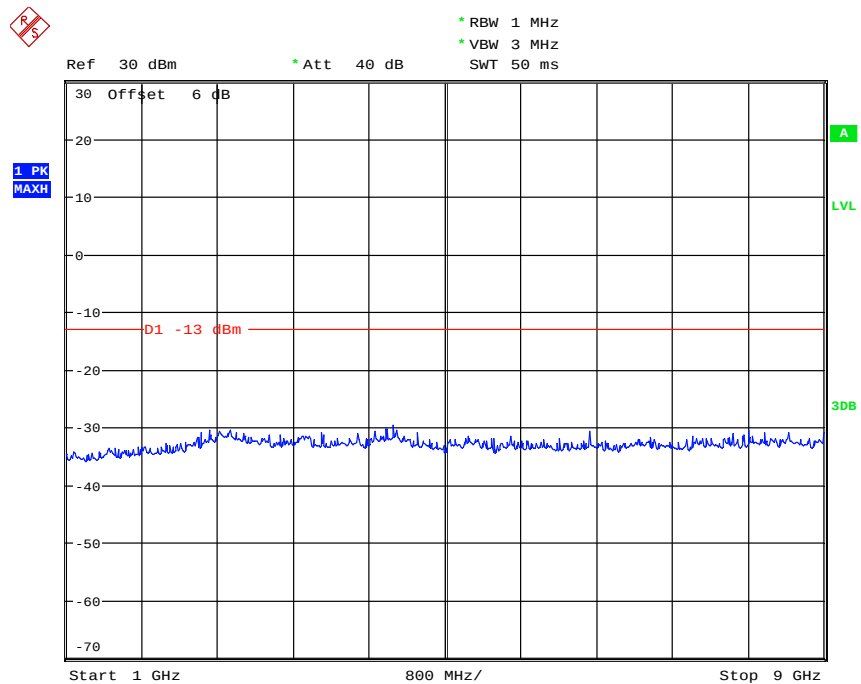


Date: 3.MAY.2016 20:58:34

(WCDMA Band V Channel = 4233, 30MHz to 9GHz)

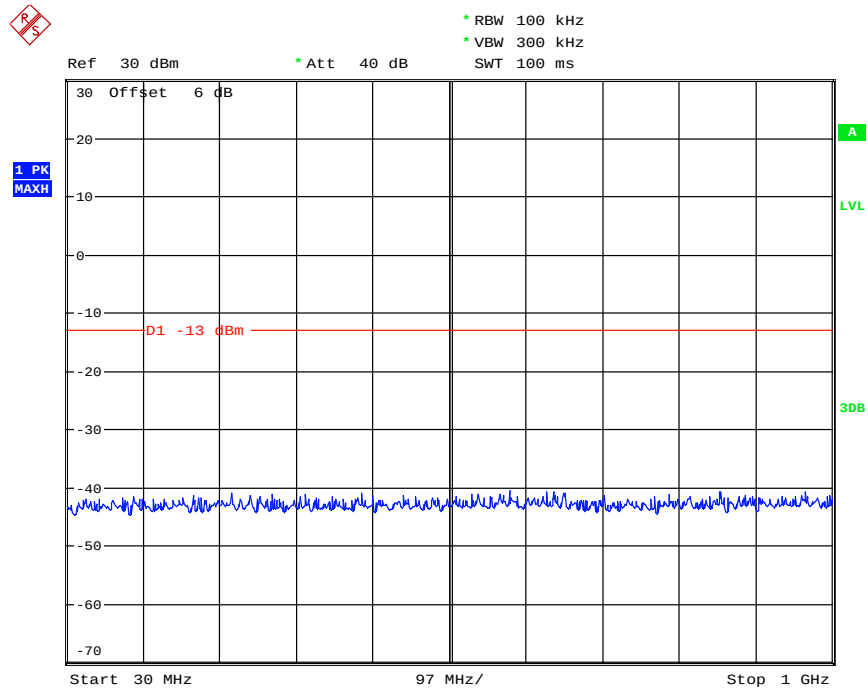


Date: 4.MAY.2016 13:50:44

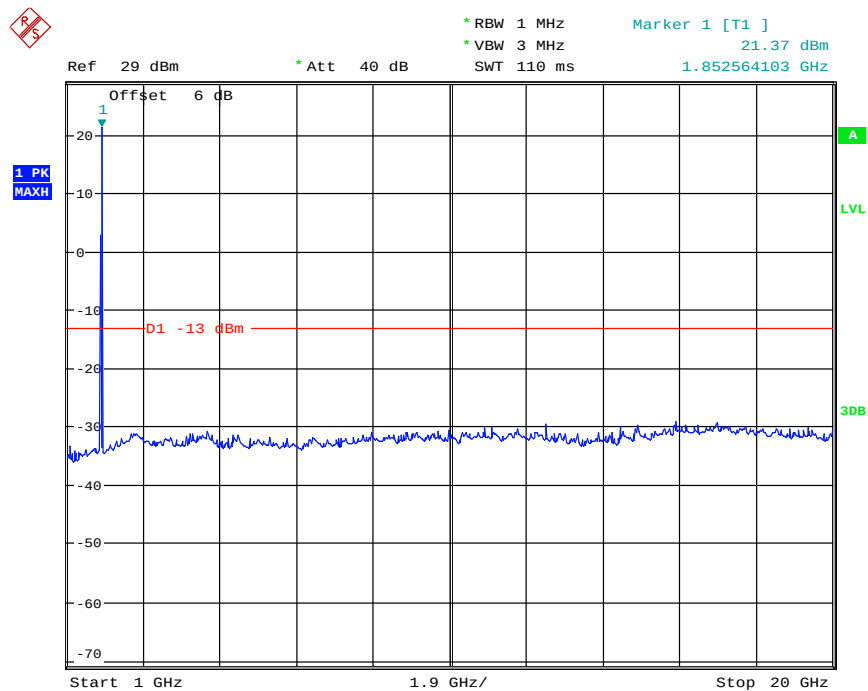


Date: 5.MAY.2016 12:32:02

(WCDMA Band II, Channel = 9262, 30MHz to 20GHz)


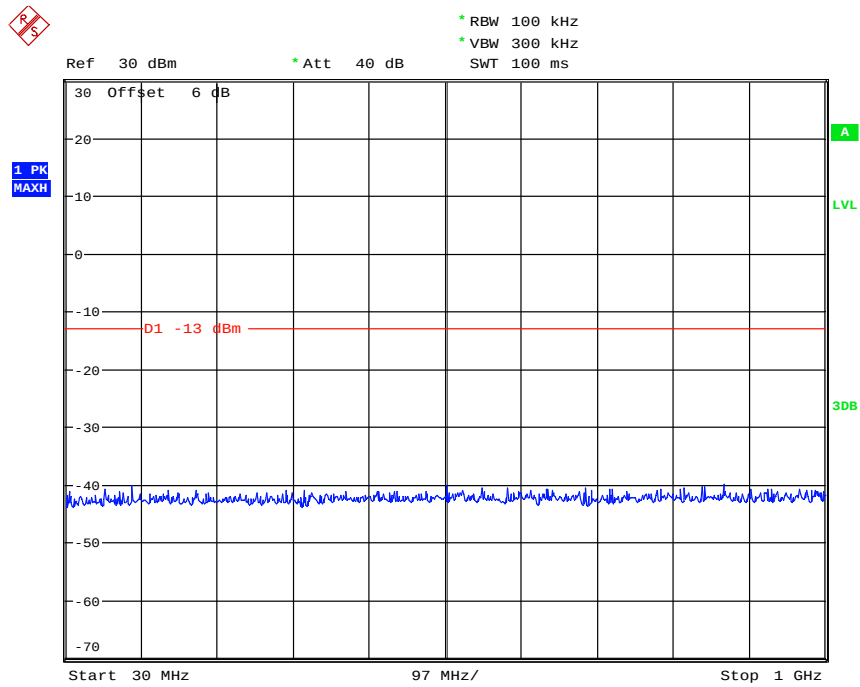


Date: 4.MAY.2016 13:50:18

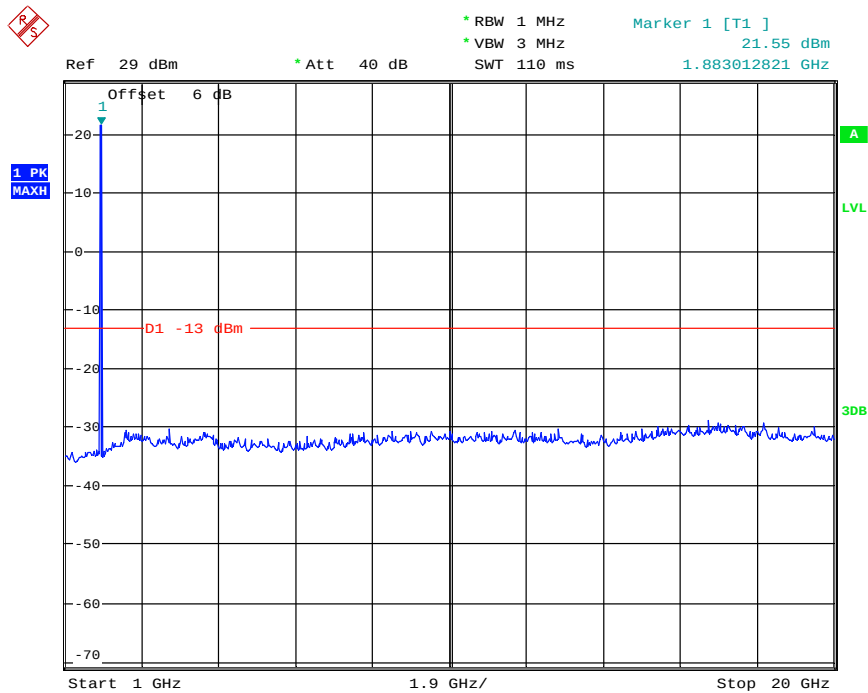

Date: 5.MAY.2016 12:32:30

(WCDMA Band II Channel =9400, 30MHz to 20GHz)



Page 50 of 66



## 4.6 Band Edge

### 4.6.1 Requirement

According to FCC section 22.917(b) and FCC section 24.238(b), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

### 4.6.2 Test Description

See section 4.2.1 of this report.

### 4.6.3 Test Results

The lowest and highest channels are tested to verify the band edge emissions.


| Band          | Channel | Frequency (MHz) | Measured Max. Band Edge Emission (dBm) | Refer to Plot | Limit (dBm) | Verdict |
|---------------|---------|-----------------|----------------------------------------|---------------|-------------|---------|
| WCDMA Band V  | 4132    | 826.4           | -23.53                                 | Plat A1       | -13         | PASS    |
|               | 4233    | 846.6           | -22.67                                 | Plot A2       |             | PASS    |
| HSDPA Band V  | 4132    | 826.4           | -23.51                                 | Plat B1       |             | PASS    |
|               | 4233    | 846.6           | -21.77                                 | Plot B2       |             | PASS    |
| HSUPA Band V  | 4132    | 826.4           | -23.75                                 | Plat C1       |             | PASS    |
|               | 4233    | 846.6           | -22.84                                 | Plot C2       |             | PASS    |
| HSPA+ Band V  | 4132    | 826.4           | -23.88                                 | Plat D1       |             | PASS    |
|               | 4233    | 846.6           | -23.19                                 | Plot D2       |             | PASS    |
| WCDMA Band II | 9262    | 1852.4          | -22.43                                 | Plat E1       |             | PASS    |
|               | 9538    | 1907.6          | -18.45                                 | Plot E2       |             | PASS    |
| HSDPA Band II | 9262    | 1852.4          | -22.49                                 | Plat F1       |             | PASS    |
|               | 9538    | 1907.6          | -18.16                                 | Plot F2       |             | PASS    |
| HSUPA Band II | 9262    | 1852.4          | -22.78                                 | Plat G1       |             | PASS    |
|               | 9538    | 1907.6          | -19.07                                 | Plot G2       |             | PASS    |
| HSPA+ Band II | 9262    | 1852.4          | -22.30                                 | Plat H1       |             | PASS    |
|               | 9538    | 1907.6          | -17.78                                 | Plot H2       |             | PASS    |

**NOTE:**

1) The power of the EUT transmitting frequency should be ignored.




## Test Plots:

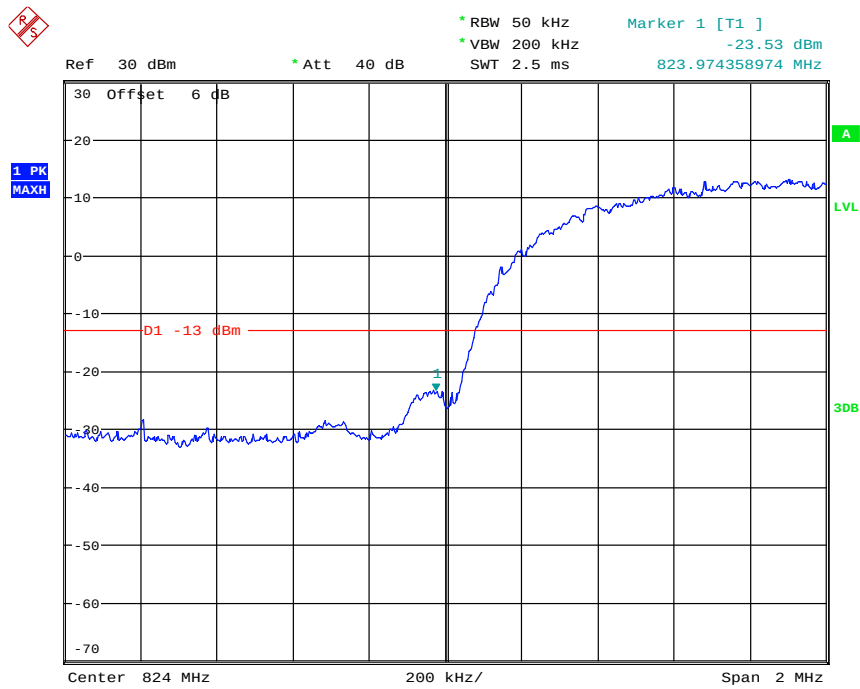


Date: 4.MAY.2016 13:06:07

(Plot A1:WCDMA Band V Channel=4132)

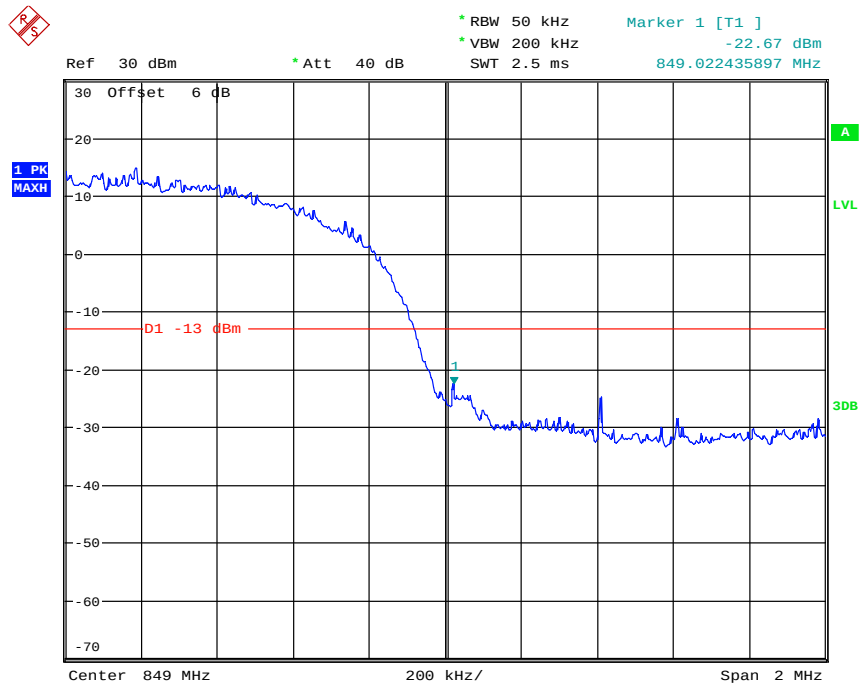


Date: 4.MAY.2016 13:08:45

(Plot A2:WCDMA Band V Channel=4233)

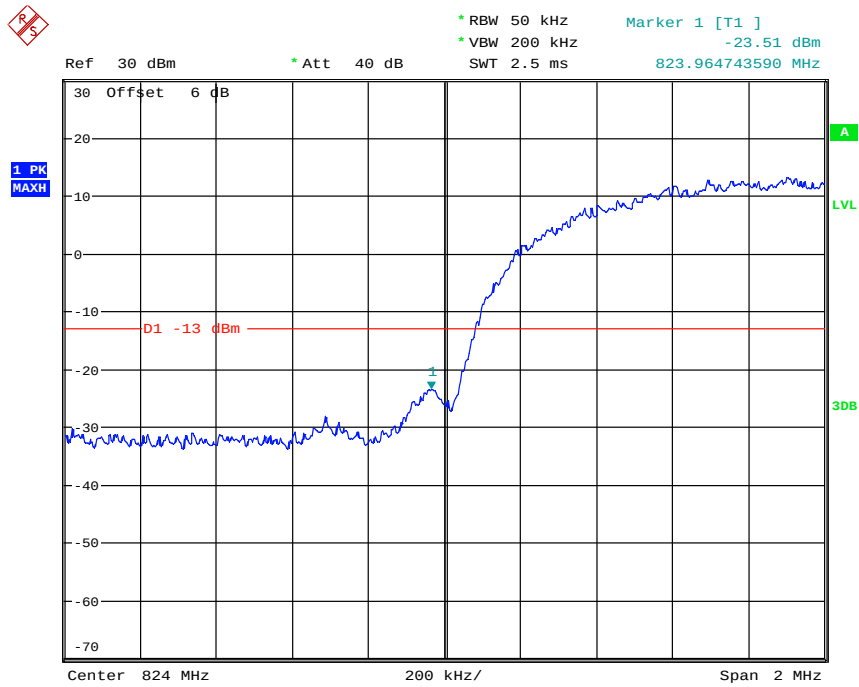


Date: 4.MAY.2016 13:06:49

(Plot B1: HSDPA Band V Channel=4132)

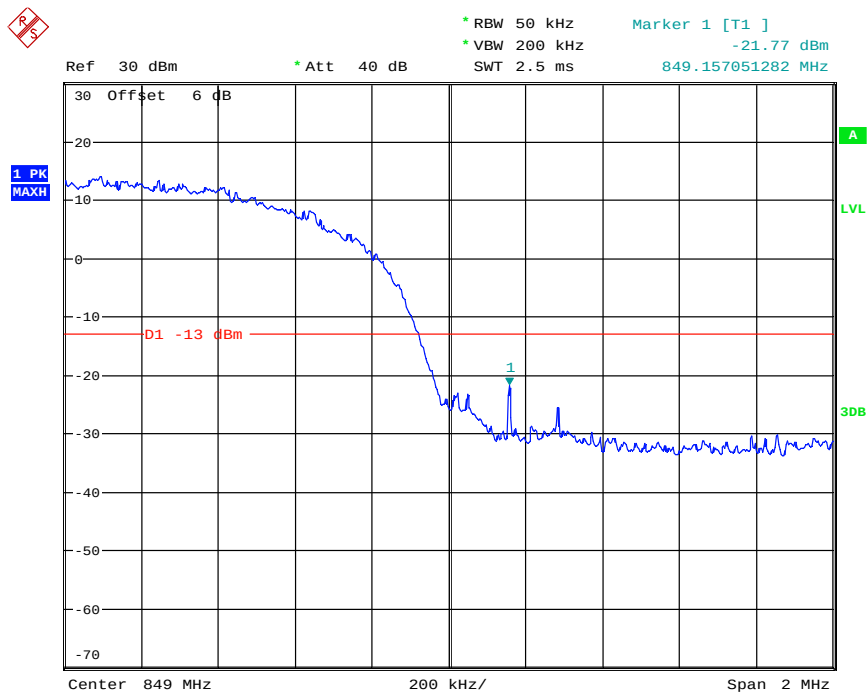


Date: 4.MAY.2016 13:09:13

(Plot B2: HSDPA Band V Channel=4233)

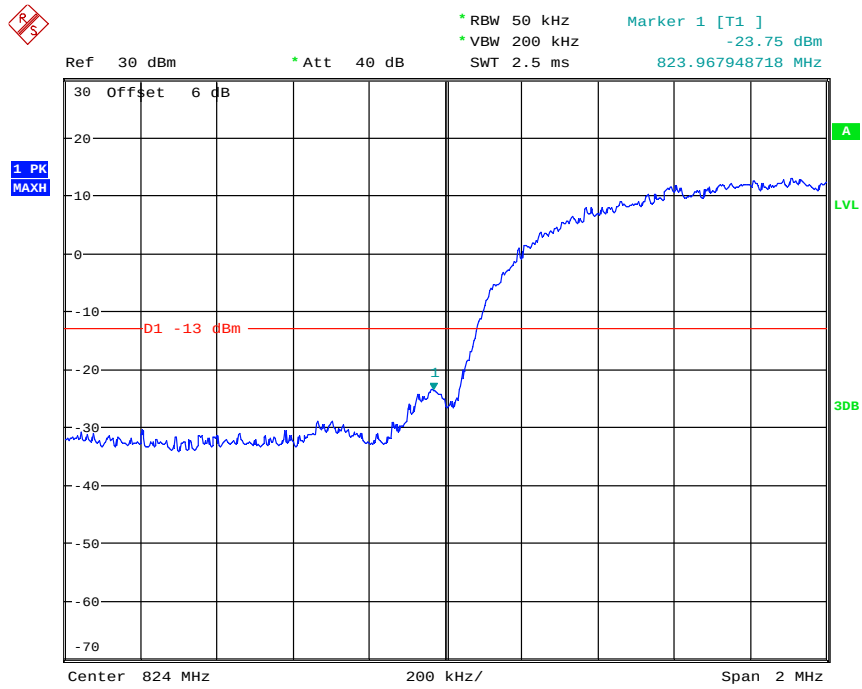


Date: 4.MAY.2016 13:07:08

(Plot C1: HSUPA Band V Channel=4132)

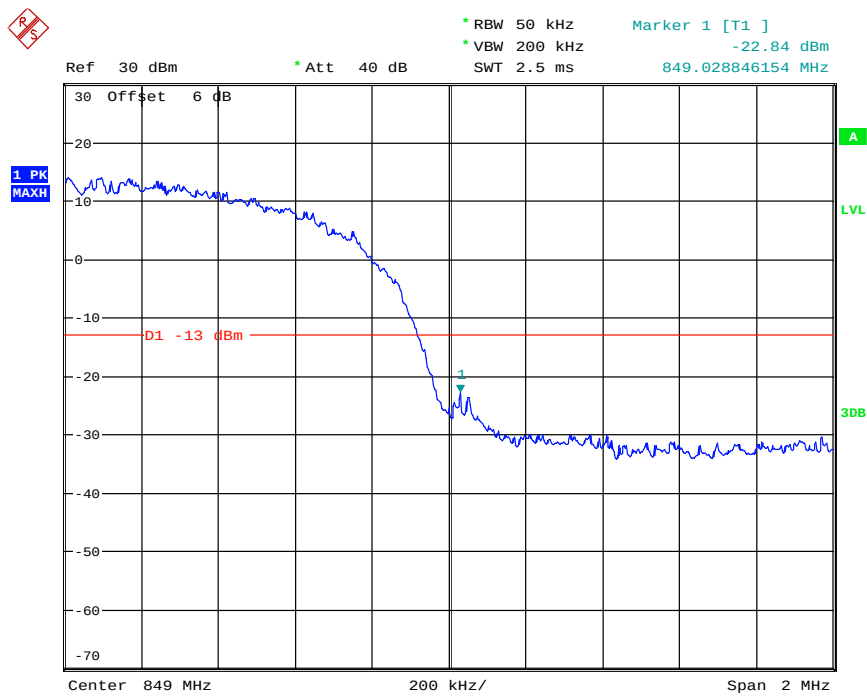


Date: 4.MAY.2016 13:09:32

(Plot C2: HSUPA Band V Channel=4233)

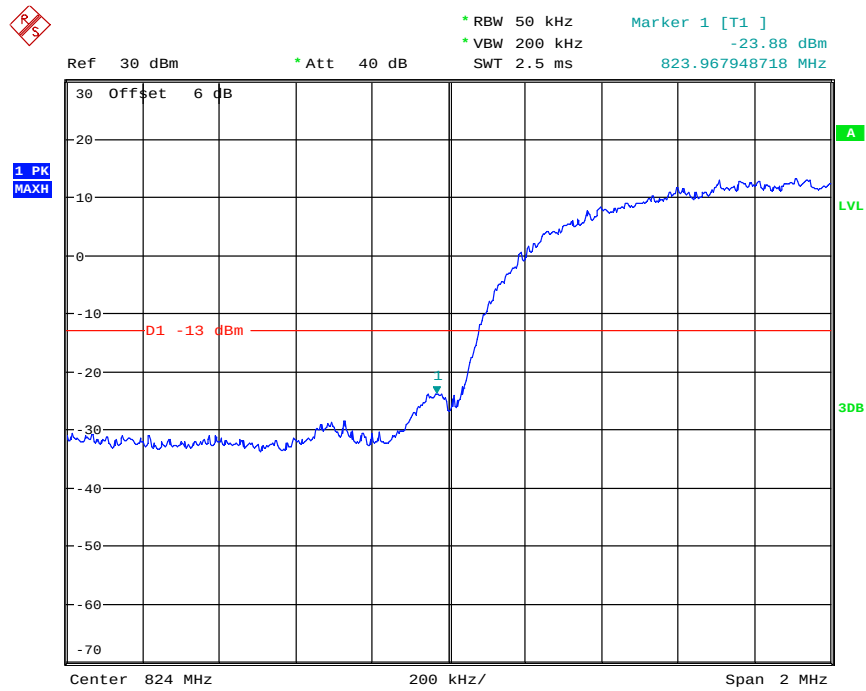


Date: 4.MAY.2016 13:07:31

(Plot D1: HSPA+ Band V Channel=4132)

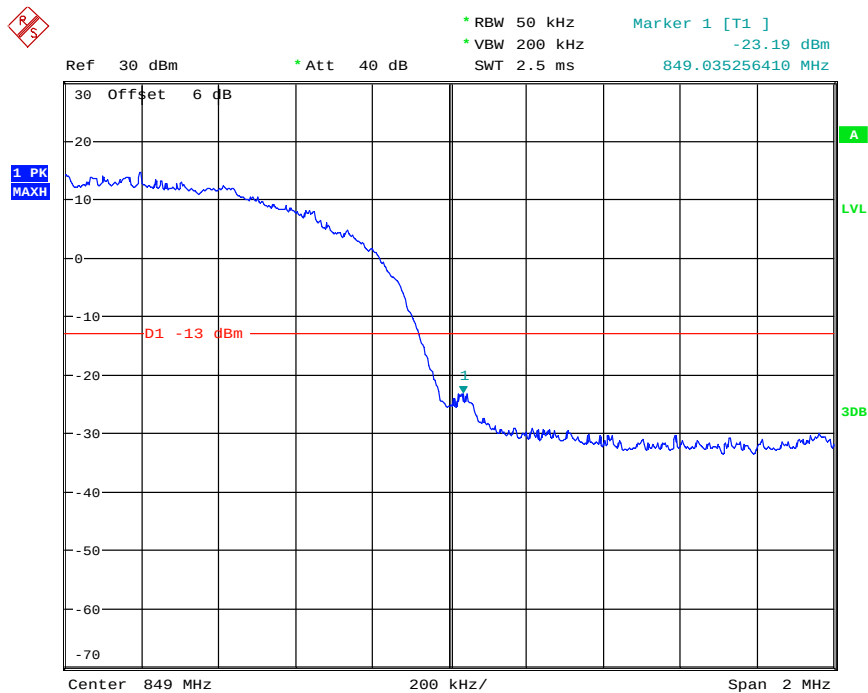


Date: 4.MAY.2016 13:10:02

(Plot D2: HSPA+ Band V Channel=4233)

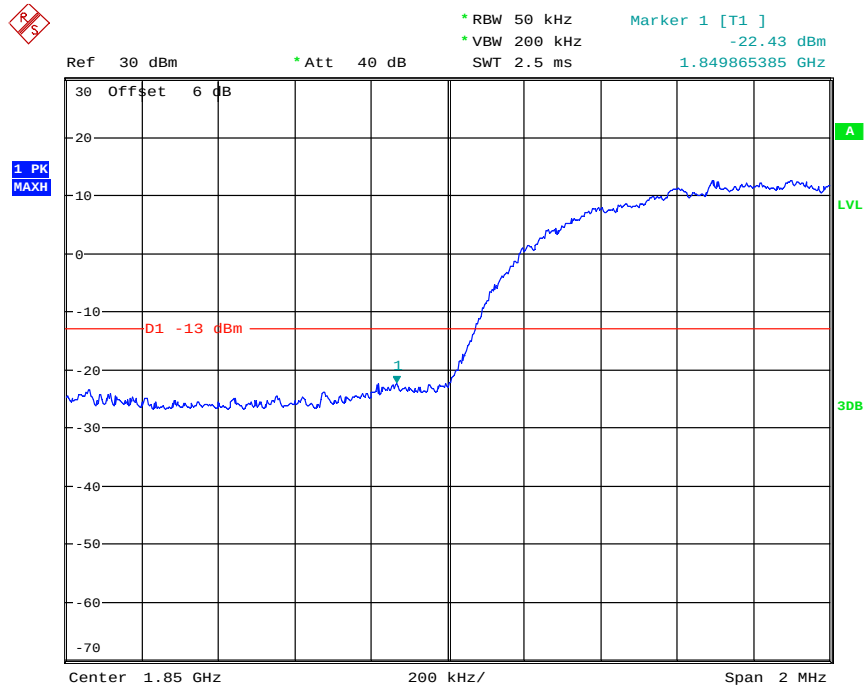


Date: 4.MAY.2016 14:10:52

(Plot E1: WCDMA Band II Channel=9262)

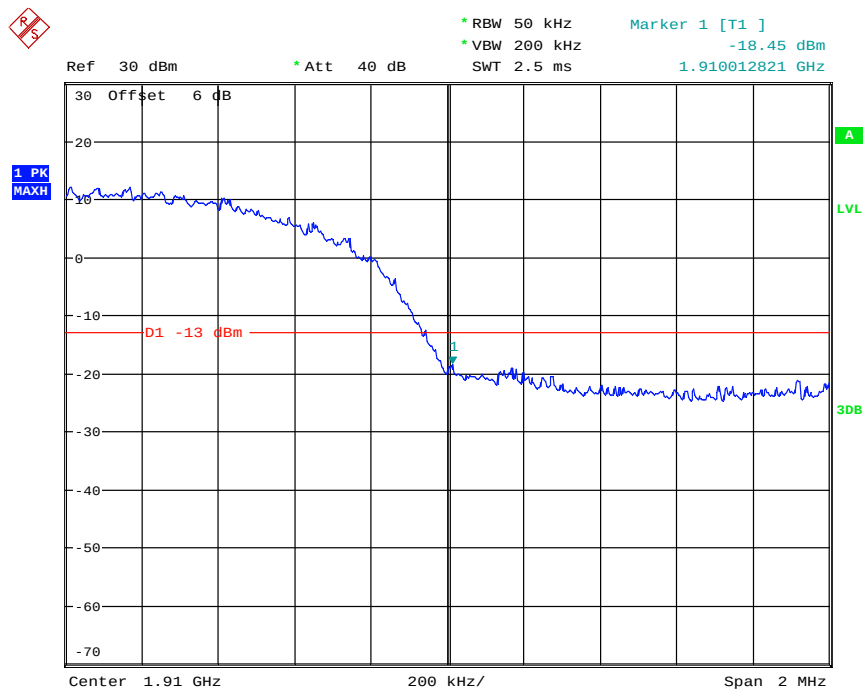


Date: 4.MAY.2016 14:12:43

(Plot E2: WCDMA Band II Channel=9538)

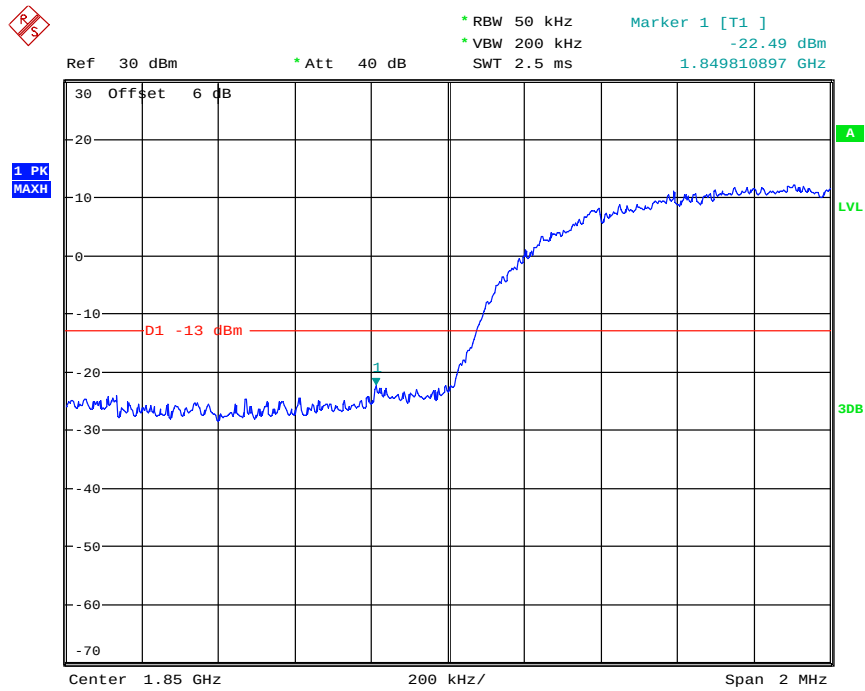


Date: 4.MAY.2016 14:11:12

(Plot F1:HSDPA Band II Channel=9262)

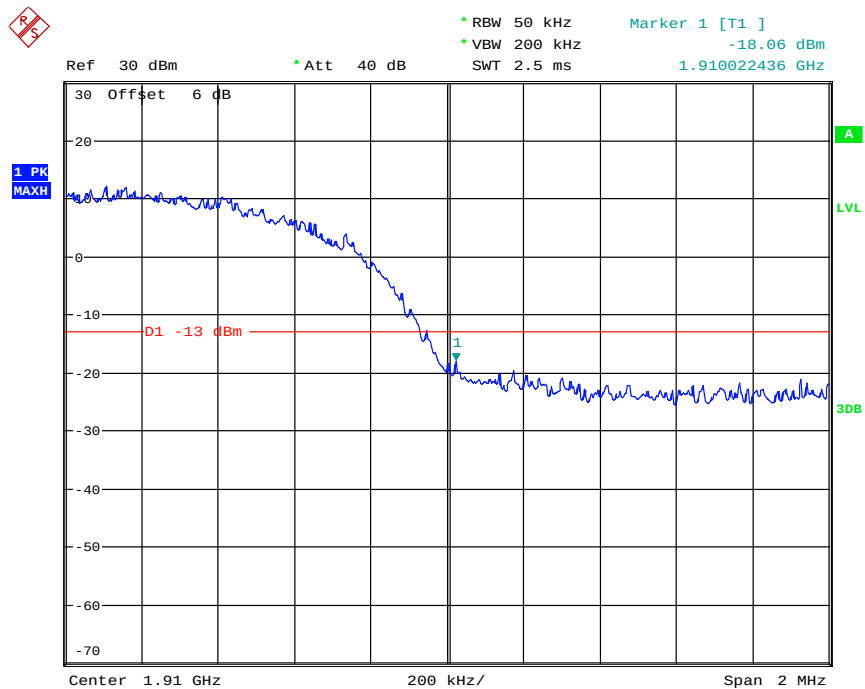


Date: 4.MAY.2016 14:13:00

(Plot F2: HSDPA Band II Channel=9538)

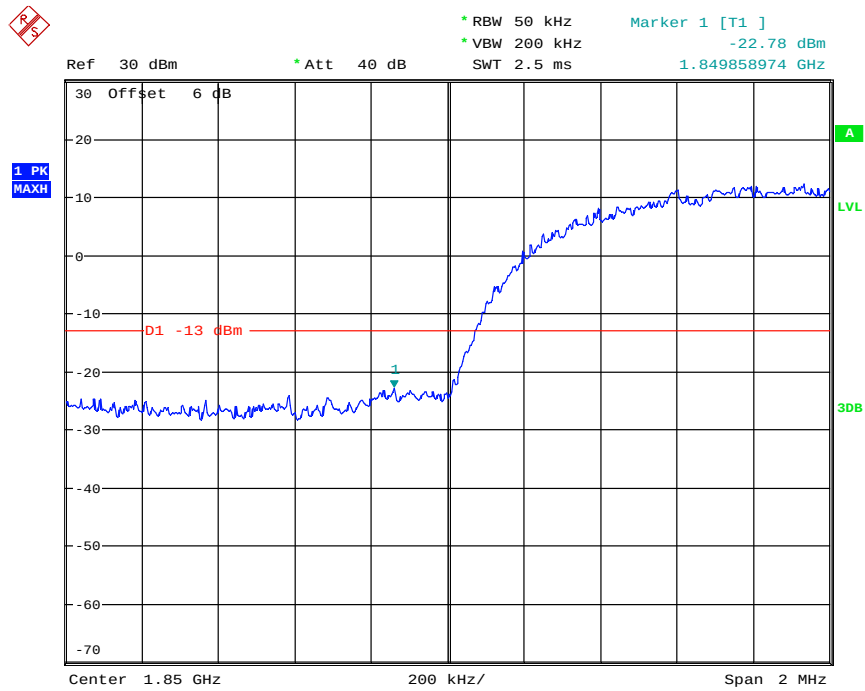


Date: 4.MAY.2016 14:11:27

(Plot G1: HSUPA Band II Channel=9262)

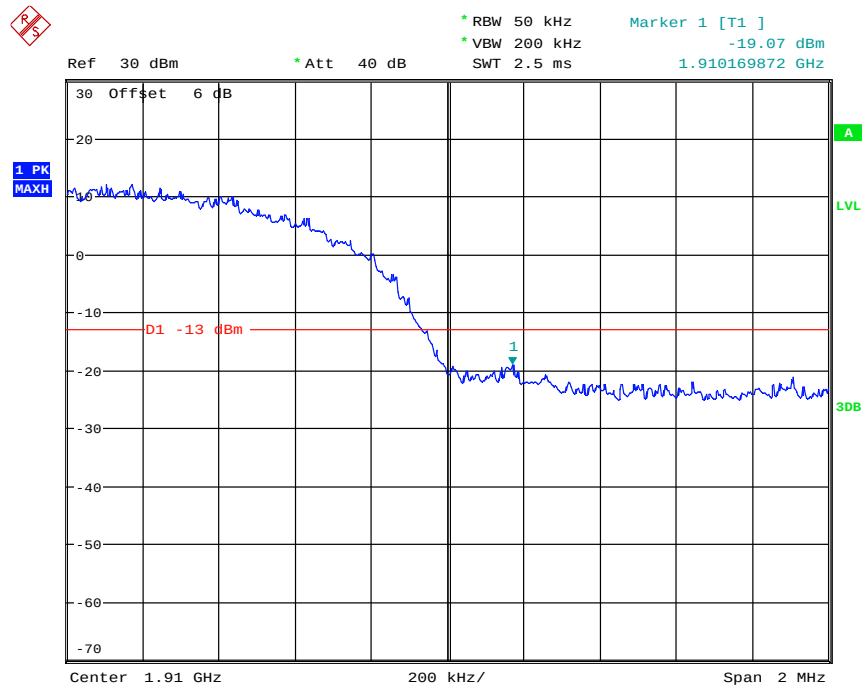


Date: 4.MAY.2016 14:13:19

(Plot G2: HSUPA Band II Channel=9538)

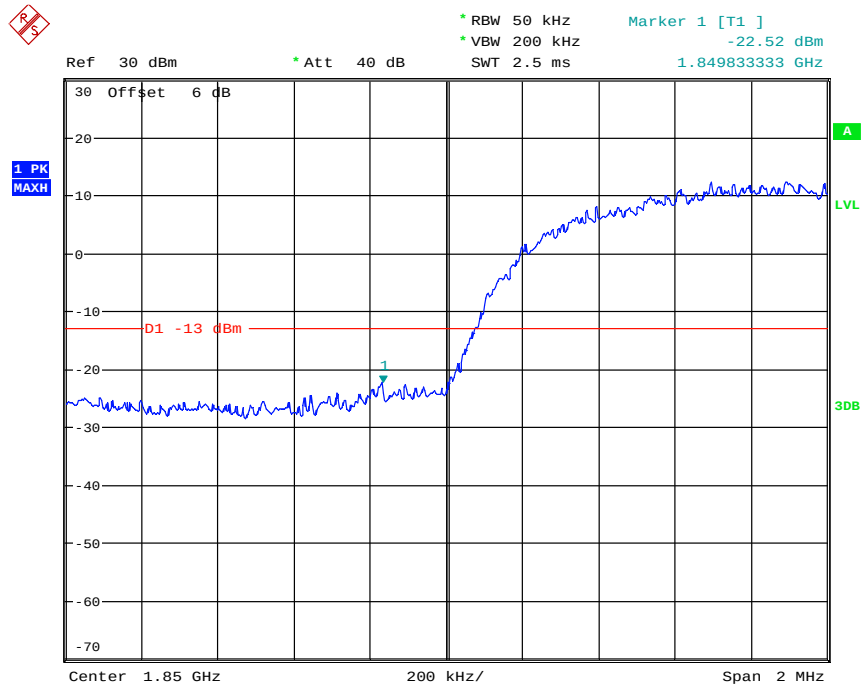

Date: 4.MAY.2016 14:11:44

(Plot H1: HSPA+ Band II Channel=9262)

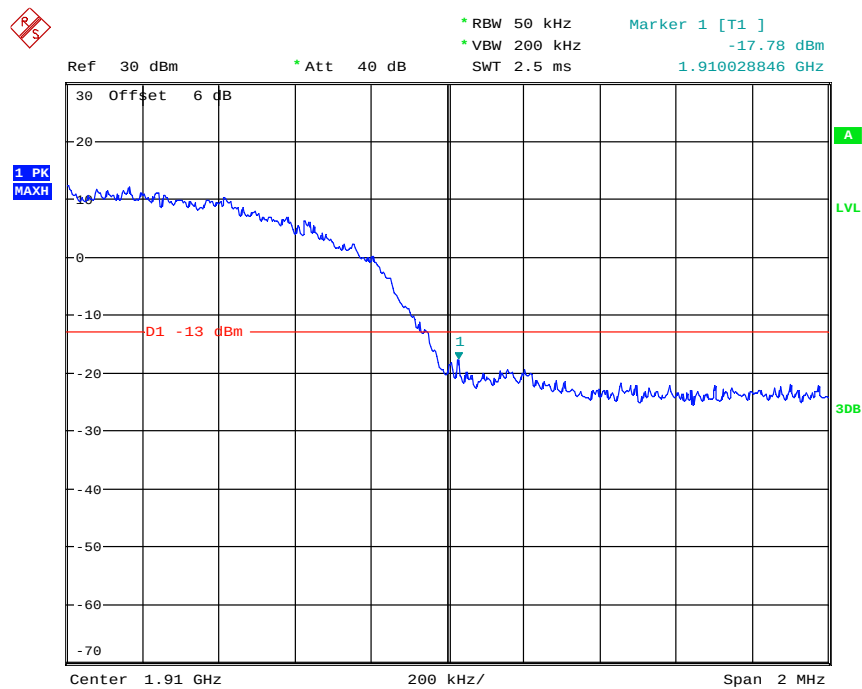

Date: 4.MAY.2016 14:13:37

(Plot H2: HSPA+ Band II Channel=9538)




## 4.7 Transmitter Radiated Power (EIRP/ERP)


### 4.7.1 Requirement

According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts, and FCC section 24.232, the broadband PCS mobile station is limited to 2Wattse.i.r.p.peak power.


### 4.7.2 Test Description

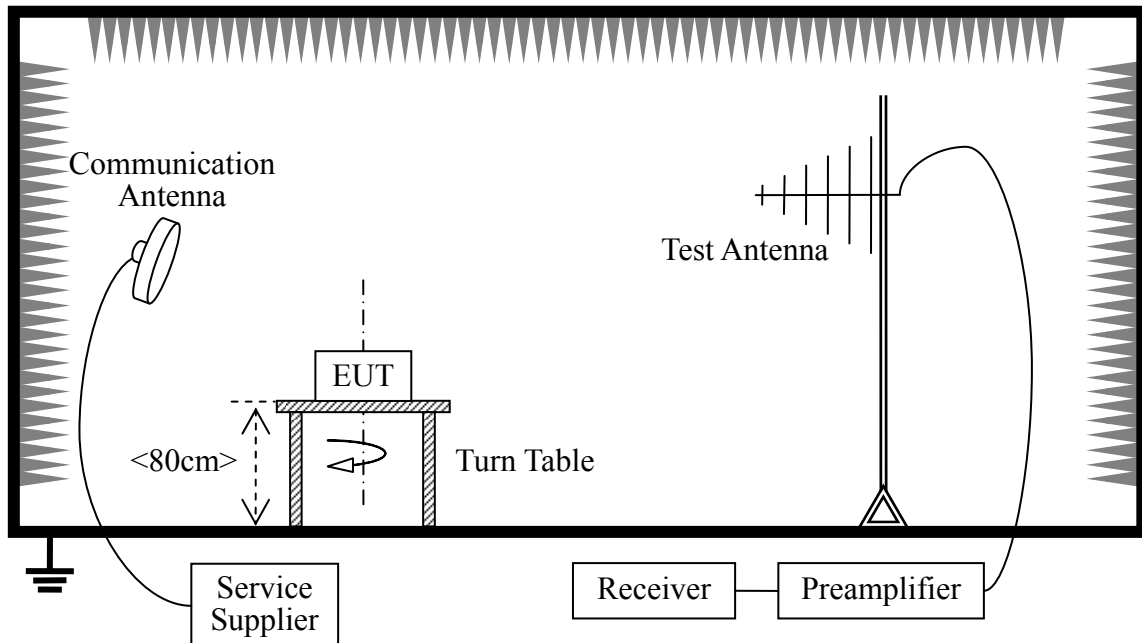

Radiated Emissions 30-1000MHz

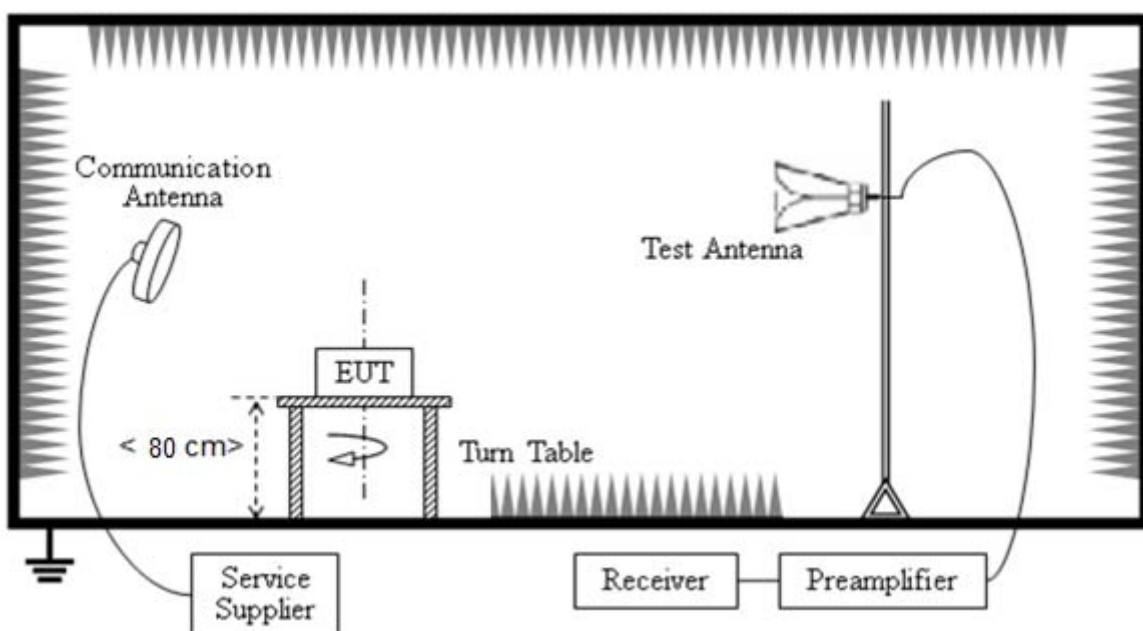

Radiated Emissions above 1000MHz

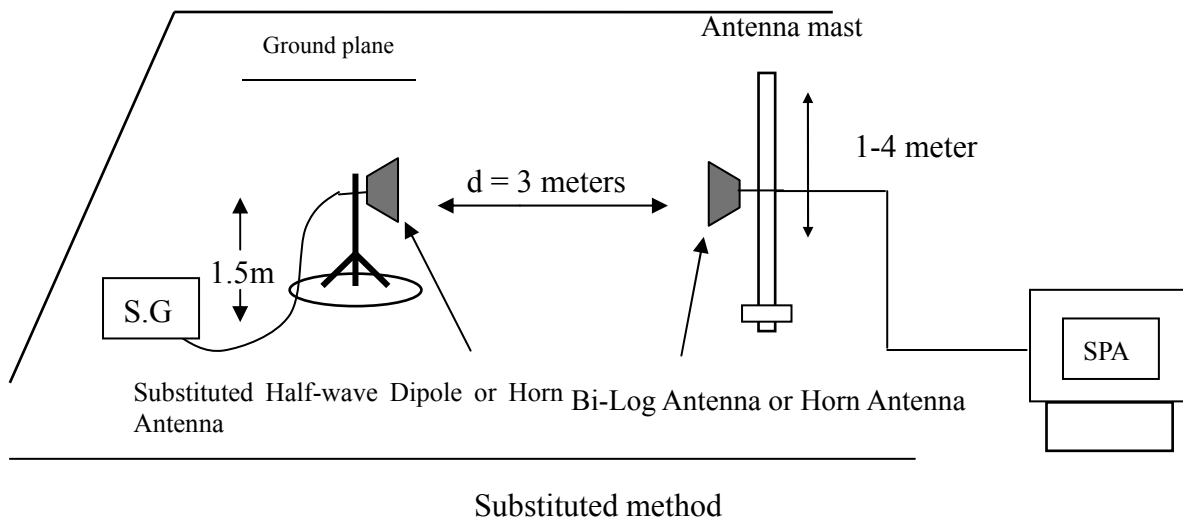

#### 4.7.3 Test Procedure

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1-4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as ( $P_r$ ).
3. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
4. The cable loss ( $P_{cl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test. The measurement results are obtained as described below:  
$$\text{Power(EIRP)} = P_{Mea} + P_{cl} + G_a$$
5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .



#### 4.7.4 Test Results

The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested. All modes are tested.

##### Limits

| Band          | Burst Peak ERP (dBm) |
|---------------|----------------------|
| WCDMA Band V  | ≤38.5dBm (7W)        |
| WCDMA Band II | ≤38.5dBm (7W)        |

##### Measurement Result

| Band | Channel | Peak ERP (dBm) | Limit (dBm) | Polarization |
|------|---------|----------------|-------------|--------------|
| V    | 4132    | 18.30          | 38.5        | Horizontal   |
|      | 4182    | 18.15          | 38.5        | Horizontal   |
|      | 4233    | 18.95          | 38.5        | Horizontal   |
|      | 4132    | 15.79          | 38.5        | Vertical     |
|      | 4182    | 14.62          | 38.5        | Vertical     |
|      | 4233    | 15.11          | 38.5        | Vertical     |

| Band | Channel | Peak EIRP (dBm) | Limit (dBm) | Polarization |
|------|---------|-----------------|-------------|--------------|
| II   | 9262    | 23.54           | 38.5        | Horizontal   |
|      | 9400    | 23.14           | 38.5        | Horizontal   |
|      | 9538    | 22.03           | 38.5        | Horizontal   |
|      | 9262    | 20.74           | 38.5        | Vertical     |
|      | 9400    | 20.98           | 38.5        | Vertical     |
|      | 9538    | 20.36           | 38.5        | Vertical     |

##### Remark:

$$\text{ERP(dBm)} = P_{\text{Mea}} + P_{\text{cl}} + G_a - 2.15$$

##### NOTE:

- 1) the power of the EUT transmitting frequency should be ignored.
- 2) All of WCDMA/HSDPA/HSUPA/HSPA+ modes were tested, and only the highest power was record in this report.



## 4.8 Radiated Out of Band Emissions

### 4.8.1 Requirement

According to FCC section 22.917(a) and section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. This calculated to be -13dBm.

### 4.8.2 Test Description

See section 4.6.2 of this report.

### 4.8.3 Test Description

See section 4.7.2 of this report.

### 4.8.4 Test Procedure

1. The lowest, middle and the highest channel were selected to perform tests respectively.
2. The EUT was placed on a rotatable non-conductive table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A substituted antenna was in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12.  $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10 \log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10 \log(P)] \text{ (dB)}$   
 $= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)}$   
 $= -13 \text{ dBm}.$



## 4.8.5 Test Results

| Measured Max. Spurious Emission(dBm) |         |              |           |            |            |         |
|--------------------------------------|---------|--------------|-----------|------------|------------|---------|
| Band                                 | Channel | Polarization | Frequency | Level(dBm) | Limit(dBm) | Verdict |
| Band V                               | 4132    | V            | 1652.8    | -51.3      | -13        | Pass    |
|                                      |         | V            | 2479.2    | -50.1      | -13        | Pass    |
|                                      |         | V            | 3305.6    | nf         | -13        | Pass    |
|                                      |         | V            | 4132.0    | nf         | -13        | Pass    |
|                                      |         | V            | 4958.4    | nf         | -13        | Pass    |
|                                      |         | H            | 1652.8    | -52.0      | -13        | Pass    |
|                                      |         | H            | 2479.2    | -47.7      | -13        | Pass    |
|                                      |         | H            | 3305.6    | nf         | -13        | Pass    |
|                                      |         | H            | 4132.0    | nf         | -13        | Pass    |
|                                      |         | H            | 4958.4    | nf         | -13        | Pass    |
| Band V                               | 4182    | V            | 1672.8    | -52.7      | -13        | Pass    |
|                                      |         | V            | 2509.2    | -51.6      | -13        | Pass    |
|                                      |         | V            | 3345.6    | nf         | -13        | Pass    |
|                                      |         | V            | 4182.0    | nf         | -13        | Pass    |
|                                      |         | V            | 5018.4    | nf         | -13        | Pass    |
|                                      |         | H            | 1672.8    | -49.0      | -13        | Pass    |
|                                      |         | H            | 2509.2    | -51.7      | -13        | Pass    |
|                                      |         | H            | 3345.6    | nf         | -13        | Pass    |
|                                      |         | H            | 4182.0    | nf         | -13        | Pass    |
|                                      |         | H            | 5018.4    | nf         | -13        | Pass    |
| Band V                               | 4233    | V            | 1693.2    | -50.6      | -13        | Pass    |
|                                      |         | V            | 2539.8    | -52.7      | -13        | Pass    |
|                                      |         | V            | 3386.4    | nf         | -13        | Pass    |
|                                      |         | V            | 4233.0    | nf         | -13        | Pass    |
|                                      |         | V            | 5079.6    | nf         | -13        | Pass    |
|                                      |         | H            | 1693.2    | -51.0      | -13        | Pass    |
|                                      |         | H            | 2539.8    | -49.7      | -13        | Pass    |
|                                      |         | H            | 3386.4    | nf         | -13        | Pass    |
|                                      |         | H            | 4233.0    | nf         | -13        | Pass    |
|                                      |         | H            | 5079.6    | nf         | -13        | Pass    |



| Measured Max. Spurious Emission(dBm) |         |              |           |            |            |         |
|--------------------------------------|---------|--------------|-----------|------------|------------|---------|
| Band                                 | Channel | Polarization | Frequency | Level(dBm) | Limit(dBm) | Verdict |
| Band II                              | 9262    | V            | 3704.8    | -53.9      | -13        | Pass    |
|                                      |         | V            | 5557.2    | -52.1      | -13        | Pass    |
|                                      |         | V            | 7409.6    | -50.3      | -13        | Pass    |
|                                      |         | V            | 9262.0    | nf         | -13        | Pass    |
|                                      |         | V            | 11114.4   | nf         | -13        | Pass    |
|                                      |         | H            | 3704.8    | -47.0      | -13        | Pass    |
|                                      |         | H            | 5557.2    | -52.6      | -13        | Pass    |
|                                      |         | H            | 7409.6    | -51.7      | -13        | Pass    |
|                                      |         | H            | 9262.0    | nf         | -13        | Pass    |
|                                      |         | H            | 11114.4   | nf         | -13        | Pass    |
| Band II                              | 9400    | V            | 3760.0    | -55.2      | -13        | Pass    |
|                                      |         | V            | 5640.0    | -52.6      | -13        | Pass    |
|                                      |         | V            | 7520.0    | -52.4      | -13        | Pass    |
|                                      |         | V            | 9400.0    | nf         | -13        | Pass    |
|                                      |         | V            | 11280.0   | nf         | -13        | Pass    |
|                                      |         | H            | 3760.0    | -44.1      | -13        | Pass    |
|                                      |         | H            | 5640.0    | -55.7      | -13        | Pass    |
|                                      |         | H            | 7520.0    | -52.1      | -13        | Pass    |
|                                      |         | H            | 9400.0    | nf         | -13        | Pass    |
|                                      |         | H            | 11280.0   | nf         | -13        | Pass    |
| Band II                              | 9538    | V            | 3815.2    | -50.3      | -13        | Pass    |
|                                      |         | V            | 5722.8    | -53.6      | -13        | Pass    |
|                                      |         | V            | 7630.4    | -51.3      | -13        | Pass    |
|                                      |         | V            | 9538.0    | nf         | -13        | Pass    |
|                                      |         | V            | 11445.6   | nf         | -13        | Pass    |
|                                      |         | H            | 3815.2    | -49.1      | -13        | Pass    |
|                                      |         | H            | 5722.8    | -50.7      | -13        | Pass    |
|                                      |         | H            | 7630.4    | -53.0      | -13        | Pass    |
|                                      |         | H            | 9538.0    | nf         | -13        | Pass    |
|                                      |         | H            | 11445.6   | nf         | -13        | Pass    |

**NOTE:**

- 1) the power of the EUT transmitting frequency should be ignored.
- 2) All spurious emission tests were performed in X,Y,Z axis direction, EUT was tested in Voice and HSDPA mode.  
Only the worst axis test condition was recored in this test report.
- 3) 'nf' means that the emission level is too low to read out from the noise floor.
- 4) The emission levels of below 1 GHz are very lower than the limit(<-40dBm) and not show in this report.
- 5) All of WCDMA/HSDPA/HSUPA/HSPA+ modes were tested, and only the worst result was record in this report.



Photos of the EUT



**\*\* END OF REPORT \*\***