

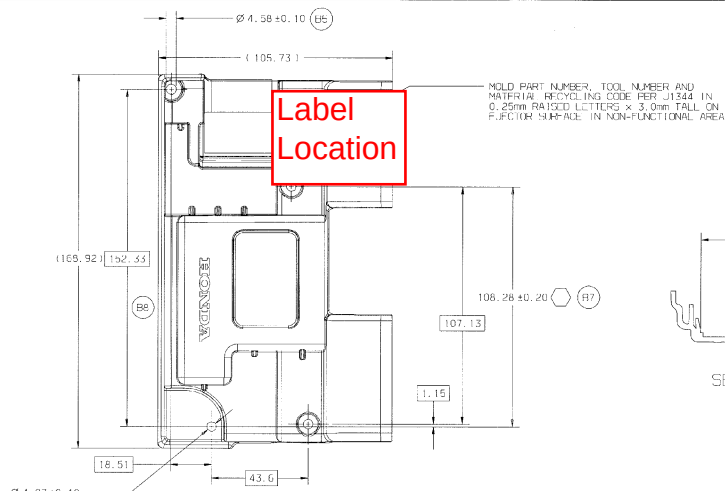



SECTION C-C

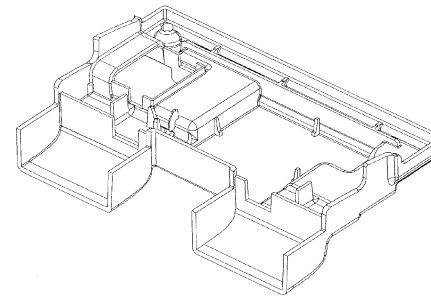


ISO VIEW
FOR REFERENCE ONLY



SECTION D-D

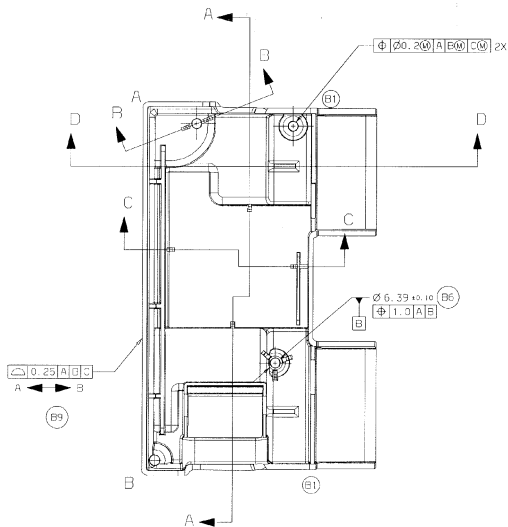

SECTION A-A



SECTION B-B

	DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN USING ATTRIBUTE GAGING METHODS.
	DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN USING VARIABLE MEASUREMENT OR GAGING METHOD.
	DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN USING ATTRIBUTE GAGING METHODS.
	DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN USING VARIABLE MEASUREMENT OR GAGING METHOD.
	DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN USING ATTRIBUTE GAGING METHODS.
	DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN USING VARIABLE MEASUREMENT OR GAGING METHOD.
	DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN USING ATTRIBUTE GAGING METHODS.
	DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN USING VARIABLE MEASUREMENT OR GAGING METHOD.
	DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN USING ATTRIBUTE GAGING METHODS.
	DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN USING VARIABLE MEASUREMENT OR GAGING METHOD.

MOLDED PART STD. UNLESS OTHERWISE SPECIFIED
THIRD ANGLE PROJECTION ASME Y14.5M 1994

1. DIMENSIONS ARE IN MILLIMETERS.
2. ELECTRONIC FORMAT IS DATA MASTER.
ALL DIMENSIONS MUST BE TAKEN FROM THE NOMINAL MODEL FILE AT ITS LATEST REVISION LEVEL.
DIMENSIONS MUST BE TO MATCH THE END MODEL.
DIMENSIONS MUST BE TO MATCH THE END MODEL.
DIMENSIONS MUST BE TO MATCH THE END MODEL.
3. POINTS MUST BE FREE OF SWAMP POINTS AND OTHER INTERFERENCE THAT ADVERSELY AFFECT FUNCTION, FIT, OR APPEARANCE.
4. LOCATION OF GATES, ELECTRIC PINS, ETC. TO BE ADVISED BY PRODUCT ENGINEERING PRIOR TO TOOLING.

REV	DATE	DESCRIPTION	BY	DATE	CHK
A		RELEASE FOR PRODUCTION	66645 TMS	090CT02 RA	
B1	01	MODIFIED RIB HEIGHT (2X)	66688 CDP	290CT02 RA	
B2	02	REMOVED DATUM D			
B3	03	PLACED DATUM C IN CORRECT LOCATION			
B4	04	CHANGED DATUM A AND RELATED DIMENSIONS TO MATCH BUILD CONDITION			
B5	05	REMOVED C&T CALLOUT AND DATUM CALLOUT			
B6	06	CHANGED LOCATION OF DATUM B			
B7	07	ADDED 108.28 DIM AND SC			
B8	08	REMOVED ONE TIME CAPABILITY CALLOUT			
B9	09	ADDED SURFACE PROFILE CALLOUT			

JOHNSON CONTROLS		AUTOMOTIVE SPECIALTY GROUP INTERIORS	
SPECIFICATIONS		PERFORMANCE	
MATERIAL		FINISH	
HOUSING - PCB		NONE	
REFLECTED DIM		2004 SEPRA-HONDA	
REV	DATE	DESIGN	DATE
VR2815	B	TODD SCHMITZ	050CT02
REV	DATE	DESIGN	DATE
VR2815	B	DRIAN LAUNER	050CT02
REV	DATE	DESIGN	DATE
VR2815	B	RANDY ARENDA	090CT02
REV	DATE	DESIGN	DATE
VR2815	B	RANDY ARENDA	090CT02
REV	DATE	DESIGN	DATE
VR2815	B	RANDY ARENDA	090CT02