



**Technical Report to the FCC and ISED Regarding
Gentex Corporation - HomeLink® VI**

**Model: IECHL6A
FCC ID: NZLIECHL6A
ISED: 4112A-IECHL6A**

**Emission Designator: 57K5L1D
8/25/2026**

A report concerning approval for Gentex Corporation Homelink® model IECHL6A
Please issue grant immediately upon review.

Measurements Made by:

Bolay Pacheco Digitally signed by Bolay Pacheco
Date: 2026.09.01 09:26:16 -04'00'

Bolay Pacheco
Laboratory Validation Engineer III
Gentex Corporation

Measurements Reviewed by:

Michael Foster Digitally signed by Michael
Foster
Date: 2026.08.31 10:22:25
-04'00'

Mike Foster
Laboratory Regulatory Engineer I
Gentex Corporation

Report Prepared by:

Patricia Szeszulski Digitally signed by Patricia
Szeszulski
Date: 2026.08.31 14:35:57
-04'00'

Patricia Szeszulski
Laboratory Validation Engineer I
Gentex Corporation

Report Submitted and Approved by:

Brian Miller Digitally signed by Brian
Miller
Date: 2026.08.31 09:45:50
-04'00'

Brian Miller
Laboratory Group Leader – Regulatory II
Gentex Corporation

Test Report Revision

REV Number	Date	Author	Description
1.0	8/25/2026	Patricia Szeszulski	Initial Release

Results relate only to the items tested as received.

Compliance has been evaluated based on the Lab Manual section 7.6.2. The decision rule used regarding measurement uncertainty was to determine results solely on whether the measured values met the defined acceptance criteria without factoring in measurement uncertainty values.

1. General Information

1.1. Product Description

The Gentex Corporation HomeLink® HLVI Universal Garage Door Opener is a low-power transceiver OEM device that is installed into a rearview mirror of an automobile. The installation is provided by trained technicians during the course of the manufacture of the automobile. It is powered by the 12 Volt system of the automobile.

This Universal Garage Door Opener has the capability to

1. Learn the frequency and bit code format of the user's existing garage door remote control devices and
2. Reproduce and transmit the frequency and bit code format to remotely operate the user's garage door.

The unit is designed for the periodic operation of a control signal, which typically activates a garage door opener receiver.

The unit is supplied to the automobile manufacturer without harness. For testing purposes, a typical assembly and 2-conductor cable harness were used to power the unit.

The unit is only operational when the user presses down the control button. It becomes inactive after the release of the control button.

The three-button HomeLink® unit replaces up to three hand-held transmitters. In addition to the typical operation of the garage door, the unit will learn the radio frequency codes of other transmitter types to activate entry door locks, estate gates, security systems, and home or office lighting.

The antenna system is an integral part of the unit. It cannot be altered nor replaced by the user. The service of this system is only available from the Automobile Manufacturer's Dealerships and Gentex Corporation.

1.2. Related Grants

This device will have functionality that is covered under 47 CFR 15.247 and part 15B. The device will have FCC ID # of NZLIECHL6A and ISED ID # of 4112A-IECHL6A under both rule parts. A separate report is submitted for functionality covered under other rule parts.

1.3. Test Methodology

Radiated Emissions testing was performed according to ANSI C63.10:2020+Cor.1-2023 and ANSI C63.10a:2024. The power source for this product is a 12V automotive vehicle battery, thus conducted emissions measurements are not required.

The unit is supplied to the automobile manufacturer without harness. For testing purposes, a 2-conductor cable harness was used to interface to the unit.

1.4. Test Facility

The 3-meter semi-anechoic chamber where these measurements were taken is located on the grounds of Gentex Corporation's Corporate Labs, in the city of Zeeland, county of Ottawa, state of Michigan, United States of America.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer's instructions.

Tabletop testing was conducted on a 3m turntable described in the site recertification report. The 3m chamber has been added to our A2LA scope of accreditation on 05/20/2016 and includes accreditation to ANSI C63.4:2014 and ANSI C63.10:2020+Cor.1-2023 and ANSI C63.10a:2024. The report filed with ISED, dated February 11, 2015, was accepted via a letter dated February 11, 2015. Our 3m chamber is registered with the ISED under Site# 4112A-2 and FCC under registration number 357351.

Corporate Mailing/Shipping Address

Gentex Corporation
600 N. Centennial Street
Zeeland, MI 49464

Site Address

Gentex Corporation
380 Riley Street
Zeeland, MI 49464

1.5. Accreditation

The Gentex Corporate EMC Lab is accredited to ISO/IEC 17025 by the American Association for Laboratory Accreditation (A2LA). Our laboratory scope and accreditation certificate #[2529.01](#) are available from their web site www.a2la.org. Our scope of accreditation covers ANSI C63.4:2014, ANSI C63.10:2020+Cor.1-2023 and ANSI C63.10a:2024, and Radiated Emissions at 3m, FCC 47 CFR Part 15, ISED RSS-210, and RSS-247.

2. Product Labeling

2.1. Identifiers

The FCC Identifier assigned is FCC ID: NZLIECHL6A. The ISED certification number is 4112A-IECHL6A. These identifiers will be labeled on the product housing.

The label will be imprinted on the exterior of the mirror housing using a molding tool that will permanently affix the label.

Because of the small size of the device and because the installation is inside a portion of the automobile, the following statements will appear in the user's manual.

"This device complies with FCC rules Part 15 and with ISED RSS-210. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) This device must accept any interference that may be received including interference that may cause undesired operation.

WARNING: The transmitter has been tested and complies with FCC and ISED rules. Changes or modifications not expressly approved by the party responsible for the compliance could void the user's authority to operate the device."

The term "ISED:" before the certification/registration number only signifies that ISED technical specifications were met.

ISED: 4112A-IECHL6A

FCC ID: NZLIECHL6A

MODEL: IECHL6A

2.2. Label Drawing and Location on Product

The label drawing is included in the "Label.pdf" attachment.

A diagram showing the location of the label on the assembly is included in the "Label Location.pdf" attachment.

3. Test Configuration

Radiated Emission measurements presented in the report were made in accordance with ANSI C63.10:2020+Cor.1-2023 and ANSI C63.10a:2024. The EUT was placed on a 1 x 1.5m non-metallic table elevated 80cm above a conducting ground plane for measurements below 1GHz and elevated to 1.5m for measurements above 1GHz. The harness was run down the edge of the test table to a power supply sitting underneath the turntable.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer's instructions.

4. Block Diagram

For system block diagram please refer to attachment named "Block Diagram.pdf"

5. Conducted Emissions Measurements

Conducted Measurements are not required for this product.

6. Radiated Emissions Data

6.1. Date(s) Tested: 7/30/2026-8/14/2026

6.2. Test Method Deviations: None

6.3. Temperature and Humidity conditions

	Measured Value	Unit
Temperature	21.3-22.1	°C
Humidity	51.1-58	%R.H.

6.4. Summary of Results

Test Results	☐ Does not meet requirements	☒ Meets requirements
---------------------	---	--

Measurement		Margin	Frequency - Duty Cycle	Meets Requirements
Worst Case Peak Emission	85.64 dBuV/m	12.56 dB	365MHz - 30%	Yes
Worst Case Average Emission	75.2 dBuV/m	3.01 dB	365MHz - 30%	Yes
Worst Case Harmonic	48 dBuV/m	5.8 dB	864MHz - (288MHz - 80%)	Yes
Worst Case Restricted Band Emission	44.8 dBuV/m	9.2 dB	930MHz - (365MHz - 80%)	Yes
Maximum -20 dB Occupied BW	17.98kHz	702.1kHz	288MHz - 30%	Yes
Maximum 99% Occupied BW	57.5kHz	662.5kHz	288MHz - 30%	Yes
Delta of Field Strength with Supply Voltage of 6-18V	0.07 dB	N/A	365MHz - 30%	Yes

- This module exhibits pulsed operation characteristics.
- The device does not operate when the input voltage is below 7V, and power reduced to 85.54dBuV/m at 7V.
- The device was found to be incapable of operating in restricted bands.
- The device deactivated in less than 5 seconds after the activation button is depressed.
- **Measurement Uncertainty:** The standard uncertainty of measurement has been determined in accordance with the ISO Guide to the Expression of Uncertainty in Measurements. The estimation of measurement uncertainty reported is the expanded uncertainty for a coverage factor of k=2.26 and confidence interval of approximately 95%.

Expanded Uncertainty U_(k=2.26) is as follows:

- Radiated Emissions – Bicon (30-250 MHz): 4.1 dB
- Radiated Emissions – LPA (250-1000 MHz): 5.0 dB
- Radiated Emissions – DRWG (26.5 GHz): 4.2 dB
- Frequency: 0.007 ppm

6.5. Test Equipment Setup and Procedure

6.5.1. Sample(s) Used for Measurements

Sample ID(s):	905-7115-168025-1
---------------	-------------------

6.5.2. Test Equipment Used

Equipment Used						
ID / Serial #	Manufacturer	Description	Type	Cal / PM Due Date	last Cal Date	Interval
6595	Rohde & Schwarz	ESR26	EMI Receiver	02/20/2027	2/20/2026	1 Year
CF GCL	Megaphase / Pasternack	CBL 94, CBL 96, CBL 158, AT26, Port N3	Cable and Feedthroughs	8/31/2026	8/31/2025	1 Year
S/N:419726	AIM-TTI	PL303-P	Power Supply	VBV	VBV	N/A
S/N: PJ2246	Lindgren	3M Chamber	Shielded Enclosure	9/30/2026	4/20/2026	Quarterly
Absorber 1	ETS-Lindgren	EHP-12PCL	Absorber Material	VBV	VBV	N/A
Tower 2	ETS-Lindgren	2171B Boresight Tower	Antenna Positioner	VBV	VBV	N/A
5835	Omega	iBTHX-W Virtual	Chart Recorder	01/09/2027	1/9/2026	1 Year
6539	Stanley	Tape Measure	Measurement Tool	7/10/2029	7/10/2026	3 Years
H4554	Fluke	87	Multimeter	02/05/2027	2/5/2026	1 Year
SW30	Gentex	3m Chamber Software	Software	3/31/2027	3/31/2026	1 Year
SW48	Gentex	Gentex Emissions Measurement Software	Software	3/31/2027	3/31/2026	1 Year
8893	Com-Power	AHA-118 Double Ridged Waveguide Horn	Antenna	04/22/2027	4/22/2024	3 Years

Equipment Used						
ID / Serial #	Manufacturer	Description	Type	Cal / PM Due Date	last Cal Date	Interval
6595	Rohde & Schwarz	ESR26	EMI Receiver	02/20/2027	2/20/2026	1 Year
H6192	EMCO	3148 Log Periodic RX	Antenna	05/13/2027	5/13/2024	3 Years
H6187	EMCO	3110B Biconical RX	Antenna	05/13/2027	5/13/2026	3 Years
S/N:273123	Sonoma Instrument Co.	310N, 32dB	Preamplifier	12/31/2026	12/11/2025	1 Year
7257	ETS-Lindgren	3116C Double Ridged Waveguide Horn	Antenna	6/27/2028	6/27/2025	3 Years
S/N:2069595	Miteq	AMF-4F-18002650-20-10P, 30 dB	Preamplifier	10/31/2026	10/14/2025	1 Year
CBL 146	Megaphase	EMC2-S1S1-72	Cable	10/31/2026	10/14/2026	1 Year
CBL 149	Megaphase	GC19-S1S1-72	Cable	10/31/2026	10/14/2026	1 Year

EMI Receiver Settings Emissions:

Detector Function: Peak
Resolution Bandwidth: 120 kHz (below 1GHz)
1MHz (above 1GHz)

EMI Receiver (in Spectrum Analyzer mode) Settings Occupied Bandwidth:

Detector: Peak
Resolution Bandwidth: 1 MHz (to determine peak level)
1 kHz (to determine occupied bandwidth)
Video Bandwidth: 3 MHz (to determine peak level)
3 kHz (to determine occupied bandwidth)

For the testing, the EUT was placed at the center of a non-conducting table 80cm above the ground plane pursuant to ANSI C63.10:2020+Cor.1-2023 and ANSI C63.10a:2024 for stand-alone equipment. The 2-conductor harness was run down the edge of the test table to a power supply underneath the turntable.

Per ANSI C63.10 section 6.3.1, EUT's with integral antennas shall be evaluated in their normal orientation. EUT is placed in the orientation which aligns with the normal orientation. These orientations are described below in Figure 6.2.1.

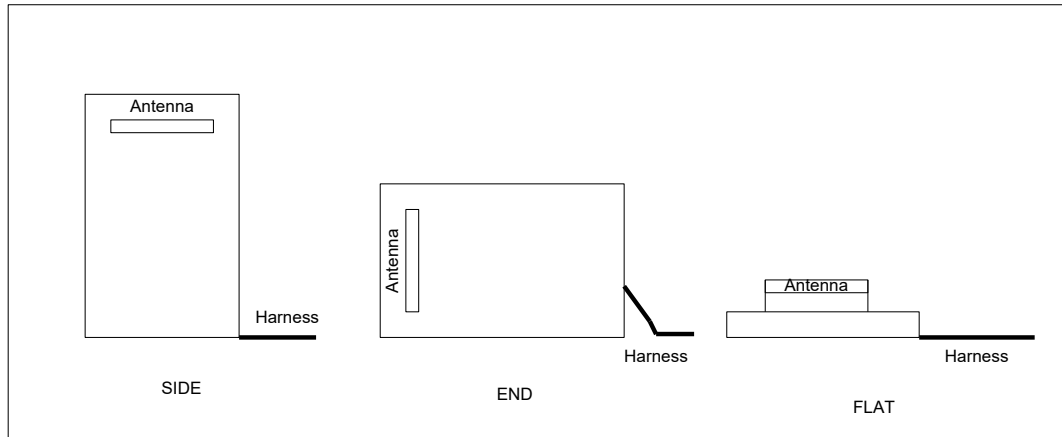


Figure 6.2.1 EUT Orthogonal Orientations

While in the prescribed orientation, the vertical antenna positioner sweeps in elevation from 1 to 4m in height until the operator finds the peak. The 3m turntable is then rotated through 360 degrees until a peak is found. The table is stopped at the peak location and the peak in elevation re-verified. Procedure is repeated for applicable orientations/measurement antenna polarizations. Radiated testing was performed in the side position only.

6.6. Measured Data – See Appendix A

7. Verification of Non-Operation in Restricted Bands

An exercise was undergone by the product Software Design team to verify that the device was not able to learn and thereby transmit in a restricted band. During this exercise, it was found that the device firmware prevents the device from learning any frequency within 1MHz of any restricted band listed in the latest issue of RSS-210, Table 1 and 47 CFR 15.205.

This exercise is described as follows:

HomeLink Operating Frequencies

HomeLink is designed to transmit from 286 – 440 MHz, with the exception of two regions:

- 321 – 336.4 MHz
- 398.9 – 411 MHz

HomeLink will only transmit at frequencies it is able to train to therefore, to verify HomeLink does not **transmit** outside the designated regions, it must be verified that HomeLink does not **train** to signals outside the designated regions.

To verify this, the Agilent E4421B signal generator was set up to output a 400 Hz square wave with 100% modulation depth and amplitude -5.00 dBm. It was then verified that HomeLink would train to this signal only when it was transmitted at the proper frequencies. Specifically, the various frequencies in the vicinity of the banned region boundaries were tested and verified that HomeLink trained when it saw a signal at a valid frequency and did not train when it saw a signal at a banned frequency. In the instances where HomeLink trained to a valid frequency, it was then verified that HomeLink transmitted at that same frequency.

One thing that should be noted: HomeLink margin of error is approximately 100 kHz. Therefore, HomeLink may not adhere to the specified limits with absolute precision. This is why the FCC

banned frequencies are guard-banded by 1MHz. For example, the FCC bans transmissions below 285MHz. By setting HomeLink's lower limit to 286 MHz, it guarantees that HomeLink will not operate below 285 MHz, and in all likelihood, HomeLink will not operate below 285.8MHz.

In addition to the banned frequencies, there also exists certain "harmonic avoidance frequency regions" which HomeLink will train to but will shift the transmit frequency so as not to generate harmonics at particular frequencies. All these frequency regions are listed below, and the table on the following pages shows the exact frequencies tested.

FCC Banned Regions	Harmonic Avoidance Regions
(HomeLink does not train to the following frequencies) 240 – 285 MHz 322 – 335.4 MHz 399.9 – 410 MHz	(HomeLink trains to the following frequencies but transmits on the edges of these bands) 303.5 MHz – 307.5 MHz

Frequency (MHz)	Part 15 Status	Result	Pass/Fail	Comments
285.0	banned	would not train	Pass	
285.5	allowed (guard band region)	would not train	Pass	
286.0	allowed (guard band region)	trained	Pass	
287.0	allowed	trained	Pass	
303.5	allowed	trained	Pass	
304.0	allowed	trained	Pass	Frequency shifted to 303.5 MHz
304.5	allowed	trained	Pass	Frequency shifted to 303.5 MHz
305.0	allowed	trained	Pass	Frequency shifted to 303.5 MHz
305.5	allowed	trained	Pass	Frequency shifted to 303.5 MHz
306.0	allowed	trained	Pass	Frequency shifted to 307.5 MHz
306.5	allowed	trained	Pass	Frequency shifted to 307.5 MHz
307.0	allowed	trained	Pass	Frequency shifted to 307.5 MHz
307.5	allowed	trained	Pass	
319.0	allowed	trained	Pass	
320.0	allowed	trained	Pass	
320.5	allowed	trained	Pass	
321.0	allowed (guard band region)	trained	Pass	
322.0	banned	would not train	Pass	
323.0	banned	would not train	Pass	
324.0	banned	would not train	Pass	
325.0	banned	would not train	Pass	
326.0	banned	would not train	Pass	
327.0	banned	would not train	Pass	
328.0	banned	would not train	Pass	
329.0	banned	would not train	Pass	
330.0	banned	would not train	Pass	
331.0	banned	would not train	Pass	
332.0	banned	would not train	Pass	
333.0	banned	would not train	Pass	

Frequency (MHz)	Part 15 Status	Result	Pass/Fail	Comments
334.0	banned	would not train	Pass	
335.0	banned	would not train	Pass	
336.0	allowed (guard band region)	would not train	Pass	
337.0	allowed (guard band region)	trained	Pass	
338.0	allowed	trained	Pass	
398.0	allowed	trained	Pass	
399.0	allowed (guard band region)	would not train	Pass	While this is a valid frequency, HomeLink guardbands this region to ensure it doesn't train to 399.9 MHz
399.5	allowed (guard band region)	would not train	Pass	While this is a valid frequency, HomeLink guardbands this region to ensure it doesn't train to 399.9 MHz
400.0	banned	would not train	Pass	
401.0	banned	would not train	Pass	
402.0	banned	would not train	Pass	
403.0	banned	would not train	Pass	
404.0	banned	would not train	Pass	
405.0	banned	would not train	Pass	
406.0	banned	would not train	Pass	
407.0	banned	would not train	Pass	
408.0	banned	would not train	Pass	
409.0	banned	would not train	Pass	
410.0	banned	would not train	Pass	
410.5	allowed (guard band region)	would not train	Pass	
411.0	allowed (guard band region)	would not train	Pass	
411.5	allowed	trained	Pass	
412.0	allowed	trained	Pass	
439.0	allowed	trained	Pass	
440.0	allowed	trained	Pass	
440.5	allowed	would not train	Pass	HomeLink only operates up to 440 MHz
441.0	allowed	would not train	Pass	HomeLink only operates up to 440 MHz
442.0	allowed	would not train	Pass	HomeLink only operates up to 440 MHz

8. Verification of De-activation after 5 seconds

An exercise was undergone by the product Software Design team to verify that the device was deactivated appropriately. This device stops transmitting after 1.099s once the activation button is released.

9. Formulas and Sample Calculations

9.1. Adjustment to account for duty cycle

The EMI Receiver used for making the measurements in this report automatically corrects for cable correction and antenna factors using values stored in memory taken from the most recent calibration (in the case of antenna factors), periodic cable loss measurements, and preamplifier gain.

Formula 1: $FS \text{ (dBuV/m)} = M \text{ (dBuV)} + AF \text{ (dB/m)} + CF \text{ (dB)} - AG \text{ (dB)}$

The presented field strength is computed by the EMI Receiver by taking the measured level and adding to it the antenna factor and cable loss corrections. The measurements presented were gathered using the EMI Receiver's peak-hold capability.

Formula 2: $\text{Average Level (dBuV/m)} = \text{Peak Level (dBuV/m)} + \text{duty cycle factor (dB)}$

The peak measurement is adjusted to an average level by a duty cycle described below.

The duty cycle factor to apply is determined for the duty cycles of 30%, 50%, and 80% as follows:

For 30% (0.30):	duty cycle factor (dB) = $20 * \log(0.3) = -10.46$
For 50% (0.50):	duty cycle factor (dB) = $20 * \log(0.5) = -6.02$
For 80% (0.80):	duty cycle factor (dB) = $20 * \log(0.8) = -1.94$

Example calculation:

With the EUT programmed with a 30% duty cycle a measurement of 74 dBuV/m is taken (about 5000 uV/m), the adjusted level would be:

$$74 + (-10.46) = 63.54 \text{ dBuV/m (example)}$$

9.2. Calculation of ISED Limits from Table 4, RSS-210 and 47 CFR Part 15.231

The prescribed limit in the range of 260 MHz to 470 MHz is stated as a linear interpolation between 3750 uV/m and 12500 uV/m. The equation used to calculate the limit using this criterion is:

FCC limit = $41.67 * f - 7083.33$
(Where 'f' is the measurement frequency in MHz.)

The limit in dBuV/m is then:

$\text{dB limit} = 20 * \log_{10}(\text{FCC limit in dBuV/m}) = 20 * \log_{10}(41.67 * f - 7083.33)$
(log10 is used to indicate the use of a base 10 logarithm)

This results in the following limits for the fundamentals:

288MHz	$20 * \log_{10}(4917.6)$	= 73.8 dBuV/m
310MHz	$20 * \log_{10}(5834.4)$	= 75.3 dBuV/m
390MHz	$20 * \log_{10}(9168.0)$	= 79.2 dBuV/m
433MHz	$20 * \log_{10}(10959.8)$	= 80.8 dBuV/m

9.3 Antenna Gain

All 15.231 required measurements were performed radiated and additional antenna gain information is not needed. Antenna gain is calculated for use in RF exposure assessment.

10. Power Targets

Region	Frequency (MHz)	CW Target (Hex)		
		0-33%	34 – 66%	67 - 100%
0	285-303	A0	9F	9F
1	303-322	07	08	08
2	335-360	06	07	06
3	360-380	06	06	06
4	380-400	03	03	03
5	410-440	90	90	8F

Appendix A

1. Measurements of Fundamentals and Harmonics

Measurements described in this section were taken according to ANSI C63.10:2020+Cor.1-2023 and ANSI C63.10a:2024 on the Gentex Corporation 3m test table.

* Measurements include Cable corrections and Antenna Factors

Measurement Settings:

Measurement Frequency: Below 1GHz

Span: 500kHz or greater

RBW: 100/120kHz VBW: 300kHz or 3 x RBW

Sweep Time: 25ms

Attenuation: Auto

Measurement Frequency: Above 1GHz

Span: 500kHz or greater

RBW: 1MHz VBW: 3MHz or 3 x RBW

Sweep Time: 25ms

Attenuation: Auto

1.1. DUT Tuned to Fund 288MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
288	Side	H	30	77.71	93.8	16.12	-10.5	67.3	73.8	6.58
288	Side	H	50	73.55	93.8	20.28	-6.0	67.5	73.8	6.30
288	Side	H	80	69.72	93.8	24.11	-1.9	67.8	73.8	6.05

1.2. DUT Tuned to Fund 310MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
310	Side	H	30	81.85	95.3	13.47	-10.5	71.4	75.3	3.93
310	Side	H	50	78.23	95.3	17.09	-6.0	72.2	75.3	3.11
310	Side	H	80	73.80	95.3	21.52	-1.9	71.9	75.3	3.46

1.3. DUT Tuned to Fund 365MHz

Frequency	Orientation	Measurement Polarization	Duty Cycle	Measurement*	FCC Peak Limit	Margin-Peak	Duty Cycle Correction	Average Level	FCC Average Limit	Margin-Average
(MHz)	(Flat/End/Side)	(H/V)	(%)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
365	Side	H	30	85.64	98.2	12.56	-10.5	75.2	78.2	3.01
365	Side	H	50	80.52	98.2	17.68	-6.0	74.5	78.2	3.70
365	Side	H	80	76.91	98.2	21.29	-1.9	75.0	78.2	3.22

1.4. DUT Tuned to Fund 430MHz

Frequency	Orientation	Measurement Polarization	Duty Cycle	Measurement*	FCC Peak Limit	Margin-Peak	Duty Cycle Correction	Average Level	FCC Average Limit	Margin-Average
(MHz)	(Flat/End/Side)	(H/V)	(%)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
430	Side	H	30	86.69	100.7	14.01	-10.5	76.2	80.7	4.46
430	Side	H	50	82.50	100.7	18.20	-6.0	76.5	80.7	4.22
430	Side	H	80	77.89	100.7	22.81	-1.9	76.0	80.7	4.74

1.5. DUT Tuned to Har 288MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
576	Side	H	30	56.99	73.8	16.81	-10.5	46.5	53.8	7.27
576	Side	H	50	48.84	73.8	24.99	-6.0	42.8	53.8	11.01
576	Side	H	80	46.14	73.8	27.69	-1.9	44.2	53.8	9.63
864	Side	H	30	53.92	73.8	19.91	-10.5	43.5	53.8	10.37
864	Side	H	50	51.51	73.8	22.32	-6.0	45.5	53.8	8.34
864	Side	H	80	49.97	73.8	23.86	-1.9	48.0	53.8	5.80
1152	Side	H	30	33.71	74.0	40.29	-10.5	23.3	54.0	30.75
1152	Side	H	50	31.79	74.0	42.21	-6.0	25.8	54.0	28.23
1152	Side	H	80	31.57	74.0	42.43	-1.9	29.6	54.0	24.37
1440	Side	H	30	44.32	74.0	29.68	-10.5	33.9	54.0	20.14
1440	Side	H	50	42.98	74.0	31.02	-6.0	37.0	54.0	17.04
1440	Side	H	80	41.57	74.0	32.43	-1.9	39.6	54.0	14.37
1728	Side	H	30	34.42	74.0	39.58	-10.5	24.0	54.0	30.04
1728	Side	H	50	33.78	74.0	40.22	-6.0	27.8	54.0	26.24
1728	Side	H	80	34.02	74.0	39.98	-1.9	32.1	54.0	21.92
2016	Side	H	30	40.06	73.8	33.77	-10.5	29.6	53.8	24.23
2016	Side	H	50	38.59	73.8	35.24	-6.0	32.6	53.8	21.26
2016	Side	H	80	37.55	73.8	36.28	-1.9	35.6	53.8	18.22
2304	Side	H	30	35.6	74.0	38.40	-10.5	25.1	54.0	28.86
2304	Side	H	50	35.22	74.0	38.78	-6.0	29.2	54.0	24.80
2304	Side	H	80	35.24	74.0	38.76	-1.9	33.3	54.0	20.70
2592	Side	H	30	39.57	74.0	34.43	-10.5	29.1	54.0	24.89
2592	Side	H	50	38.23	74.0	35.77	-6.0	32.2	54.0	21.79
2592	Side	H	80	37.687	74.0	36.31	-1.9	35.7	54.0	18.25
2880	Side	H	30	36.31	74.0	37.69	-10.5	25.9	54.0	28.15
2880	Side	H	50	35.21	74.0	38.79	-6.0	29.2	54.0	24.81
2880	Side	H	80	34.22	74.0	39.78	-1.9	32.3	54.0	21.72

1.6. DUT Tuned to Har 310MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement*	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
620	Side	H	30	49.47	75.3	25.83	-10.5	39.0	55.3	16.29
620	Side	H	50	46.33	75.3	28.97	-6.0	40.3	55.3	14.99
620	Side	V	80	44.21	75.3	31.09	-1.9	42.3	55.3	13.03
930	Side	H	30	50.48	74.0	23.52	-10.5	40.0	54.0	13.98
930	Side	H	50	48.66	74.0	25.34	-6.0	42.6	54.0	11.36
930	Side	H	80	46.74	74.0	27.26	-1.9	44.8	54.0	9.20
1240	Side	H	30	37.37	74.0	36.63	-10.5	26.9	54.0	27.09
1240	Side	H	50	36.45	74.0	37.55	-6.0	30.4	54.0	23.57
1240	Side	H	80	35.88	74.0	38.12	-1.9	33.9	54.0	20.06
1550	Side	H	30	44.53	74.0	29.47	-10.5	34.1	54.0	19.93
1550	Side	H	50	43.82	74.0	30.18	-6.0	37.8	54.0	16.20
1550	Side	H	80	42.09	74.0	31.91	-1.9	40.2	54.0	13.85
1860	Side	H	30	37.24	75.3	38.06	-10.5	26.8	55.3	28.52
1860	Side	H	50	36.22	75.3	39.08	-6.0	30.2	55.3	25.10
1860	Side	H	80	37.31	75.3	37.99	-1.9	35.4	55.3	19.93
2170	Side	H	30	42.23	74.0	31.77	-10.5	31.8	54.0	22.23
2170	Side	H	50	40.34	74.0	33.66	-6.0	34.3	54.0	19.68
2170	Side	H	80	39.74	74.0	34.26	-1.9	37.8	54.0	16.20
2480	Side	H	30	36.3	74.0	37.70	-10.5	25.8	54.0	28.16
2480	Side	H	50	35.21	74.0	38.79	-6.0	29.2	54.0	24.81
2480	Side	H	80	34.78	74.0	39.22	-1.9	32.8	54.0	21.16
2790	Side	H	30	40.46	74.0	33.54	-10.5	30.0	54.0	24.00
2790	Side	H	50	39.55	74.0	34.45	-6.0	33.5	54.0	20.47
2790	Side	H	80	38.41	74.0	35.59	-1.9	36.5	54.0	17.53
3100	Side	H	30	40.43	75.3	34.87	-10.5	30.0	55.3	25.33
3100	Side	H	50	39.54	75.3	35.76	-6.0	33.5	55.3	21.78
3100	Side	H	80	37.89	75.3	37.41	-1.9	36.0	55.3	19.35

1.7. DUT Tuned to Har 365MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
730	Side	H	30	48.05	78.2	30.15	-10.5	37.6	58.2	20.61
730	Side	H	50	46.55	78.2	31.65	-6.0	40.5	58.2	17.67
730	Side	H	80	45.87	78.2	32.33	-1.9	43.9	58.2	14.27
1095	Side	H	30	42.38	74.0	31.62	-10.5	31.9	54.0	22.08
1095	Side	H	50	40.33	74.0	33.67	-6.0	34.3	54.0	19.69
1095	Side	H	80	38.48	74.0	35.52	-1.9	36.5	54.0	17.46
1460	Side	V	30	37.91	74.0	36.09	-10.5	27.5	54.0	26.55
1460	Side	H	50	37.45	74.0	36.55	-6.0	31.4	54.0	22.57
1460	Side	V	80	37.24	74.0	36.76	-1.9	35.3	54.0	18.70
1825	Side	V	30	38.59	74.0	35.41	-10.5	28.1	54.0	25.87
1825	Side	V	50	38.02	74.0	35.98	-6.0	32.0	54.0	22.00
1825	Side	V	80	37.44	74.0	36.56	-1.9	35.5	54.0	18.50
2190	Side	H	30	37.42	74.0	36.58	-10.5	27.0	54.0	27.04
2190	Side	H	50	36.59	74.0	37.41	-6.0	30.6	54.0	23.43
2190	Side	H	80	36.41	74.0	37.59	-1.9	34.5	54.0	19.53
2555	Side	V	30	35.01	74.0	38.99	-10.5	24.6	54.0	29.45
2555	Side	V	50	34.71	74.0	39.29	-6.0	28.7	54.0	25.31
2555	Side	V	80	33.66	74.0	40.34	-1.9	31.7	54.0	22.28
2920	Side	H	30	37.663	74.0	36.34	-10.5	27.2	54.0	26.79
2920	Side	H	50	37.41	74.0	36.59	-6.0	31.4	54.0	22.61
2920	Side	H	80	36.89	74.0	37.11	-1.9	35.0	54.0	19.05
3285	Side	H	30	41.64	74.0	32.36	-10.5	31.2	54.0	22.82
3285	Side	H	50	40.22	74.0	33.78	-6.0	34.2	54.0	19.80
3285	Side	H	80	40.65	74.0	33.35	-1.9	38.7	54.0	15.29
3650	Side	H	30	36.98	74.0	37.02	-10.5	26.5	54.0	27.48
3650	Side	H	50	36.78	74.0	37.22	-6.0	30.8	54.0	23.24
3650	Side	H	80	37.26	74.0	36.74	-1.9	35.3	54.0	18.68

1.8. DUT Tuned to Har 430MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
860	Side	H	30	50.23	80.8	30.57	-10.5	39.8	60.8	21.03
860	Side	H	50	48.59	80.8	32.21	-6.0	42.6	60.8	18.23
860	Side	H	80	48.69	80.8	32.11	-1.9	46.8	60.8	14.05
1290	Side	H	30	45.72	74.0	28.28	-10.5	35.3	54.0	18.74
1290	Side	H	50	44.51	74.0	29.49	-6.0	38.5	54.0	15.51
1290	Side	H	80	42.55	74.0	31.45	-1.9	40.6	54.0	13.39
1720	Side	H	30	35.75	74.0	38.25	-10.5	25.3	54.0	28.71
1720	Side	V	50	36.01	74.0	37.99	-6.0	30.0	54.0	24.01
1720	Side	V	80	36.41	74.0	37.59	-1.9	34.5	54.0	19.53
2150	Side	H	30	39.59	80.8	41.21	-10.5	29.1	60.8	31.67
2150	Side	H	50	38.45	80.8	42.35	-6.0	32.4	60.8	28.37
2150	Side	H	80	37.45	80.8	43.35	-1.9	35.5	60.8	25.29
2580	Side	V	30	38.61	74.0	35.39	-10.5	28.2	54.0	25.85
2580	Side	V	50	37.43	74.0	36.57	-6.0	31.4	54.0	22.59
2580	Side	V	80	36.88	74.0	37.12	-1.9	34.9	54.0	19.06
3010	Side	H	30	39.15	74.0	34.85	-10.5	28.7	54.0	25.31
3010	Side	H	50	38.45	74.0	35.55	-6.0	32.4	54.0	21.57
3010	Side	H	80	37.44	74.0	36.56	-1.9	35.5	54.0	18.50
3440	Side	H	30	39.12	74.0	34.88	-10.5	28.7	54.0	25.34
3440	Side	H	50	38.42	74.0	35.58	-6.0	32.4	54.0	21.60
3440	Side	H	80	37.98	74.0	36.02	-1.9	36.0	54.0	17.96
3870	Side	V	30	38.63	74.0	35.37	-10.5	28.2	54.0	25.83
3870	Side	H	50	36.95	74.0	37.05	-6.0	30.9	54.0	23.07
3870	Side	V	80	36.49	74.0	37.51	-1.9	34.6	54.0	19.45
4300	Side	V	30	40.94	74.0	33.06	-10.5	30.5	54.0	23.52
4300	Side	H	50	39.78	74.0	34.22	-6.0	33.8	54.0	20.24
4300	Side	H	80	39.55	74.0	34.45	-1.9	37.6	54.0	16.39

2. TX Spurious Emissions

Measurements described in this section were taken according to ANSI C63.10:2020+Cor.1-2023 and ANSI C63.10a:2024. on the Gentex Corporation 3m test table. Pre-Scan measurements were taken with the transmitter on to identify which emissions to maximize during the final measurement. Maximized data can be found in the table below. No significant emissions were identified in the region from 1000MHz to 25000MHz. Harmonics measurement data can be found in section 1 above.


* Measurements include Cable corrections and Antenna Factors

Measurement Settings:
Measurement Frequency: Below 1GHz
Span: 500kHz or greater
RBW: 100/120kHz VBW: 300kHz or 3 x RBW
Sweep Time: 25ms
Attenuation: Auto


Measurement Frequency: Above 1GHz
Span: 500kHz or greater
RBW: 1MHz VBW: 3MHz or 3 x RBW
Sweep Time: 25ms
Attenuation: Auto

Test Mode	Detector	Frequency (MHz)		Worst-Case Orientation	Antenna Polarization	Frequencies (MHz)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		Start	Stop						
TX	Quasi-Peak	30	88	Side	V	38	24.53	40	-15.47
TX	Quasi-Peak	30	88	Side	H	87	21.37	40	-18.63
TX	Quasi-Peak	88	216	Side	H	89	26.96	43.5	-16.54
TX	Quasi-Peak	88	216	Side	H	99	26.55	43.5	-16.95
TX	Quasi-Peak	88	216	Side	H	106	25.27	43.5	-18.23
TX	Quasi-Peak	88	216	Side	V	112	21.46	43.5	-22.04
TX	Quasi-Peak	88	216	Side	H	118	28.56	43.5	-14.94
TX	Quasi-Peak	88	216	Side	V	120	22.35	43.5	-21.15
TX	Quasi-Peak	88	216	Side	H	125	27.96	43.5	-15.54
TX	Quasi-Peak	88	216	Side	V	131	23.64	43.5	-19.86
TX	Quasi-Peak	88	216	Side	V	137	22.41	43.5	-21.09
TX	Quasi-Peak	88	216	Side	V	143	21.62	43.5	-21.88
TX	Quasi-Peak	88	216	Side	V	162	21.78	43.5	-21.72
TX	Quasi-Peak	88	216	Side	V	168	23.247	43.5	-20.253
TX	Quasi-Peak	216	1000	Side	V	827	23.65	46	-22.35
TX	Quasi-Peak	216	1000	Side	H	835	23.94	46	-22.06

Emission Sweep from 30MHz to 200MHz

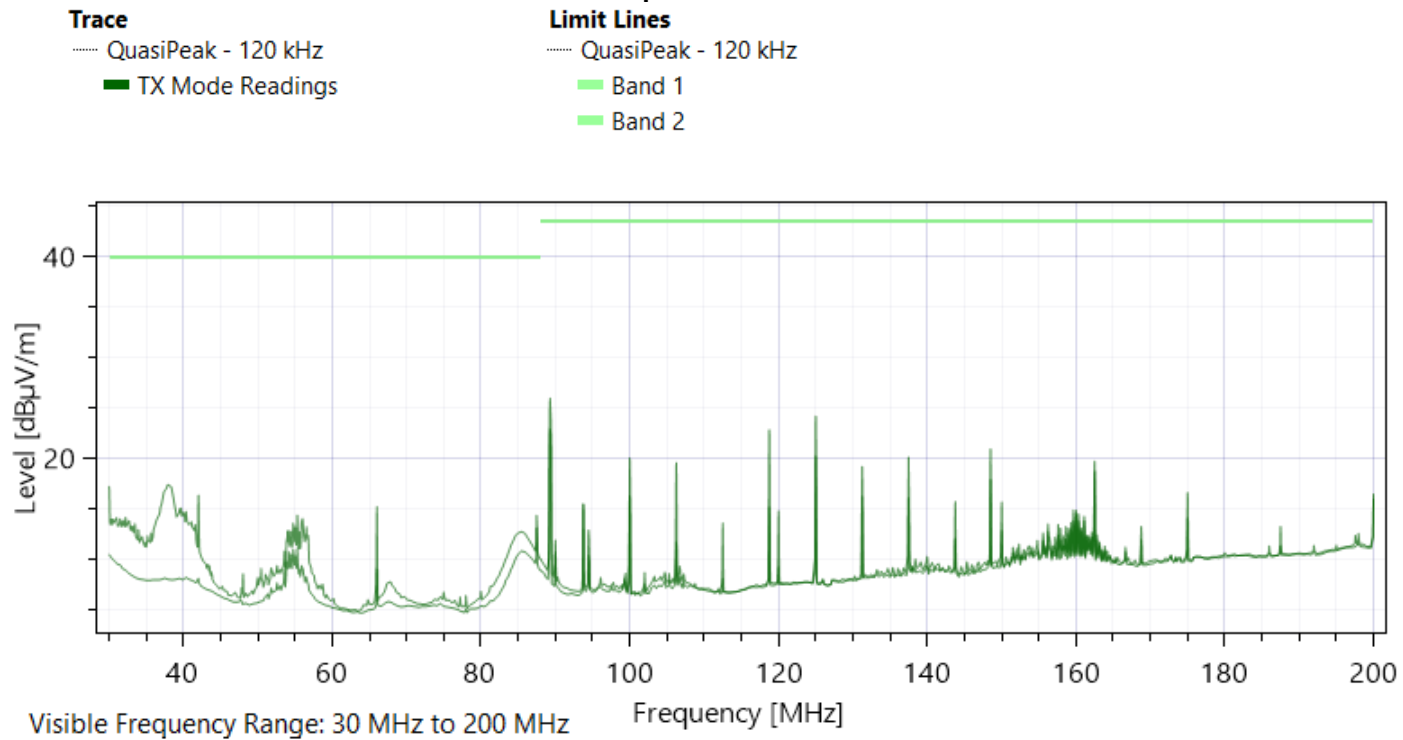

Emission Sweep from 200MHz to 1000MHz

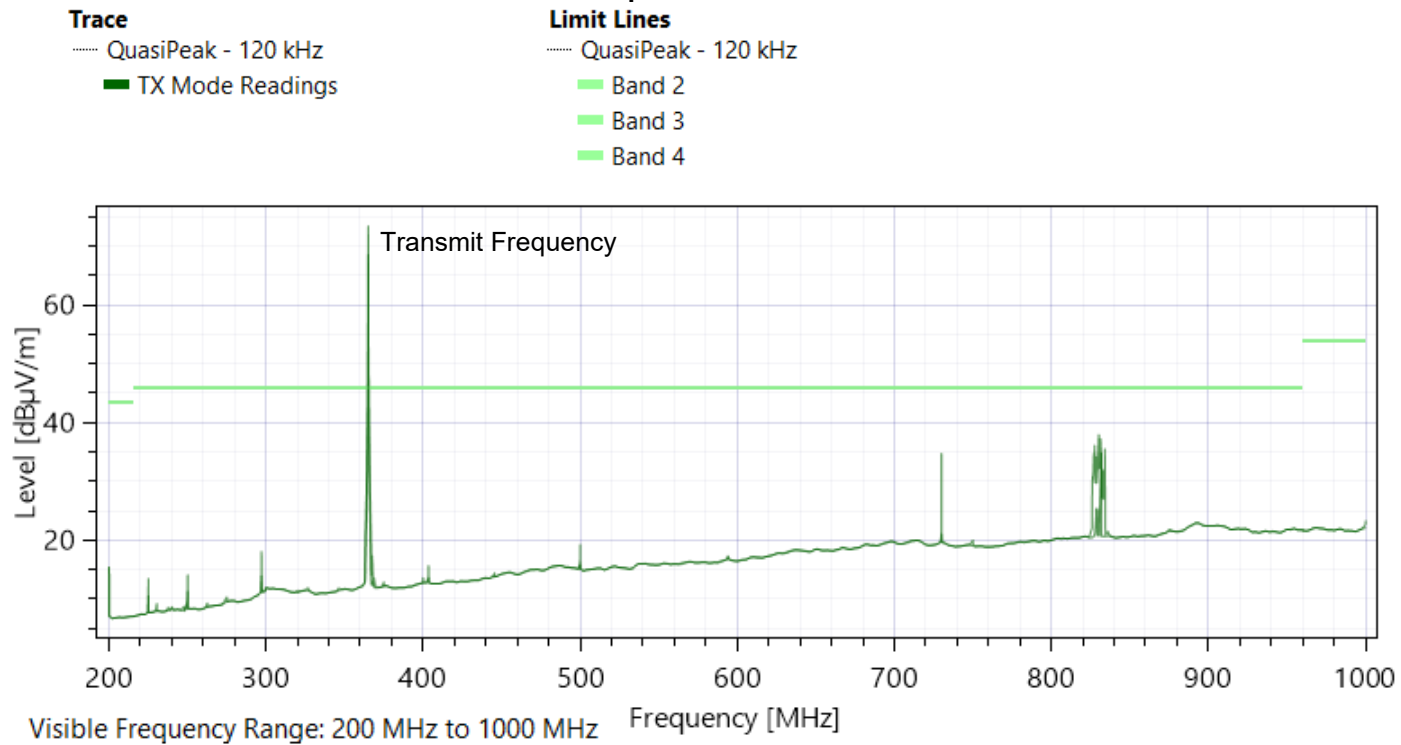


Emission Sweep from 1000MHz to 18000MHz

Trace Readings

..... Peak - 1000 kHz
■ TX Mode Readings

Limit Lines

..... Peak - 1000 kHz
■ Band 5
■ New Band

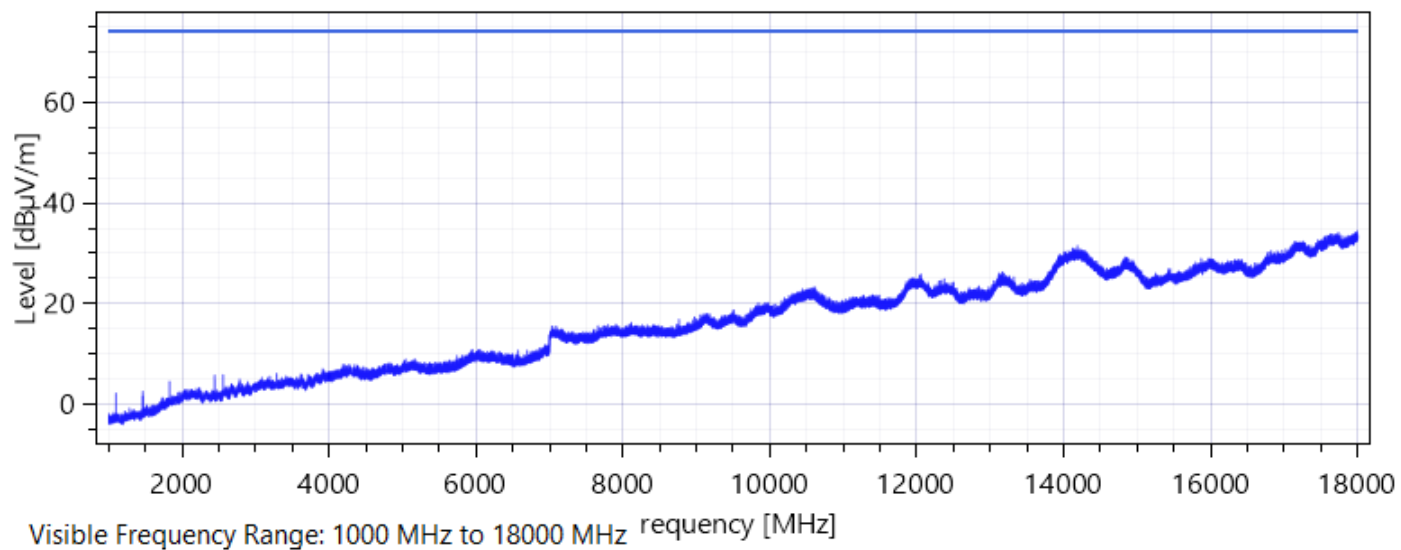


Emission Sweep from 18GHz to 25GHz

Trace Readings

..... Peak - 1000 kHz
■ TX Mode Readings

Limit Lines


..... Peak - 1000 kHz
■ Band 5
■ New Band

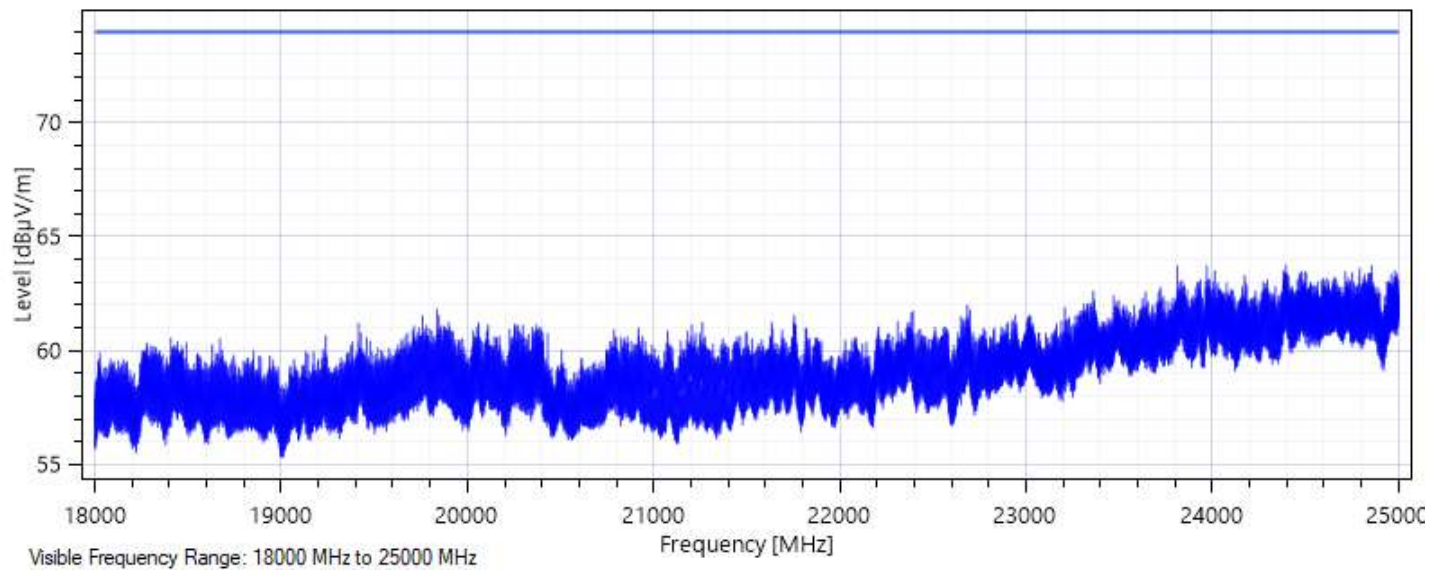

3. Pulsed Operation

The Homelink® transmitter tested here transmits pulses using amplitude modulation with varying duty cycle. Verification of pulse operation at 30, 50 and 80% duty cycles are provided here. Measurements were taken at 365 MHz with the span set to zero on the R&S ESR26 EMI Receiver. The modulation frequency is 500Hz.

3.1. 30% Duty Cycle

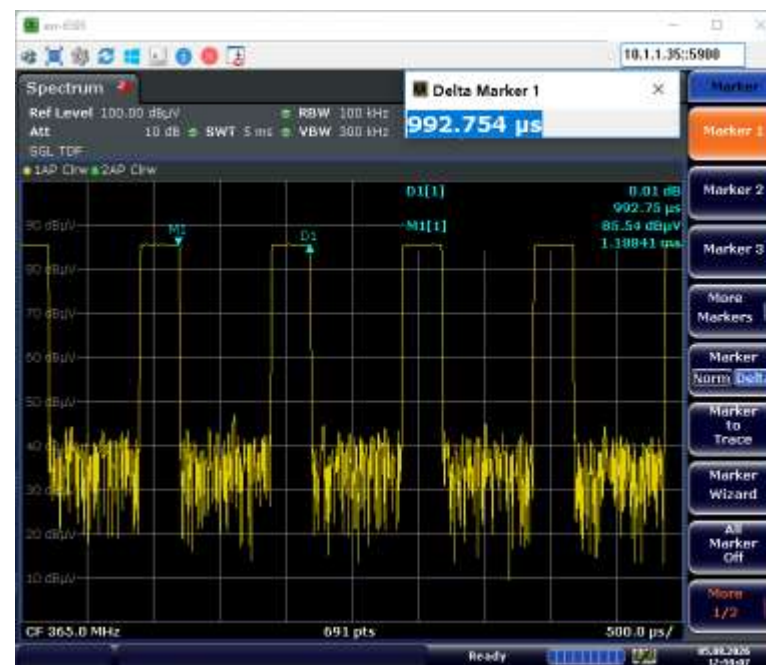

3.2. 50% Duty Cycle



3.3. 80% Duty Cycle



4. Occupied Bandwidth

Occupied bandwidth measurements were taken at 288, 310, 365 and 430MHz. The occupied bandwidth was determined using the -20dB and 99% measurement methods.

4.1. -20dB Occupied Bandwidth Measurement


-20dB Occupied Bandwidth				
Frequency (MHz)	Duty Cycle (%)	Occupied Bandwidth (kHz)	Limit (kHz)	Margin
288	30	17.98	720	702.02
	50	10.34	720	709.66
	80	7.64	720	712.36
310	30	18.05	775	756.95
	50	10.42	775	764.58
	80	7.62	775	767.38
365	30	18.08	912.5	894.42
	50	10.45	912.5	902.05
	80	7.62	912.5	904.88
430	30	18.05	1082.5	1064.45
	50	10.45	1082.5	1072.05
	80	7.62	1082.5	1074.88

4.2. 99% Occupied Bandwidth Measurement

99% Occupied Bandwidth				
Frequency (MHz)	Duty Cycle (%)	Occupied Bandwidth (kHz)	Limit (kHz)	Margin
288	30	57.50	720	662.50
	50	36.12	720	683.88
	80	46.64	720	673.36
310	30	61.72	775	713.28
	50	33.82	775	741.18
	80	40.47	775	734.53
365	30	52.62	912.5	859.88
	50	29.22	912.5	883.28
	80	31.30	912.5	881.20
430	30	56.50	1082.5	1026.00
	50	30.50	1082.5	1052.00
	80	34.92	1082.5	1047.58

4.3. Occupied Bandwidth Worst-Case Screenshot

20dB BW

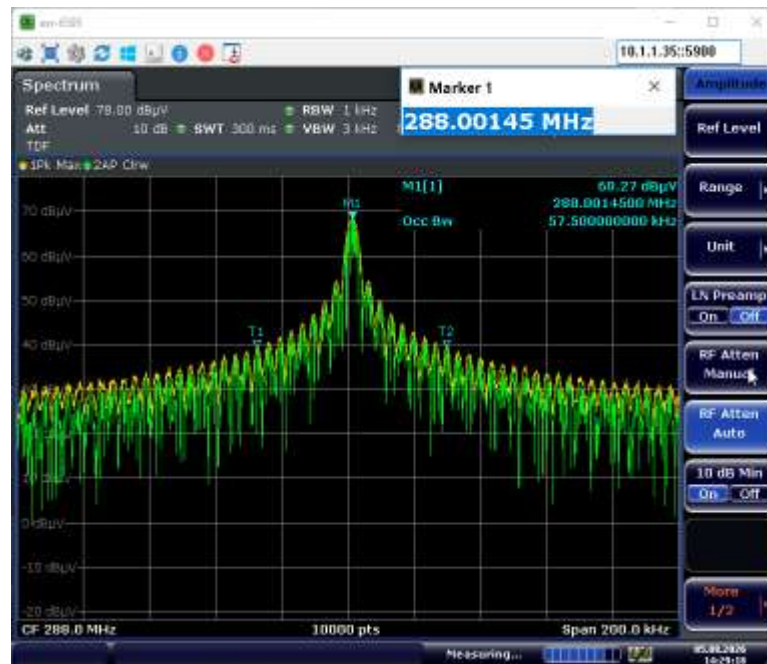


99% BW



5. Variation of Supply Voltage

Measurements of the variation in output field strength due to variation in the supply voltage were taken in accordance with 15.231(e). The DUT was configured to transmit at the peak frequency, 365MHz, 30% Duty Cycle. Values presented are not corrected for duty cycle.

5.1. Plot of output power over supply voltage

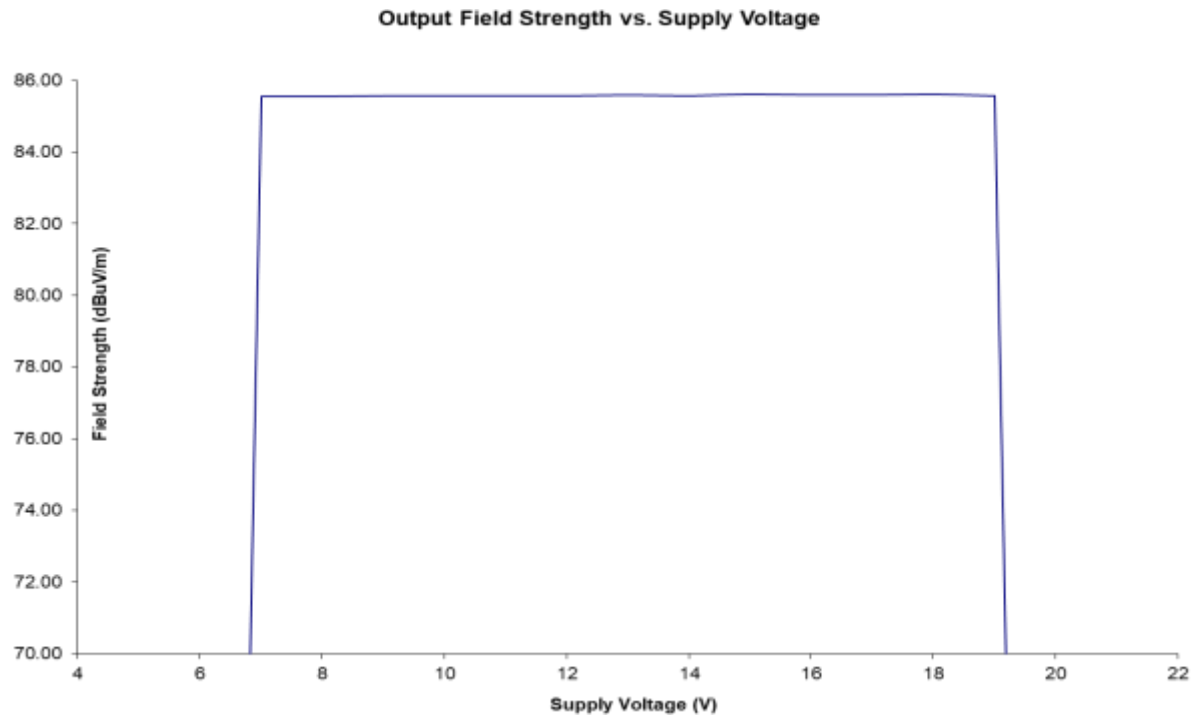

5.2. Output Power as a Function of Supply Voltage

Voltage	Field Strength (dBuV/m)
6	0.00
7	85.54
8	85.55
9	85.57
10	85.57
11	85.58
12	85.58
13	85.59
14	85.58
15	85.61
16	85.60
17	85.59
18	85.61
19	85.58
20	0.00