


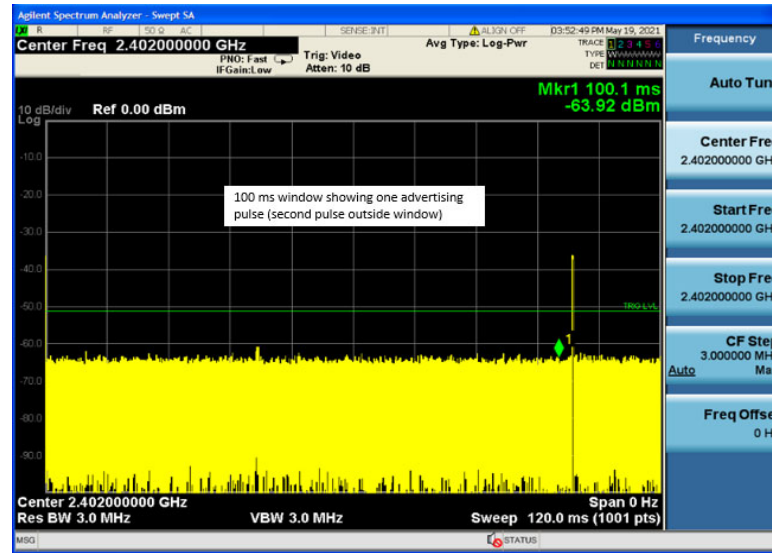
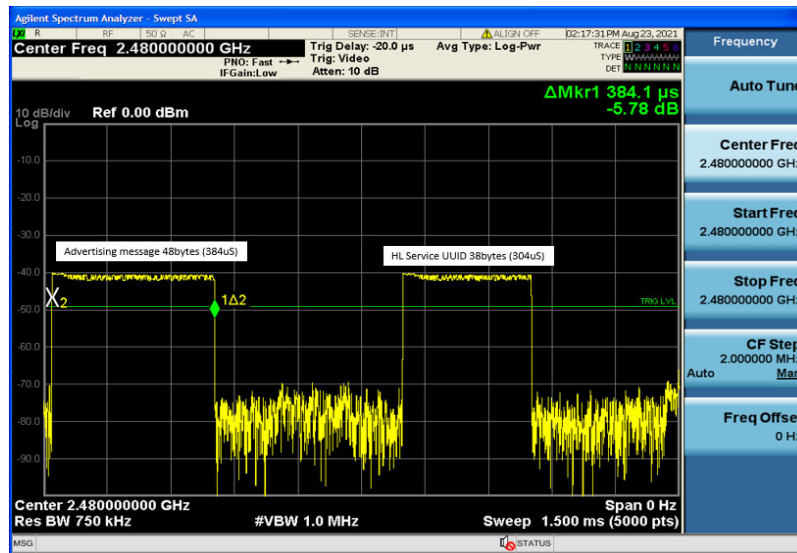
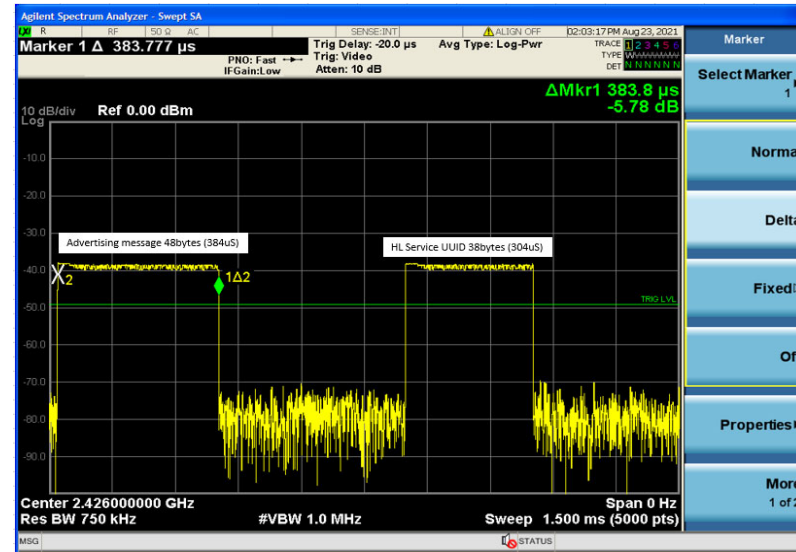
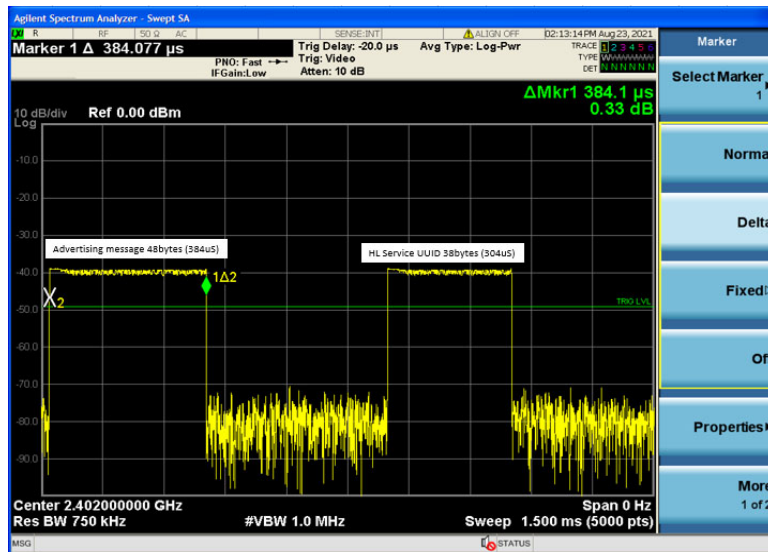


Advertising Data Exchange:

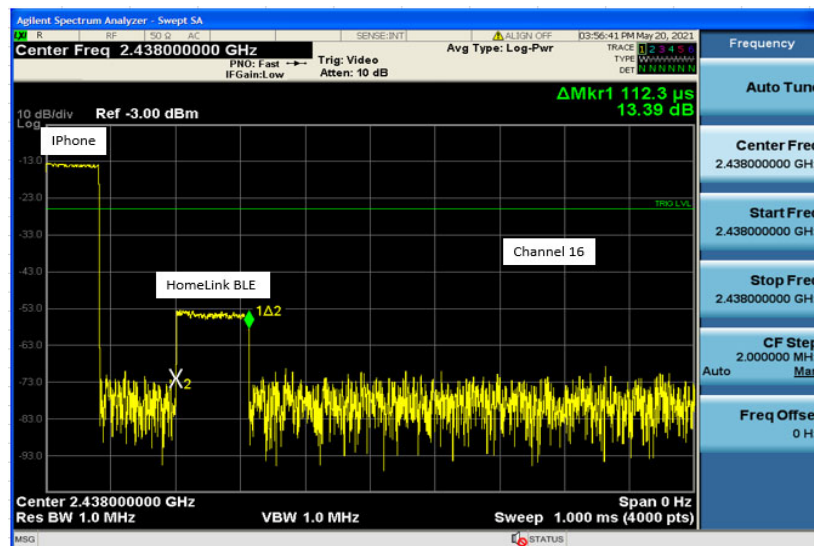

Connected Data Exchange:

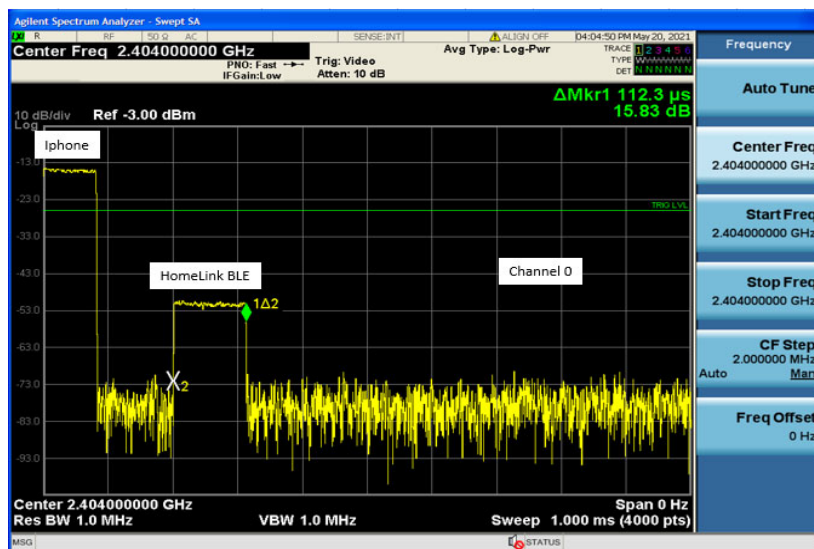

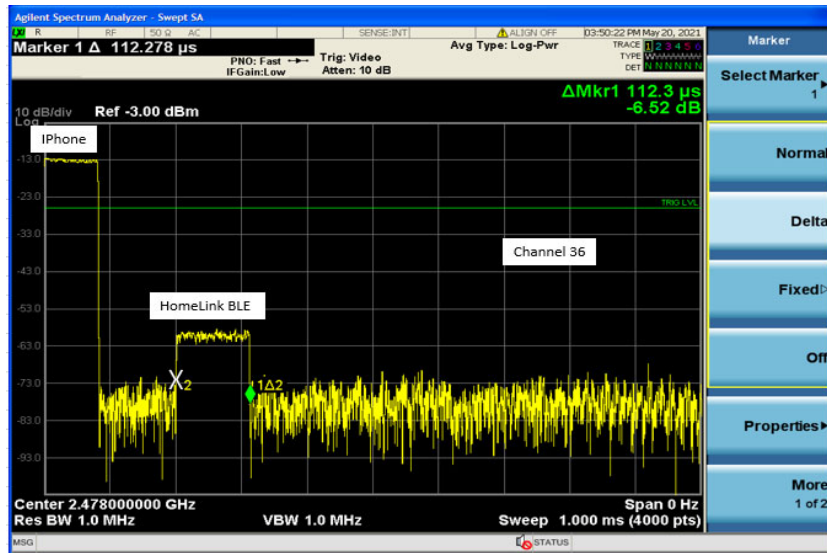

Duty Cycle Correction Calculation	DC Correction Value (dB)
	-49
<i>Screen shots of overhead messages only. Wost case calculated below.</i>	
Worst Case Characteristic: 34 bytes = 272uS	
Shortest connection interval: 7.5ms	
All channels blocked but current (no hopping)	
$100\text{ms}/7.5\text{ms} * 272\text{us} =$ 3.6176ms	
$\text{Log}(3.6176\text{mS})*20 =$	