



Level [dBm]

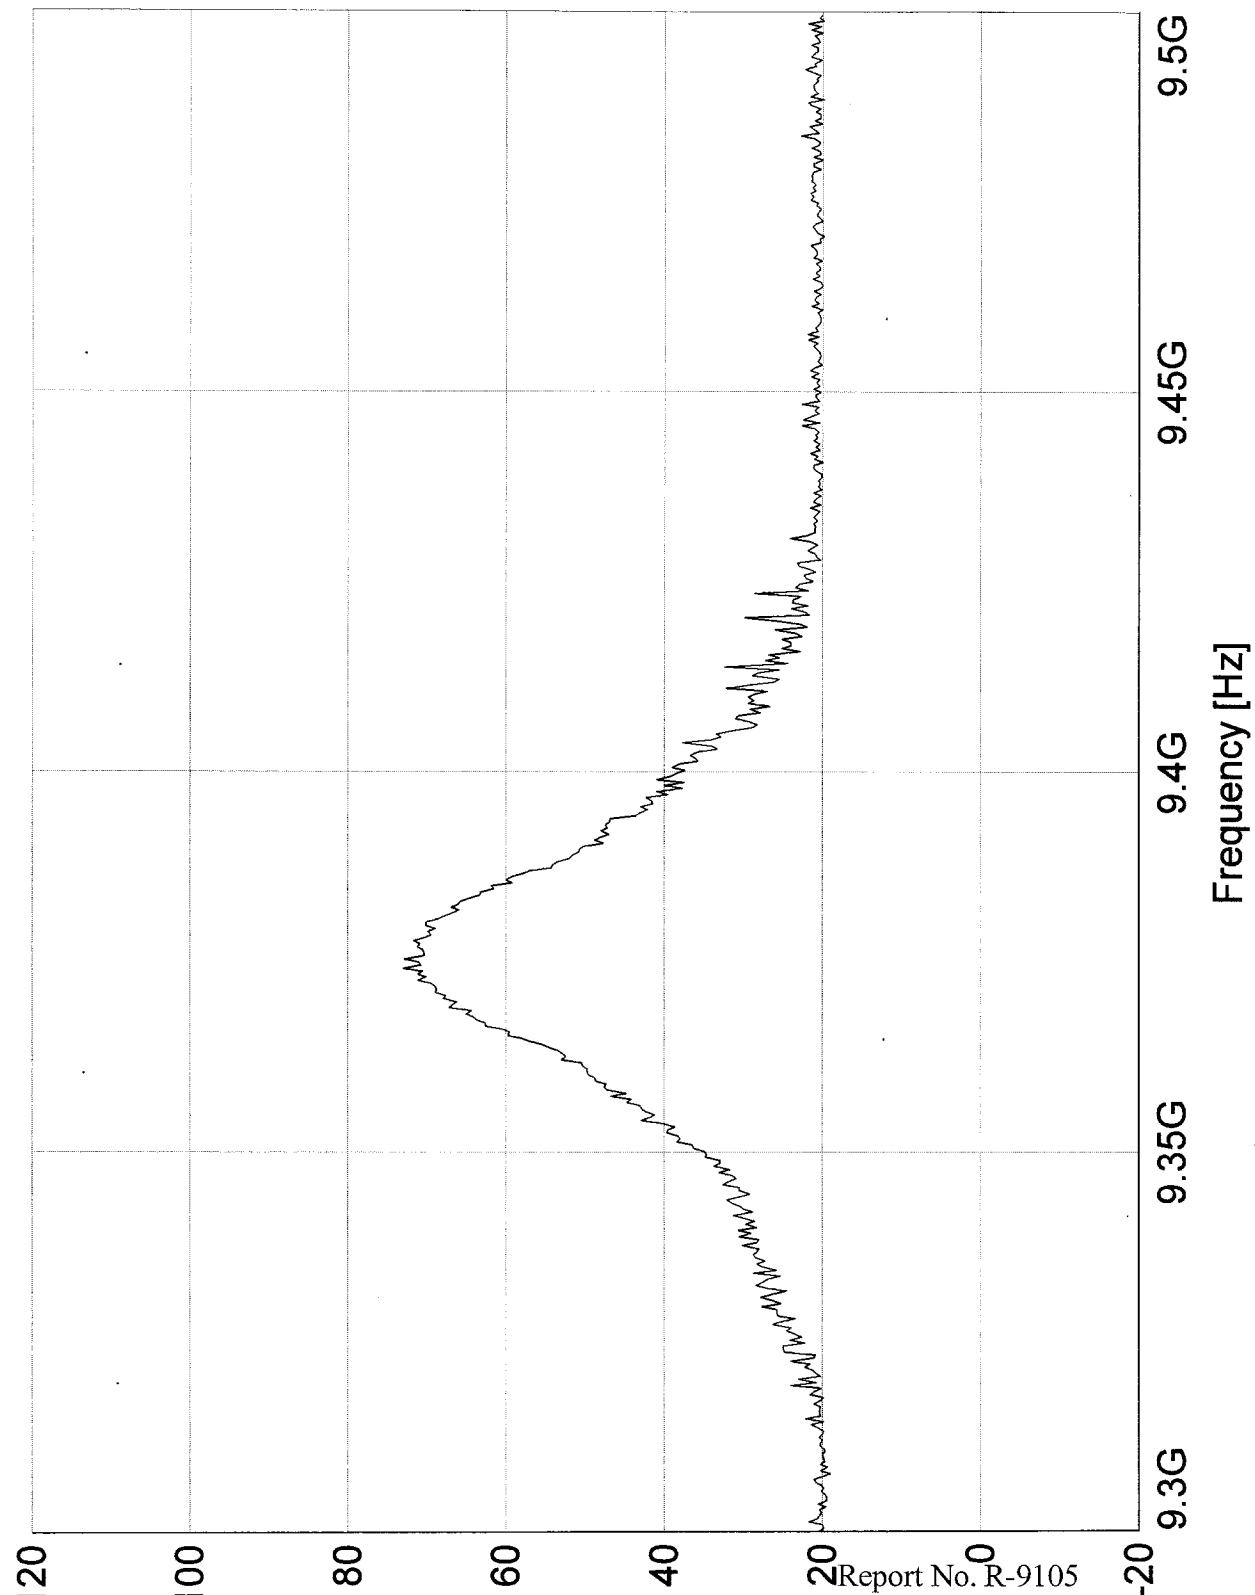


Customer: Telephonics	Model: RT-1601, FCC ID: 02IMCB-RT-1601
Test: Airborne Radar Transmitter	No.: Temperature = -20C
Sample: FCC Part 87, Power Output	Notes: Mode = Weather (WX)
Test: RBW/VBW = 10 MHz	Tech: TS/RPW
Method:	Sheet 1 of 8

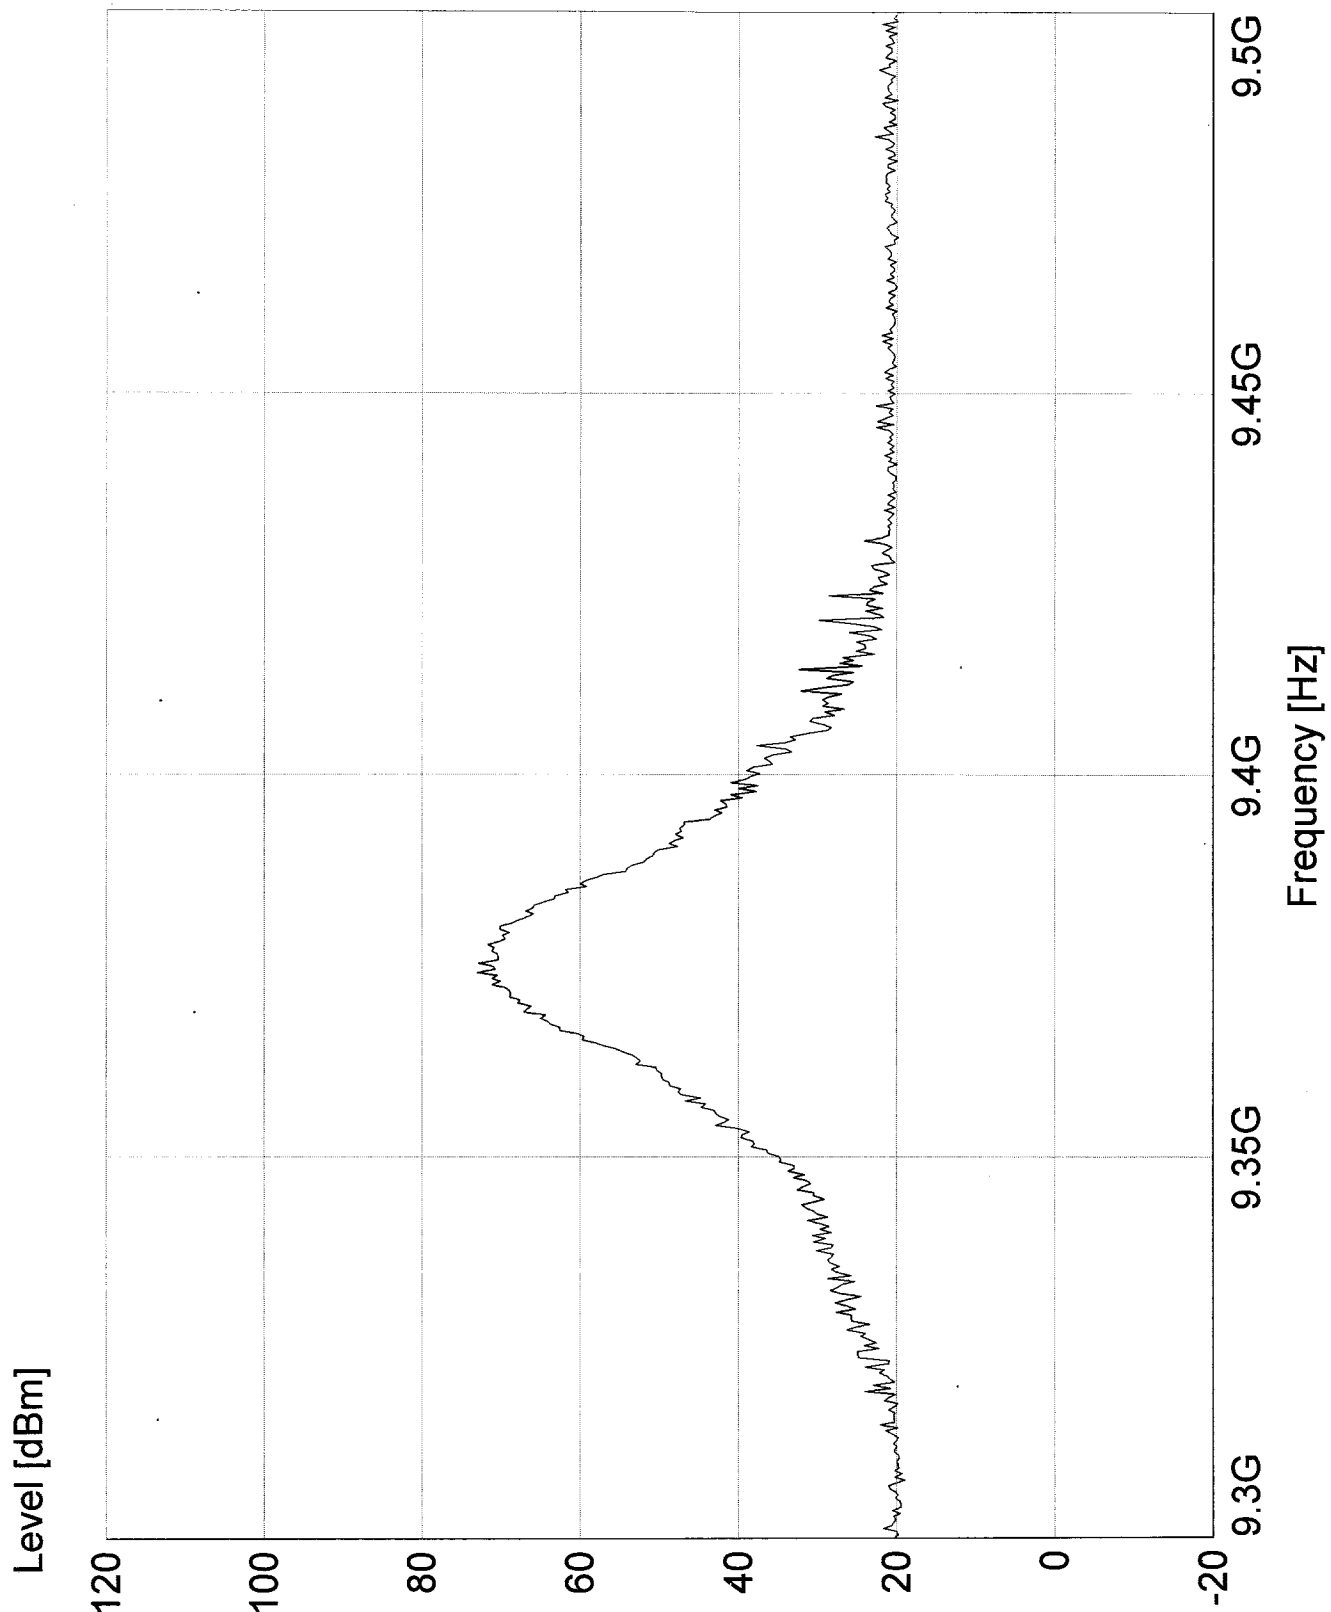

Report No. R-9105

Customer:	Telephonics	Model:	RT-1601, FCC ID:02IMCB-RT-1601
Test:	Airborne Radar Transmitter	Temp.:	Temperature= -10C
Sample:		Notes:	Mode= Weather(WX)
Test:	FCC Part 87, Power Output	RBW/VBW:	10 MHz
Method:		Tech.:	TS/RPW
		Sheet 2 of 8	


Level [dBm]

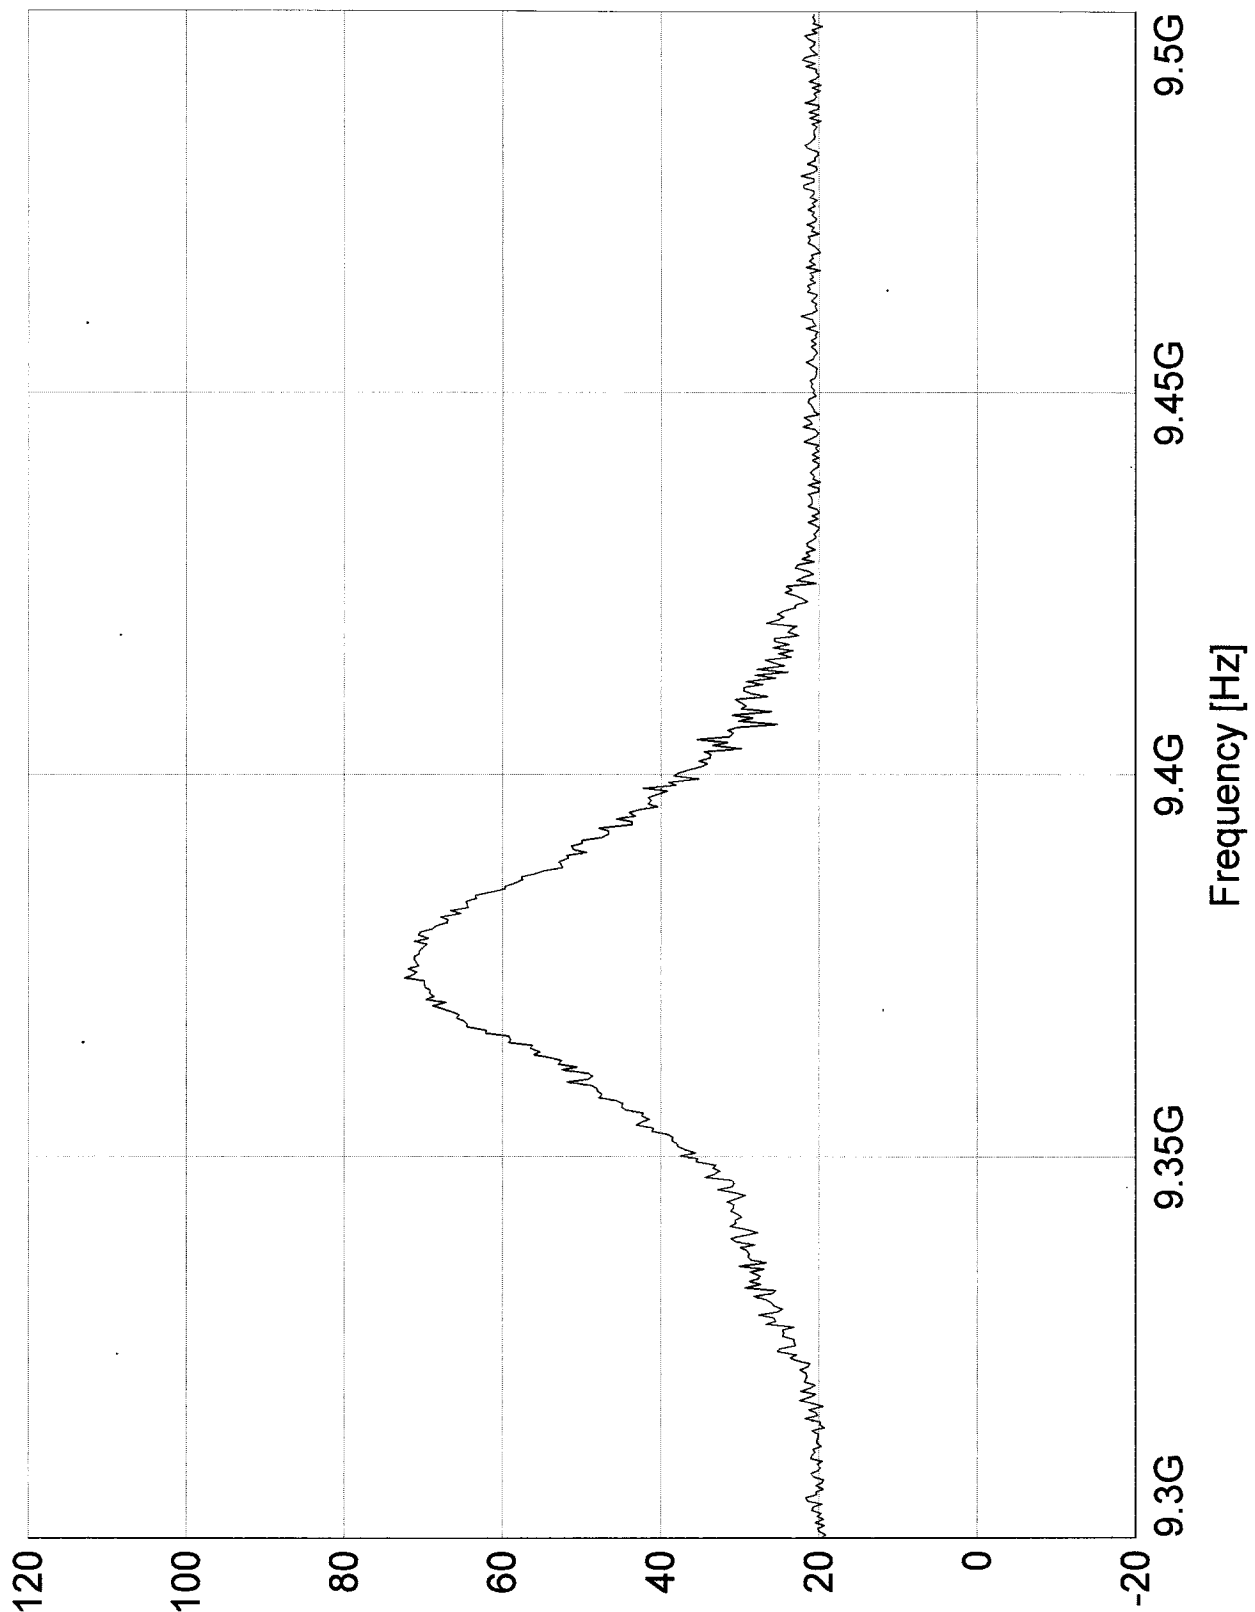

Report No. R-9105

Customer: Telephonics	Model: RT-1601, FCC ID: 02IMCB-RT-1601
Test: Airborne Radar Transmitter	Temperature: 0C
Sample: FCC Part 87, Power Output	Mode: Weather (WX)
Test:	RBW/VEW: 10 MHz
Method:	Tech: TS/RPM
Sheet 3 of 8	


Level [dBm]

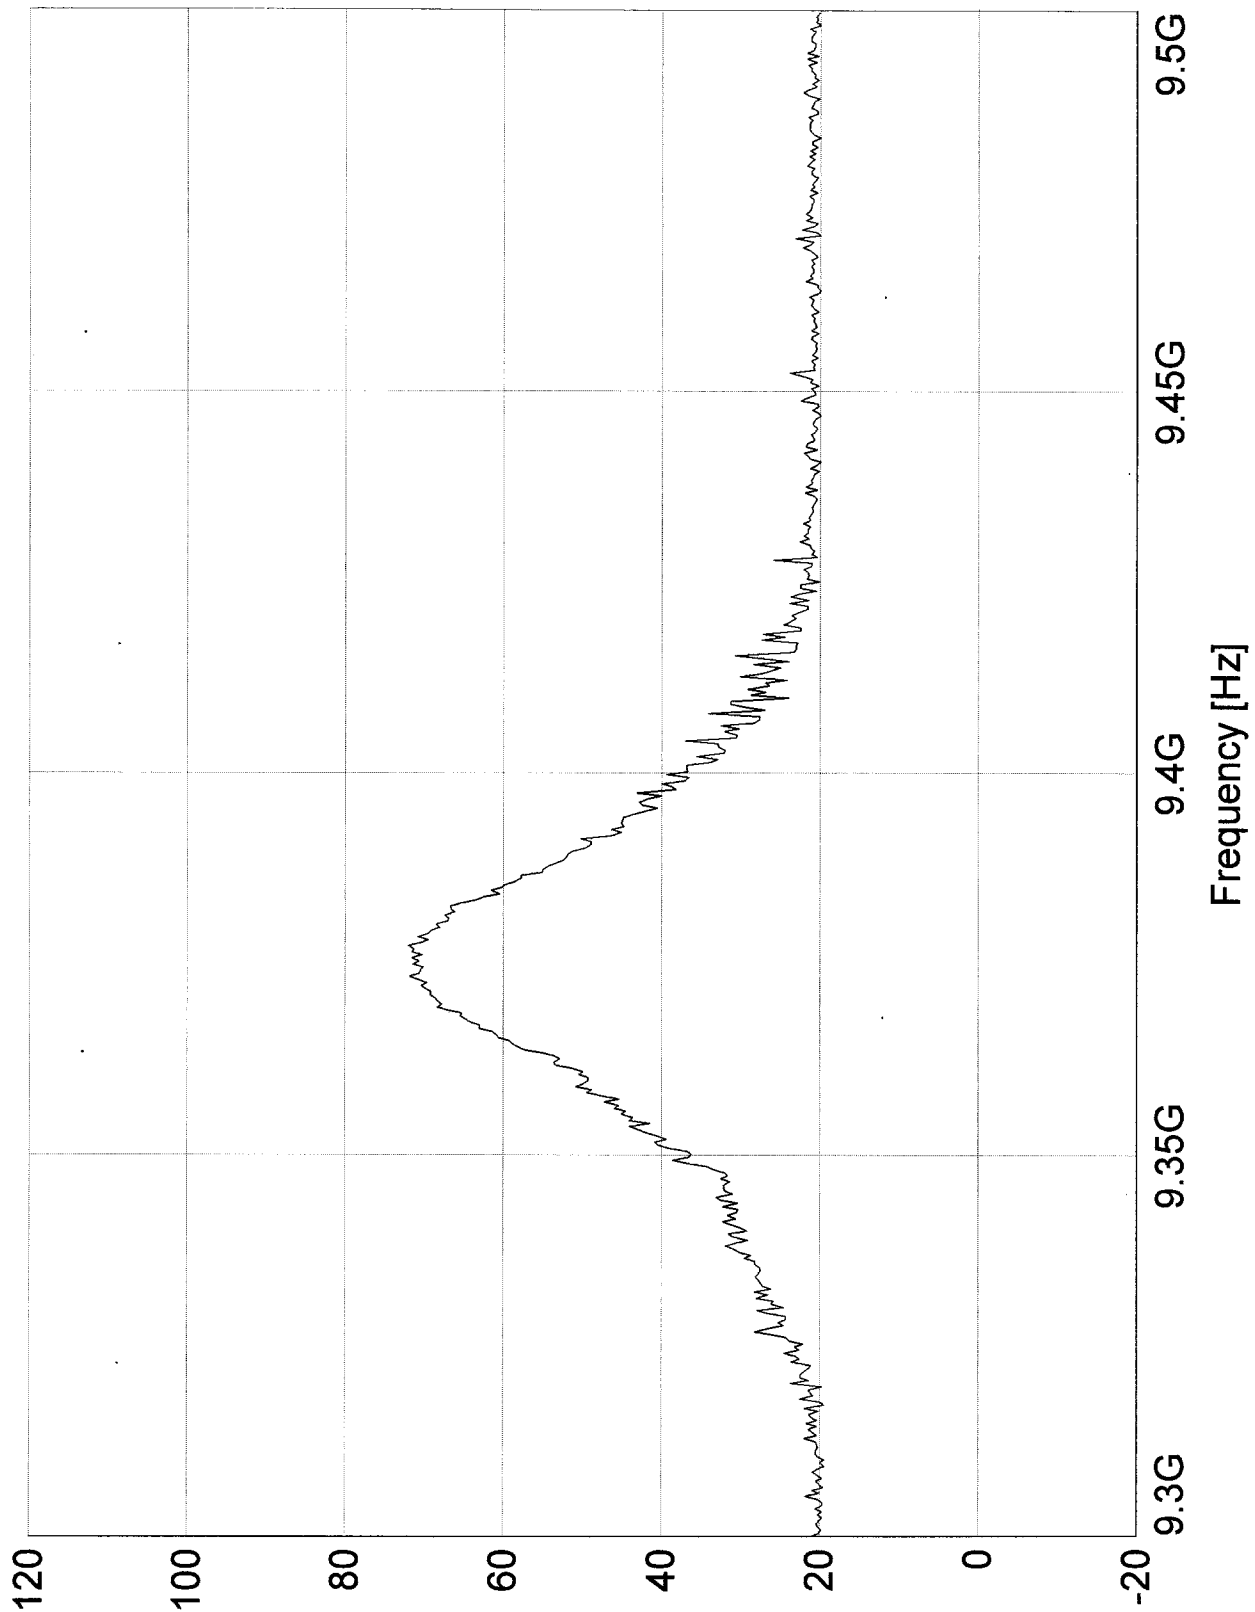

Report No. R-9105

Customer:	Telephonics	Model:	RT-1601, FCC ID: 02IMCB-RT-1601
Test:	Airborne Radar Transmitter	No.:	Temperature= +10C
Sample:		Notes:	Mode= Weather(WX)
Test:	FCC Part 87, Power Output	RBW/VBW= 10 MHz	
Method:		Tech:	TS/RPW
		Sheet	4 of 8


Level [dBm]

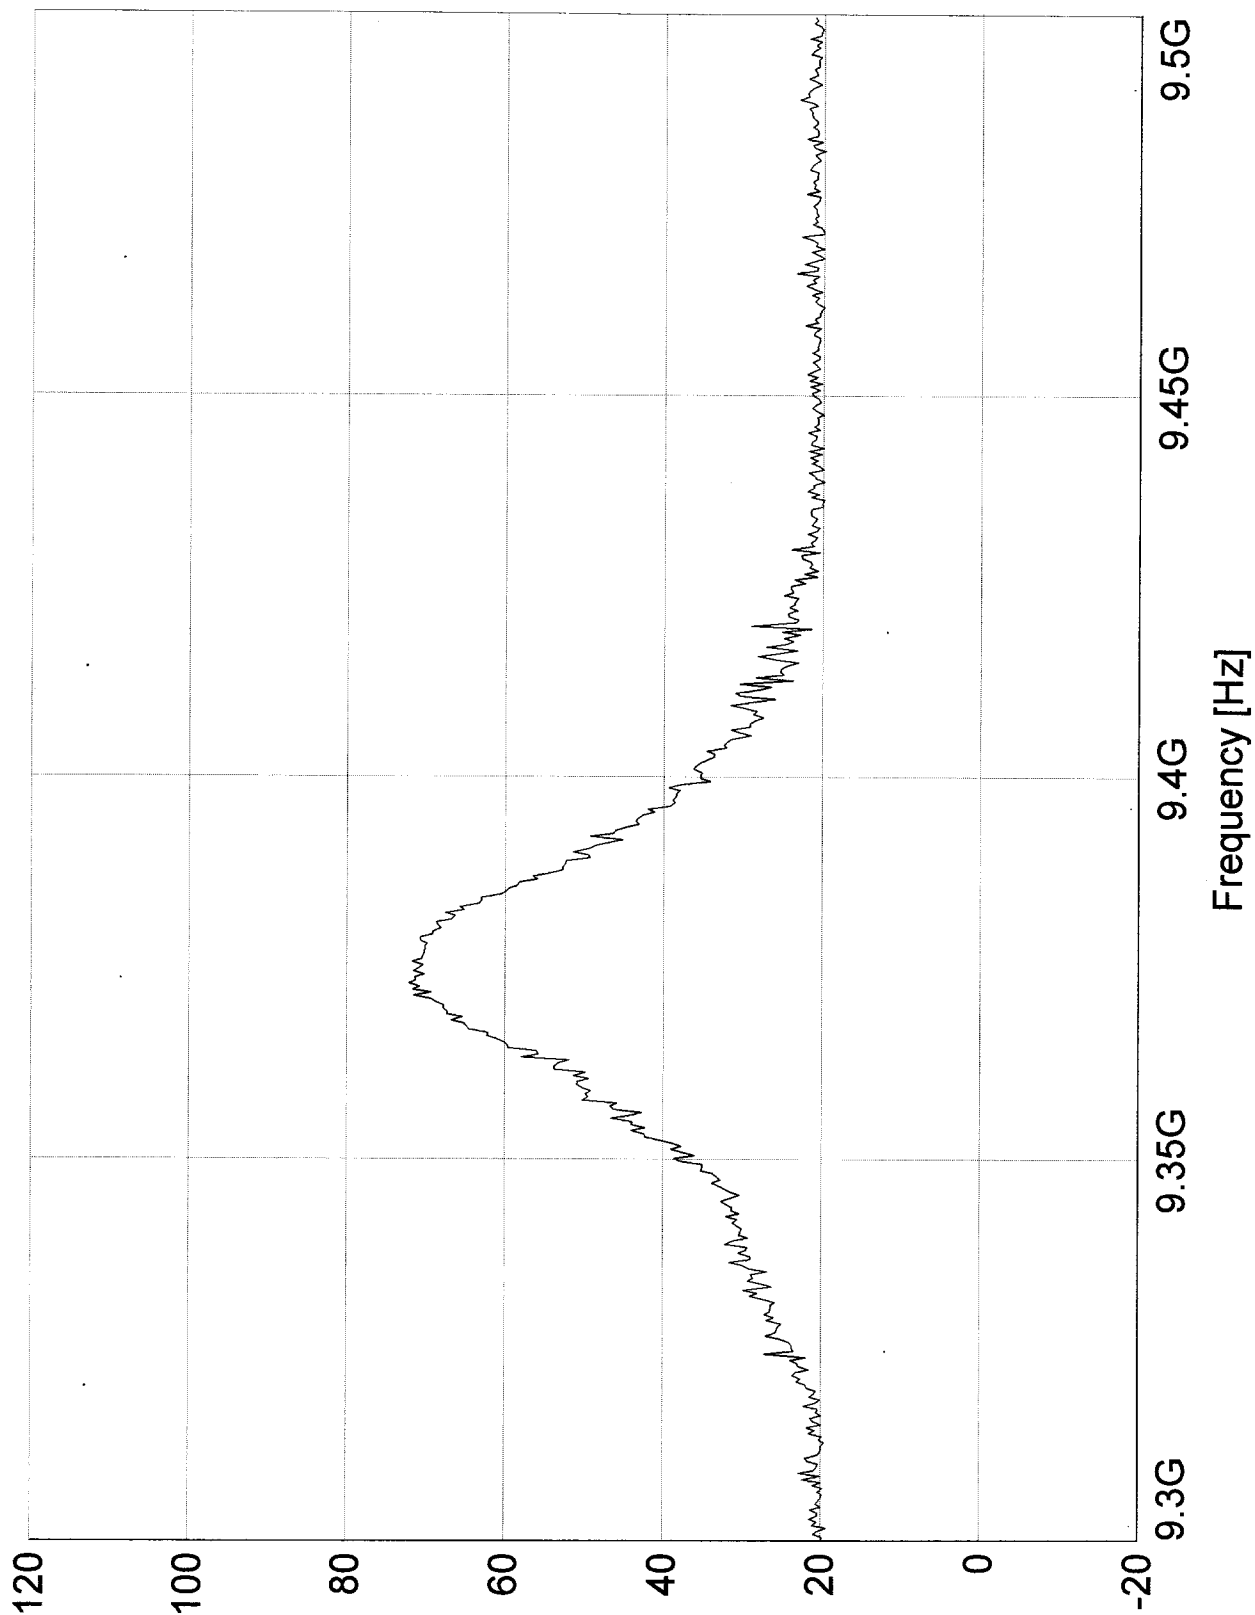

Report No. R-9105

Customer: Telephonics	Model: RT-1601, FCC ID:02IMCB-RT-1601
Test: Airborne Radar Transmitter	Temperature: +20C
Sample: FCC Part 87, Power Output	Mode: Weather(WX)
Test: RBW/UBW= 10 MHz	RBW/UBW= 10 MHz
Method:	Tech.: TS/RPM
Sheet 5 of 8	


Level [dBm]

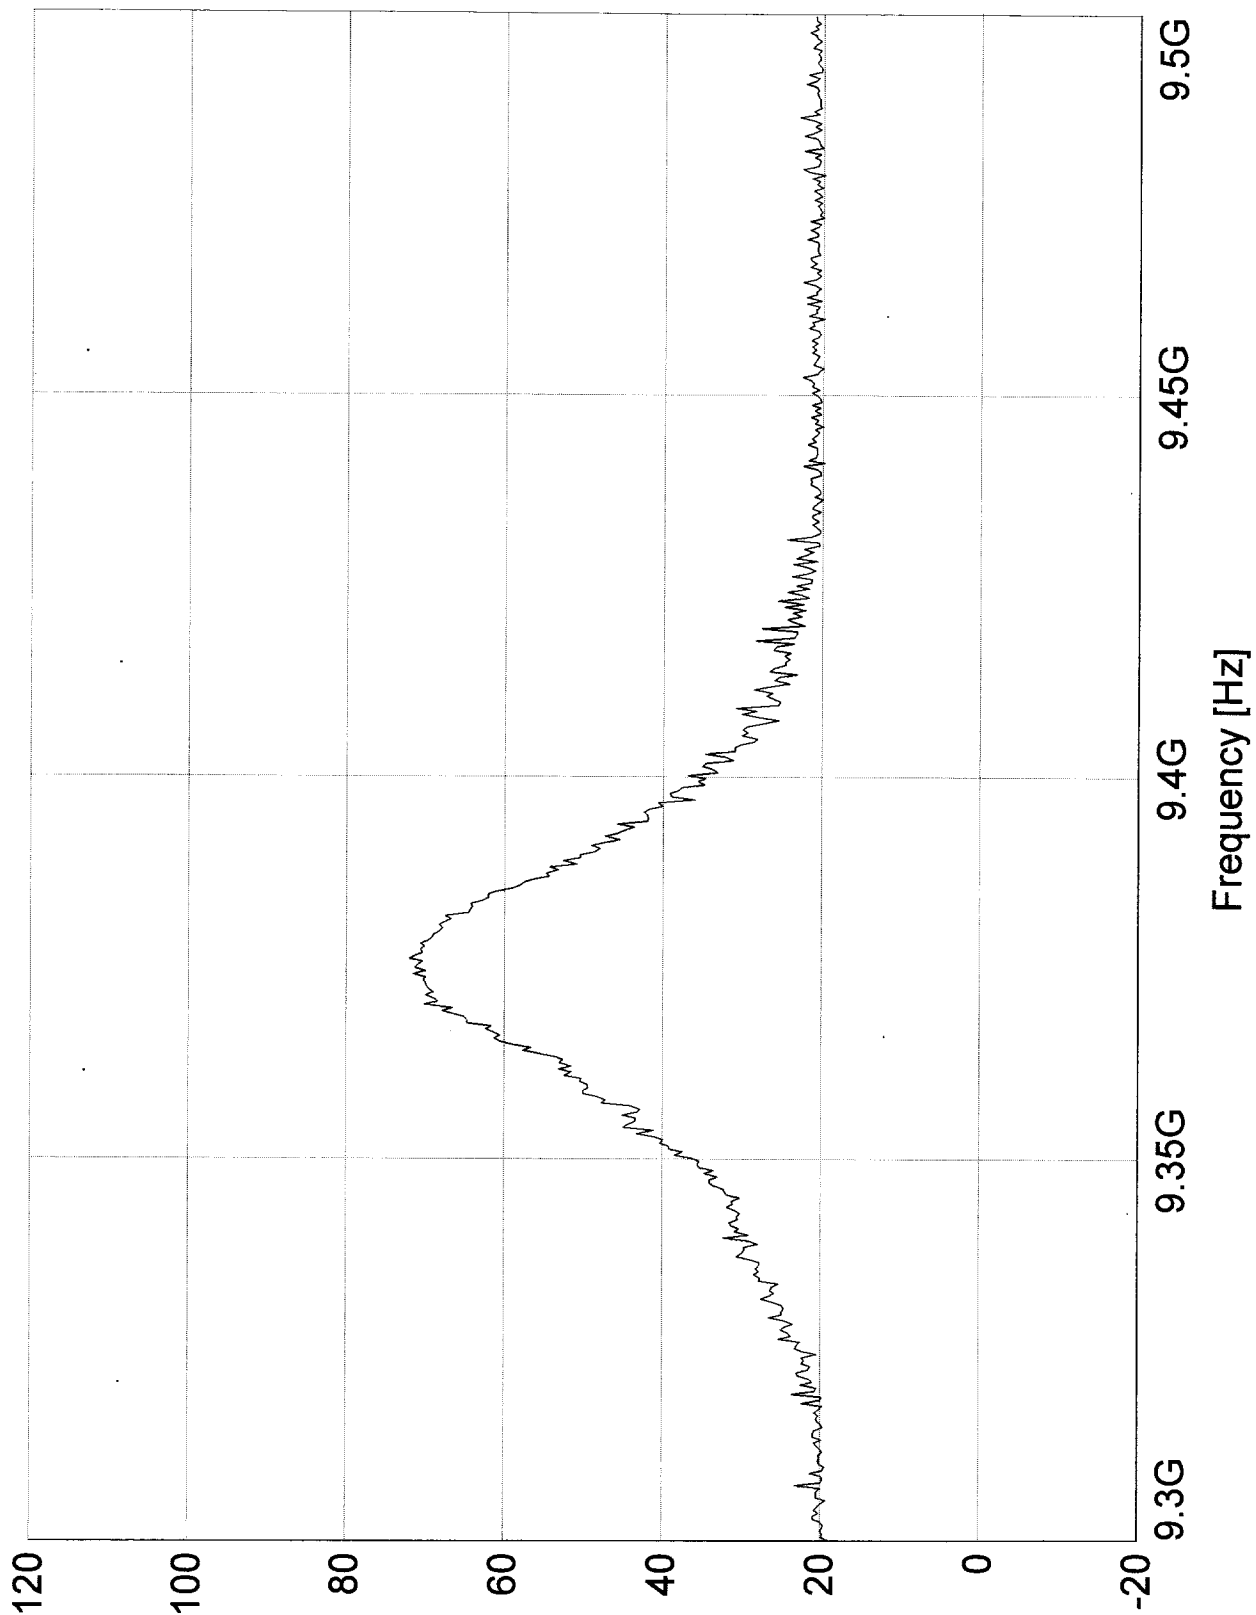

Report No. R-9105

Customer:	Telephonics	Model:	RT-1601, FCC ID:02IMCB-RT-1601
Test:	Airborne Radar Transmitter	No.:	Temperature= +30C
Sample:		Notes:	Mode= Weather(WX)
Test:	FCC Part 87, Power Output	RBW/VEW=	10 MHz
Method:		Tech.:	
		TS/RPM	Sheet 6 of 8


Level [dBm]

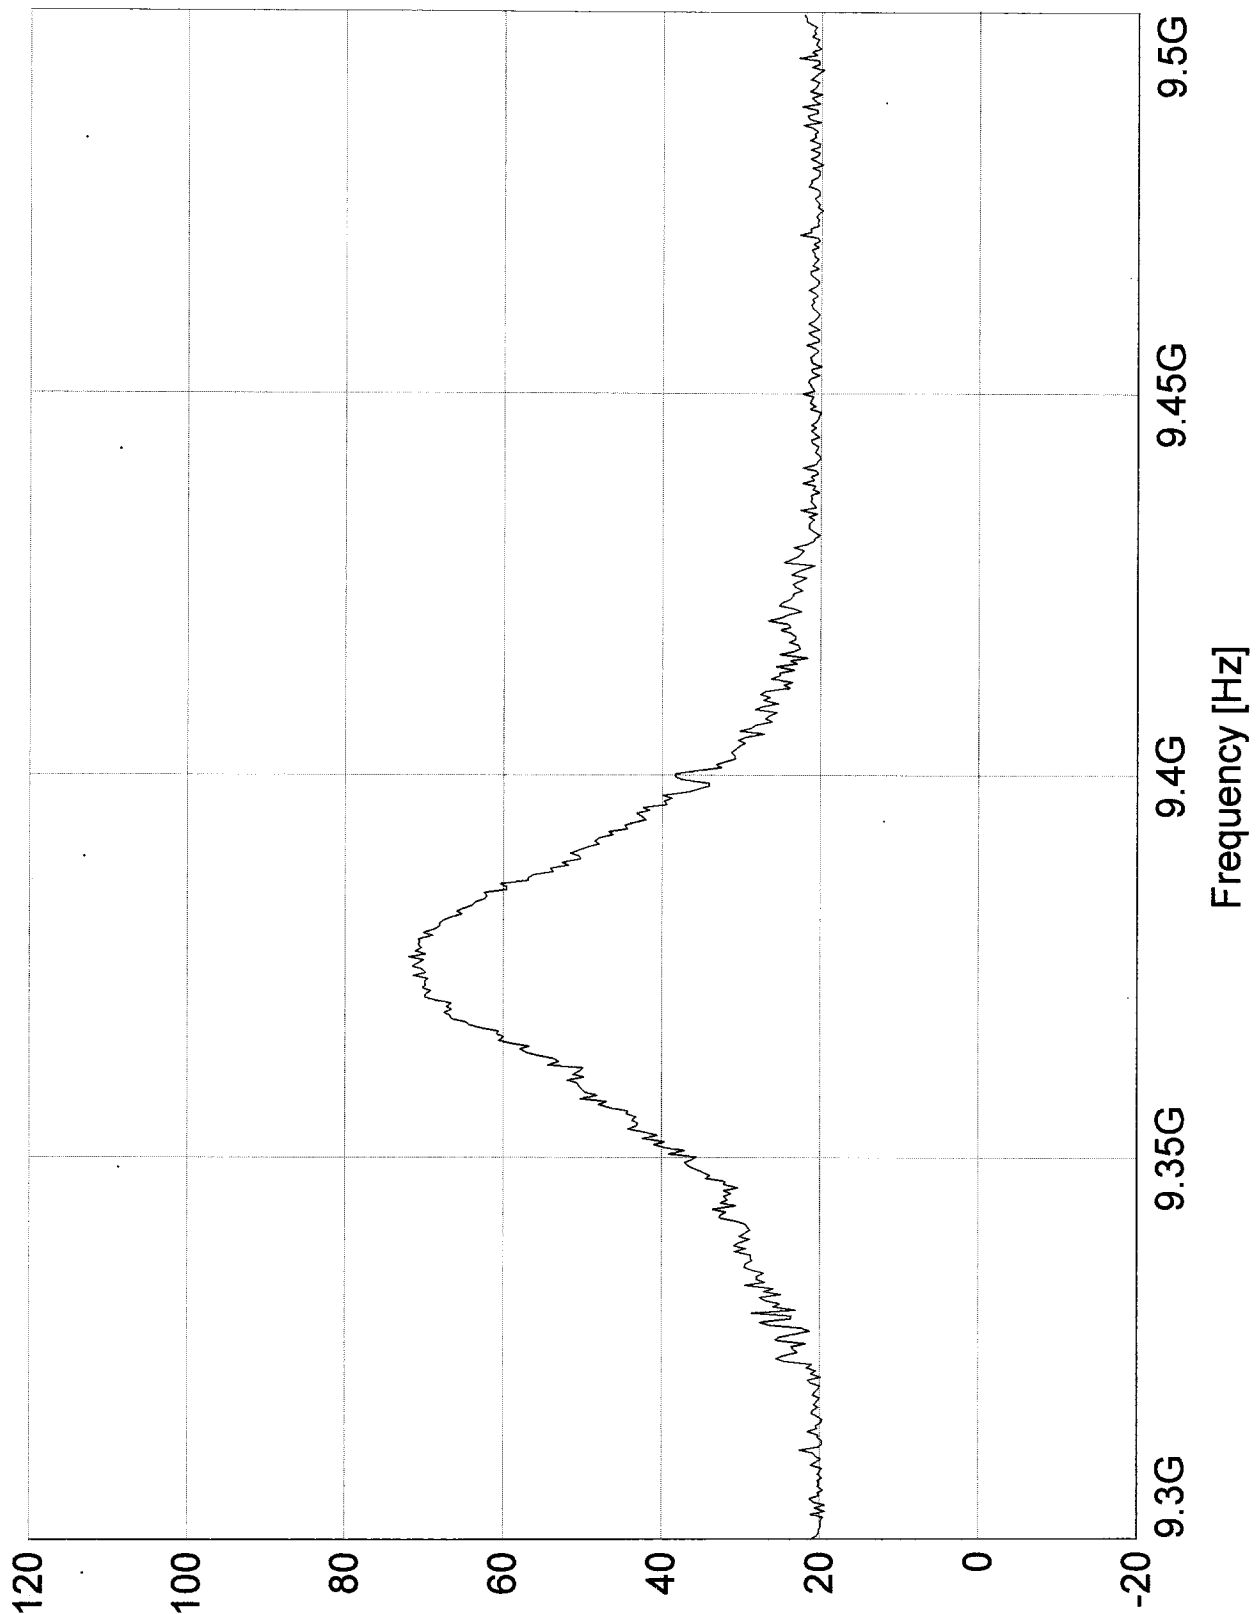

Report No. R-9105

Customer:	Telephonics	Model:	RT-1601, FCC ID: 02IMCB-RT-1601
Test:	Airborne Radar Transmitter	No.:	Temperature= +40C
Sample:		Notes:	Mode= Weather(WX)
Test:	FCC Part 87, Power Output		RBW/VBW= 10 MHz
Method:		Tech.:	TS/RPM
		Sheet	7 of 8


Level [dBm]

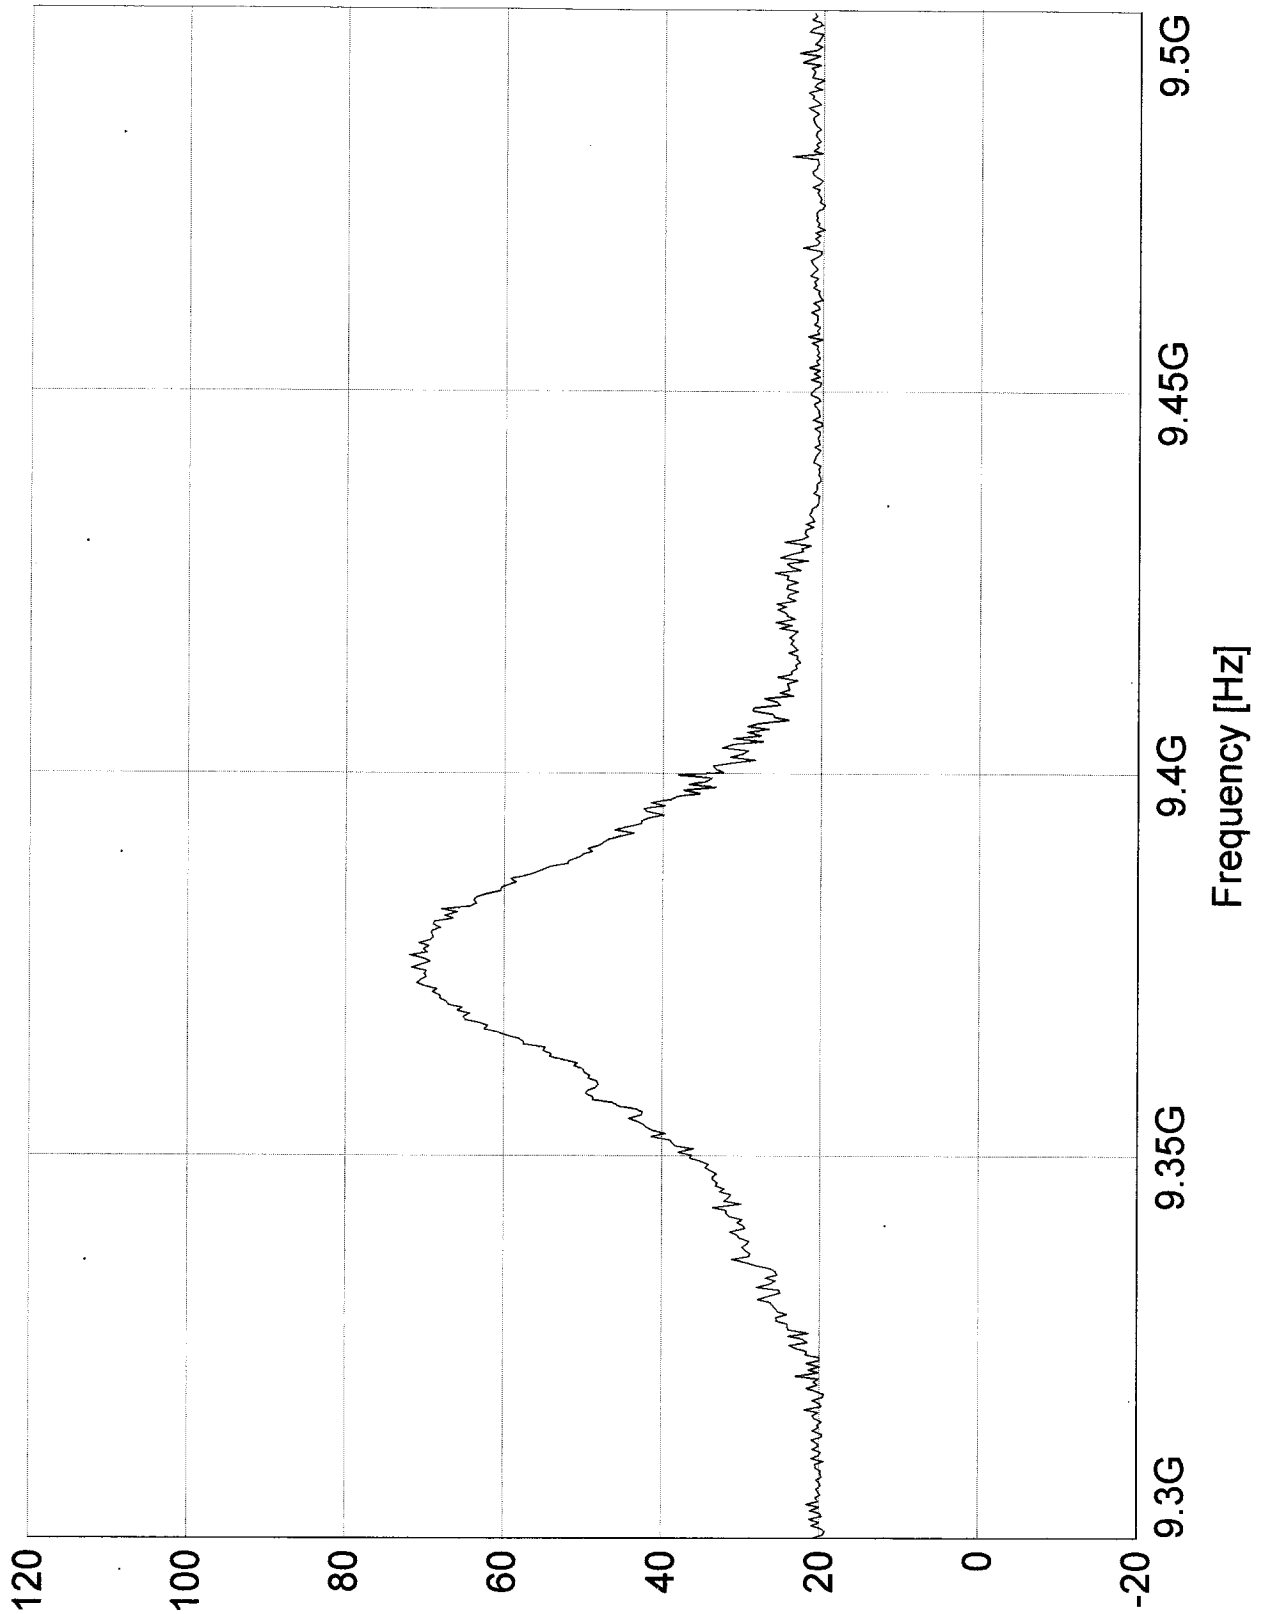

Report No. R-9105

Customer: Telephonics	Model: RT-1601, FCC ID:02IMCB-RT-1601
Test: Airborne Radar Transmitter	Notes: Temperature= +50C
Sample:	Mode= Weather(WX)
Test: FCC Part 87, Power Output	RBW/VBW= 10 MHz
Method:	Tech.: TS/RPM
Sheet 6 of 8	


Level [dBm]

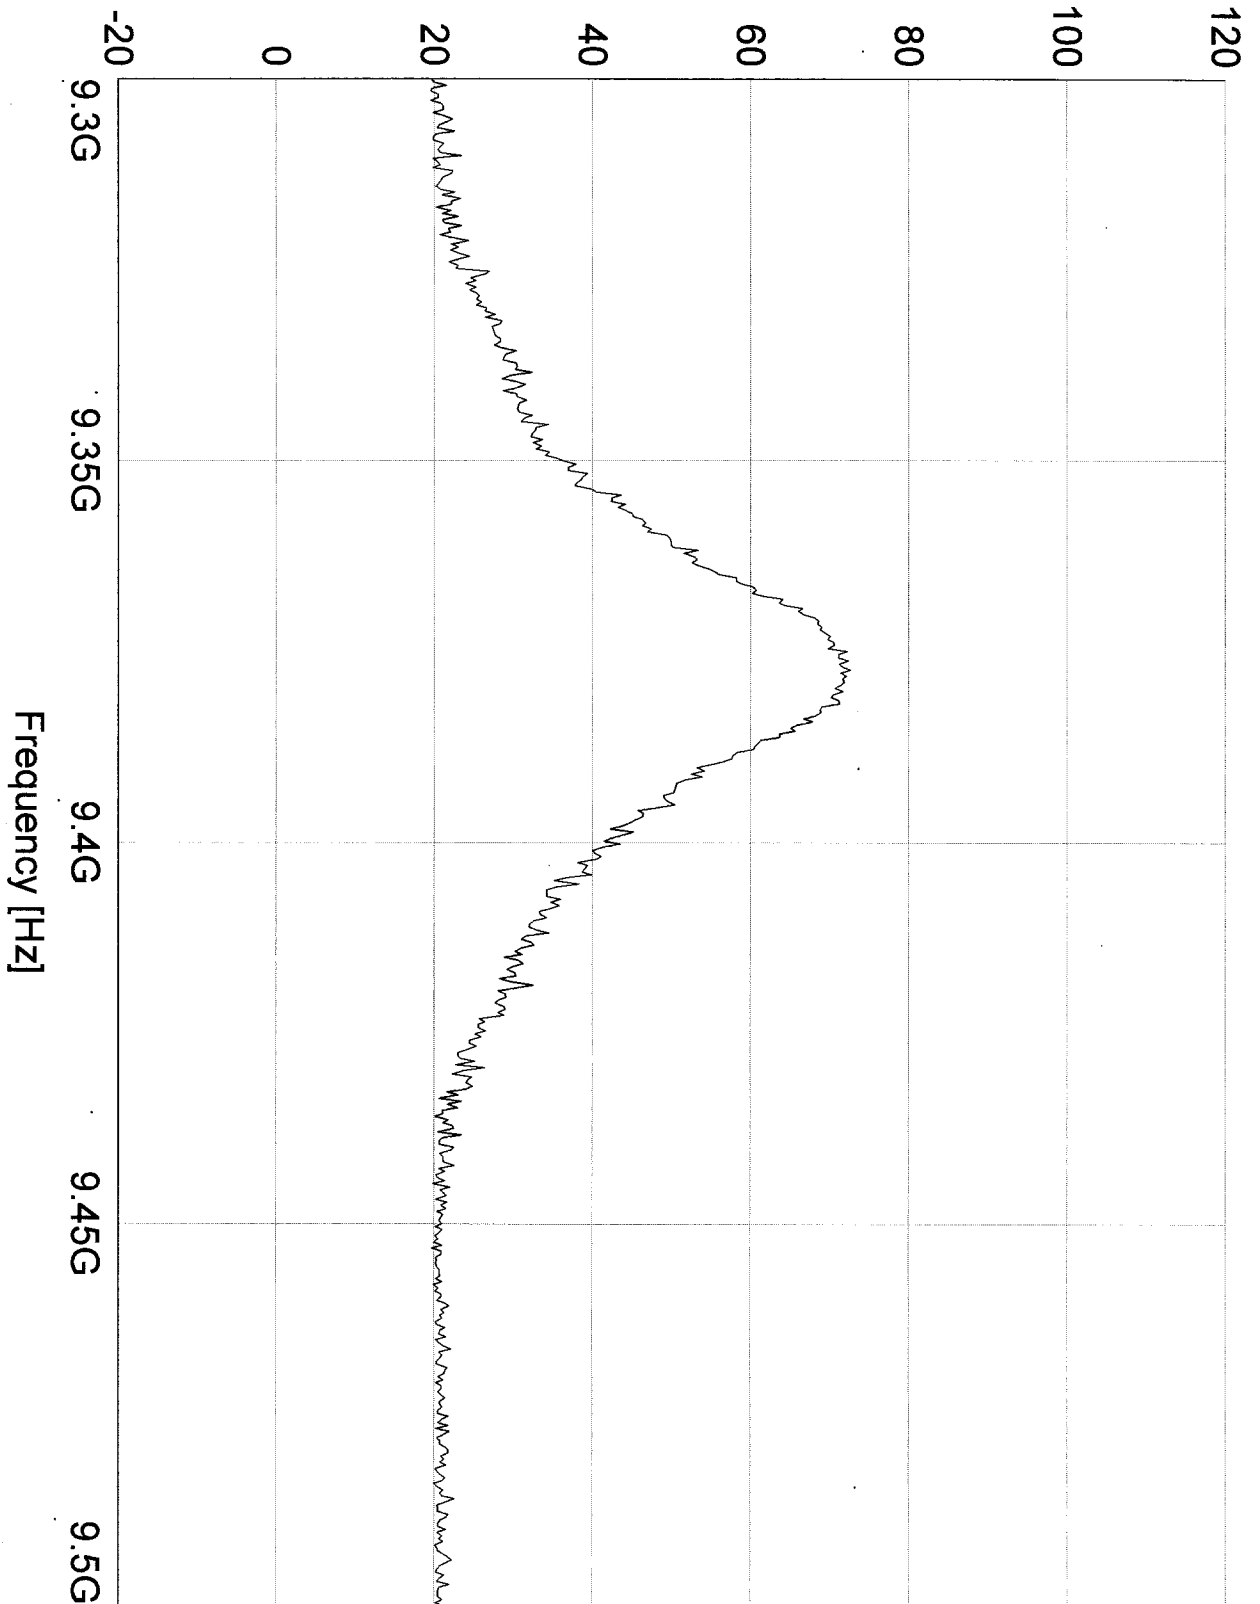

Report No. R-9105

Customer:	Telephonics	Model:	RT-1601, FCC ID:02IMCB-RT-1601
Test:	Airborne Radar Transmitter	No.:	Temperature= -20C
Sample:		Notes:	Mode= SEARCH
Test:	FCC Part 87, Power Output		RBW/VBW= 10 MHz
Method:		Tech.:	TS/RPW
		Sheet 1 of 8	

Level [dBm]

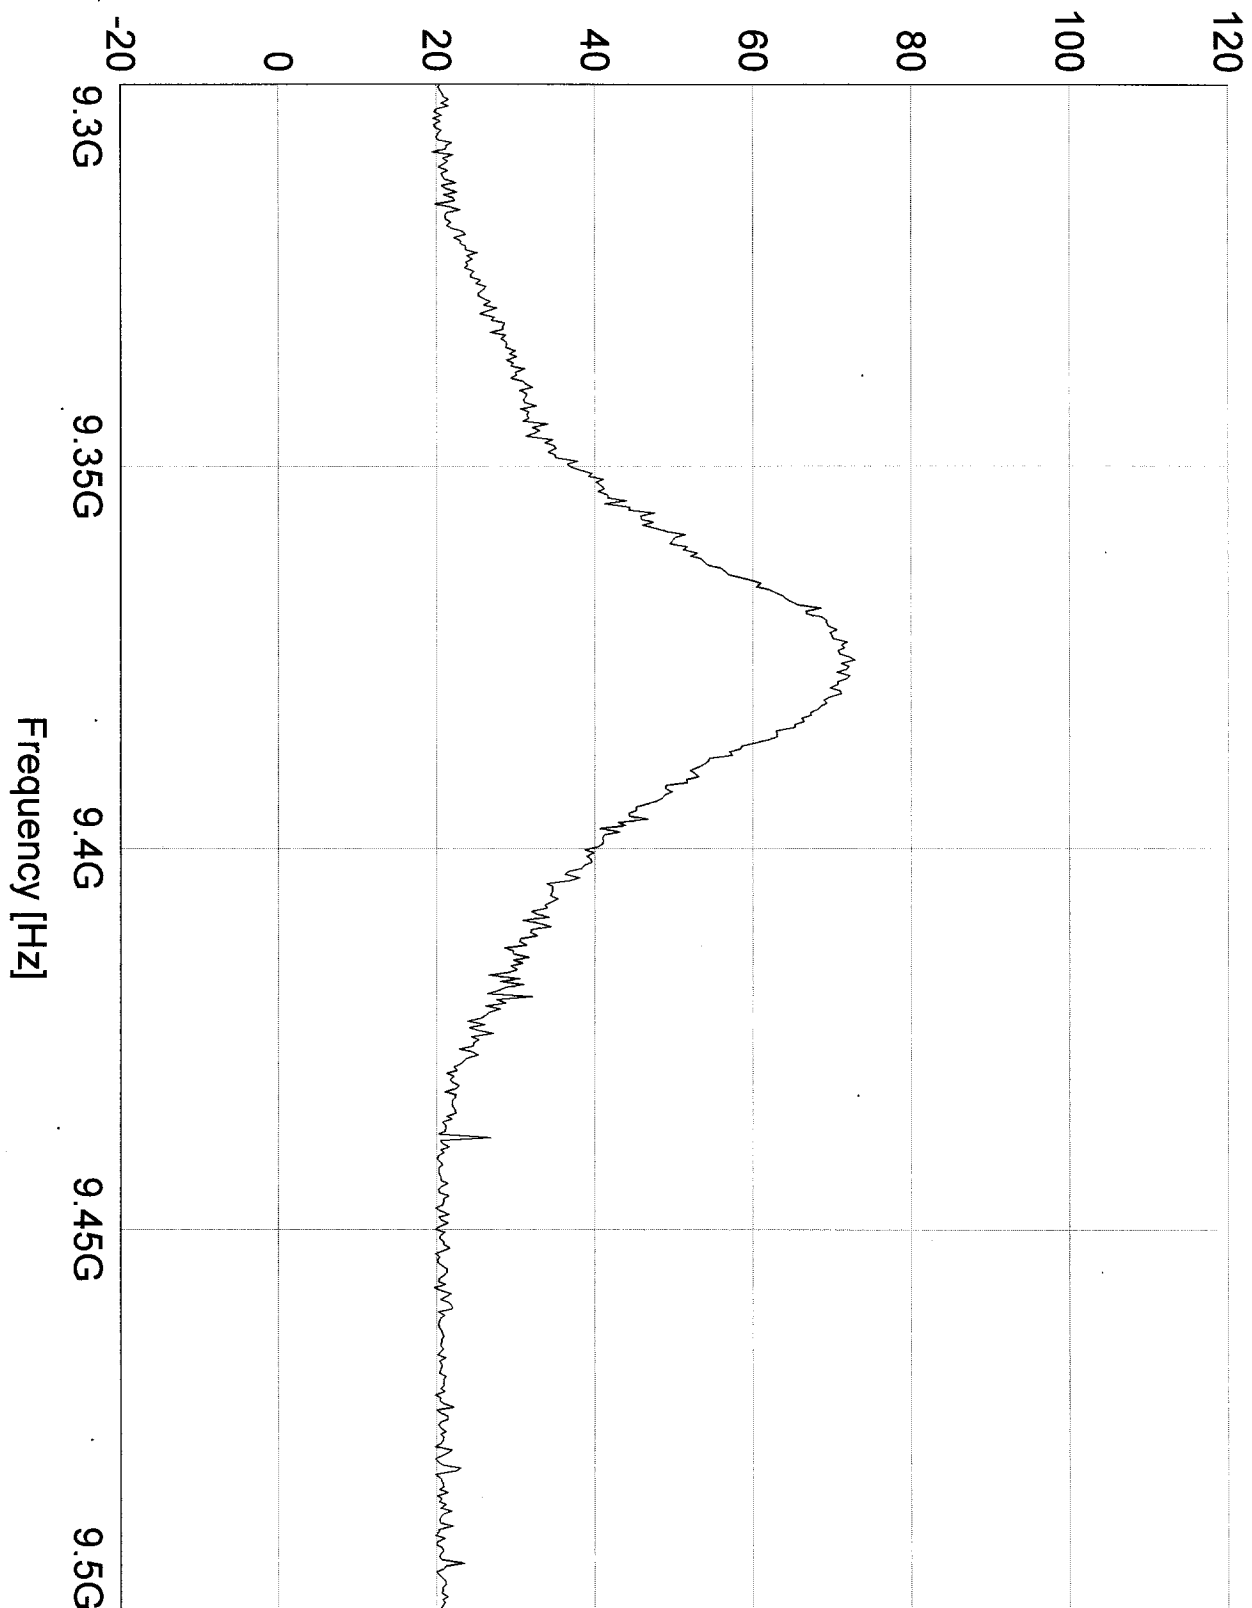


Report No. R-9105

Customer:	Telephonics	Model:	RT-1601, FCC ID:02IMCB-RT-1601
Test:	Airborne Radar Transmitter	No.:	Temperature= -10C
Sample:		Notes:	Mode= SEARCH
Test:	FCC Part 87, Power Output		RBM/VBW= 10 MHz
Method:		Tech.:	TS/RPW

Sheet 2 of 8

Level [dBm]

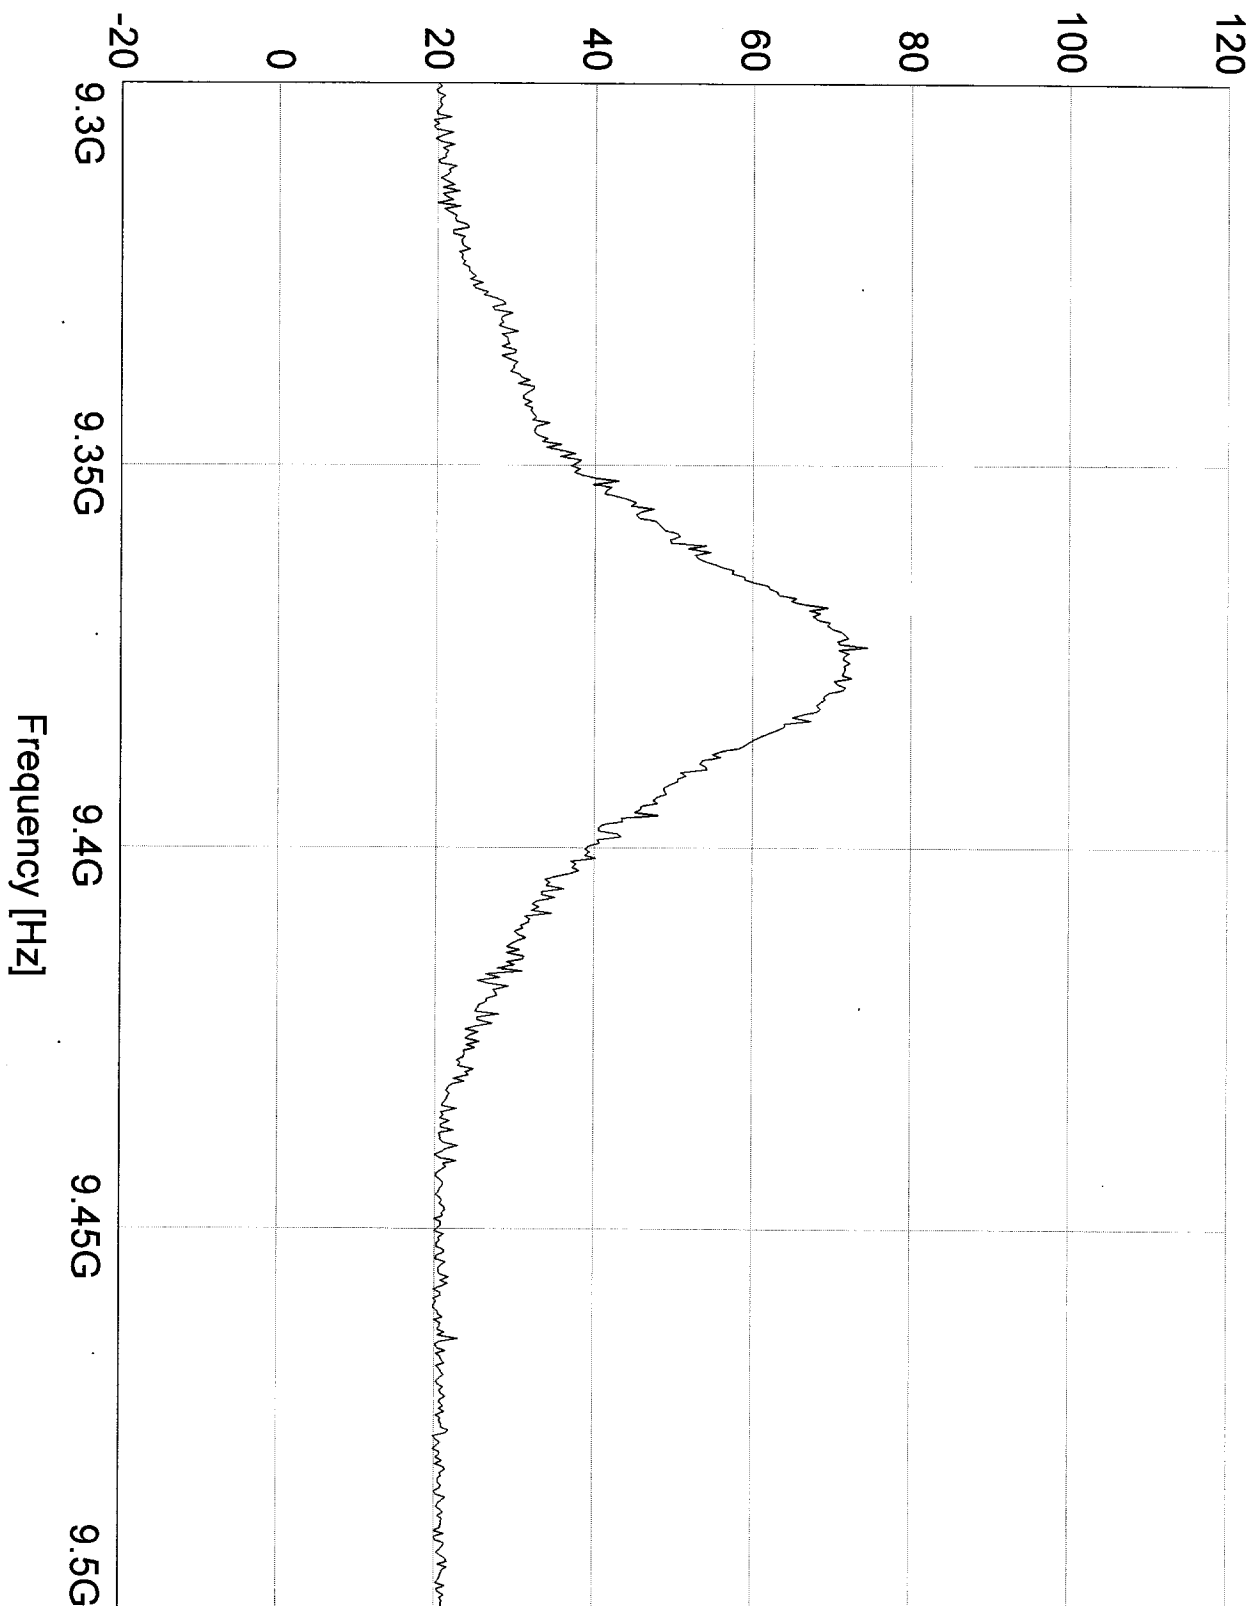


Report No. R-9105

Customer:	Telephonics	Model:	RT-1601, FCC ID:02IMCB-RT-1601
Test:	Airborne Radar Transmitter	Notes:	Temperature= 0C
Sample:		Notes:	Mode= SEARCH
Test:	FCC Part 87, Power Output	Notes:	RBW/VBW= 10 MHz
Method:		Tech:	TS/RPW

Sheet 3 of 8


Level [dBm]

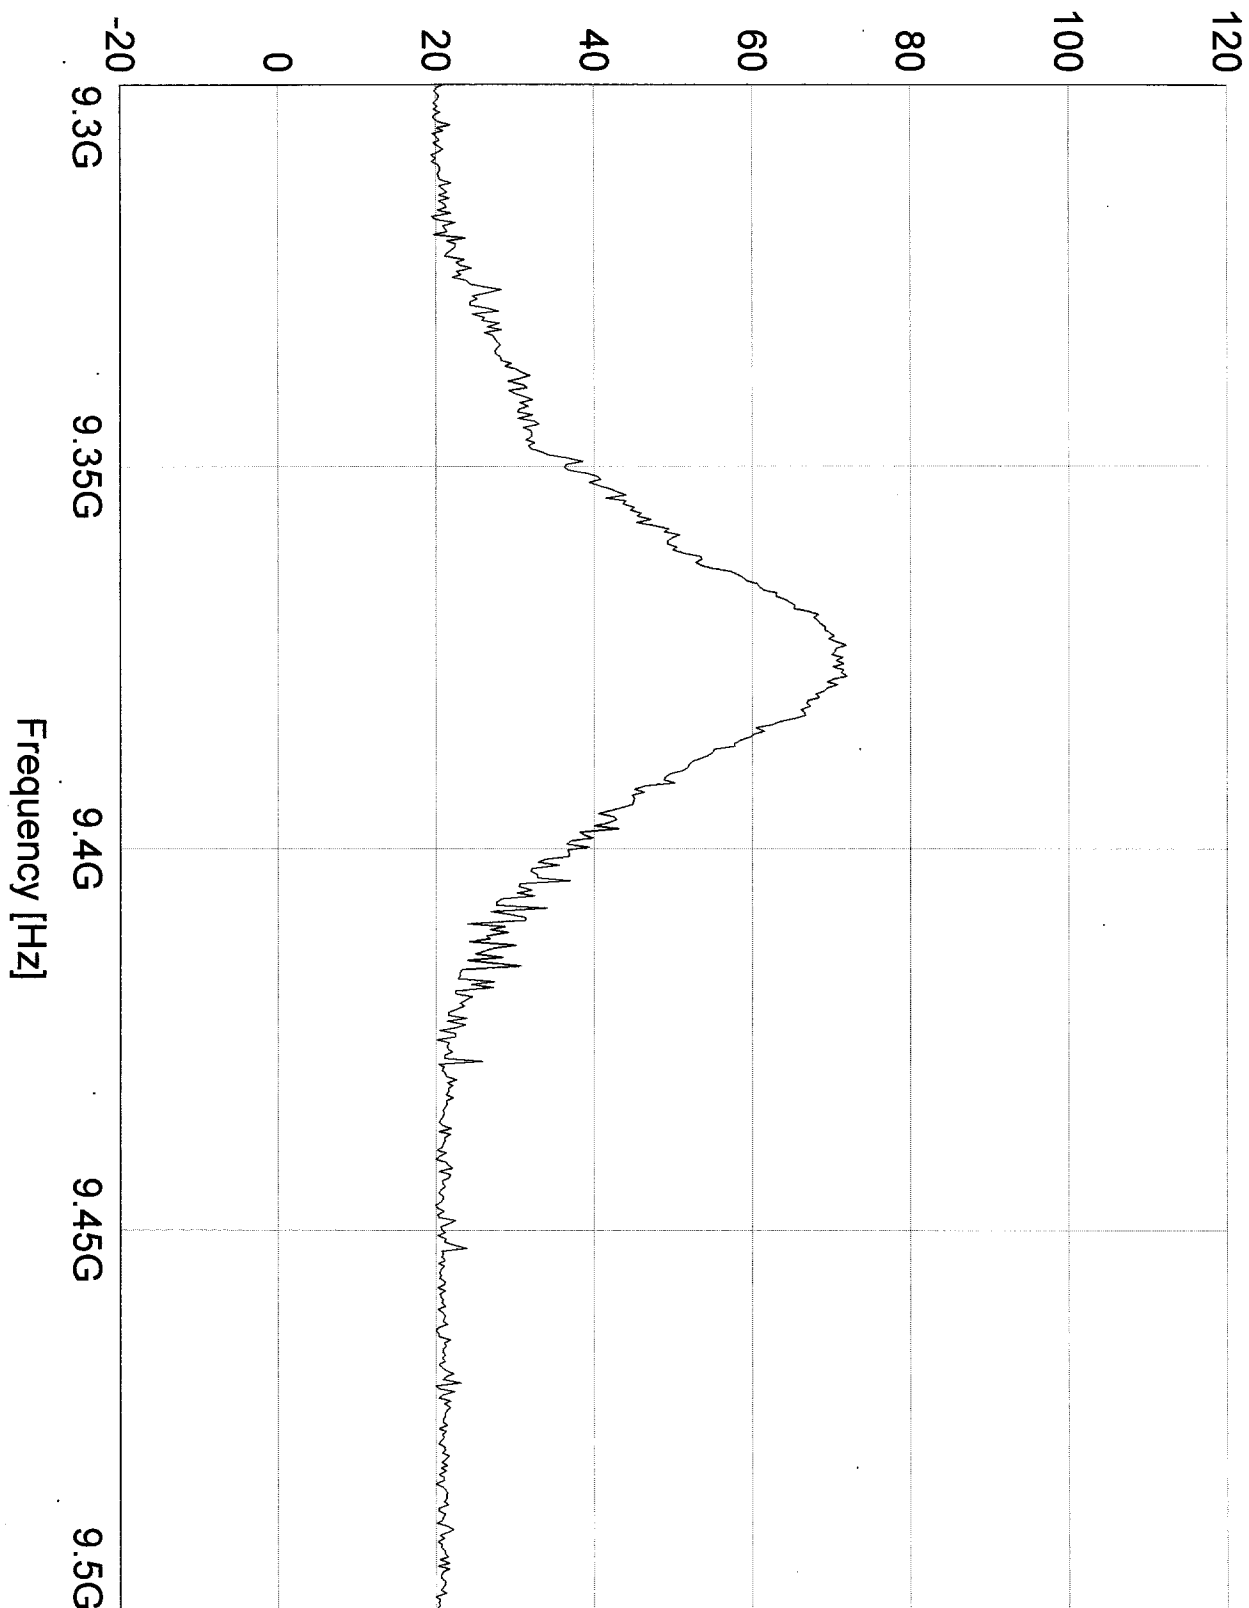

Report No. R-9105

Customer:	Telephonics	Model:	RT-1601, FCC ID:02IMCB-RT-1601
Test:	Airborne Radar Transmitter	No.:	Temperature= +10C
Sample:		Notes:	Mode= SEARCH
Test:	FCC Part 87, Power Output		RBW/VBW= 10 MHz
Method:		Tech.:	TS/RPW
		Sheet 4 of 8	

Level [dBm]

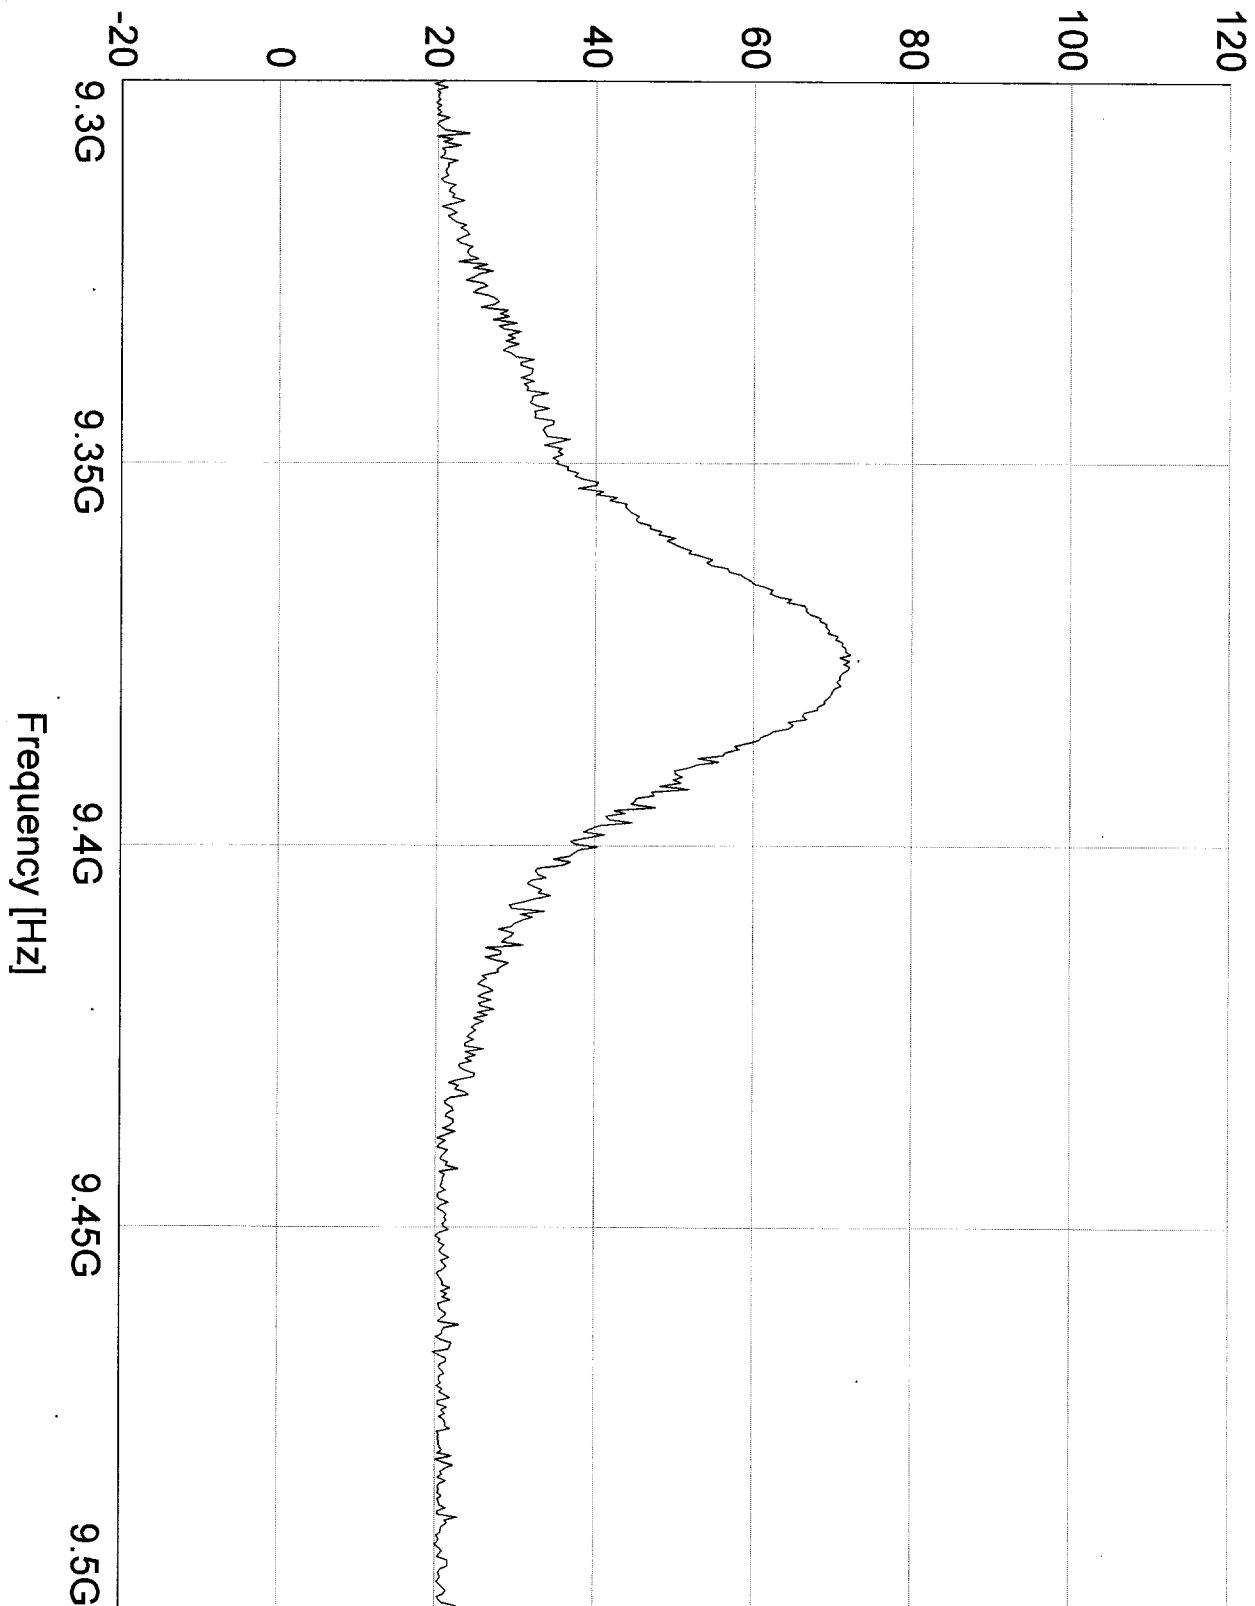


Report No. R-9105

Customer:	Telephonics	Model:	RT-1601, FCC ID:02IMCB-RT-1601
Test:	Airborne Radar Transmitter	No.:	Temperature= +30C
Sample:		Notes:	Mode= SEARCH
Test:	FCC Part 87, Power Output		RBW/VBW= 10 MHz
Method:		Tech.:	TS/RPM

Sheet 5 of 8

Level [dBm]

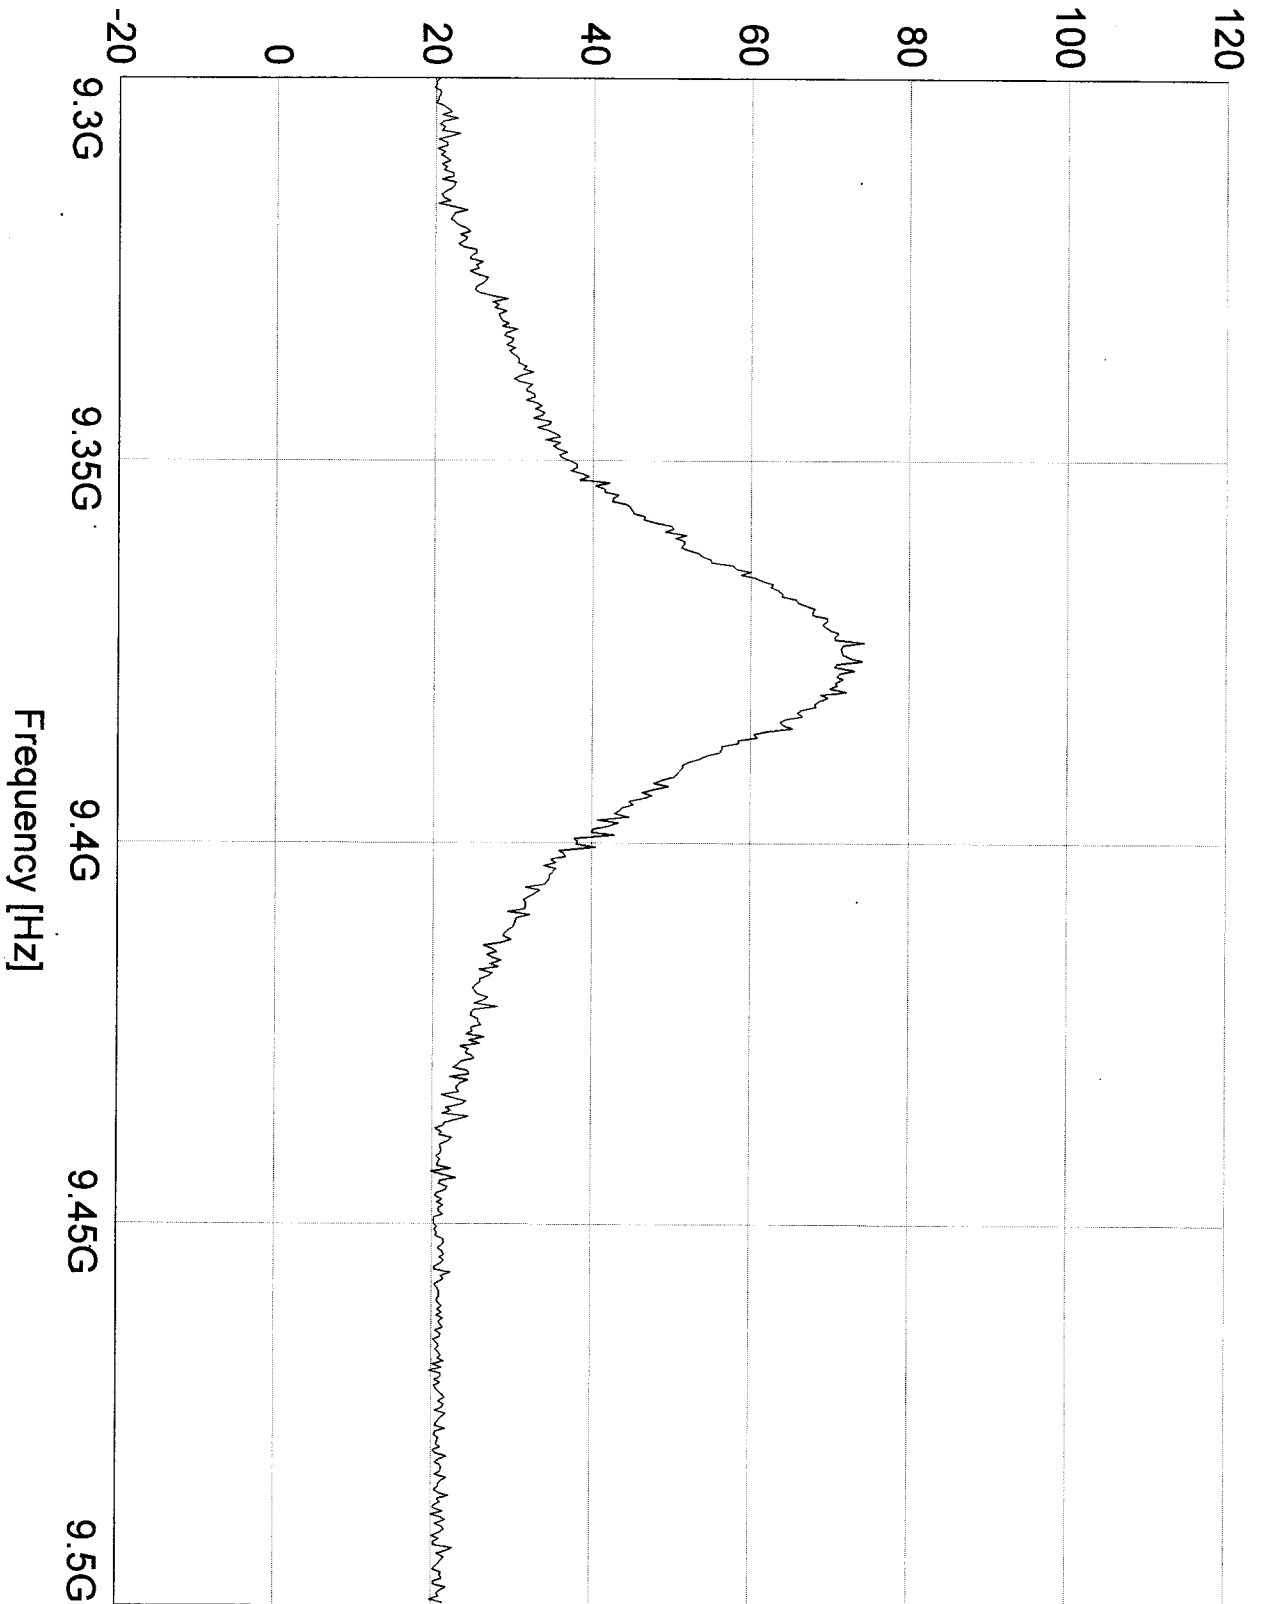


Report No. R-9105

Customer: Telephonics	Model: RT-1601, FCC ID:02IMCB-RT-1601
Test: Airborne Radar Transmitter	Notes: Temperature= +20C
Sample: FCC Part 87, Power Output	Mode= SEARCH
Test:	RBW/VBW= 10 MHz
Method:	Tech: TS/RPW

Sheet 6 of 8


Level [dBm]

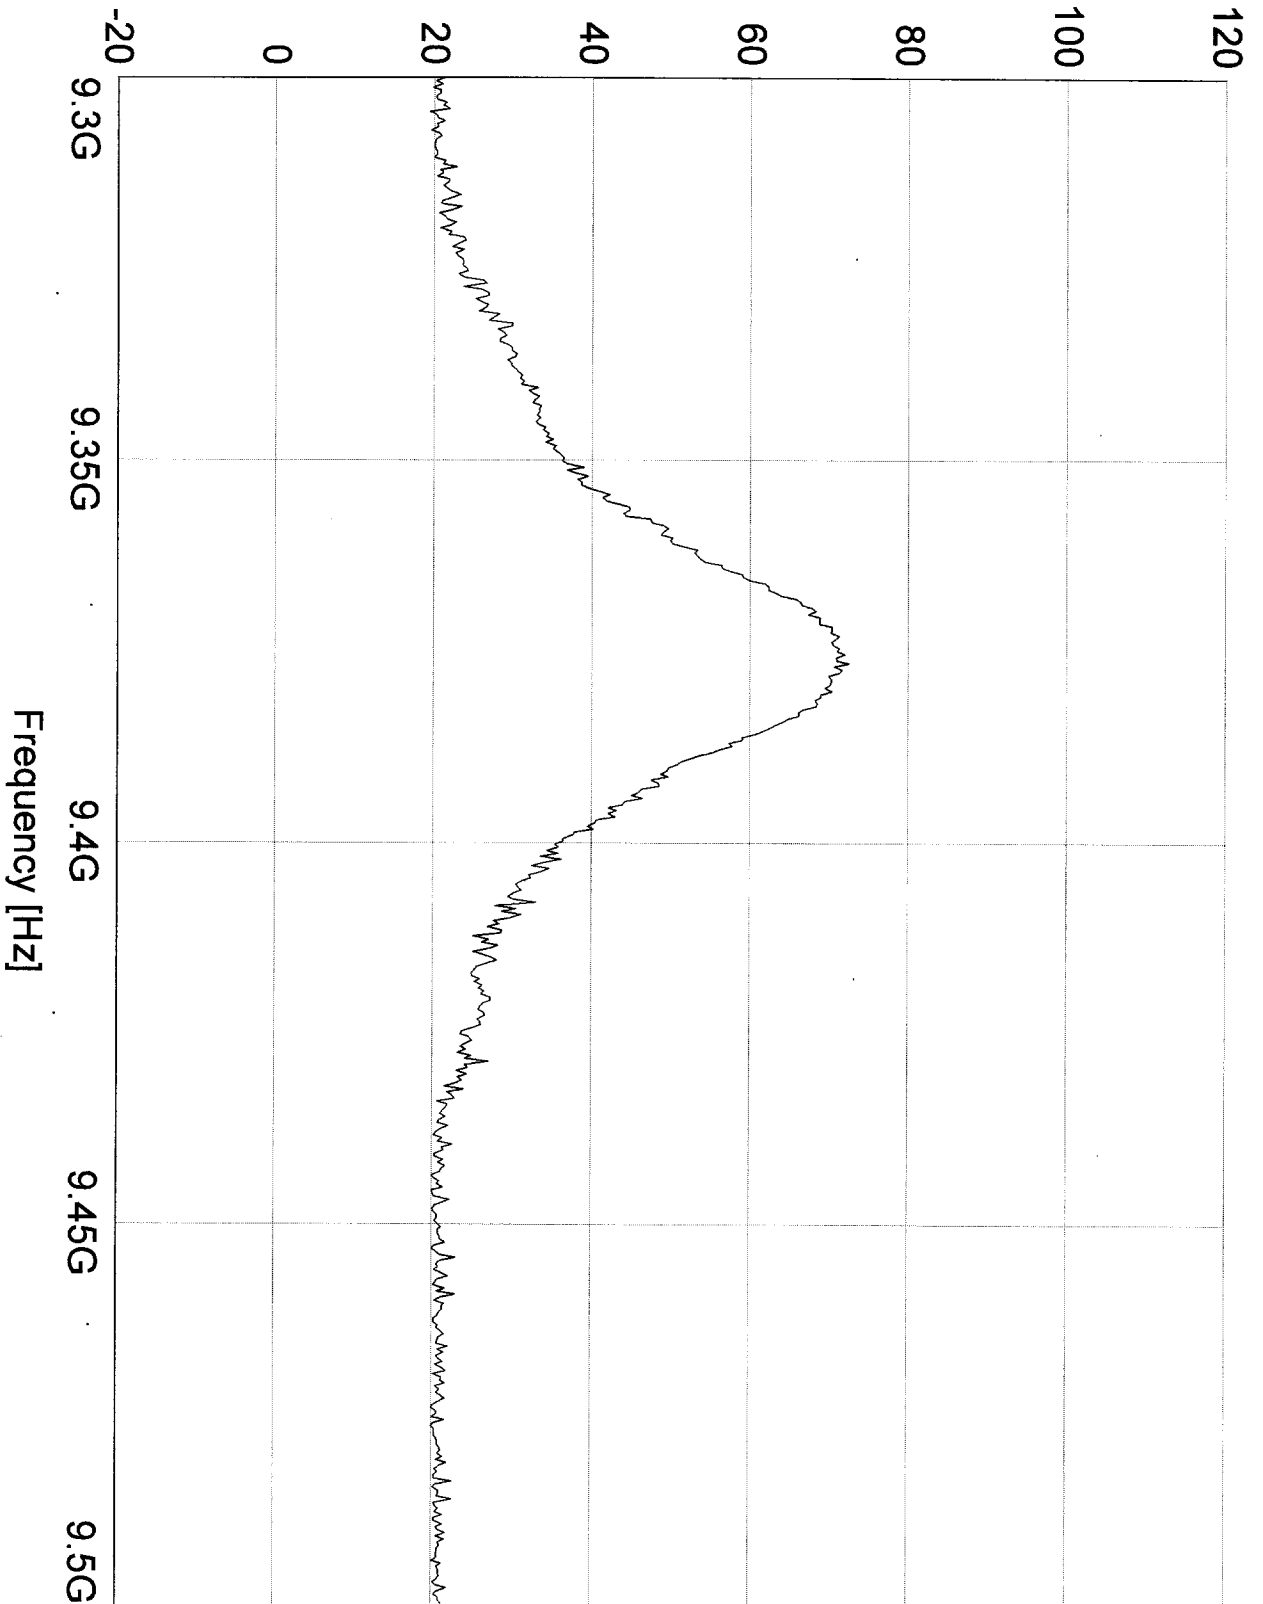

Report No. R-9105

Customer: Telephonics	Model: RT-1601, FCC ID:02IMCB-RT-1601
Test: Airborne Radar Transmitter	Temperature: +40C
Sample: FCC Part 87, Power Output	Mode: SEARCH
Test Method:	RBW/UBW: 10 MHz
	Tech.: TS/RPM
	Sheet 7 of 8

Level [dBm]

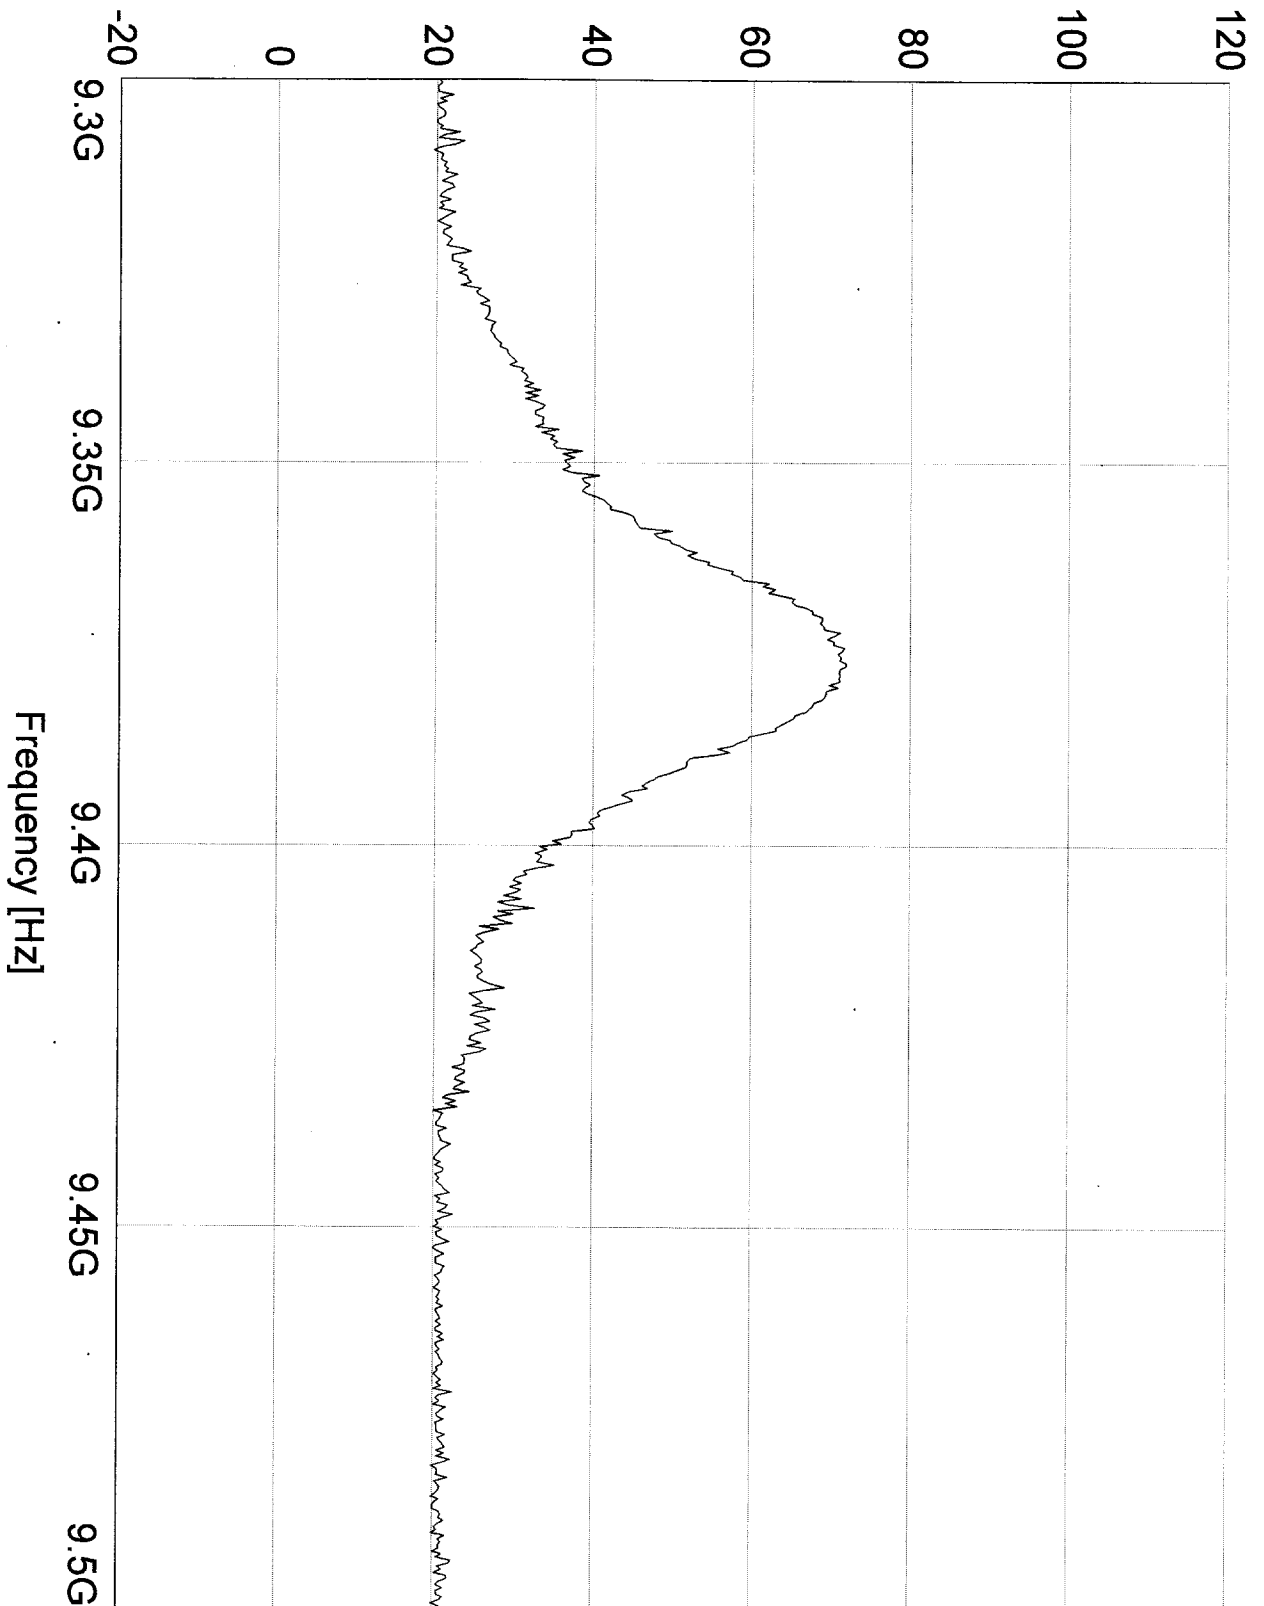

Report No. R-9105

Customer: Telephonics	Model: RT-1601, FCC ID:02IMCB-RT-1601
Test: Airborne Radar Transmitter	No.: Temperature= +50C
Sample: FCC Part 87, Power Output	Notes: Mode= SEARCH
Test:	REBW/UBW= 10 MHz
Method:	Tech: TS/RPM
Sheet 7 of 8	