

Nemko Test Report No.:

2L0092EUS1

Applicant:

Internet Telemetry
5311 S.122nd East Avenue
Tulsa, OK 74146

Equipment Under Test:

Model TIM 15 Version G4

In Accordance With:

FCC Part 15, Subpart B
Radio Receivers

Tested By:

Nemko Dallas Inc.
802 N. Kealy
Lewisville, Texas 75057-3136

A handwritten signature in blue ink, appearing to read "Tom Tidwell", is written over a horizontal line.

Authorized By:

Tom Tidwell, Wireless Group Manager

Date:

6/5/02

Total Number of Pages:

20

EQUIPMENT: **Model TIM 15 Version G4** PROJECT NO.: **2L0092EUS1**

TABLE OF CONTENTS

Section 1. Summary of Test Results..... 3

Section 2. Equipment Under Test (E.U.T.) 5

Section 3. Equipment Configuration 7

Section 4. Conducted Emissions..... 9

Section 5. Radiated Emissions..... 13

Section 6. Sample Calculations..... 17

Section 7. Block Diagrams 18

Section 8. Test Equipment List 20

EQUIPMENT: **Model TIM 15 Version G4**PROJECT NO.: **2L0092EUS1**

Section 1. Summary of Test Results**General:****All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15, Subpart B. Measurement procedure ANSI C63.4-1992 was used for all tests. Radiated Emissions were measured on an open area test site.

☐

Declaration of Conformity

☐

Production Unit

☐

Verification

☒

Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST
SPECIFICATIONS HAVE BEEN MADE.

See “ Summary of Test Data”.

**NVLAP LAB CODE: 100426-0**

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

EQUIPMENT: **Model TIM 15 Version G4**PROJECT NO.: **2L0092EUS1**

Summary Of Test Data

Name Of Test	Para. No.	Results
Antenna Conducted Emissions	15.111	Not Tested ¹
Radiated Emissions	15.109	Complies
Powerline Conducted Emissions	15.107	Complies

Footnotes:¹The unit contains an integral antenna.**Measurement uncertainty for each test configuration is expressed to 95% probability.**

EQUIPMENT: **Model TIM 15 Version G4** PROJECT NO.: **2L0092EUS1**

Section 2. Equipment Under Test (E.U.T.)

Manufacturer: Internet Telemetry

Model No.: TIM 15 version G4

Serial No.: None

Equipment Details

Frequency Range:	906.5 – 927.875 MHz
Number of Channels:	50 channels per hop table
Operating Frequency(ies) of Sample:	Tuned to 906.5 MHz, 917,25 MHz, and 927.875 MHz for testing.
Power Supply Requirement:	Battery or external supply
Type of Modulation:	FSK
Bandwidth:	50.8 kHz
Intermediate Frequencies:	None

EQUIPMENT: **Model TIM 15 Version G4** PROJECT NO.: **2L0092EUS1**

Description of E.U.T.

The Telemetry Interface Module (TIM) is a data-collection-wireless-transceiver module. The receiver hops in synchronization with a companion transmitter.

Modifications Incorporated in E.U.T.

The EUT has not been modified from what is described by the brand name and unique type identification stated above.

EQUIPMENT: **Model TIM 15 Version G4** PROJECT NO.: **2L0092EUS1**

Section 3. Equipment Configuration**Equipment Configuration List:**

Item	Description	Model No.	Serial.	Rev.
(A)	Transceiver module	TIM 15	None(S#01)	G4
(B)	Laptop computer	Dell		
(C)	Power Adapter	DV-091A-5720	None	
(D)				
(E)				
(F)				
(G)				


Inter-connection Cables:

Item	Description	Length (m)
(1)	Power/Data cable. 6 conductors, unshielded.	1.5
(2)		
(3)		
(4)		
(5)		
(6)		
(7)		
(8)		

EQUIPMENT: **Model TIM 15 Version G4**

PROJECT NO.: **2L0092EUS1**

Diagram of the Equipment Under Test (E.U.T)

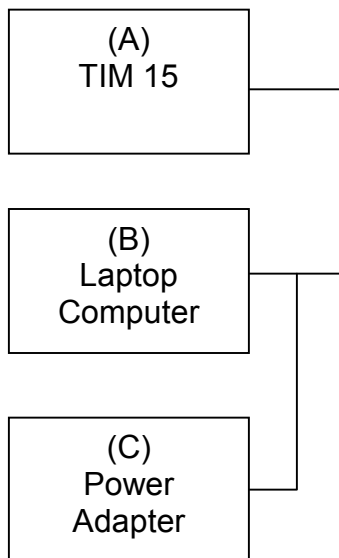

EQUIPMENT: **Model TIM 15 Version G4**PROJECT NO.: **2L0092EUS1****Section 4. Conducted Emissions**

(1)

NAME OF TEST: Radiated Emissions

FARA. NO.: 15.109(a)



TESTED BY: Tom Tidwell

DATE: 7/2/02

Minimum Standard:

Frequency(MHz)	Level (dB μ V/m)
.450 - 30	48.0

Test Results: Complies.**Measurement Data:** See attached table.**Measurement Uncertainty:** +/- 1.8 dB**Temperature:** 25 °C**Relative Humidity:** 52 %

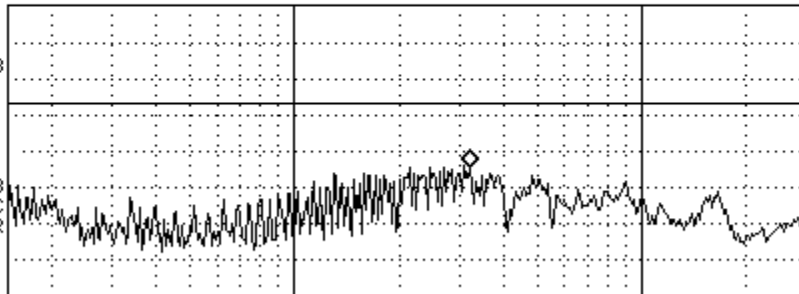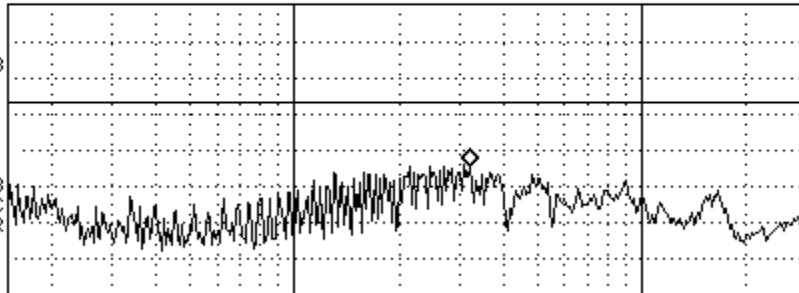EQUIPMENT: **Model TIM 15 Version G4**PROJECT NO.: **2L0092EUS1**12:04:03 JUL 02, 2002
~~17~~MARKER
3.22 MHz
30.15 dBµVACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 3.22 MHz
30.15 dBµVLOG REF 75.0 dBµV
10
dB/
ATN
10 dB**Phase Conductor 60 Hz/120 Vac**DL
48.0
dBµV
VA SB
SC FC
CORRSTART 150 kHz STOP 30.00 MHz
RL #IF BW 9.0 kHz AVG BW 30 kHz SWP 1.40 sec12:07:11 JUL 02, 2002
~~17~~MARKER
3.22 MHz
30.15 dBµVACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 3.22 MHz
30.15 dBµVLOG REF 75.0 dBµV
10
dB/
ATN
10 dB**Neutral Conductor 60 Hz/120 Vac**DL
48.0
dBµV
VA SB
SC FC
CORRSTART 150 kHz STOP 30.00 MHz
RL #IF BW 9.0 kHz AVG BW 30 kHz SWP 1.40 sec


EQUIPMENT: **Model TIM 15 Version G4**

PROJECT NO.: **2L0092EUS1**



EQUIPMENT: **Model TIM 15 Version G4**

PROJECT NO.: **2L0092EUS1**

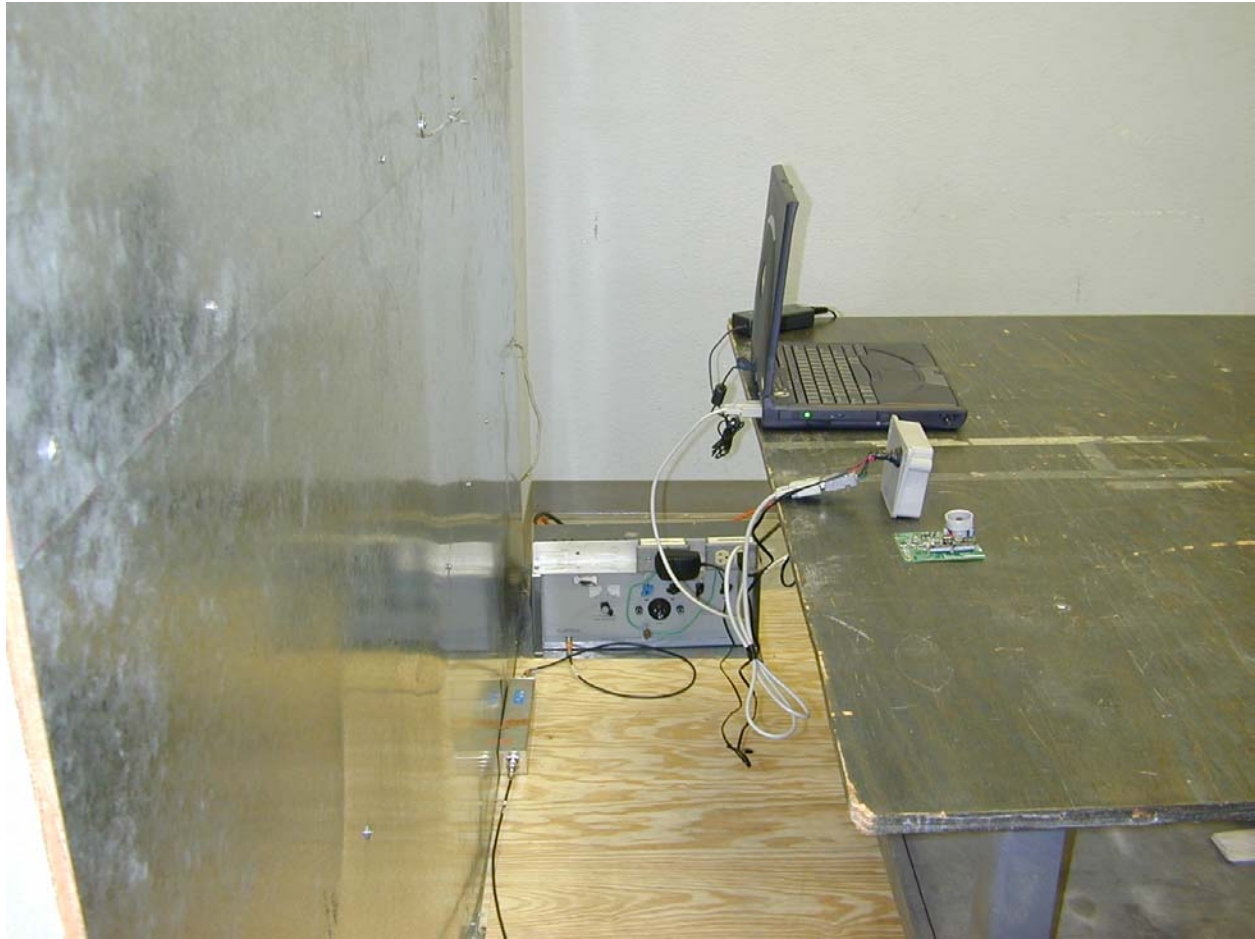

EQUIPMENT: **Model TIM 15 Version G4**PROJECT NO.: **2L0092EUS1****Section 5. Radiated Emissions**

NAME OF TEST: Radiated Emissions	PARA. NO.: 15.109(a)
TESTED BY: Kevin Rose	DATE: 5/28/02

Minimum Standard:


Frequency(MHz)	Field Strength (dB μ V/m @ 3m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
Above 960	54.0

Test Results: Complies.**Measurement Data:** See attached table.**Measurement Uncertainty:** +/- 3.6 dB**Temperature:** 23 °C**Relative Humidity:** 39 %

NOTE: The unit was tested on three frequencies. There were no emissions detected above 1 GHz. The ambient threshold of sensitivity was sufficient to detect emissions 20 dB below the specification limit.


For super-regenerative receivers the receiver is cohered using a signal generator and dipole antenna.

Handheld equipment and equipment not designed to be mounted in any fixed orientation is tested in three orthogonal axis to obtain worst case results.

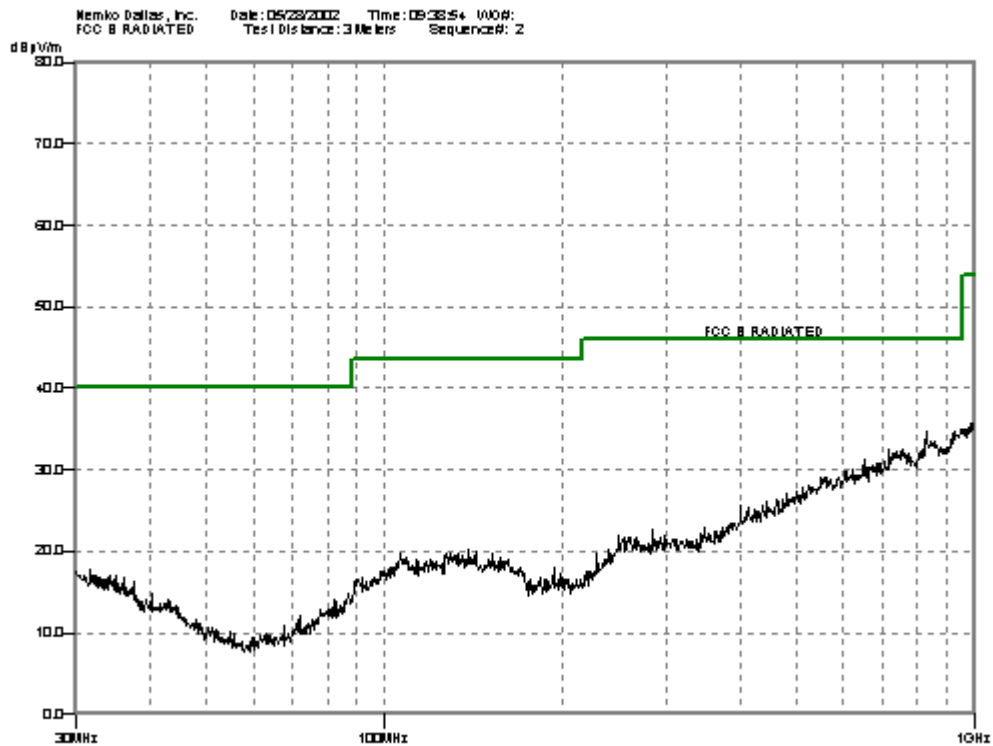EQUIPMENT: **Model TIM 15 Version G4**PROJECT NO.: **2L0092EUS1****Test Data - Radiated Emissions**

EQUIPMENT: **Model TIM 15 Version G4**

PROJECT NO.: **2L0092EUS1**

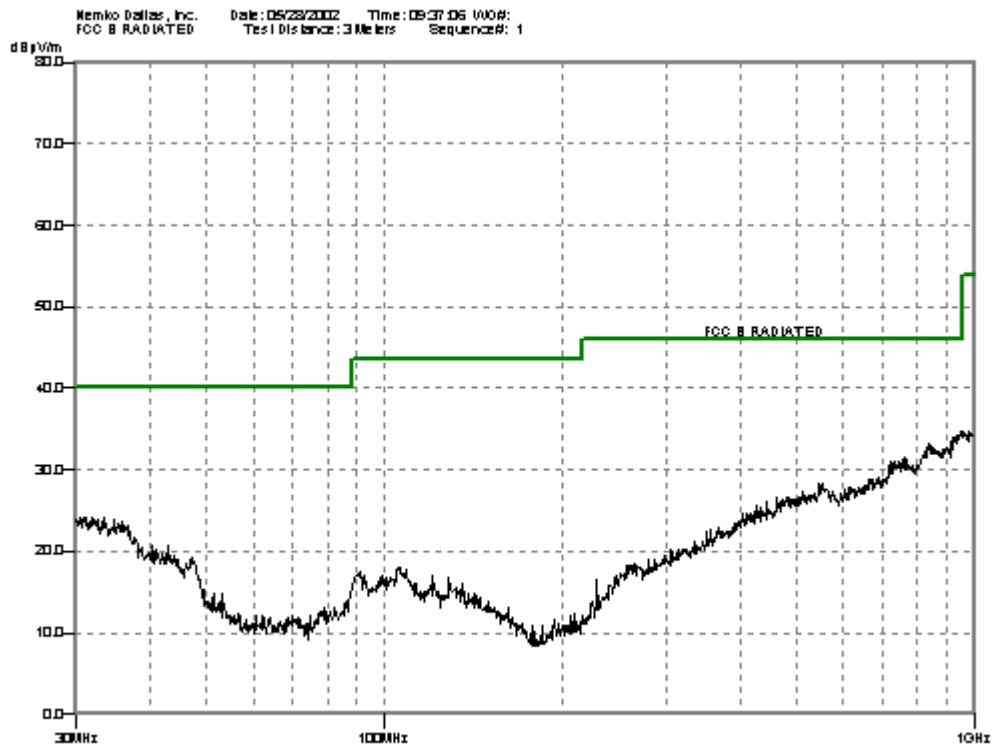

EQUIPMENT: **Model TIM 15 Version G4**

PROJECT NO.: **2L0092EUS1**

Radiated Photographs (Worst Case Configuration)



EQUIPMENT: **Model TIM 15 Version G4**PROJECT NO.: **2L0092EUS1**

Section 6. Sample Calculations**Conducted Emissions:**

If the Quasi-Peak to Average ratio is greater than 6 dB, then the emission is classified as broadband and its Quasi-Peak level is reduced by 13 dB for comparison to the limit.

- i.e. Quasi-Peak level = 40 dB μ V
 Average level = 34 dB μ V
 Corrected level = 40 - 13 = 27 dB μ V

Radiated Emissions

Emissions are measured at a distance of 3 meters and corrected for antenna factor and cable loss.


- i.e. Received Signal = 25 dB μ V @ 100 MHz
 Antenna Factor & Cable Loss = 9.8 dB
 Field Intensity = 25 + 9.8 = 34.8 dB μ V/m @ 3 m


EQUIPMENT: **Model TIM 15 Version G4**

PROJECT NO.: **2L0092EUS1**

Section 7. Block Diagrams

Conducted Emissions

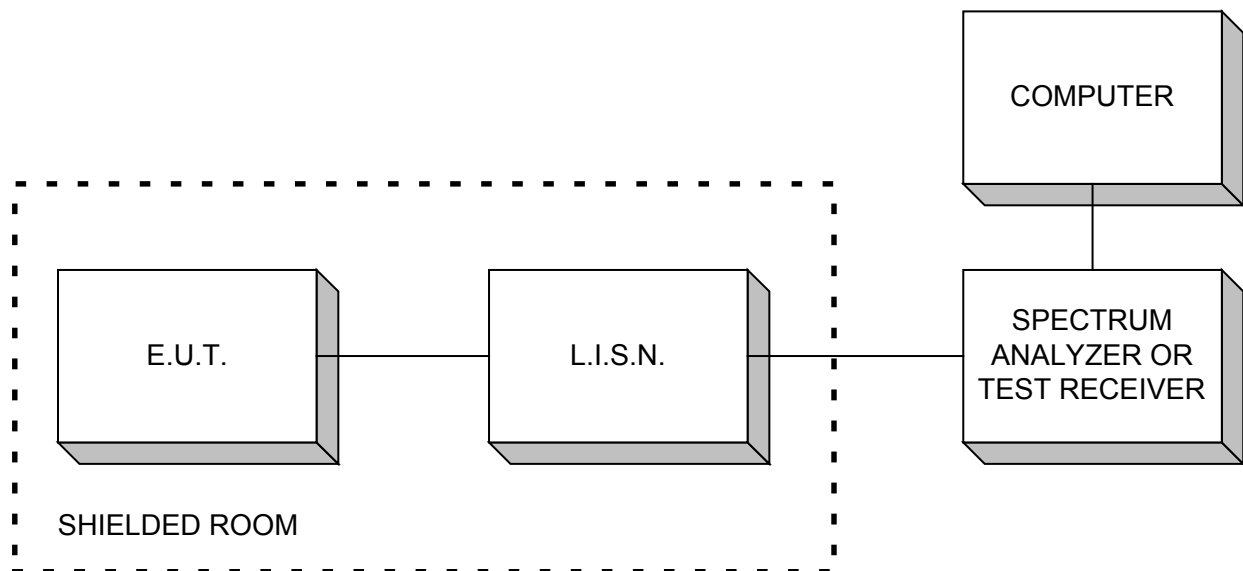

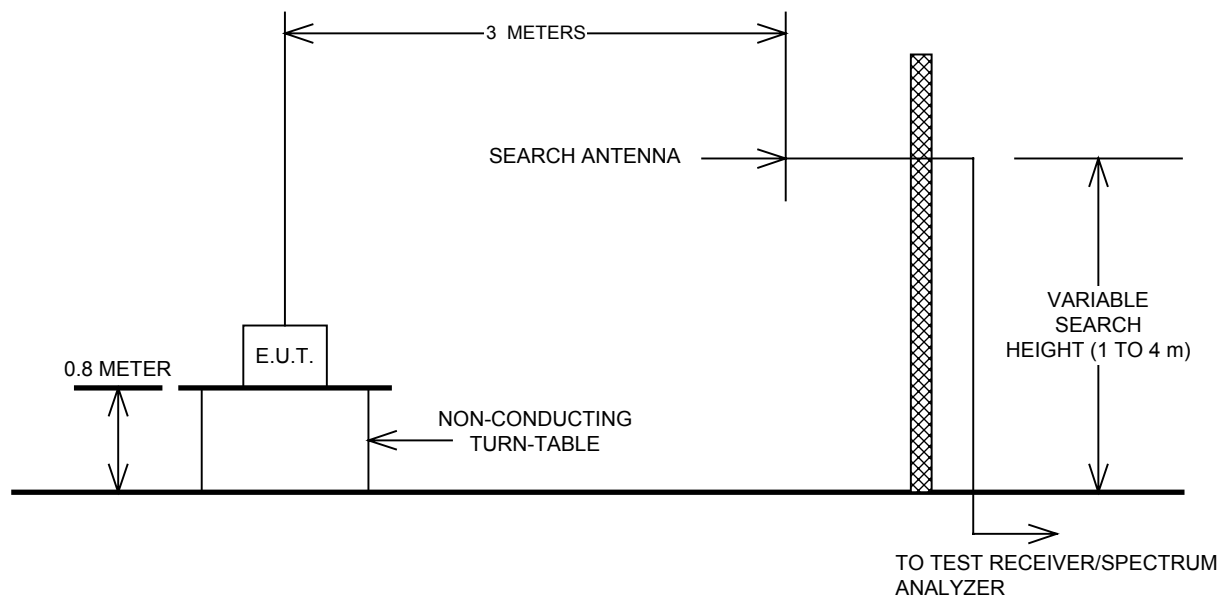EQUIPMENT: **Model TIM 15 Version G4**PROJECT NO.: **2L0092EUS1****Outdoor Test Site For Radiated Emissions**

Measurements are made at a distance of 3 meters on the open area test site up to 18 GHz. The spectrum is searched at a distance of 1 meter for emissions in the range 18 GHz up to to the maximum search frequency required by 15.33(a). If emissions are detected at 1 meter measurement distance, the receive antenna is re-sited to 3 meters from the EUT and measurements are recorded.

EQUIPMENT: **Model TIM 15 Version G4**PROJECT NO.: **2L0092EUS1****Section 8. Test Equipment List**

ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	01/02/01	01/02/03
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	05/30/01	06/30/02
791	PREAMP, 25dB	ICC LNA25	398	08/16/01	08/16/02
1046	Flex cable 1m	Astrolab Inc. 32022-2-29094K-1M	N/A	01/18/02	01/18/03
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	06/01/01	07/01/02
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	06/01/01	07/01/02
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	07/30/01	07/30/02
1480	Bilog Antenna	Schaffner-Chase CBL6111C	2572	06/30/01	06/30/02
969	LISN	Schwarbeck 8120	8120281	07/18/01	07/18/02
1553	Cable 1m	KTL RG223	N/A	08/06/01	08/06/02
1555	High Pass Filter	Solar Electronics 7930-5.0	933125	06/06/02	06/06/03
1114	Cable 7m	KTL RG223	N/A	06/06/02	06/06/03
1603	LIMITER	FISCHER FCC-450-1.25-N	447	01/17/02	01/17/03
718	Spectrum Analyzer	Hewlett Packard 8591EM	3639A00980	12/17/01	12/17/02