

# Test Report

## Processing gain Measurement

for  
Digianswer Bluetooth™ Protocol Analyser

Report Reference: 4\_DIGI\_0300\_BT\_FCC\_n

### **Applicant:**

Digianswer A/S  
Skalhuse 5  
DK-9240 Nibe

### **Test Laboratory:**

7 layers AG  
Borsigstrasse. 11  
D-40880 Ratingen  
Germany

Registergericht • registered in:  
Ratingen, HRB 3264

~~Notaratsratsvorsitzende •~~  
~~The following test results relate~~  
~~Dr. Sabine Grobecker~~  
Reproduced in parts without the written approval of the testing laboratory

Vorstand • Board of Directors:

~~Dr. Wolfgang Dahm~~  
Dr. Hans-Jürgen Meckelburg

7 layers AG, Borsigstrasse 11

~~40880 Ratingen, Germany~~

Phone: +49 (0) 2102 749 0

~~Fax: +49 (0) 2102 749 350~~

~~www.7Layers.com~~

**Administrative Data:****Testing Laboratory**

Company Name: 7 layers AG

Address: Borsigstrasse 11  
40880 Ratingen  
Germany

Laboratory accreditation no: DAR – Registration no. TTI-P-G 178/99-10

Responsible for accreditation scope: Dipl.-Ing. Bernhard Retka  
Dipl.-Ing. Marco Kullik

Report Template Version: 1.1

**Project Data**

Project Leader: Dipl.-Ing. Arndt Stöcker

Date of Report: 2000 September 22<sup>nd</sup>

**Applicant Data:**

Company Name: Digianswer A/S

Address: Skalhuse 5  
DK-9240 Nibe  
Denmark

Contact Person: B. sc. Tom Ringtved

**Summary of test result**

**The devices fulfils the requirements of FCC part 15, 247(g), processing gain.**

Responsible for Accreditation Scope: \_\_\_\_\_ Responsible for Test Report: \_\_\_\_\_

**Introduction**

This report describes the results of the processing gain measurement for the PCMCIA Card Type BTPCM101 using the FCC CW jamming margin method.

**Requirement**

Hybrid systems that employ a combination of both direct sequence and frequency hopping modulation techniques shall achieve a processing gain of at least 17 dB from the combined techniques.

**Modification of measurement method**

Despreading is accomplished by correlating the received bit stream with the bit pattern of the access code. Then with the value of the correlator output will be decided if the access code is valid or not.

That means if the access code is not valid a "bit error" occurs for the Bluetooth device.

For this reason in CW jamming margin method the ratio of invalid access codes (IACR) is used to instead of the BER.

Another reason to use this criteria is the fact, that the Bluetooth technology uses the access code to find the correct sampling point. That means if the access code cannot be found, all other bits in the transmission cannot be sampled successfully.

**System losses**


In the formula for calculation the processing gain appears the term system losses. In Bluetooth there are two major causes for the system loss:

1. The non optimal sampling time. The CW jamming method assumes that the optimal sampling time as determined before, in fact, as described above, it will be determined via the access code.
2. Losses due to attenuation in the RF part.

Although this two points produce a system loss which will be much greater than 2 dB, we calculated with this value, because this is the maximum that will be accepted by FCC.

## Measurement Set-up

To measure the IACR the following test set-up was used:

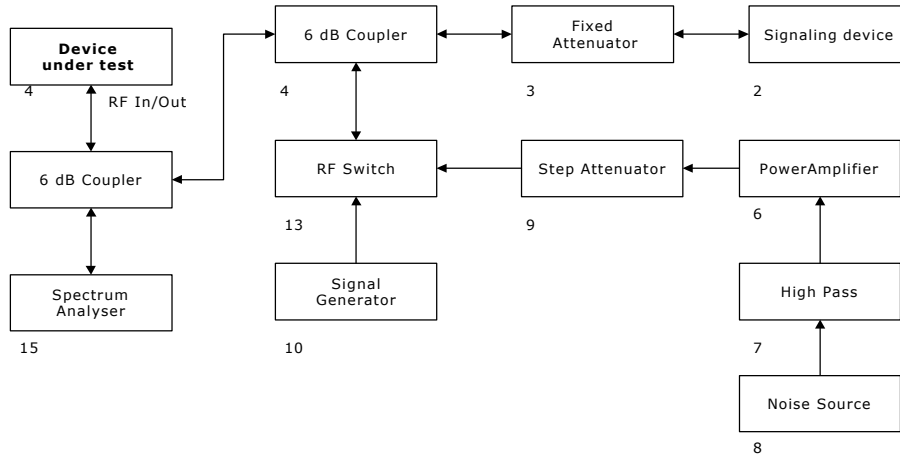

### Measurement set-up

*Note: detailed information for the equipment please see in the test equipment list*

To set-up the connection and measure the IACR special debug program was used. It is installed on the laptop and communicates with the PCMCIA card via the RS 232 serial port.

In the result the number of invalid access codes for a packet of 255 transmissions is given. For this test 200 packets (51000 bursts) were measured. For the selected IACR of 0.1%, this means that 51 access codes are not valid.

The level of the wanted signal was set for all single measurements to -42 dBm.

## Measurement Results

### S/N Measurement


The measurement for S/N was performed by adding noise to the wanted signal. The noise level was adjusted until the IACR reached 0.1%. Due to the fact that a measured noise level depends essentially of the characteristic of the measurement filter. If you measure at the RF input of the card, the relevant filter will be the analyser filter, which has a gaussian characteristic. This characteristic is completely different from the internal IF filter. For this reason the signal/noise ratio was measured behind the IF filter (worst case).

With this measurement configuration the S/N ratio was 18.0 dB

### **Jammer/Signal Measurement (JSR)**

The jammer signal was stepped in 50 kHz steps over the receiving channel. For every step the jammer level was adjusted until the IACR was 0.1 %. The ratio between wanted signal power and the jammer power at the RF input of the device is the required Jammer to Signal ratio.

With this measurement configuration the JSR has the following results:

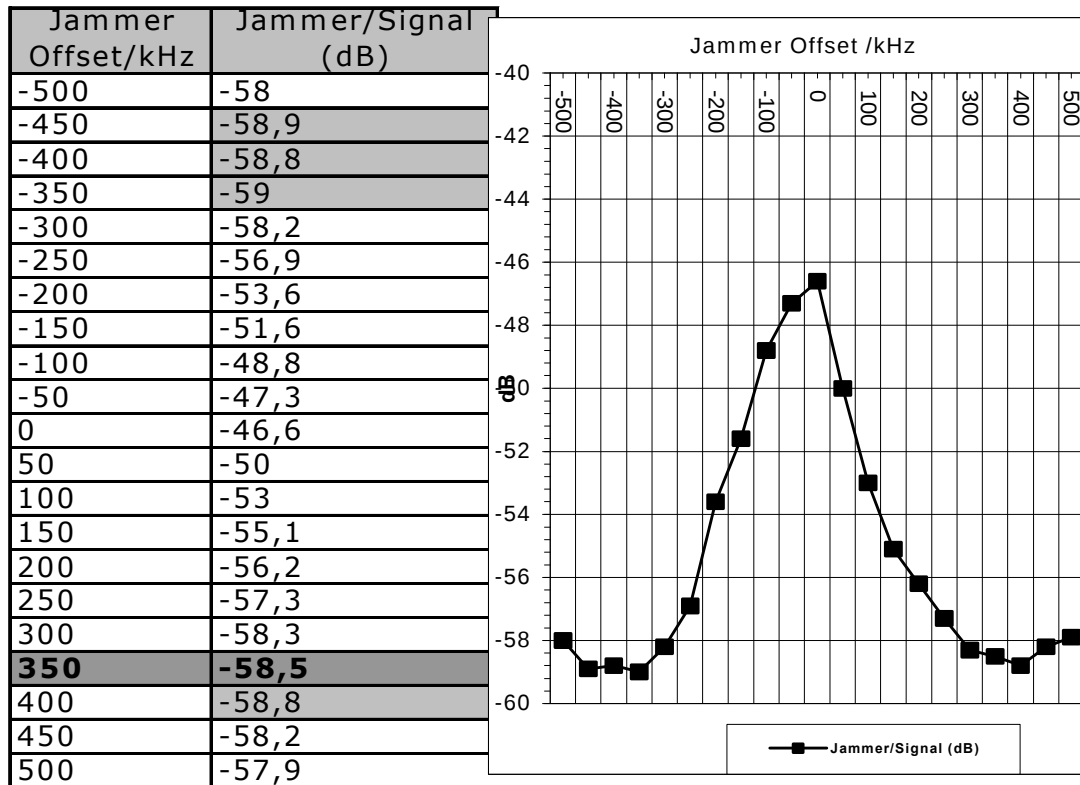

Disregarding the marked data points (-450, -400, -350, 400 kHz) the worst data point is at 350 kHz with a value of -58,5 dB.

### **Processing gain calculation**

With these values we calculated the processing gain:

$$M_j = JSR$$

$$G_p = S/N + M_j + L_{sys} = 18.0 - 16.5 + 2.0 = 3.5 \text{ dB}$$

The processing gain for the DSS is 2.5 dB.

The processing gain for FHSS part is calculated as:

$$10 * \log 32 = 15 \text{ dB (32 hopping channels in hybrid mode)}$$

This means for the total processing gain of the hybrid system:

$$15 \text{ dB} + 3.5 \text{ dB} = 18.5 \text{ dB}$$

This is above the minimum value of 17 dB stated in FCC rules.

**The device passes the requirement of this clause.**

### Test equipment

| no | Single Devices                      | Type                 | Serial No      | Manufacturer    |
|----|-------------------------------------|----------------------|----------------|-----------------|
| 1  | Digianswer protocol analyser        | DGABTPA101           | 0050CD010048   | Digianswer      |
| 2  | Digianswer PC-card                  | BTPCM100             | 0050CD12A07F   | Digianswer      |
| 3  | Signal Generator                    | SMIQ 03B             | 832492/061     | Rohde & Schwarz |
| 3  | Attenuator, 20dB RCC                | Model 2              | BD8827         | Weinschel       |
| 4  | Broadband Resist. Power Divider N   | 1506A / 93459        | LM390          | Weinschel       |
| 5  | Broadband Resist. Power Divider SMA | 1515 / 93459         | LN673          | Weinschel       |
| 6  | Broadband Amplifier 45MHz-27GHz     | JS4-00102600-42-     | 619368         | Miteq           |
| 7  | High Pass Filter                    | 5HC2700/12750-1.5-KK | 9942012        | Trilithic       |
| 8  | Noise Emitter                       | CNE III              | 99/016         | York            |
| 9  | RF Step Attenuator                  | RSP                  | 833695/001     | Rohde & Schwarz |
| 11 | Laptop                              | 2626                 | 55-3211P 99/09 | IBM             |
| 12 | Laptop                              | Omnibook XE2         | TW95004702     | HP              |
| 13 | Manual Switch                       | -                    | -              | 7 layers        |
| 14 | Manual Switch                       | -                    | -              | 7 layers        |
| 15 | EMI Analyzer                        | ESI 26               | 830482/004     | Rohde & Schwarz |