

# **FCC TEST REPORT**

for

47 CFR, Part 15, Subpart C

Equipment : Wireless Desktop ( Keyboard )

Model No. : PT-2002-K3I, KBR-37

FCC ID : O3L-PT-02-K3I

Filing Type : Certification

Applicant : **Paten Wireless Technology Inc.**  
4F, No. 50, Lane. 10, Jihu Road,  
Neihu, Taipei 114, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## Table of Contents

|                                                           |         |
|-----------------------------------------------------------|---------|
| History of this test report .....                         | ii      |
| CERTIFICATE OF COMPLIANCE.....                            | 1       |
| 1. General Description of Equipment under Test .....      | 2       |
| 1.1. Applicant.....                                       | 2       |
| 1.2. Manufacturer.....                                    | 2       |
| 1.3. Basic Description of Equipment under Test.....       | 2       |
| 1.4. Feature of Equipment under Test.....                 | 3       |
| 2. Test Configuration of Equipment under Test .....       | 4       |
| 2.1. Test Manner .....                                    | 4       |
| 2.2. Description of Test System .....                     | 4       |
| 2.3. Band edge compliance plot per 15.227(b).....         | 6       |
| Horizontal.....                                           | 6       |
| 2.4. Connection Diagram of Test System.....               | 7       |
| 3. General Information of Test .....                      | 8       |
| 3.1. Test Facility .....                                  | 8       |
| 3.2. Standard for Methods of Measurement.....             | 8       |
| 3.3. Test in Compliance with.....                         | 8       |
| 3.4. Frequency Range Investigated.....                    | 8       |
| 3.5. Test Distance.....                                   | 8       |
| 4. Test of Conducted Powerline.....                       | 9       |
| 5. Test of Radiated Emission .....                        | 10      |
| 5.1. Major Measuring Instruments.....                     | 10      |
| 5.2. Test Procedures .....                                | 11      |
| 5.3. Typical Test Setup Layout of Radiated Emission ..... | 12      |
| 5.4. Test Result of Radiated Emission .....               | 13      |
| 6. EMI Suppression Component List.....                    | 15      |
| 7. Antenna Factor & Cable Loss .....                      | 16      |
| 8. List of Measuring Equipments Used .....                | 17      |
| 9. Uncertainty of Test Site.....                          | 18      |
| Appendix A. Photographs of EUT .....                      | A1 ~ A5 |

**History of this test report**

Original Report Issue Date: Oct. 7, 2002

☒ No additional attachment.☐ Additional attachment were issued as following record :

| Attachment No. | Issue Date | Description |
|----------------|------------|-------------|
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |

# CERTIFICATE OF COMPLIANCE

for

## 47 CFR, Part 15, Subpart C

Equipment : Wireless Desktop ( Keyboard )

Model No. : PT-2002-K3I, KBR-37

FCC ID : O3L-PT-02-K3I

Applicant : **Paten Wireless Technology Inc.**  
4F, No. 50, Lane. 10, Jihu Road,  
Neihu, Taipei 114, Taiwan, R.O.C.

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed** both radiated and conducted emission limits. Testing was carried out on Aug. 9, 2002 at **SPORTON International Inc.** LAB. in Kwei-Shan.

  
K. J. Lin  
Manager

**SPORTON International Inc.**

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## **1. General Description of Equipment under Test**

### **1.1. Applicant**

Paten Wireless Technology Inc.  
4F, No. 50, Lane. 10, Jihu Road,  
Neihu, Taipei 114, Taiwan, R.O.C.

### **1.2. Manufacturer**

WEI FU Mold Plastic & Metal Factory  
Da-Ning Industrial Zone Humen  
Dongguan Guangdong, CHINA

### **1.3. Basic Description of Equipment under Test**

|                   |                                 |
|-------------------|---------------------------------|
| Equipment         | : Wireless Desktop ( Keyboard ) |
| Model No.         | : PT-2002-K3I, KBR-37           |
| FCC ID            | : O3L-PT-02-K3I                 |
| Trade Name        | : Paten, Acer                   |
| Power Supply Type | : 3 VDC From Battery            |
| Power Cord        | : N/A                           |

**1.4. Feature of Equipment under Test**

1. 1 Channel (With Multi Task, Paten's Patent)
2. Security ID: 256 Sets
3. Cordless Technology: Radio Frequency (TDMA technology)
4. Carry Frequency: 27.145MHZ
5. Modulation Mode: FSK (Frequency Shift Key)
6. Transfer Rate: 10 kbps
7. Input Power: 3VDC (2\*AAA)
8. Power Consumption: 10 mA
9. RF Power: 500uv/m at 3m
10. Switch Activation Mechanism: Membrane
11. Indicator LED: 1 LED (Red, Blinking)
12. Operation Switch: 1 Link Switch (Tact switch)
13. Effective Distance: 2 M
14. Battery Life: 6 Months

## **2. Test Configuration of Equipment under Test**

### **2.1. Test Manner**

- a. The EUT has been configured and operated pursuant to ANSI C63.4-1992 in a manner which tended to maximize its emission characteristics in a typical application.
- b. Frequency range investigated: conduction 450 KHz to 30 MHz, radiation 30 MHz to 1000MHz.
- c. The test system has been included the HP PC, REALsync Monitor, HP Printer, ACEEX Modem, PATEN Mouse, PATEN Receiver and EUT for EMI test.

### **2.2. Description of Test System**

#### **Support Unit 1. -- Personal Computer (HP)**

|                   |                                                                                                                 |
|-------------------|-----------------------------------------------------------------------------------------------------------------|
| FCC ID            | : N/A                                                                                                           |
| Model No.         | : DTPC-22                                                                                                       |
| Power Supply Type | : Switching                                                                                                     |
| Power Cord        | : Non-Shielded                                                                                                  |
| Serial No.        | : SP0039                                                                                                        |
| Data Cable        | : Shielded, 360 degree via metal back shells                                                                    |
| Remark            | : This support device was tested to comply with FCC standards and authorized under a declaration of conformity. |

#### **Support Unit 2. -- Monitor (REALsync)**

|                   |                                                                                                                 |
|-------------------|-----------------------------------------------------------------------------------------------------------------|
| FCC ID            | : N/A                                                                                                           |
| Model No.         | : DJ72                                                                                                          |
| Power Supply Type | : Switching                                                                                                     |
| Power Cord        | : Non-Shielded                                                                                                  |
| Serial No.        | : SP0023                                                                                                        |
| Data Cable        | : Shielded, 360 degree via metal back shells, 1.7m                                                              |
| Remark            | : This support device was tested to comply with FCC standards and authorized under a declaration of conformity. |

#### **Support Unit 3. -- Mouse (PATEN)**

|            |              |
|------------|--------------|
| FCC ID     | : N/A        |
| Model No.  | : PT-2002-MO |
| Serial No. | : N/A        |

## Support Unit 4. -- Printer (HP)

|                   |                                                     |
|-------------------|-----------------------------------------------------|
| FCC ID            | : B94C2642X                                         |
| Model No.         | : DJ 400                                            |
| Power Supply Type | : Linear                                            |
| Power Cord        | : Non-Shielded                                      |
| Serial No.        | : SP0048                                            |
| Data Cable        | : Shielded, 360 degree via metal back shells, 1.35m |

## Support Unit 5. -- Modem (ACEEX)


|                   |                                                     |
|-------------------|-----------------------------------------------------|
| FCC ID            | : IFAXDM1414                                        |
| Model No.         | : DM1414                                            |
| Power Supply Type | : Linear                                            |
| Power Cord        | : Non-Shielded                                      |
| Serial No.        | : SP0015                                            |
| Data Cable        | : Shielded, 360 degree via metal back shells, 1.15m |

## Support Unit 6. -- Receiver (PATEN)

|            |                |
|------------|----------------|
| FCC ID     | : N/A          |
| Model No.  | : PT-2002-RLPJ |
| Serial No. | : N/A          |


### 2.3. Band edge compliance plot per 15.227(b).

#### Vertical

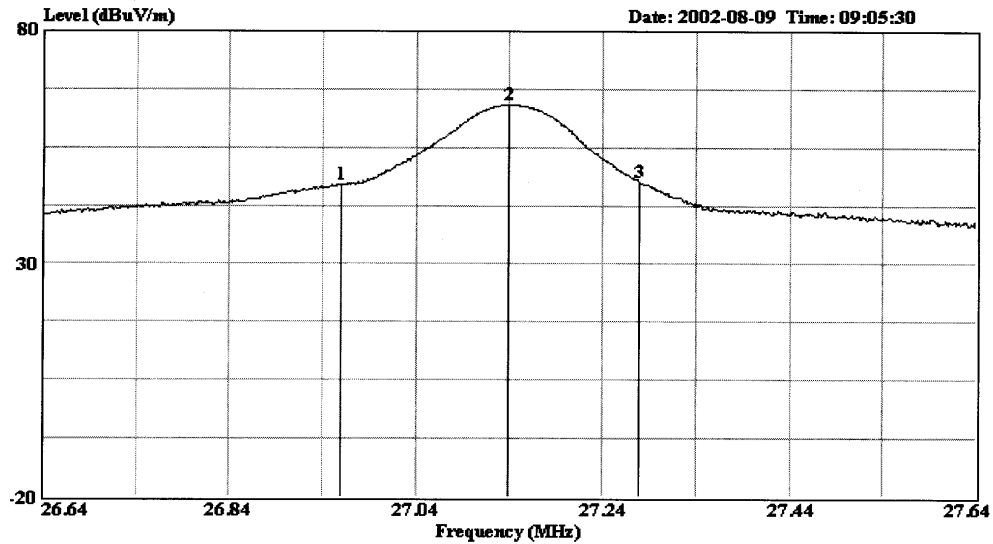

Mark 1 : 26.96MHz 32.99dBuV/m  
Mark 3 : 27.28MHz 33.46dBuV/m


#### Horizontal

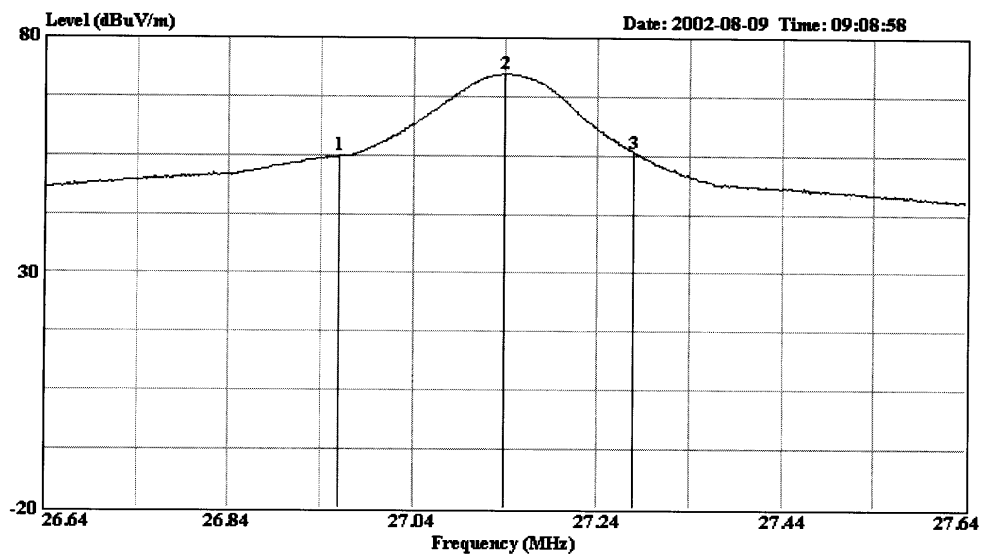

Mark 1 : 26.96MHz 40.84dBuV/m  
Mark 2 : 27.28MHz 41.65dBuV/m

Conformation of the fundamental frequency

## 2.4. Connection Diagram of Test System

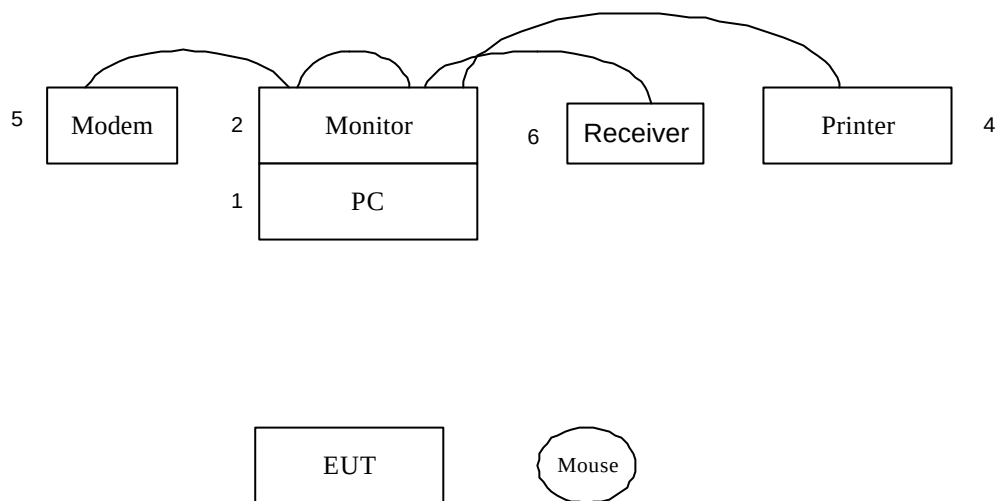

1. The I/O cable is connected from PC to the support unit 2.
2. The I/O cable is connected from PC to the support unit 4.
3. The I/O cable is connected from PC to the support unit 5.
4. The I/O cable is connected from PC to the support unit 6.

### **3. General Information of Test**

#### **3.1. Test Facility**

This test was carried out by SPORTON International Inc.

Test Site Location : No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,  
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

Test Site No : SH03

#### **3.2. Standard for Methods of Measurement**

ANSI C63.4-1992

#### **3.3. Test in Compliance with**

FCC Part 15, Subpart C

#### **3.4. Frequency Range Investigated**

Radiation : from 30 MHz to 1 GHz

#### **3.5. Test Distance**

The test distance of radiated emission from antenna to EUT is 3 M.

## **4. Test of Conducted Powerline**

The power supply of the EUT is from battery.

So the conducted powerline test is not applicable to the EUT.

## **5. Test of Radiated Emission**

Radiated emissions from 30 MHz to 1 GHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 5.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

### **5.1. Major Measuring Instruments**


#### **5.1.1. from 30MHz to 1GHz**

- |                      |                         |
|----------------------|-------------------------|
| • Amplifier          | (ADVANTEST BB525C)      |
| Attenuation          | 10 dB                   |
| RF Gain              | 30 dB                   |
| Signal Input         | 9 KHz to 3 GHz          |
| • Spectrum Analyzer  | (RAHDE&SCHEARZ & FSP7 ) |
| Attenuation          | 10 dB                   |
| Start Frequency      | 30 MHz                  |
| Stop Frequency       | 1000 MHz                |
| Resolution Bandwidth | 120 KHz                 |
| Signal Input         | 9 KHz to 7 GHz          |

## **5.2. Test Procedures**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

### 5.3. Typical Test Setup Layout of Radiated Emission

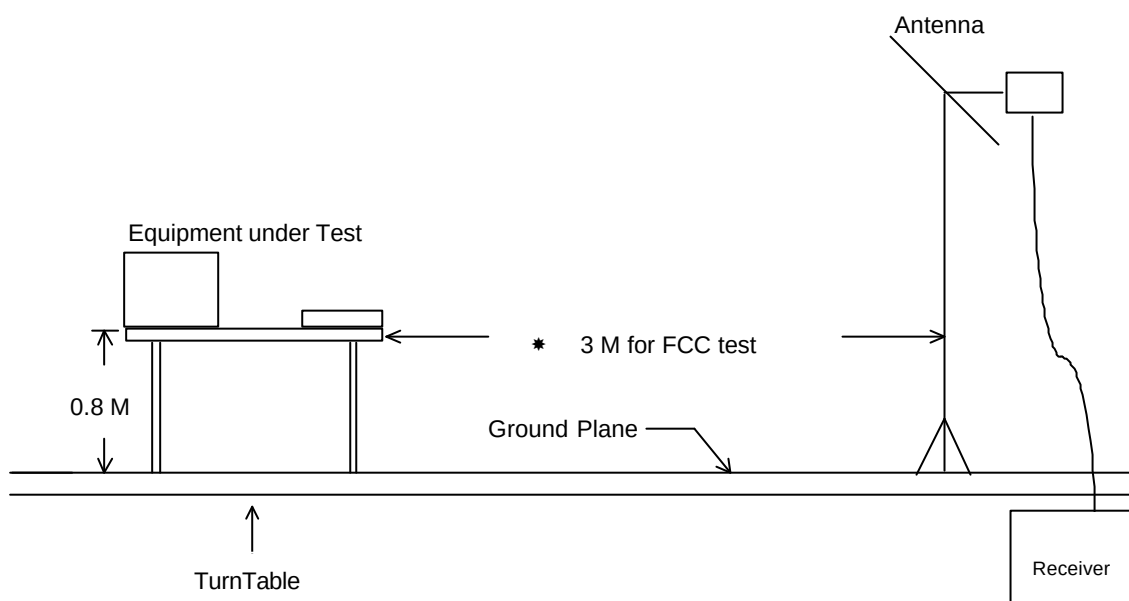

#### 5.4. Test Result of Radiated Emission

- Test Distance : 3 M
- Temperature : 26°C
- Relative Humidity : 65 %
- Test Date : August 9, 2002
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission Level

The Radiated Emission test was passed at minimum margin

108.30 MHz / 40.15 dBuV/m (HORIZONTAL) Antenna Height 2 Meter, Turntable Degree 161 °.


- Spurious Emissions:

| Frequency<br>( MHz ) | Polarity | Antenna<br>Factor<br>( dB/m ) | Cable<br>Loss<br>( dB ) | Reading<br>( dBuV ) | Limits<br>( dBuV/m ) ( uV/m ) | Emission Level<br>( dBuV/m ) ( uV/m ) |        | Margin<br>( dB ) | Detect<br>Mode |
|----------------------|----------|-------------------------------|-------------------------|---------------------|-------------------------------|---------------------------------------|--------|------------------|----------------|
| 54.30                | V        | 6.59                          | 1.32                    | 41.26               | 40.00 100                     | 18.46                                 | 8.38   | -21.54           | Peak           |
| 81.30                | V        | 7.27                          | 1.63                    | 41.30               | 40.00 100                     | 19.52                                 | 9.46   | -20.48           | Peak           |
| 108.30               | V        | 11.14                         | 1.90                    | 52.96               | 43.50 150                     | 35.42                                 | 59.02  | -8.08            | Peak           |
| 135.57               | V        | 10.69                         | 2.08                    | 42.73               | 43.50 150                     | 25.04                                 | 17.86  | -18.46           | Peak           |
| 162.57               | V        | 9.14                          | 2.29                    | 38.26               | 43.50 150                     | 19.23                                 | 9.15   | -24.27           | Peak           |
| 189.57               | V        | 8.80                          | 2.51                    | 54.60               | 43.50 150                     | 35.45                                 | 59.22  | -8.05            | Peak           |
| 54.30                | H        | 6.59                          | 1.32                    | 50.58               | 40.00 100                     | 27.78                                 | 24.50  | -12.22           | Peak           |
| 81.30                | H        | 7.27                          | 1.63                    | 46.08               | 40.00 100                     | 24.30                                 | 16.40  | -15.70           | Peak           |
| 108.30               | H        | 11.14                         | 1.90                    | 57.69               | 43.50 150                     | 40.15                                 | 101.74 | -3.35            | Peak           |
| 135.37               | H        | 10.69                         | 2.08                    | 50.92               | 43.50 150                     | 33.23                                 | 45.87  | -10.27           | Peak           |
| 162.57               | H        | 9.14                          | 2.29                    | 44.87               | 43.50 150                     | 25.84                                 | 19.59  | -17.66           | Peak           |
| 189.57               | H        | 8.80                          | 2.51                    | 57.17               | 43.50 150                     | 38.02                                 | 79.60  | -5.48            | Peak           |

**• Field strength of fundamental and harmonics**

| Frequency | Antenna  | Cable           | Reading     | Limits   |            | Emission Level |            | Margin   | Detect |      |
|-----------|----------|-----------------|-------------|----------|------------|----------------|------------|----------|--------|------|
| ( MHz )   | Polarity | Factor ( dB/m ) | Loss ( dB ) | ( dBuV ) | ( dBuV/m ) | ( uV/m )       | ( dBuV/m ) | ( uV/m ) | ( dB ) | Mode |
| 27.140    | H        | 15.40           | 0.93        | 72.25    | 80.00      | 10000          | 58.27      | 819.407  | -21.73 | Peak |
| 27.140    | V        | 15.40           | 0.93        | 64.22    | 80.00      | 10000          | 50.24      | 325.087  | -29.76 | Peak |

Test Engineer :



Wayne Hsu

## **6. EMI Suppression Component List**

⇒No EMI suppression components.

## 7. Antenna Factor & Cable Loss

| Frequency ( Mhz ) | Antenna Factor ( dB ) | Cable Loss ( dB ) |
|-------------------|-----------------------|-------------------|
| 30                | 18.10                 | 0.99              |
| 35                | 16.00                 | 1.07              |
| 40                | 13.29                 | 1.13              |
| 45                | 10.75                 | 1.20              |
| 50                | 8.10                  | 1.26              |
| 55                | 6.40                  | 1.32              |
| 60                | 5.36                  | 1.40              |
| 65                | 4.94                  | 1.41              |
| 70                | 5.19                  | 1.51              |
| 75                | 6.05                  | 1.57              |
| 80                | 6.96                  | 1.60              |
| 85                | 8.04                  | 1.70              |
| 90                | 8.76                  | 1.70              |
| 95                | 9.70                  | 1.75              |
| 100               | 10.30                 | 1.79              |
| 110               | 11.17                 | 1.93              |
| 120               | 11.60                 | 1.95              |
| 130               | 11.23                 | 2.01              |
| 140               | 10.61                 | 2.12              |
| 150               | 10.10                 | 2.20              |
| 160               | 9.20                  | 2.26              |
| 170               | 9.01                  | 2.33              |
| 180               | 8.71                  | 2.40              |
| 190               | 8.80                  | 2.52              |
| 200               | 8.24                  | 2.55              |
| 220               | 8.80                  | 2.64              |
| 240               | 10.72                 | 2.78              |
| 260               | 13.20                 | 2.89              |
| 280               | 12.50                 | 2.98              |
| 300               | 12.96                 | 3.11              |
| 320               | 13.50                 | 3.20              |
| 340               | 13.93                 | 3.25              |
| 360               | 14.39                 | 3.44              |
| 380               | 14.70                 | 3.63              |
| 400               | 15.76                 | 3.50              |
| 450               | 16.35                 | 3.82              |
| 500               | 17.29                 | 4.01              |
| 550               | 18.50                 | 4.16              |
| 600               | 18.43                 | 4.39              |
| 650               | 18.85                 | 4.72              |
| 700               | 18.93                 | 4.71              |
| 750               | 19.75                 | 4.83              |
| 800               | 19.92                 | 5.27              |
| 850               | 20.24                 | 5.22              |
| 900               | 20.30                 | 5.22              |
| 950               | 20.46                 | 5.54              |
| 1000              | 20.80                 | 5.81              |

**8. List of Measuring Equipments Used**

| Instrument        | Manufacturer    | Model No. | Serial No. | Characteristics | Calibration Date | Remark           |
|-------------------|-----------------|-----------|------------|-----------------|------------------|------------------|
| Spectrum Analyzer | RAHDE & SCHEARZ | FSP7      | 838858/039 | 9KHz – 7GHz     | Jan. 07, 2002    | Radiation (SH03) |
| Amplifier         | ADVANTEST       | BB525C    | CH300001   | 9KHz – 3GHz     | Nov. 15, 2001    | Radiation (SH03) |
| Bilog Antenna     | SCHAFFNER       | CBL61128  | 2681       | 30MHz –2GHz     | Dec. 23, 2001    | Radiation (SH03) |
| Turn Table        | HD              | DS 420    | 420/649/00 | 0 ~ 360 degree  | N/A              | Radiation (SH03) |
| Antenna Mast      | HD              | MA 240    | 240/559/00 | 1 m - 4 m       | N/A              | Radiation (SH03) |

\*Calibration Interval of instruments listed above is one year.

## 9. Uncertainty of Test Site

### Uncertainty of Radiated Emission Measurement

| Contribution                                                                                                            | Probability Distribution | 3m                          |
|-------------------------------------------------------------------------------------------------------------------------|--------------------------|-----------------------------|
| Antenna factor calibration                                                                                              | normal(k=2)              | $\pm 1$                     |
| cable loss calibration                                                                                                  | normal(k=2)              | $\pm 0.3$                   |
| RCV/SPA specification                                                                                                   | rectangular              | $\pm 2$                     |
| Antenna Directivity                                                                                                     | rectangular              | $\pm 3$                     |
| Antenna Factor V.S. Height                                                                                              | rectangular              | $\pm 2$                     |
| Antenna Factor Interpolation for Frequency                                                                              | rectangular              | $\pm 0.25$                  |
| site imperfection                                                                                                       | rectangular              | $\pm 2$                     |
| Mismatch<br>Receiver VSWR $\Gamma_1=0.09$<br>Antenna VSWR $\Gamma_2=0.67$<br>Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$ | U-shaped                 | $\pm 0.54$                  |
| <b>combined standard uncertainty Ue(y)</b>                                                                              | <b>normal</b>            | <b><math>\pm 2.7</math></b> |
| <b>Measuring uncertainty for a level of confidence of 95% U=2Ue(y)</b>                                                  | <b>normal (k=2)</b>      | <b><math>\pm 5.4</math></b> |

$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 0.5^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.2$  for 10m test distance

$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 3^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.7$  for 3m test distance

### Uncertainty of Conducted Emission Measurement

| Contribution                                                                                                         | Probability Distribution | 150KHz – 30MHz               |
|----------------------------------------------------------------------------------------------------------------------|--------------------------|------------------------------|
| Cable and I/P attenuator calibration                                                                                 | normal(k=2)              | $\pm 0.3$                    |
| RCV/SPA specification                                                                                                | rectangular              | $\pm 2$                      |
| LISN coupling specification                                                                                          | rectangular              | $\pm 1.5$                    |
| Transducer factor frequency interpolation                                                                            | rectangular              | $\pm 0.2$                    |
| Mismatch<br>Receiver VSWR $\Gamma_1=0.09$<br>LISN VSWR $\Gamma_2=0.33$<br>Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$ | U-shaped                 | 0.2                          |
| <b>combined standard uncertainty Ue(y)</b>                                                                           | <b>normal</b>            | <b><math>\pm 1.66</math></b> |
| <b>Measuring uncertainty for a level of confidence of 95% U=2Ue(y)</b>                                               | <b>normal (k=2)</b>      | <b><math>\pm 3.32</math></b> |

$U = \sqrt{\{(0.3/2)^2 + (2^2 + 1.5^2 + 0.2^2)/3 + (0.2)^2/2\}} = 1.66$