



Radio Test Report

Report No.:STS2512103W02

Issued for

SWAGTEK

10205 NW 19th Street,STE 101,Miami, FL33172.USA

Product Name: 4G Smart Phone

Brand Name: LOGIC, UNONU, iSWAG

Model Name: LOGIC

Series Model(s): UNONU, iSWAG

FCC ID: O556751525

Test Standards: FCC Part15.247

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT****Applicant's Name**..... : SWAGTEK

Address : 10205 NW 19th Street,STE 101,Miami, FL33172.USA

Manufacturer's Name : SWAGTEK

Address : 10205 NW 19th Street,STE 101,Miami, FL33172.USA

Product Description

Product Name : 4G Smart Phone

Brand Name : LOGIC, UNONU, iSWAG

Model Name : G2L

Series Model(s) : UG2L, Gamer2

Test Standards..... : FCC Part15.247

Test Procedure : ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the IC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test..... :

Date of receipt of test item : 28 Apr., 2025

Date (s) of performance of tests..... : 06 May, to 07 Aug., 2025

Date of Issue..... : 08 Aug., 2025

Test Result..... : **Pass**

Testing Engineer : _____

(Aaron Bu)

Technical Manager : _____

(Skylar Li)

Authorized Signatory : _____

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 TEST SOFTWARE AND POWER LEVEL	10
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.6 EQUIPMENTS LIST	12
RF RADIATION TEST EQUIPMENT	12
3. EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 TEST PROCEDURE	15
3.3 TEST SETUP	15
3.4 EUT OPERATING CONDITIONS	15
3.5 TEST RESULTS	16
4. RADIATED EMISSION MEASUREMENT	18
4.1 RADIATED EMISSION LIMITS	18
4.2 TEST PROCEDURE	20
4.3 TEST SETUP	21
4.4 EUT OPERATING CONDITIONS	21
4.5 FIELD STRENGTH CALCULATION	22
4.6 TEST RESULTS	23
5. CONDUCTED SPURIOUS & BAND EDGE EMISSION	46
5.1 LIMIT	46
5.2 TEST PROCEDURE	46
5.3 TEST SETUP	46
5.4 EUT OPERATION CONDITIONS	46
5.5 TEST RESULTS	46
6. POWER SPECTRAL DENSITY TEST	47
6.1 LIMIT	47
6.2 TEST PROCEDURE	47



Table of Contents	Page
6.3 TEST SETUP	47
6.4 EUT OPERATION CONDITIONS	47
6.5 TEST RESULTS	47
7. BANDWIDTH TEST	48
7.1 LIMIT	48
7.2 TEST PROCEDURE	48
7.3 TEST SETUP	48
7.4 EUT OPERATION CONDITIONS	48
7.5 TEST RESULTS	48
8. PEAK OUTPUT POWER TEST	49
8.1 LIMIT	49
8.2 TEST PROCEDURE	49
8.3 TEST SETUP	49
8.4 EUT OPERATION CONDITIONS	49
8.5 TEST RESULTS	49
9. ANTENNA REQUIREMENT	50
9.1 STANDARD REQUIREMENT	50
9.2 EUT ANTENNA	50
APPENDIX 1-TEST DATA	51
APPENDIX 2- EUT TEST PHOTO	139

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	08 Aug., 2025	STS2512103W02	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted bands of operation	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

Note:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.751\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.888\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.48\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 2.52\text{dB}$
5	All emissions, radiated 1G-18GHz	$\pm 3.48\text{dB}$
6	All emissions, radiated >18GHz	$\pm 4.18\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.48\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.52\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.6\%$
10	Power Spectral Density, conducted	$\pm 1.214\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	4G Smart Phone														
Brand Name	LOGIC, UNONU, iSWAG														
Model Name	G2L														
Series Model(s)	UG2L, Gamer2														
Model Difference	G2L, UG2L, Gamer2 were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name and trade mark.														
Product Description	The EUT is a 4G Smart Phone <table><tr><td>Operation Frequency:</td><td>2402~2480 MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Radio Technology:</td><td>BLE</td></tr><tr><td>Bluetooth Configuration:</td><td>BDR+EDR</td></tr><tr><td>Number Of Channel:</td><td>40</td></tr><tr><td>Antenna Type:</td><td>Internal Antenna</td></tr><tr><td>Antenna Gain (dBi)</td><td>-0.4 dBi (declare by applicant)</td></tr></table>	Operation Frequency:	2402~2480 MHz	Modulation Type:	GFSK	Radio Technology:	BLE	Bluetooth Configuration:	BDR+EDR	Number Of Channel:	40	Antenna Type:	Internal Antenna	Antenna Gain (dBi)	-0.4 dBi (declare by applicant)
Operation Frequency:	2402~2480 MHz														
Modulation Type:	GFSK														
Radio Technology:	BLE														
Bluetooth Configuration:	BDR+EDR														
Number Of Channel:	40														
Antenna Type:	Internal Antenna														
Antenna Gain (dBi)	-0.4 dBi (declare by applicant)														
Channel List	Please refer to the Note 3.														
Adapter	Model: TF-K05 Input: AC110-240V, 50/60Hz, 0.5A Max; Type-C Output: DC 5.0V, 3A/9A, 2.22A/12V, 1.67A (20W Max); PPS: 3.3-5.9V 3A/3.3-11V, 1.8A USB-A Output: 5V, 3A/9V, 2A/12V, 1.5A(18W Max) USB-A+Type-C Total Output: 5V, 3A(15W Max)														
Battery	Rechargeable Li-ion Battery DC3.87V, 4900mAh														
Hardware version number	/														
Software version number	/														
Connecting I/O Port(s)	Please refer to the Note 1.														

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.



3.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480

2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data/Modulation
Mode 1	TX CH00(2402MHz)	1M PHY /GFSK
Mode 2	TX CH19(2440MHz)	1M PHY /GFSK
Mode 3	TX CH39(2480MHz)	1M PHY /GFSK

Worst Mode	Description	Data/Modulation
Mode 4	TX CH00(2402MHz)	2M PHY /GFSK
Mode 5	TX CH19(2440MHz)	2M PHY /GFSK
Mode 6	TX CH39(2480MHz)	2M PHY /GFSK

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

(2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report.

(3) The battery is fully-charged during the radited and RF conducted test.

For AC Conducted Emission

Test Worst Case	
AC Conducted Emission	Mode 7 : Keeping BLE TX

For Radiated Spurious Emission

Test Worst Case	
Radiated Spurious Emission	Mode 7 : Keeping BLE TX



2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode or Modulation type	ANT Gain(dBi)	Power Class	Software for testing
BLE	LE 1M PHY	GFSK	-0.4	default	Engineering Mode
	LE 2M PHY	GFSK		default	
	LE Coded PHY, S=8	GFSK		default	
	LE Coded PHY, S=2	GFSK		default	




2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



AC Conducted Emission Test

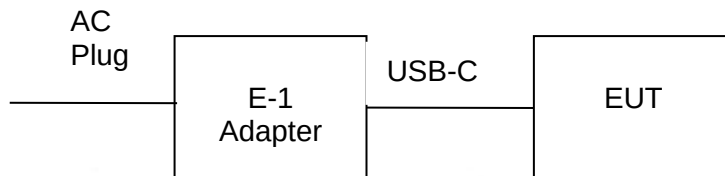

RF Conducted Test





2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
1	Adapter	N/A	TF-K05	N/A
2	USB Cable	N/A	N/A	N/A

Item	Equipment	Ferrite Core	Length	Note
1	Detached USB Cable	Shielding	1.5m	N/A

2.6 EQUIPMENTS LIST

RF RADIATION TEST EQUIPMENT

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Pre-Amplifier(0.1 M-3GHz)	EM	EM330	060665	2025.02.22	2026.02.21
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2024.09.23	2025.09.22
				2025.09.25	2026.09.24
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2025.02.22	2026.02.21
Active loop Antenna	ZHINAN	ZN30900C	16035	2025.02.25	2027.02.24
Bilog Antenna	TESEQ	CBL6111D	34678	2024.09.30	2025.09.29
				2025.09.27	2027.09.26
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2023.09.24	2025.09.23
				2025.09.27	2027.09.26
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2023.10.10	2025.10.09
				2025.09.27	2027.09.26
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2024.09.23	2025.09.22
				2025.09.26	2026.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFENG	DPS-305AF	17064939	2024.09.23	2025.09.22
				2025.09.22	2026.09.21
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2024.9.23	2025.9.22
				2025.09.25	2026.09.24
Limiter	CYBERTEK	EM5010	N/A	2024.9.23	2025.9.22
				2025.09.25	2026.09.24
LISN	R&S	ENV216	101242	2024.9.23	2025.9.22
				2025.09.25	2026.09.24
LISN	EMCO	3810/2NM	23625	2024.9.23	2025.9.22
				2025.09.25	2026.09.24
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23



Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Keysight	N9020B	MY60240215	2024.09.10	2025.09.09
				2025.08.08	2026.08.07
Power detector group	Keysight	NW2021031	N/A	2024.09.24	2025.09.23
				2025.09.23	2026.09.22
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2025.02.22	2026.02.21
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Test SW	MW	MTS 8310 2.0.0.0			

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

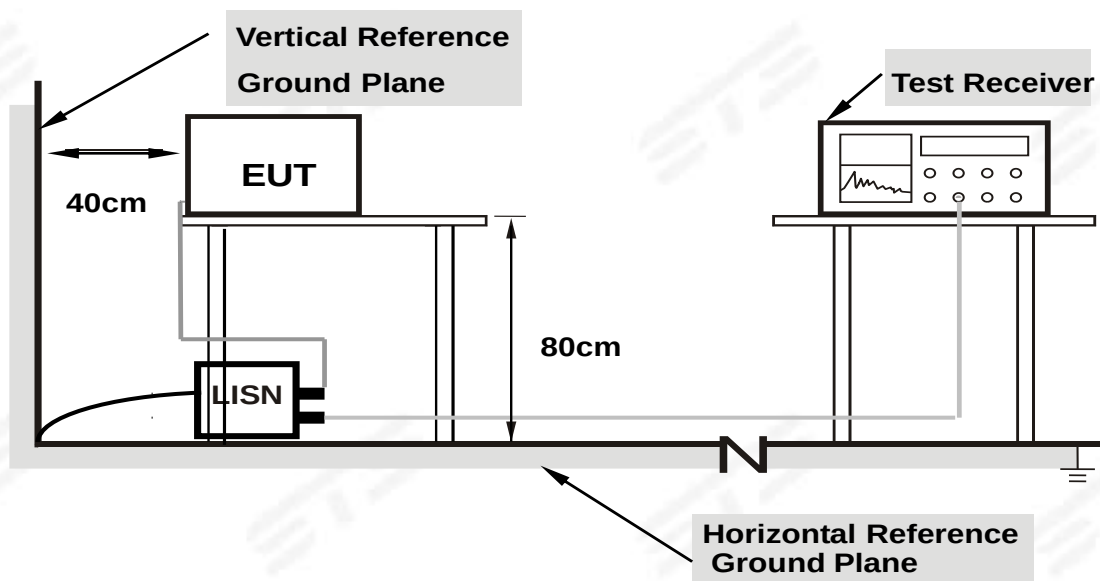

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.


3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.5 TEST RESULTS

Temperature:	23.9℃	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 7		

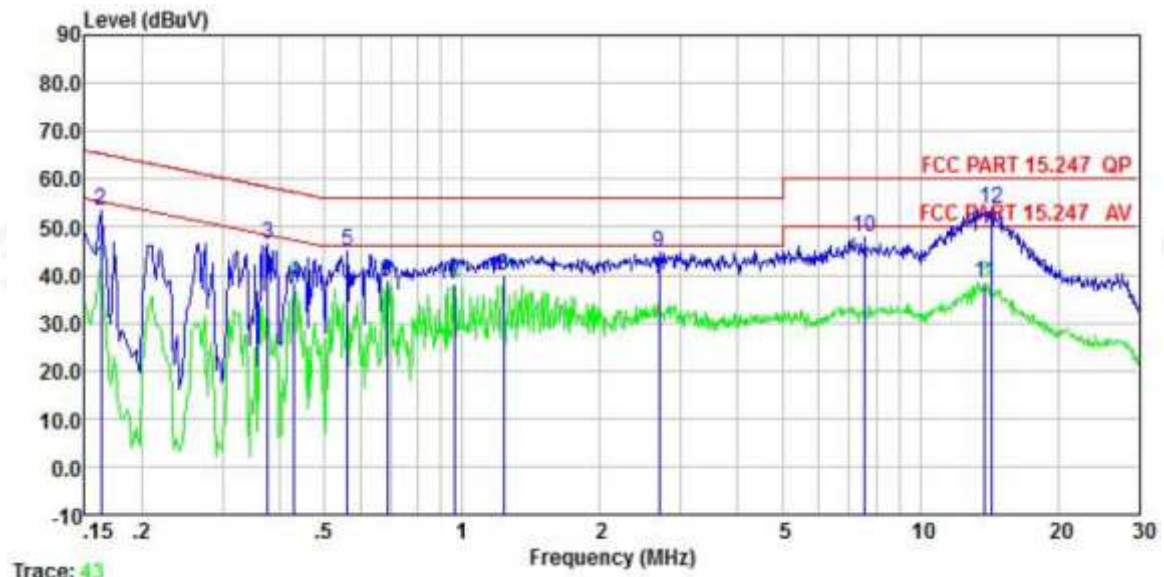


Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

	Freq	Read	LISN	Aux	Aux2	Cable	Level	Limit	Over	Remark
	MHz	dBuV	Factor	Factor	Factor	Loss	dBuV	dBuV	dB	
1	0.162	21.77	10.17	0.00	9.88	0.01	41.83	55.34	-13.51	Average
2	0.162	33.39	10.17	0.00	9.88	0.01	53.45	65.34	-11.89	QP
3	0.377	26.37	10.10	0.00	9.88	0.03	46.38	58.34	-11.96	QP
4	0.431	18.45	10.12	0.00	9.88	0.03	38.48	47.24	-8.76	Average
5	0.561	24.76	10.18	0.00	9.88	0.02	44.84	56.00	-11.16	QP
6	0.686	18.62	10.15	0.00	9.88	0.03	38.68	46.00	-7.32	Average
7	0.963	17.69	10.18	0.00	9.88	0.05	37.80	46.00	-8.20	Average
8	1.229	19.58	10.17	0.00	9.88	0.10	39.73	46.00	-6.27	Average
9	2.692	24.54	10.25	0.00	9.88	0.11	44.78	56.00	-11.22	QP
10	7.566	27.43	10.38	0.00	9.90	0.10	47.81	60.00	-12.19	QP
11	13.841	17.73	10.70	0.00	9.93	0.12	38.48	50.00	-11.52	Average
12	14.288	32.88	10.74	0.00	9.93	0.13	53.68	60.00	-6.32	QP



Temperature:	23.9℃	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 7		

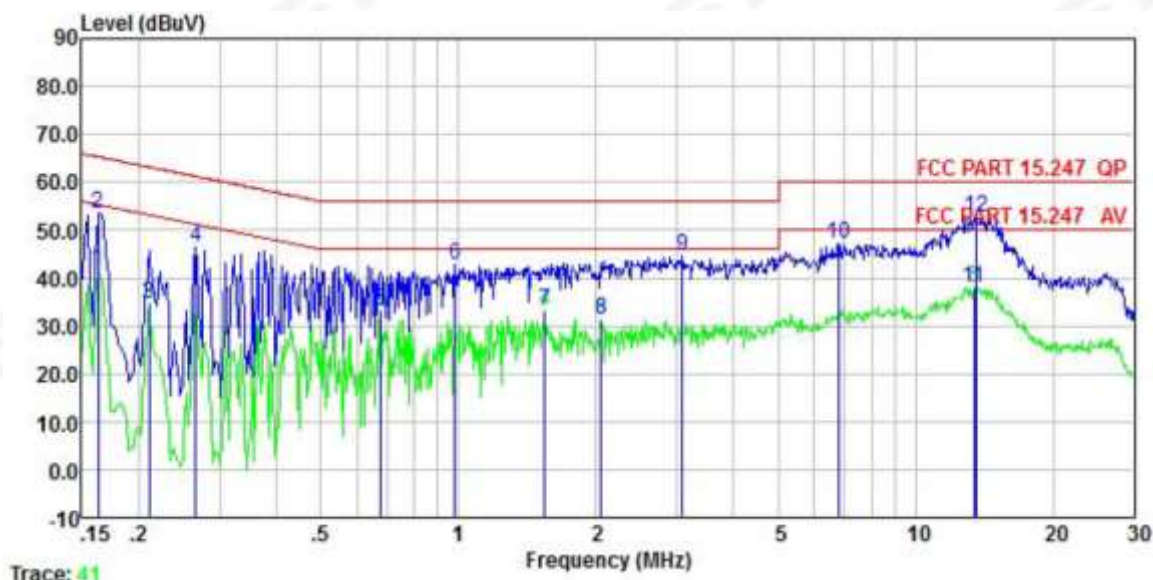

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.162	21.50	10.20	0.00	9.88	0.01	41.59	55.34	-13.75	Average
2	0.162	33.20	10.20	0.00	9.88	0.01	53.29	65.34	-12.05	QP
3	0.211	14.40	10.19	0.00	9.88	0.03	34.50	53.18	-18.68	Average
4	0.266	26.36	10.16	0.00	9.88	0.02	46.42	61.25	-14.83	QP
5	0.675	12.88	10.30	0.00	9.88	0.03	33.09	46.00	-12.91	Average
6	0.984	22.75	10.21	0.00	9.88	0.05	42.89	56.00	-13.11	QP
7	1.544	13.05	10.26	0.00	9.88	0.15	33.34	46.00	-12.66	Average
8	2.055	11.00	10.29	0.00	9.88	0.20	31.37	46.00	-14.63	Average
9	3.090	24.53	10.20	0.00	9.89	0.07	44.69	56.00	-11.31	QP
10	6.769	26.95	10.29	0.00	9.90	0.10	47.24	60.00	-12.76	QP
11	13.408	17.49	10.52	0.00	9.92	0.11	38.04	50.00	-11.96	Average
12	13.551	32.25	10.52	0.00	9.92	0.12	52.81	60.00	-7.19	QP



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2020 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2475 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

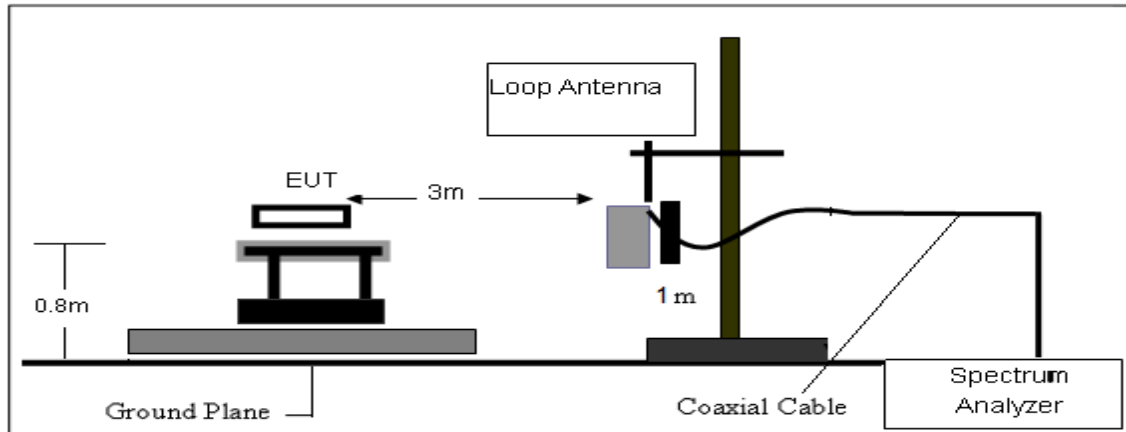

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

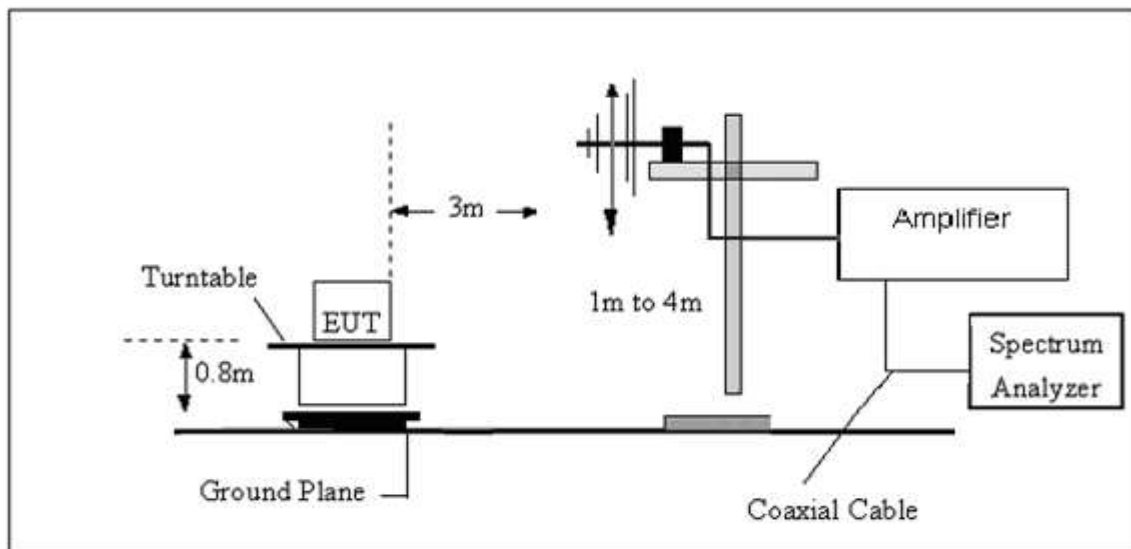

(C) Radiated Emission Test-Up Frequency Above 1GHz

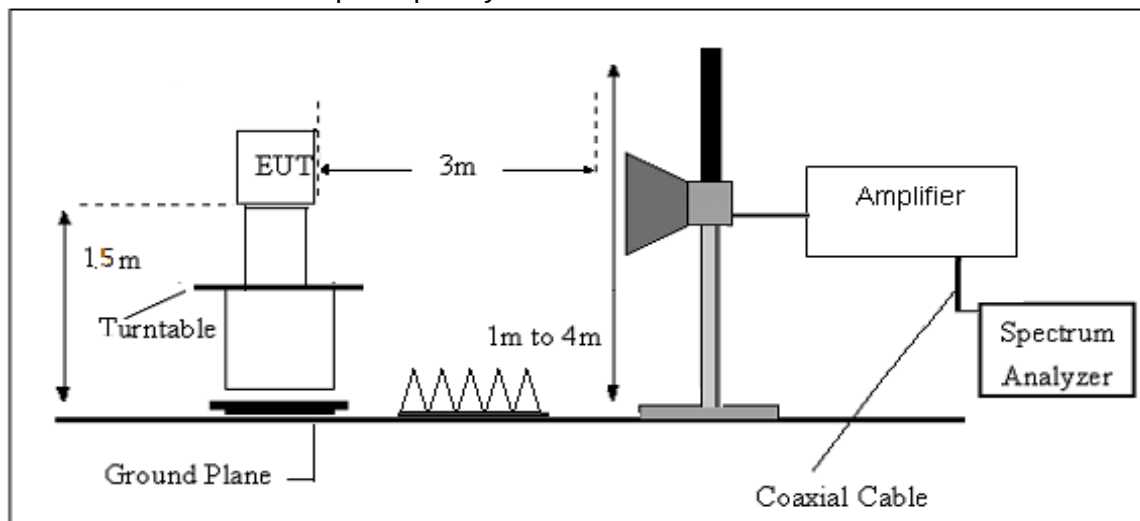

4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.



4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



4.6 TEST RESULTS

(Between 9KHz – 30 MHz)


Below 30MHz:

Test Frequency from 9KHz to 30MHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.



(30MHz -1000MHz)

Temperature:	22°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	Mode 7		

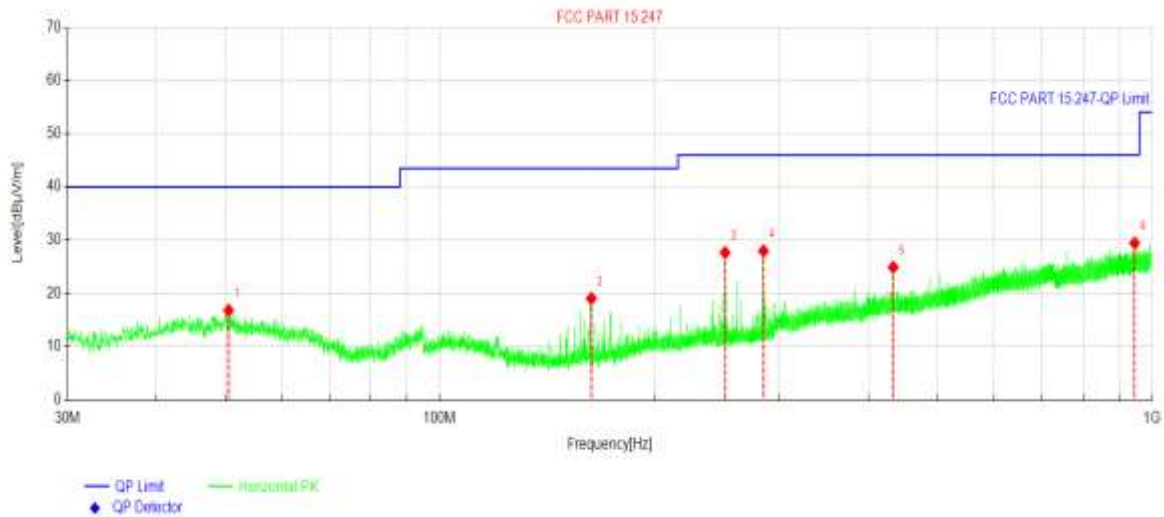


Remark:

1. Margin = Result (Result =Reading + Factor) –Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	50.5650	29.20	-12.41	16.79	40.00	23.21	PK	Horizontal
2	163.284	36.40	-17.34	19.06	43.50	24.44	PK	Horizontal
3	251.559	41.26	-13.59	27.67	46.00	18.33	PK	Horizontal
4	284.831	40.98	-13.01	27.97	46.00	18.03	PK	Horizontal
5	433.249	34.74	-9.83	24.91	46.00	21.09	PK	Horizontal
6	945.531	31.42	-1.97	29.45	46.00	16.55	PK	Horizontal



Temperature:	22°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	Mode 7		

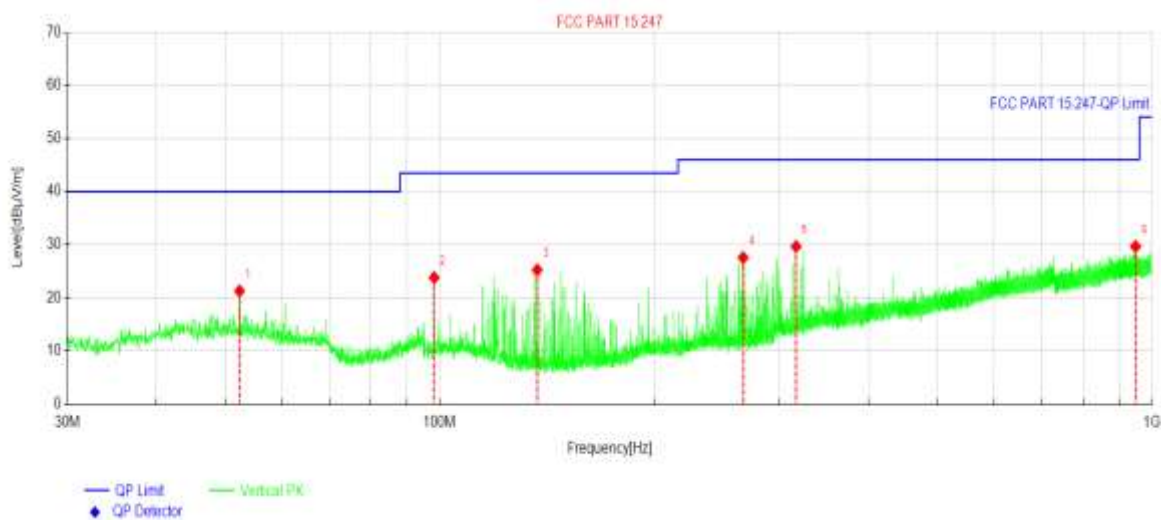

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	52.3596	33.80	-12.51	21.29	40.00	18.71	PK	Vertical
2	98.2429	38.43	-14.63	23.80	43.50	19.70	PK	Vertical
3	137.093	43.05	-17.81	25.24	43.50	18.26	PK	Vertical
4	266.691	40.91	-13.36	27.55	46.00	18.45	PK	Vertical
5	316.455	42.13	-12.47	29.66	46.00	16.34	PK	Vertical
6	948.247	31.59	-1.92	29.67	46.00	16.33	PK	Vertical



(1GHz-25GHz) Spurious emission Requirements

BLE Tx (LE 1M PHY)						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	49.86	-7.98	41.88	74.00	32.12	Vertical
4804.00	48.96	-7.98	40.98	74.00	33.02	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	39.51	-7.98	31.53	54.00	22.47	Vertical
4804.00	39.63	-7.98	31.65	54.00	22.35	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	49.38	-7.46	41.92	74.00	32.08	Vertical
4884.00	49.77	-7.46	42.31	74.00	31.69	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	39.91	-7.46	32.45	54.00	21.55	Vertical
4884.00	40.08	-7.46	32.62	54.00	21.38	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	48.93	-7.00	41.93	74.00	32.07	Vertical
4960.00	49.02	-7.00	42.02	74.00	31.98	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	39.15	-7.00	32.15	54.00	21.85	Vertical
4960.00	39.56	-7.00	32.56	54.00	21.44	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						



BLE Tx (LE 2M PHY)						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	48.66	-7.98	40.68	74.00	33.32	Vertical
4804.00	49.59	-7.98	41.61	74.00	32.39	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	39.52	-7.98	31.54	54.00	22.46	Vertical
4804.00	40.12	-7.98	32.14	54.00	21.86	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	48.65	-7.46	41.19	74.00	32.81	Vertical
4884.00	49.63	-7.46	42.17	74.00	31.83	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	39.95	-7.46	32.49	54.00	21.51	Vertical
4884.00	39.67	-7.46	32.21	54.00	21.79	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	49.23	-7.00	42.23	74.00	31.77	Vertical
4960.00	49.75	-7.00	42.75	74.00	31.25	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	39.64	-7.00	32.64	54.00	21.36	Vertical
4960.00	39.75	-7.00	32.75	54.00	21.25	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						


BEL Tx (LE Coded PHY, S=2)						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	48.72	-7.98	40.74	74.00	33.26	Vertical
4804.00	49.2	-7.98	41.22	74.00	32.78	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	39.82	-7.98	31.84	54.00	22.16	Vertical
4804.00	40.54	-7.98	32.56	54.00	21.44	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	49.06	-7.46	41.60	74.00	32.40	Vertical
4884.00	49.66	-7.46	42.20	74.00	31.80	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	39.92	-7.46	32.46	54.00	21.54	Vertical
4884.00	40.14	-7.46	32.68	54.00	21.32	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	48.76	-7.00	41.76	74.00	32.24	Vertical
4960.00	49.75	-7.00	42.75	74.00	31.25	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	39.55	-7.00	32.55	54.00	21.45	Vertical
4960.00	40.35	-7.00	33.35	54.00	20.65	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

BEL Tx (LE Coded PHY, S=8)						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	49.16	-7.98	41.18	74.00	32.82	Vertical
4804.00	49.69	-7.98	41.71	74.00	32.29	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4804.00	39.39	-7.98	31.41	54.00	22.59	Vertical
4804.00	39.74	-7.98	31.76	54.00	22.24	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	49.04	-7.46	41.58	74.00	32.42	Vertical
4884.00	49.62	-7.46	42.16	74.00	31.84	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4884.00	39.37	-7.46	31.91	54.00	22.09	Vertical
4884.00	40.38	-7.46	32.92	54.00	21.08	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	48.6	-7.00	41.60	74.00	32.40	Vertical
4960.00	49.29	-7.00	42.29	74.00	31.71	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4960.00	39.35	-7.00	32.35	54.00	21.65	Vertical
4960.00	39.76	-7.00	32.76	54.00	21.24	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						



4.6 TEST RESULTS (Restricted Bands Requirements)

Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE 1M PHY)
Test Channel:	Lowest channel	Polarization:	Vertical

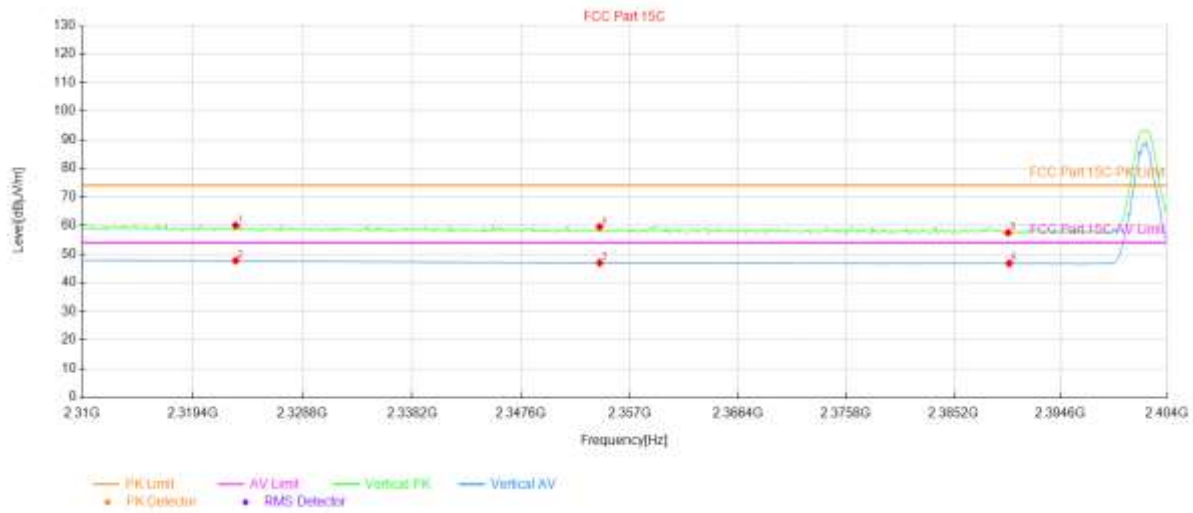

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2323.07	23.67	36.35	60.02	74.00	13.98	68	PK	PASS	Vertical
2	2323.07	11.32	36.35	47.67	54.00	6.33	26	AV	PASS	Vertical
3	2354.37	10.97	35.96	46.93	54.00	7.07	266	AV	PASS	Vertical
4	2354.37	23.52	35.96	59.48	74.00	14.52	72	PK	PASS	Vertical
5	2390.00	21.51	35.93	57.44	74.00	16.56	113	PK	PASS	Vertical
6	2390.09	10.81	35.93	46.74	54.00	7.26	135	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE 1M PHY)
Test Channel:	Lowest channel	Polarization:	Horizontal

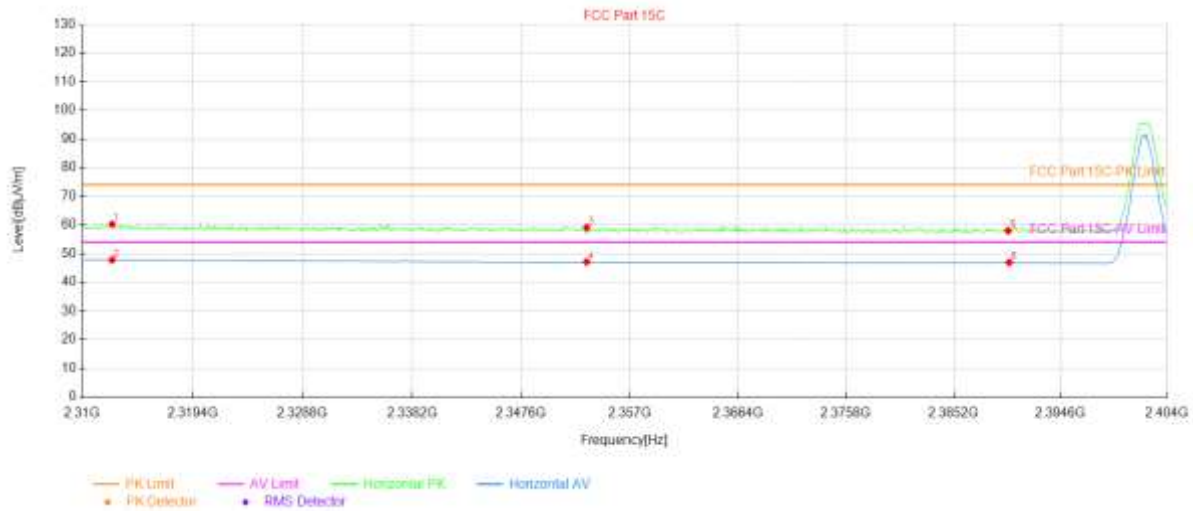


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2312.54	23.70	36.53	60.23	74.00	13.77	307	PK	PASS	Horizontal
2	2312.54	11.21	36.53	47.74	54.00	6.26	210	AV	PASS	Horizontal
3	2353.24	23.08	35.97	59.05	74.00	14.95	0	PK	PASS	Horizontal
4	2353.24	11.12	35.97	47.09	54.00	6.91	345	AV	PASS	Horizontal
5	2390.00	22.03	35.93	57.96	74.00	16.04	41	PK	PASS	Horizontal
6	2390.09	10.97	35.93	46.90	54.00	7.10	154	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE 1M PHY)
Test Channel:	Highest channel	Polarization:	Vertical

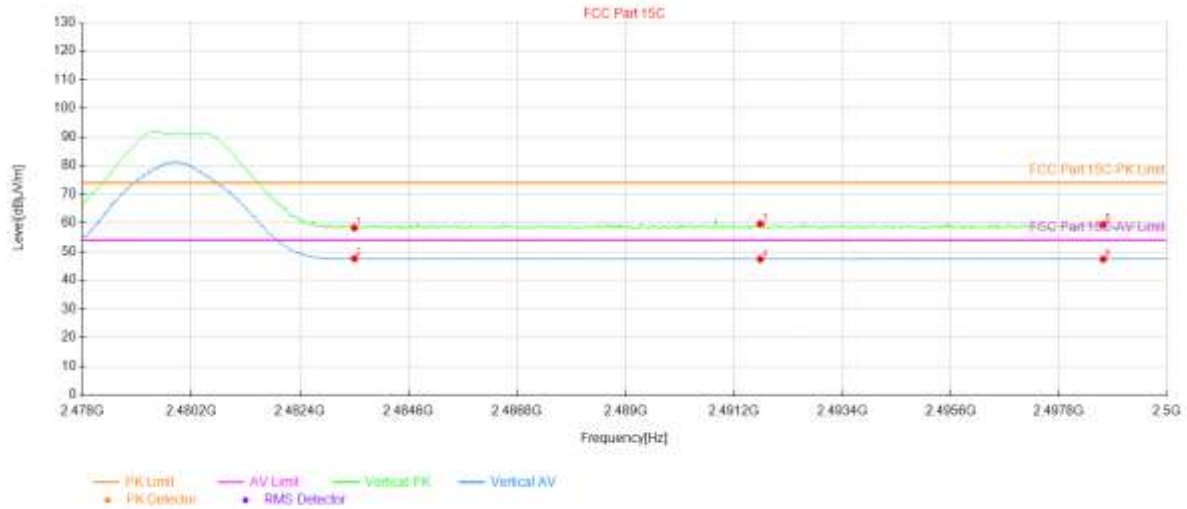

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.58	36.74	58.32	74.00	15.68	183	PK	PASS	Vertical
2	2483.50	10.77	36.74	47.51	54.00	6.49	34	AV	PASS	Vertical
3	2491.73	22.89	36.76	59.65	74.00	14.35	2	PK	PASS	Vertical
4	2491.73	10.54	36.76	47.30	54.00	6.70	120	AV	PASS	Vertical
5	2498.70	22.61	36.77	59.38	74.00	14.62	350	PK	PASS	Vertical
6	2498.70	10.55	36.77	47.32	54.00	6.68	198	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE 1M PHY)
Test Channel:	Highest channel	Polarization:	Horizontal

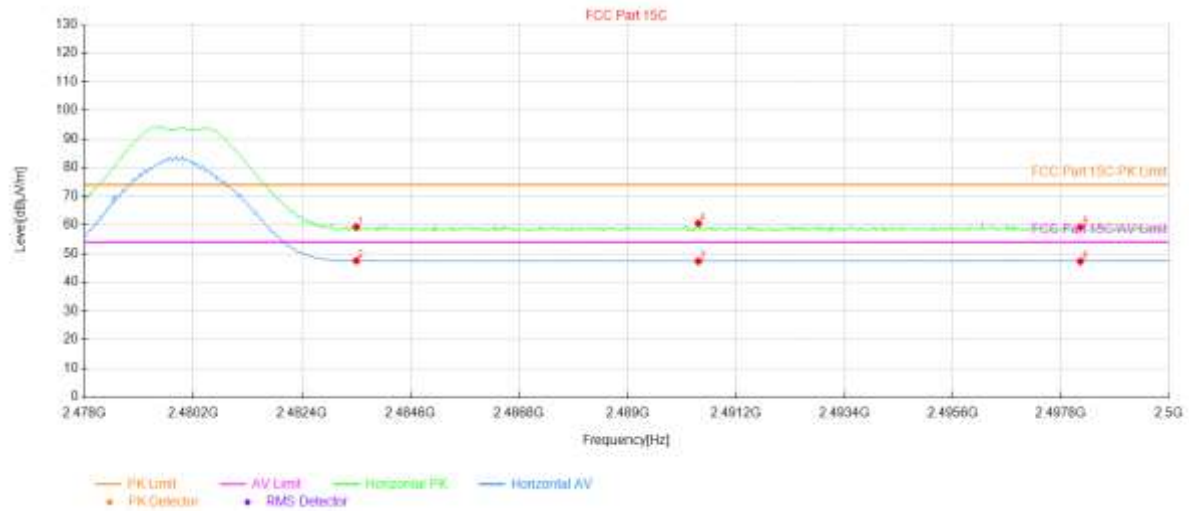**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	22.54	36.74	59.28	74.00	14.72	32	PK	PASS	Horizontal
2	2483.50	10.72	36.74	47.46	54.00	6.54	148	AV	PASS	Horizontal
3	2490.43	10.51	36.76	47.27	54.00	6.73	1	AV	PASS	Horizontal
4	2490.43	23.78	36.76	60.54	74.00	13.46	114	PK	PASS	Horizontal
5	2498.20	22.41	36.77	59.18	74.00	14.82	222	PK	PASS	Horizontal
6	2498.20	10.50	36.77	47.27	54.00	6.73	278	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE 2M PHY)
Test Channel:	Lowest channel	Polarization:	Vertical

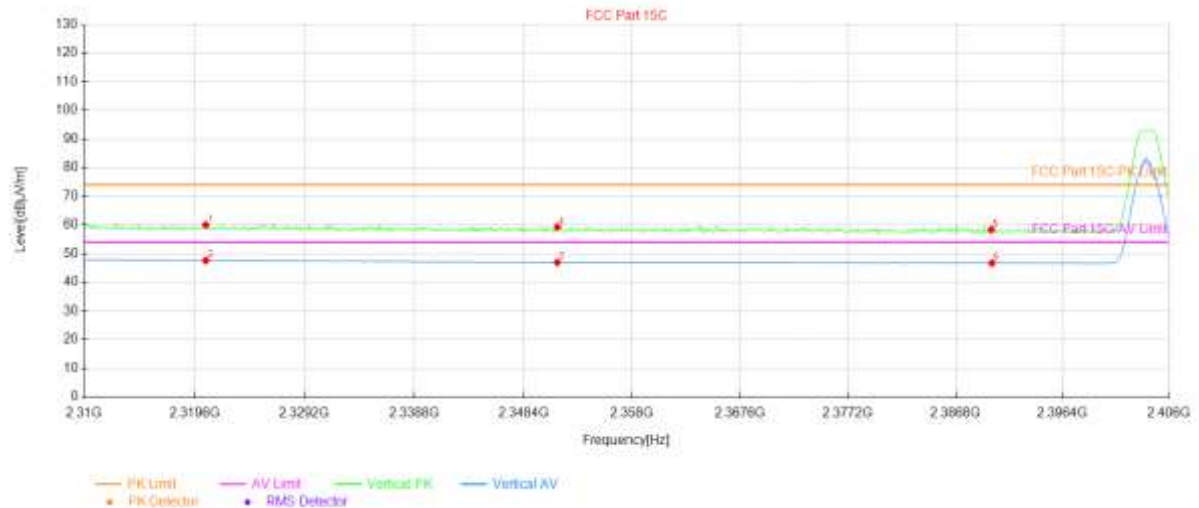**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2320.56	23.60	36.39	59.99	74.00	14.01	348	PK	PASS	Vertical
2	2320.56	11.16	36.39	47.55	54.00	6.45	344	AV	PASS	Vertical
3	2351.38	10.96	35.96	46.92	54.00	7.08	303	AV	PASS	Vertical
4	2351.38	23.25	35.96	59.21	74.00	14.79	359	PK	PASS	Vertical
5	2390.00	22.43	35.93	58.36	74.00	15.64	303	PK	PASS	Vertical
6	2390.06	10.73	35.93	46.66	54.00	7.34	251	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE 2M PHY)
Test Channel:	Lowest channel	Polarization:	Horizontal

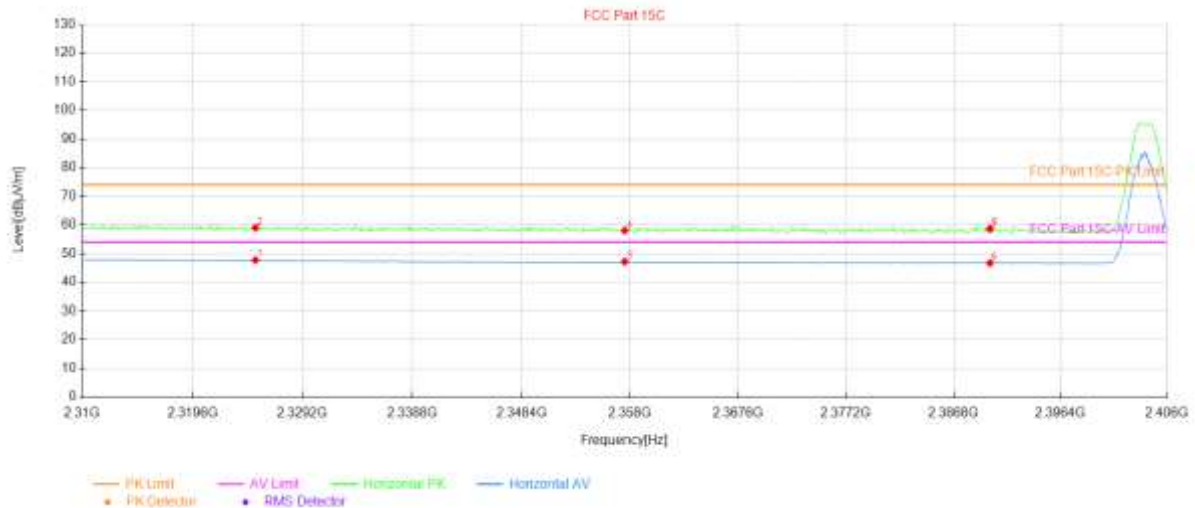**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2325.07	11.40	36.32	47.72	54.00	6.28	274	AV	PASS	Horizontal
2	2325.07	22.67	36.32	58.99	74.00	15.01	311	PK	PASS	Horizontal
3	2357.52	11.20	35.96	47.16	54.00	6.84	304	AV	PASS	Horizontal
4	2357.52	22.08	35.96	58.04	74.00	15.96	105	PK	PASS	Horizontal
5	2390.06	22.72	35.93	58.65	74.00	15.35	262	PK	PASS	Horizontal
6	2390.06	10.77	35.93	46.70	54.00	7.30	285	AV	PASS	Horizontal
7	2390.06	22.72	35.93	58.65	74.00	15.35	262	PK	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE 2M PHY)
Test Channel:	Highest channel	Polarization:	Vertical

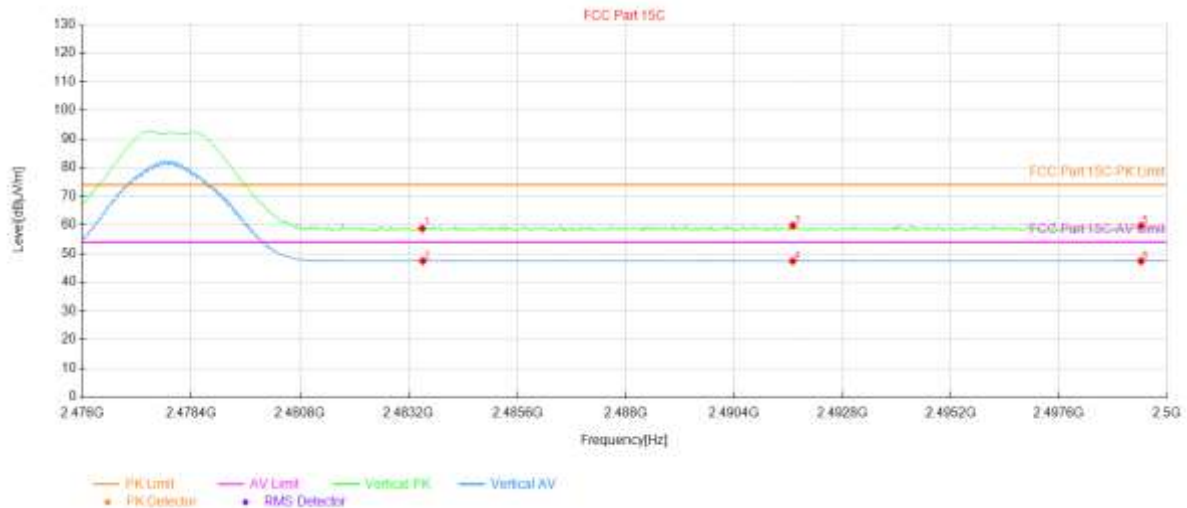**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.99	36.74	58.73	74.00	15.27	295	PK	PASS	Vertical
2	2483.51	10.61	36.74	47.35	54.00	6.65	228	AV	PASS	Vertical
3	2491.70	22.97	36.76	59.73	74.00	14.27	221	PK	PASS	Vertical
4	2491.70	10.58	36.76	47.34	54.00	6.66	45	AV	PASS	Vertical
5	2499.42	22.87	36.78	59.65	74.00	14.35	273	PK	PASS	Vertical
6	2499.42	10.57	36.78	47.35	54.00	6.65	358	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE 2M PHY)
Test Channel:	Highest channel	Polarization:	Horizontal

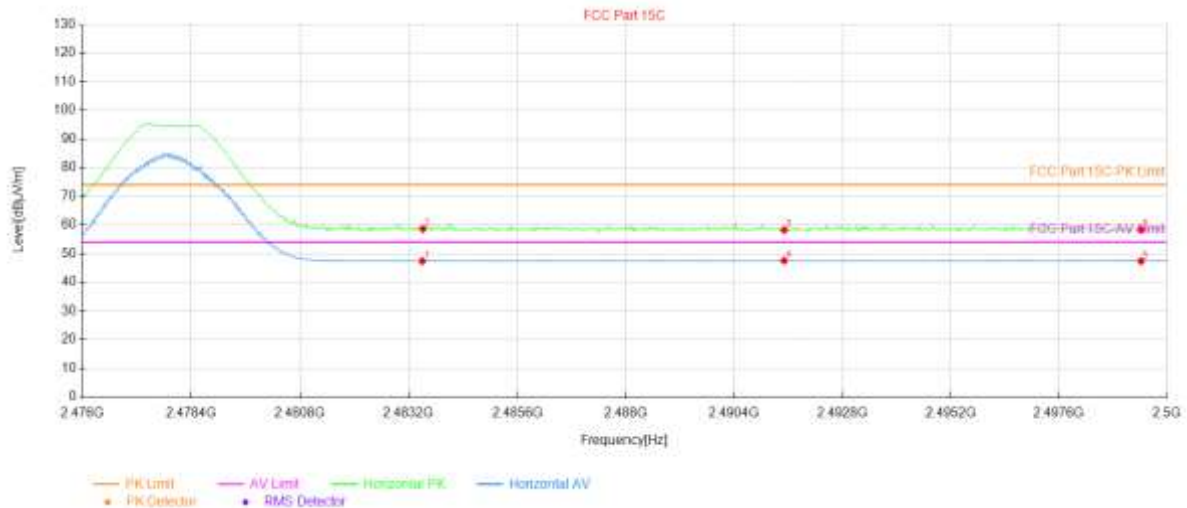**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	10.61	36.74	47.35	54.00	6.65	177	AV	PASS	Horizontal
2	2483.51	21.81	36.74	58.55	74.00	15.45	0	PK	PASS	Horizontal
3	2491.50	21.43	36.76	58.19	74.00	15.81	140	PK	PASS	Horizontal
4	2491.50	10.73	36.76	47.49	54.00	6.51	200	AV	PASS	Horizontal
5	2499.42	10.57	36.78	47.35	54.00	6.65	76	AV	PASS	Horizontal
6	2499.42	21.61	36.78	58.39	74.00	15.61	46	PK	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE Coded PHY, S=2)
Test Channel:	Lowest channel	Polarization:	Vertical

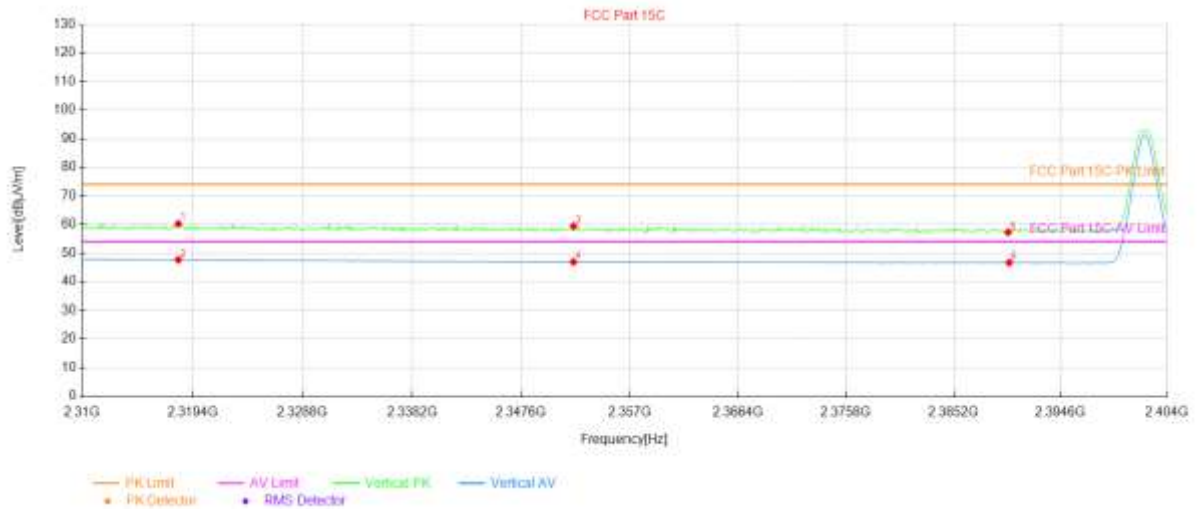

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2318.18	23.80	36.44	60.24	74.00	13.76	8	PK	PASS	Vertical
2	2318.18	11.19	36.44	47.63	54.00	6.37	82	AV	PASS	Vertical
3	2352.11	23.40	35.97	59.37	74.00	14.63	212	PK	PASS	Vertical
4	2352.11	10.94	35.97	46.91	54.00	7.09	15	AV	PASS	Vertical
5	2390.00	21.33	35.93	57.26	74.00	16.74	79	PK	PASS	Vertical
6	2390.09	10.72	35.93	46.65	54.00	7.35	291	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE Coded PHY, S=2)
Test Channel:	Lowest channel	Polarization:	Horizontal

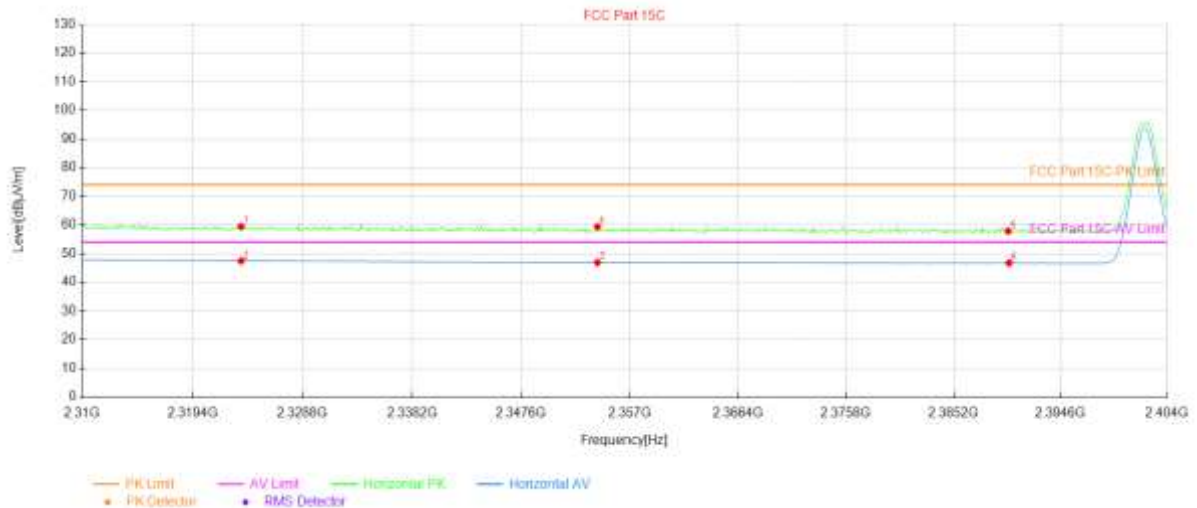**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2323.54	23.11	36.34	59.45	74.00	14.55	143	PK	PASS	Horizontal
2	2323.54	11.06	36.34	47.40	54.00	6.60	195	AV	PASS	Horizontal
3	2354.18	10.91	35.96	46.87	54.00	7.13	255	AV	PASS	Horizontal
4	2354.18	23.38	35.96	59.34	74.00	14.66	341	PK	PASS	Horizontal
5	2390.00	21.87	35.93	57.80	74.00	16.20	57	PK	PASS	Horizontal
6	2390.09	10.78	35.93	46.71	54.00	7.29	314	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE Coded PHY, S=2)
Test Channel:	Highest channel	Polarization:	Vertical

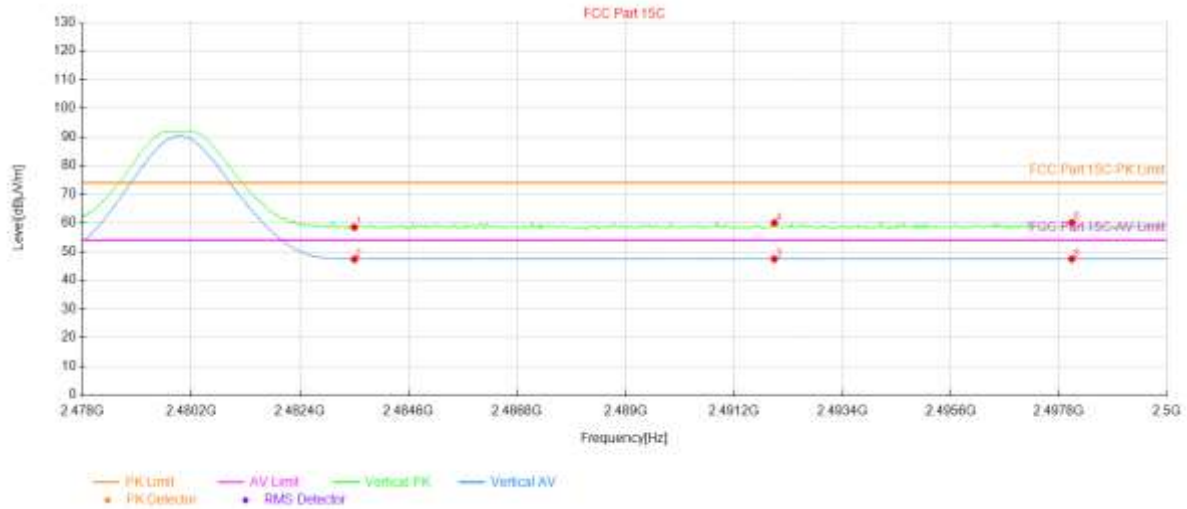**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.70	36.74	58.44	74.00	15.56	179	PK	PASS	Vertical
2	2483.50	10.53	36.74	47.27	54.00	6.73	258	AV	PASS	Vertical
3	2492.01	10.60	36.76	47.36	54.00	6.64	164	AV	PASS	Vertical
4	2492.01	23.27	36.76	60.03	74.00	13.97	359	PK	PASS	Vertical
5	2498.06	23.37	36.77	60.14	74.00	13.86	19	PK	PASS	Vertical
6	2498.06	10.61	36.77	47.38	54.00	6.62	127	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE Coded PHY, S=2)
Test Channel:	Highest channel	Polarization:	Horizontal

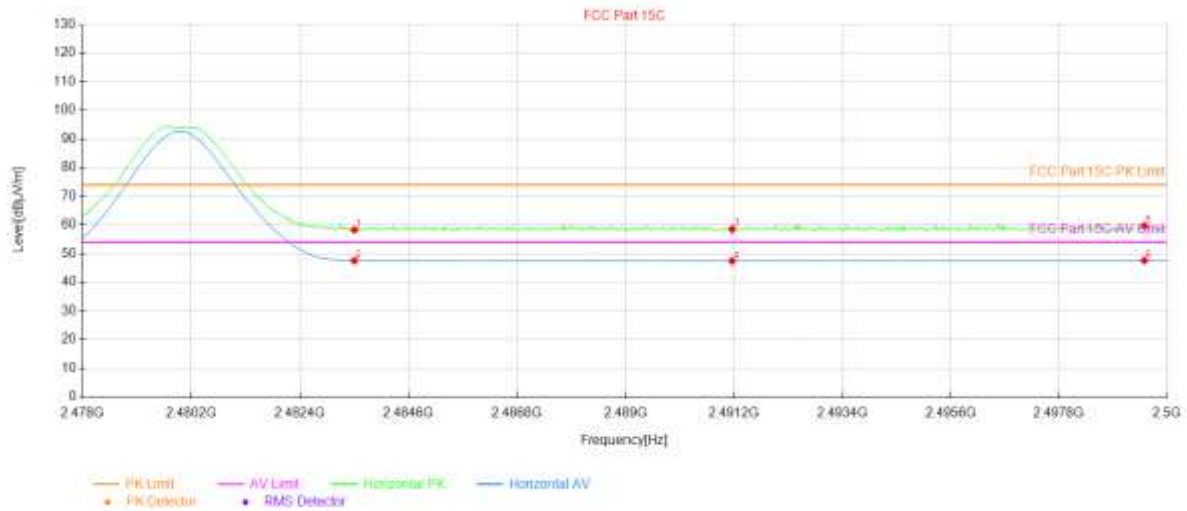**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.50	36.74	58.24	74.00	15.76	274	PK	PASS	Horizontal
2	2483.50	10.74	36.74	47.48	54.00	6.52	13	AV	PASS	Horizontal
3	2491.16	21.73	36.76	58.49	74.00	15.51	233	PK	PASS	Horizontal
4	2491.16	10.65	36.76	47.41	54.00	6.59	151	AV	PASS	Horizontal
5	2499.54	22.88	36.78	59.66	74.00	14.34	311	PK	PASS	Horizontal
6	2499.54	10.76	36.78	47.54	54.00	6.46	162	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE Coded PHY, S=8)
Test Channel:	Lowest channel	Polarization:	Vertical

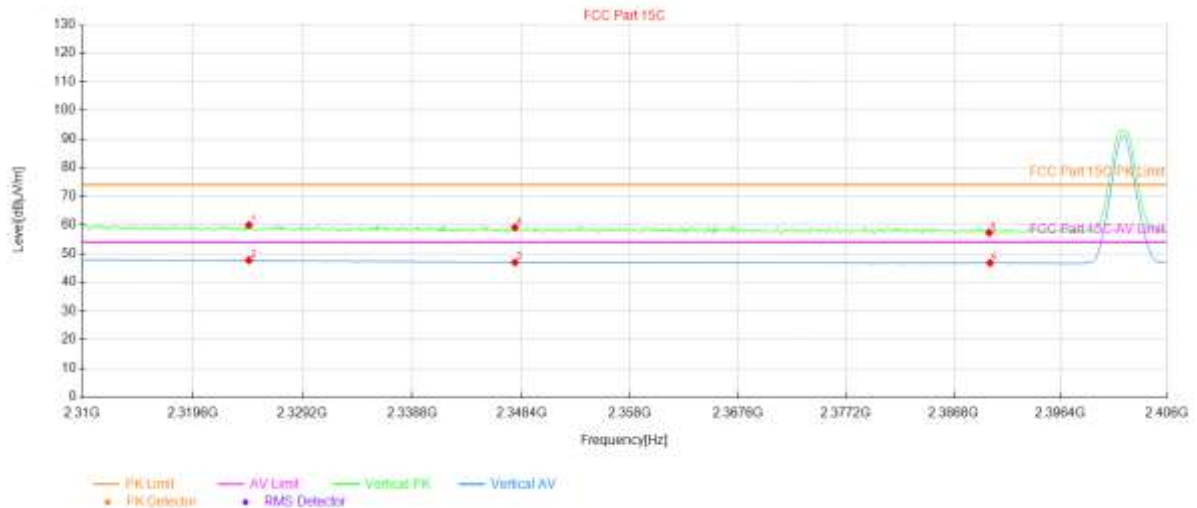**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2324.50	23.64	36.33	59.97	74.00	14.03	101	PK	PASS	Vertical
2	2324.50	11.30	36.33	47.63	54.00	6.37	2	AV	PASS	Vertical
3	2347.82	10.91	35.99	46.90	54.00	7.10	258	AV	PASS	Vertical
4	2347.82	23.11	35.99	59.10	74.00	14.90	56	PK	PASS	Vertical
5	2390.00	21.32	35.93	57.25	74.00	16.75	4	PK	PASS	Vertical
6	2390.06	10.79	35.93	46.72	54.00	7.28	280	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE Coded PHY, S=8)
Test Channel:	Lowest channel	Polarization:	Horizontal

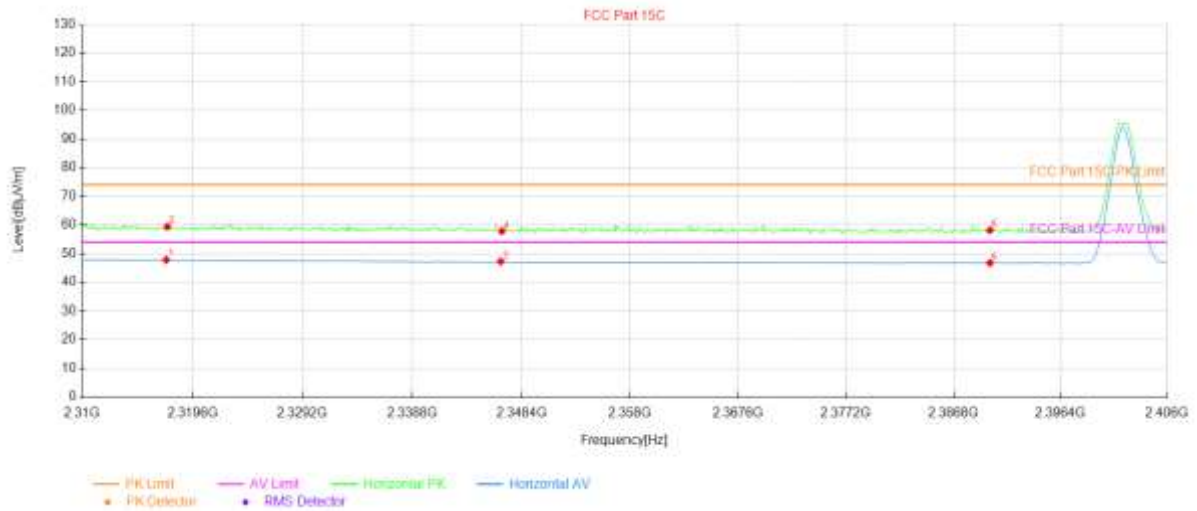**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2317.30	11.34	36.45	47.79	54.00	6.21	105	AV	PASS	Horizontal
2	2317.39	22.87	36.45	59.32	74.00	14.68	262	PK	PASS	Horizontal
3	2346.58	11.22	36.01	47.23	54.00	6.77	15	AV	PASS	Horizontal
4	2346.67	21.77	36.01	57.78	74.00	16.22	315	PK	PASS	Horizontal
5	2390.06	22.19	35.93	58.12	74.00	15.88	2	PK	PASS	Horizontal
6	2390.06	10.79	35.93	46.72	54.00	7.28	4	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE Coded PHY, S=8)
Test Channel:	Highest channel	Polarization:	Vertical

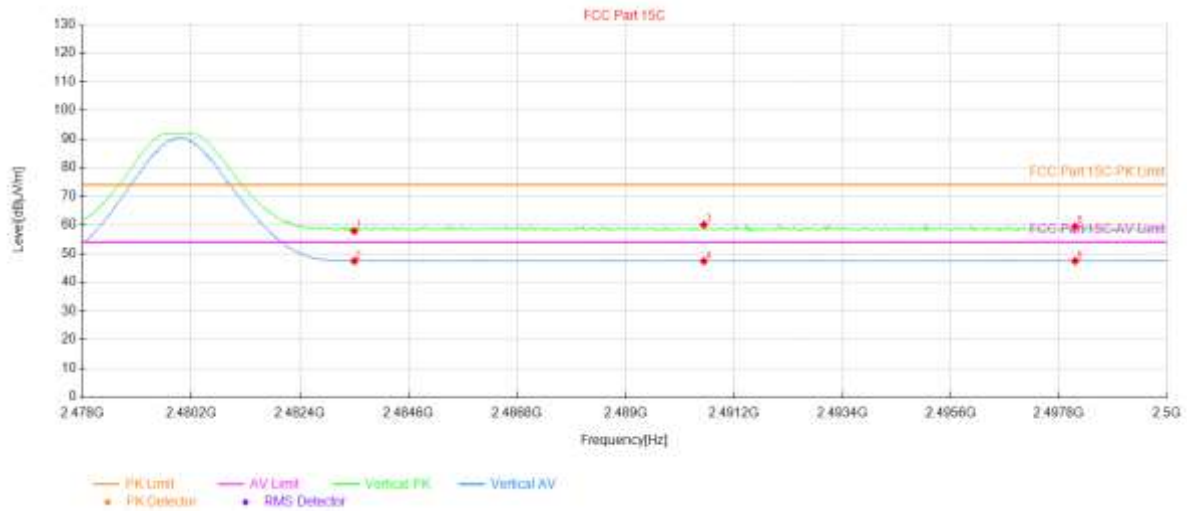**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.14	36.74	57.88	74.00	16.12	265	PK	PASS	Vertical
2	2483.50	10.62	36.74	47.36	54.00	6.64	146	AV	PASS	Vertical
3	2490.58	23.26	36.76	60.02	74.00	13.98	351	PK	PASS	Vertical
4	2490.58	10.57	36.76	47.33	54.00	6.67	340	AV	PASS	Vertical
5	2498.13	22.60	36.77	59.37	74.00	14.63	359	PK	PASS	Vertical
6	2498.13	10.61	36.77	47.38	54.00	6.62	299	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



Product Name:	4G Smart Phone	Product Model:	G2L
Test Voltage:	DC 3.87V	Test mode:	BLE Tx (LE Coded PHY, S=8)
Test Channel:	Highest channel	Polarization:	Horizontal

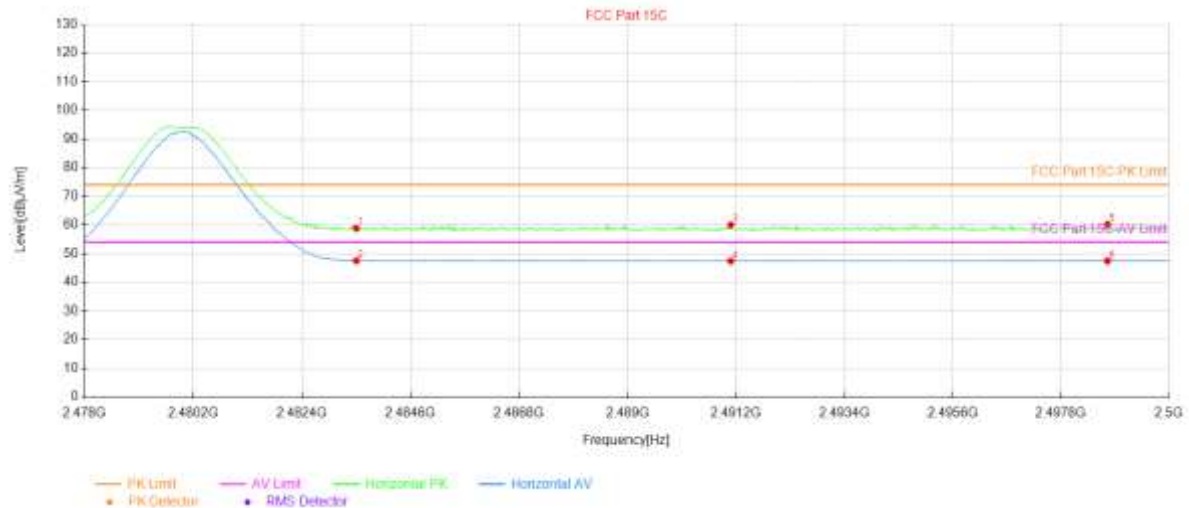**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	22.03	36.74	58.77	74.00	15.23	315	PK	PASS	Horizontal
2	2483.50	10.73	36.74	47.47	54.00	6.53	9	AV	PASS	Horizontal
3	2491.09	23.18	36.76	59.94	74.00	14.06	307	PK	PASS	Horizontal
4	2491.09	10.60	36.76	47.36	54.00	6.64	125	AV	PASS	Horizontal
5	2498.75	23.41	36.77	60.18	74.00	13.82	139	PK	PASS	Horizontal
6	2498.75	10.64	36.77	47.41	54.00	6.59	277	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).



5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

5.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

5.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

5.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

5.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



6. POWER SPECTRAL DENSITY TEST

6.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	≤ 8 dBm (RBW ≥ 3 KHz)	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

6.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



7. BANDWIDTH TEST

7.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW ≥ 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

7.3 TEST SETUP



7.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

7.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



8. PEAK OUTPUT POWER TEST

8.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq$ [3 $\times$ RBW].
- Set span $\geq$ [3 $\times$ RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

8.3 TEST SETUP



8.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

8.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is Internal Antenna. It comply with the standard requirement.

**APPENDIX 1-TEST DATA****Appendix A – BLE-1M PHY**

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	BLE	2402	Ant1	34.99	4.56
NVNT	BLE	2442	Ant1	34.4	4.63
NVNT	BLE	2480	Ant1	34.44	4.63



Test Graphs
Duty Cycle NVNT BLE 2402MHz Ant1



Duty Cycle NVNT BLE 2442MHz Ant1



Duty Cycle NVNT BLE 2480MHz Ant1





Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	3.689	30	Pass
NVNT	BLE	2442	Ant1	2.911	30	Pass
NVNT	BLE	2480	Ant1	2.751	30	Pass



Test Graphs
Power NVNT BLE 2402MHz Ant1



Power NVNT BLE 2442MHz Ant1



Power NVNT BLE 2480MHz Ant1





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit (MHz)	Verdic
NVNT	BLE	2402	Ant1	0.662	0.5	Pass
NVNT	BLE	2442	Ant1	0.66	0.5	Pass
NVNT	BLE	2480	Ant1	0.66	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT BLE 2402MHz Ant1



-6dB Bandwidth NVNT BLE 2442MHz Ant1



-6dB Bandwidth NVNT BLE 2480MHz Ant1





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	1.02
NVNT	BLE	2442	Ant1	1.02
NVNT	BLE	2480	Ant1	1.02



Test Graphs

OBW NVNT BLE 2402MHz Ant1



OBW NVNT BLE 2442MHz Ant1



OBW NVNT BLE 2480MHz Ant1





Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE	2402	Ant1	-11.419	8	Pass
NVNT	BLE	2442	Ant1	-12.271	8	Pass
NVNT	BLE	2480	Ant1	-12.315	8	Pass



Test Graphs
PSD NVNT BLE 2402MHz Ant1



PSD NVNT BLE 2442MHz Ant1

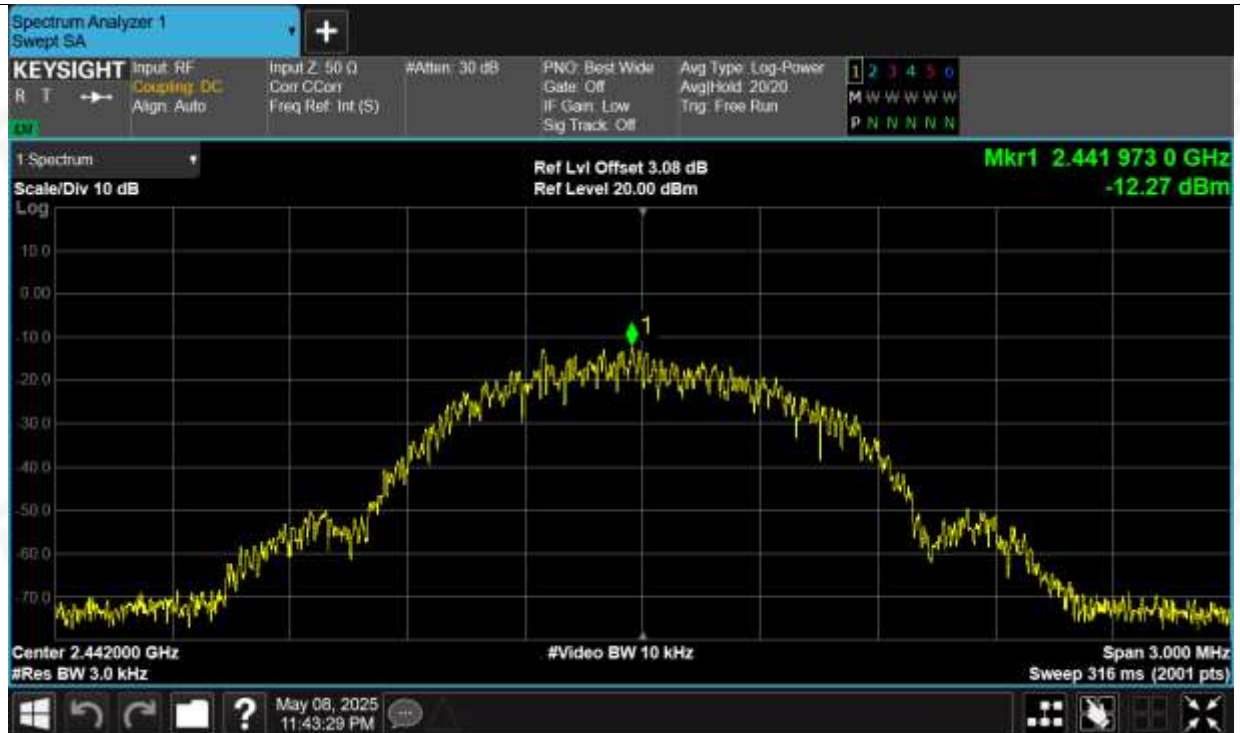

PSD NVNT BLE 2480MHz Ant1






Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-59.91	-20	Pass
NVNT	BLE	2480	Ant1	-57.39	-20	Pass




Test Graphs


Band Edge NVNT BLE 2402MHz Ant1 Ref

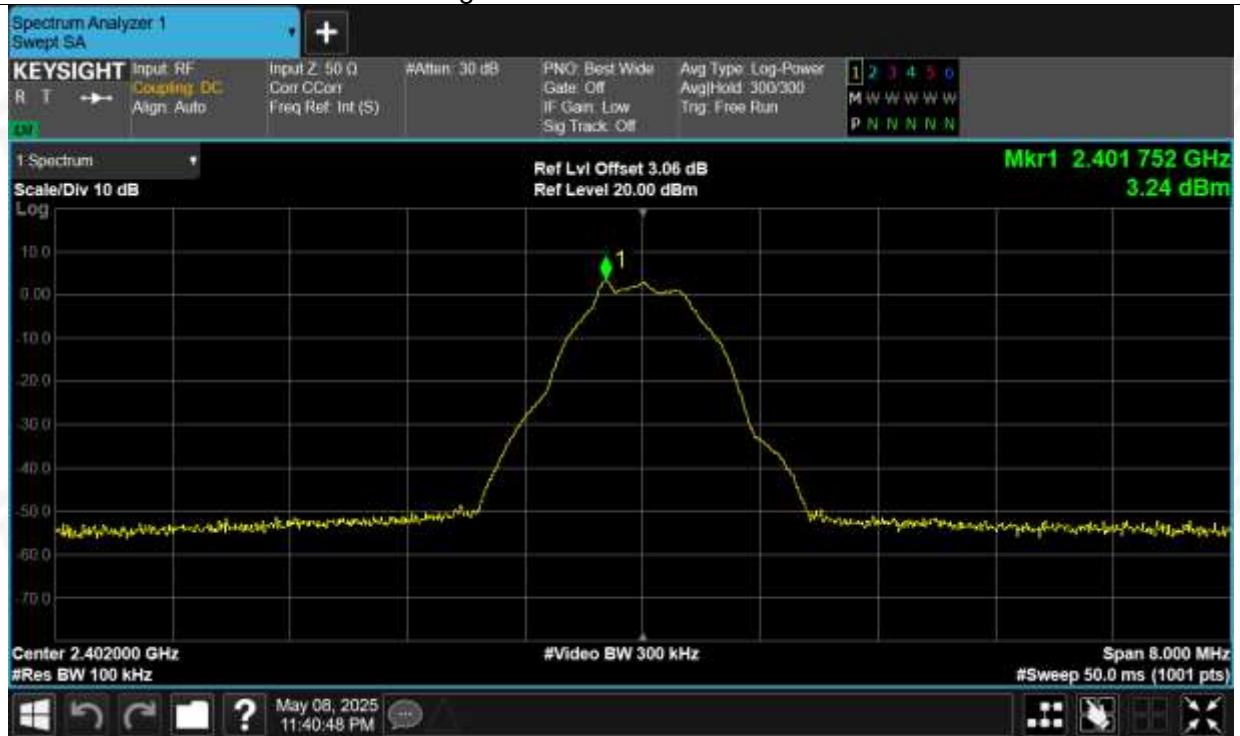

Band Edge NVNT BLE 2402MHz Ant1 Emission

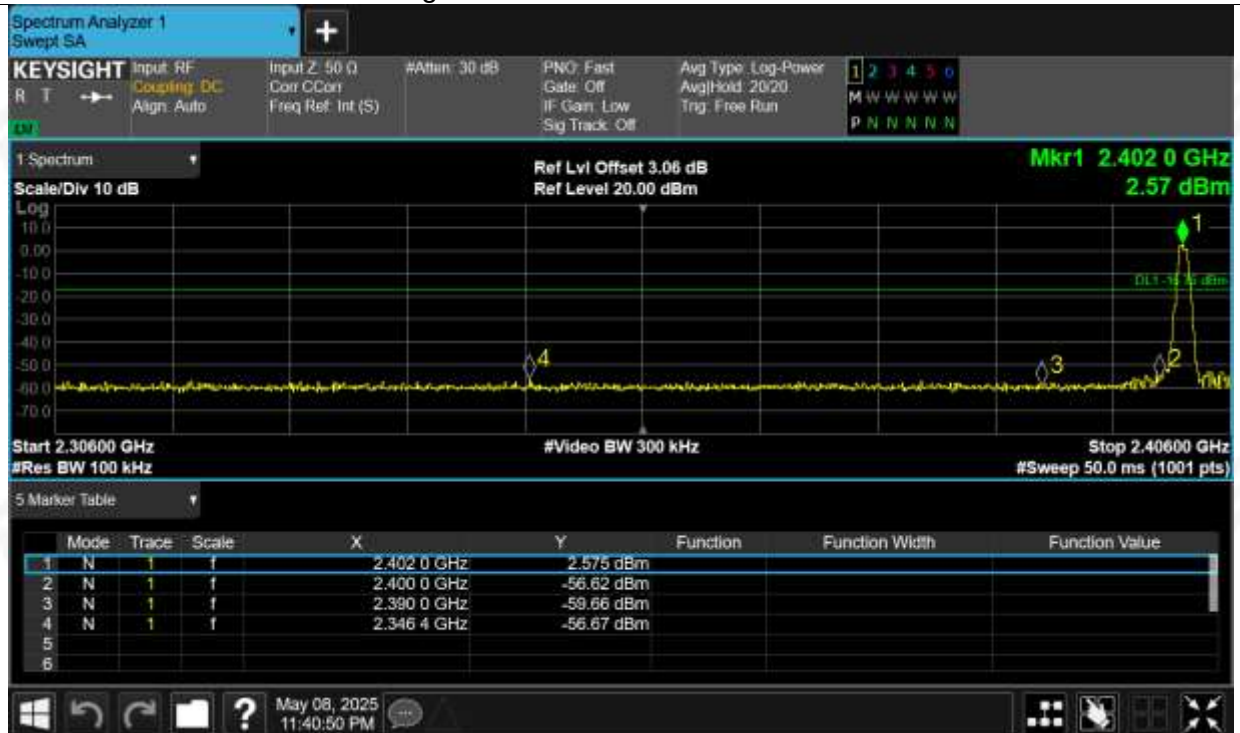

Band Edge NVNT BLE 2480MHz Ant1 Ref

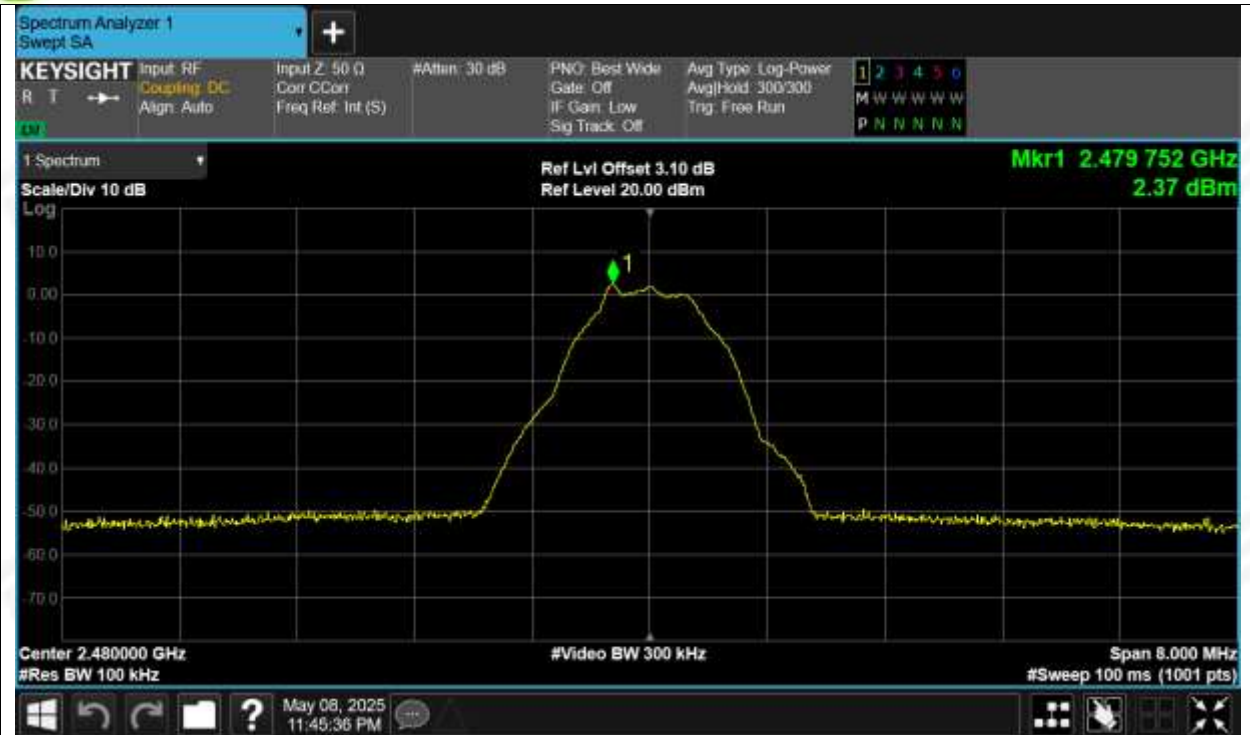

Band Edge NVNT BLE 2480MHz Ant1 Emission






Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-51.52	-20	Pass
NVNT	BLE	2442	Ant1	-51.31	-20	Pass
NVNT	BLE	2480	Ant1	-51.69	-20	Pass




Test Graphs

Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

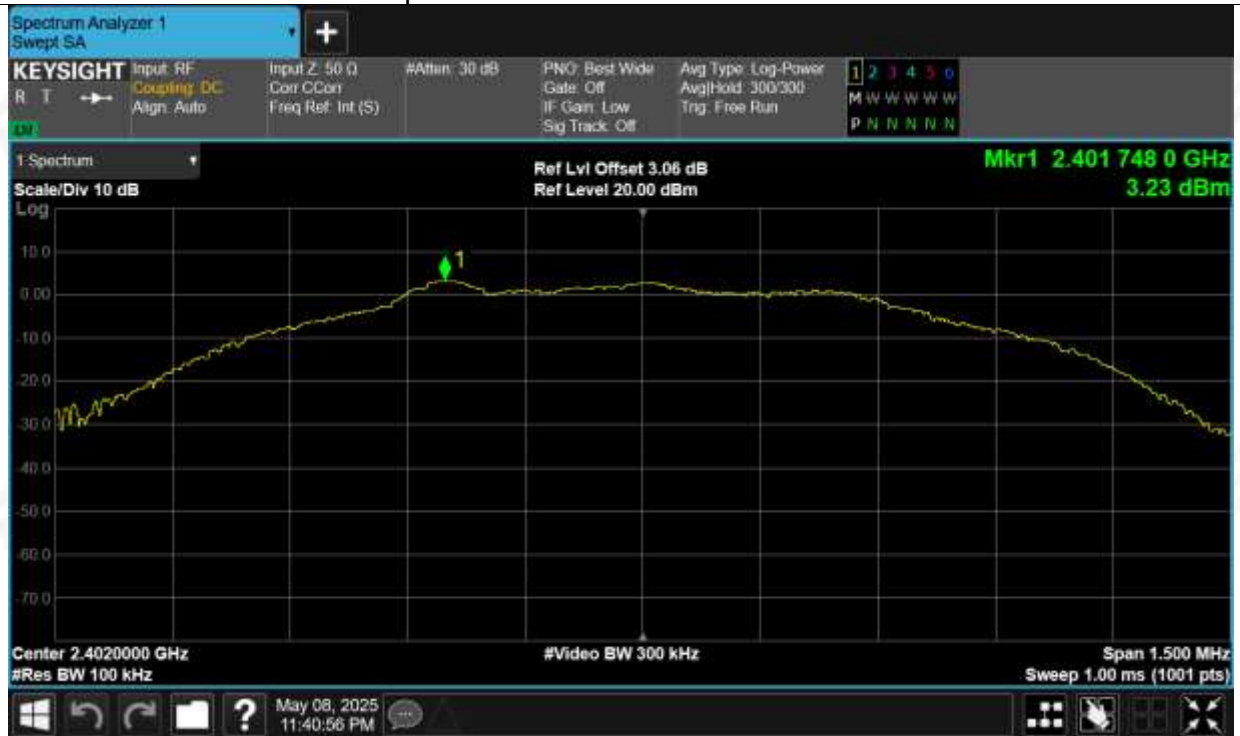

Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

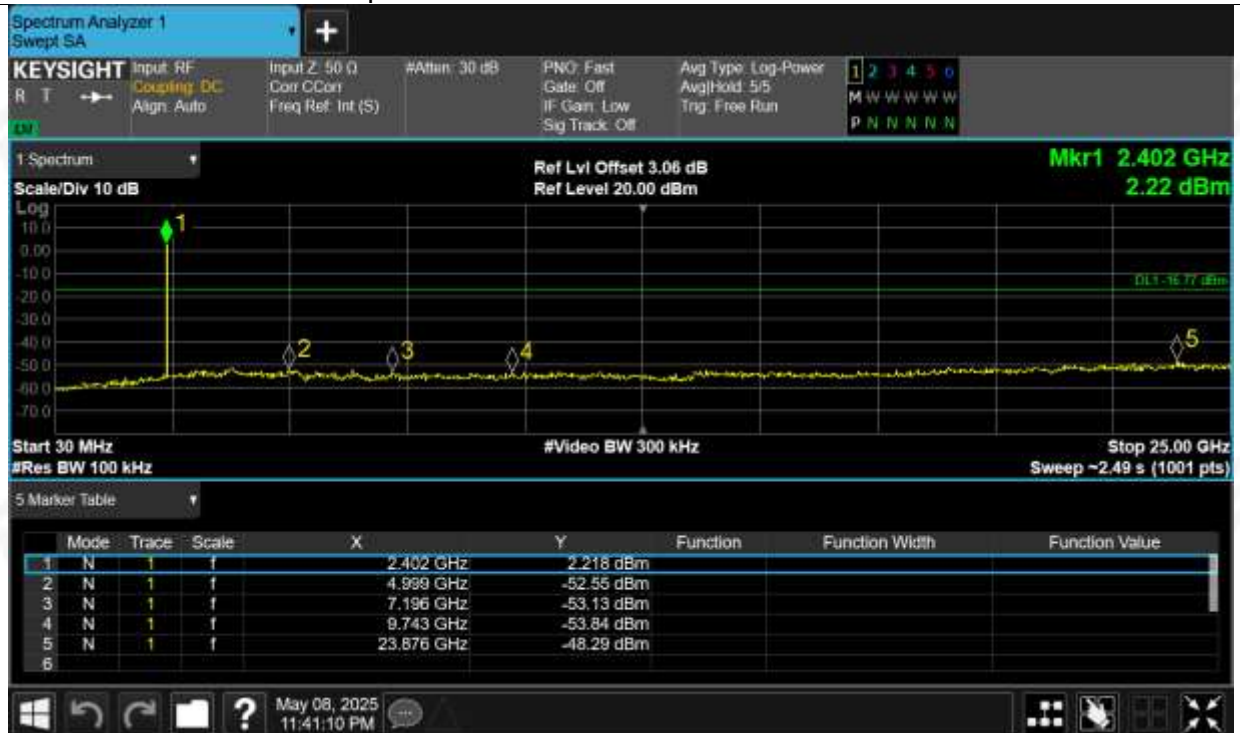

Tx. Spurious NVNT BLE 2442MHz Ant1 Ref



Tx. Spurious NVNT BLE 2442MHz Ant1 Emission



Tx. Spurious NVNT BLE 2480MHz Ant1 Ref



Tx. Spurious NVNT BLE 2480MHz Ant1 Emission



**Appendix A – BLE-2M PHY**

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	BLE	2402	Ant1	40.8	3.89
NVNT	BLE	2442	Ant1	41.6	3.81
NVNT	BLE	2480	Ant1	41.27	3.84



Test Graphs

Duty Cycle NVNT BLE 2402MHz Ant1



Duty Cycle NVNT BLE 2442MHz Ant1



Duty Cycle NVNT BLE 2480MHz Ant1





Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	3.362	30	Pass
NVNT	BLE	2442	Ant1	2.654	30	Pass
NVNT	BLE	2480	Ant1	2.491	30	Pass



Test Graphs
Power NVNT BLE 2402MHz Ant1



Power NVNT BLE 2442MHz Ant1

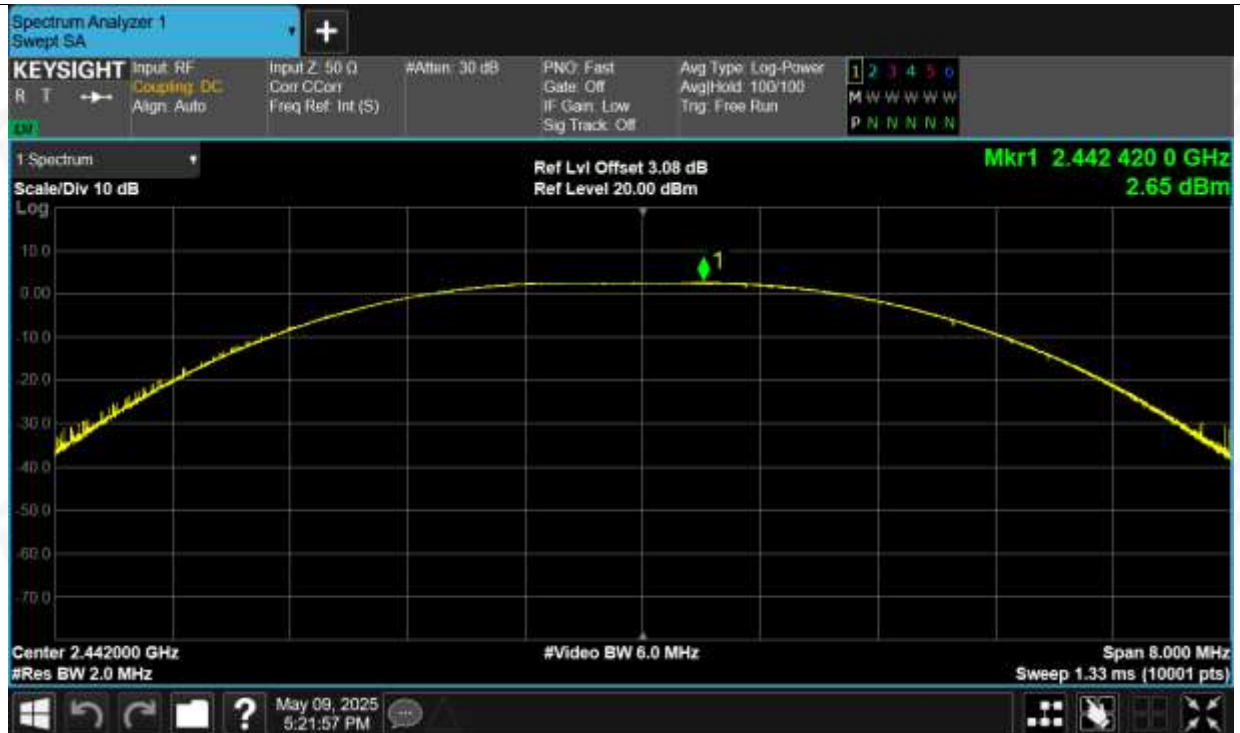

Power NVNT BLE 2480MHz Ant1





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit (MHz)	Verdic
NVNT	BLE	2402	Ant1	1.121	0.5	Pass
NVNT	BLE	2442	Ant1	1.126	0.5	Pass
NVNT	BLE	2480	Ant1	1.102	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT BLE 2402MHz Ant1



-6dB Bandwidth NVNT BLE 2442MHz Ant1



-6dB Bandwidth NVNT BLE 2480MHz Ant1