



FCC RF Test Report

APPLICANT : Lenovo (Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : dtab Compact
BRAND NAME : NTT docomo
MODEL NAME : ELF-8605L
FCC ID : O57ELF8605L
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on May 09, 2020 and testing was completed on Jul. 28, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Test Software.....	8
1.8 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system	14
2.5 EUT Operation Test Setup	15
2.6 Measurement Results Explanation Example.....	15
3 TEST RESULT	16
3.1 26dB & 99% Occupied Bandwidth Measurement	16
3.2 Maximum Conducted Output Power Measurement	18
3.3 Power Spectral Density Measurement	20
3.4 Unwanted Emissions Measurement.....	23
3.5 AC Conducted Emission Measurement.....	28
3.6 Automatically Discontinue Transmission	30
3.7 Antenna Requirements	31
4 LIST OF MEASURING EQUIPMENT	32
5 UNCERTAINTY OF EVALUATION	33
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR050909D	Rev. 01	Initial issue of report	Aug. 25, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.05 dB at 5459.98 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.02 dB at 0.589 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-
Remark: Not required means after assessing, test items are not necessary to carry out.					

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	dtab Compact
Brand Name	NTT docomo
Model Name	ELF-8605L
FCC ID	O57ELF8605L
EUT supports Radios application	WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver and GNSS
IMEI Code	Conducted: N/A Conduction: 860775040008126 Radiation: 860775040008167
HW Version	Tablet ELF-8605L
SW Version	ELF-8605L_RF04_20200813
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 16.02 dBm / 0.0400 W 802.11n HT20 : 16.04 dBm / 0.0402 W 802.11n HT40 : 13.92 dBm / 0.0247 W 802.11ac VHT20 : 13.02 dBm / 0.0200 W 802.11ac VHT40 : 13.28 dBm / 0.0213 W 802.11ac VHT80 : 11.78 dBm / 0.0151 W <5260 MHz ~ 5320 MHz> 802.11a : 15.93 dBm / 0.0392 W 802.11n HT20 : 15.98 dBm / 0.0396 W 802.11n HT40 : 13.88 dBm / 0.0244 W 802.11ac VHT20 : 13.00 dBm / 0.0200 W 802.11ac VHT40 : 13.22 dBm / 0.0210 W 802.11ac VHT80 : 10.84 dBm / 0.0121 W <5500 MHz ~ 5720 MHz > 802.11a : 16.19 dBm / 0.0416 W 802.11n HT20 : 15.82 dBm / 0.0382 W 802.11n HT40 : 14.04 dBm / 0.0254 W 802.11ac VHT20 : 13.19 dBm / 0.0208 W 802.11ac VHT40 : 13.07 dBm / 0.0203 W 802.11ac VHT80 : 12.88 dBm / 0.0194 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 17.53 MHz 802.11n HT20 : 18.73 MHz 802.11n HT40 : 36.56 MHz 802.11ac VHT80 : 76.00 MHz <5260 MHz ~ 5320 MHz > 802.11a : 17.43 MHz 802.11n HT20 : 18.73 MHz 802.11n HT40 : 36.46 MHz 802.11ac VHT80 : 75.64 MHz <5500 MHz ~ 5720 MHz > 802.11a : 17.53 MHz 802.11n HT20 : 18.63 MHz 802.11n HT40 : 36.56 MHz 802.11ac VHT80 : 75.88 MHz
Antenna Type / Gain	<5150 MHz ~ 5250 MHz> FPC Antenna with gain 0.60 dBi <5250 MHz ~ 5350 MHz> FPC Antenna with gain 0.90 dBi <5470 MHz ~ 5725 MHz> FPC Antenna with gain 0.20 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

<FCC>-KS

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link(5G) + USB Cable(Charging from Adaptor Cradle) + Earphone
Remark: 1. The worst case of conducted emission is mode 1; 2. For Radiated Test Cases, The tests were performance with Adapter, Earphone , USB Cable	



Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	-
Straddle		-	-	138

2.3 Connection Diagram of Test System

For Radiation

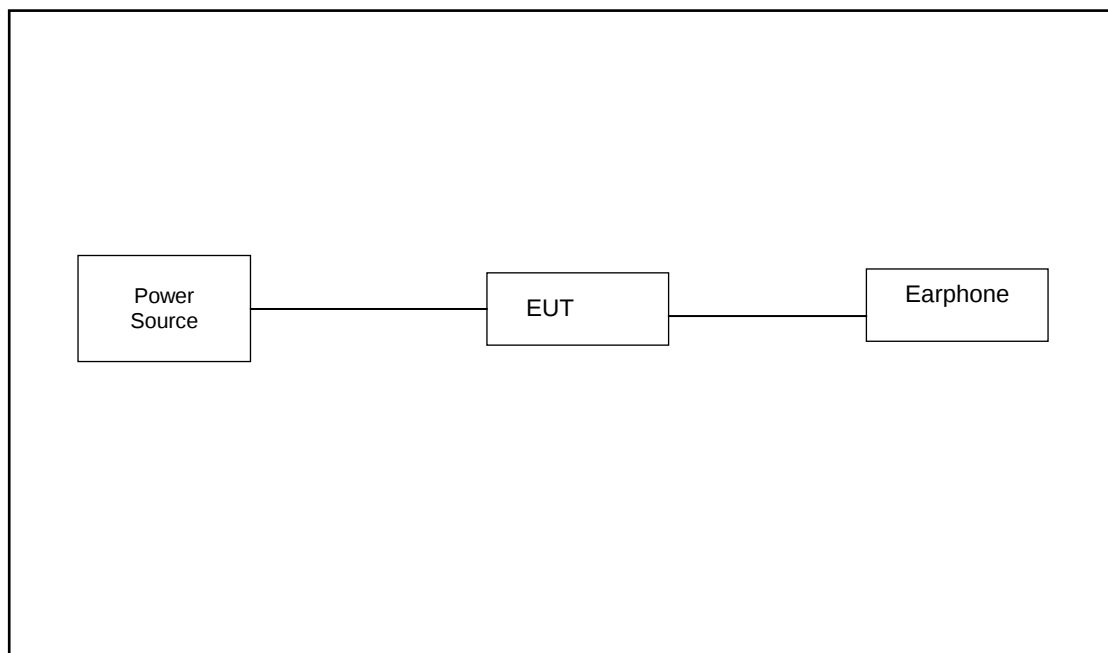

For AC Conducted Emission

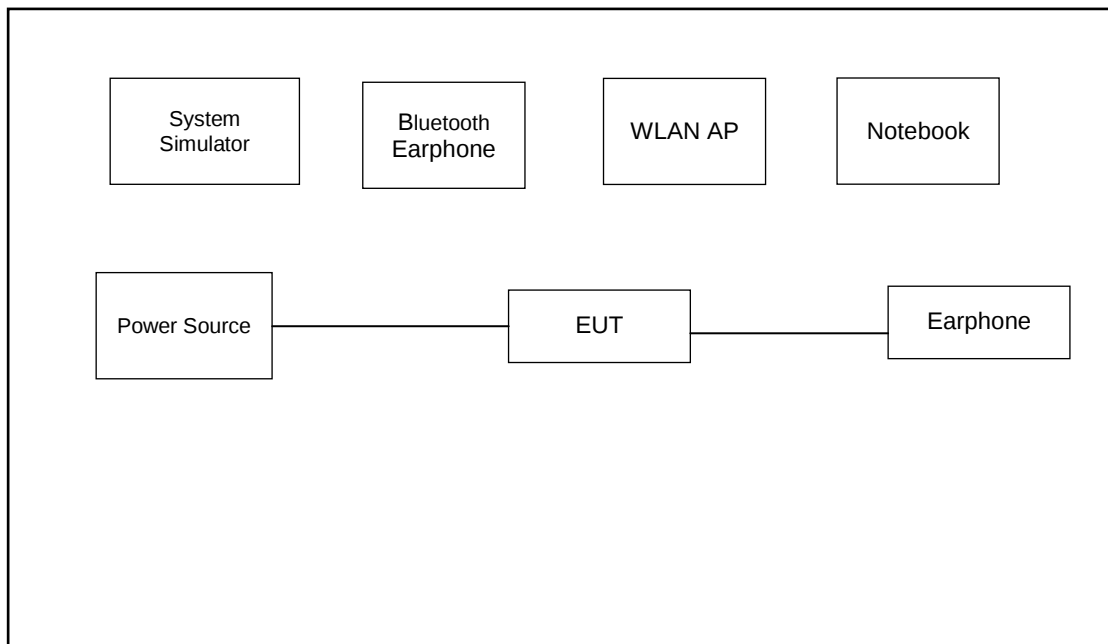

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5.	Adapter	N/A	N/A	N/A	N/A	N/A
6.	USB cable	N/A	N/A	N/A	N/A	shielded,0.8m
7.	Earphone	N/A	N/A	N/A	N/A	Unshielded,1.2m
8.	SD Card	Kingston	8GB	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 7.40 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 7.40 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

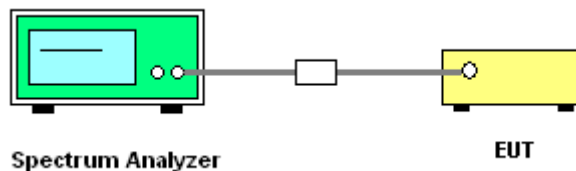

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

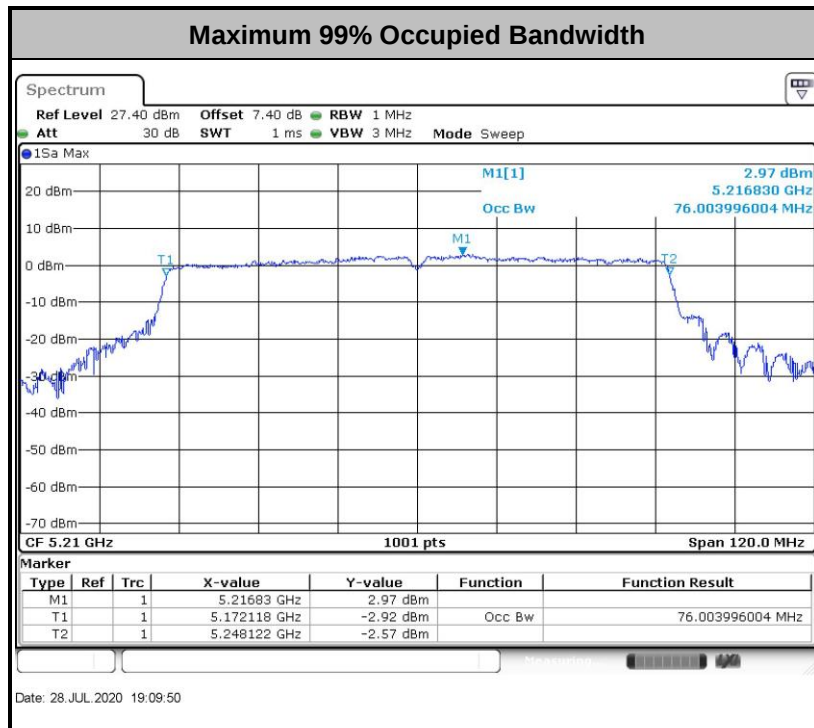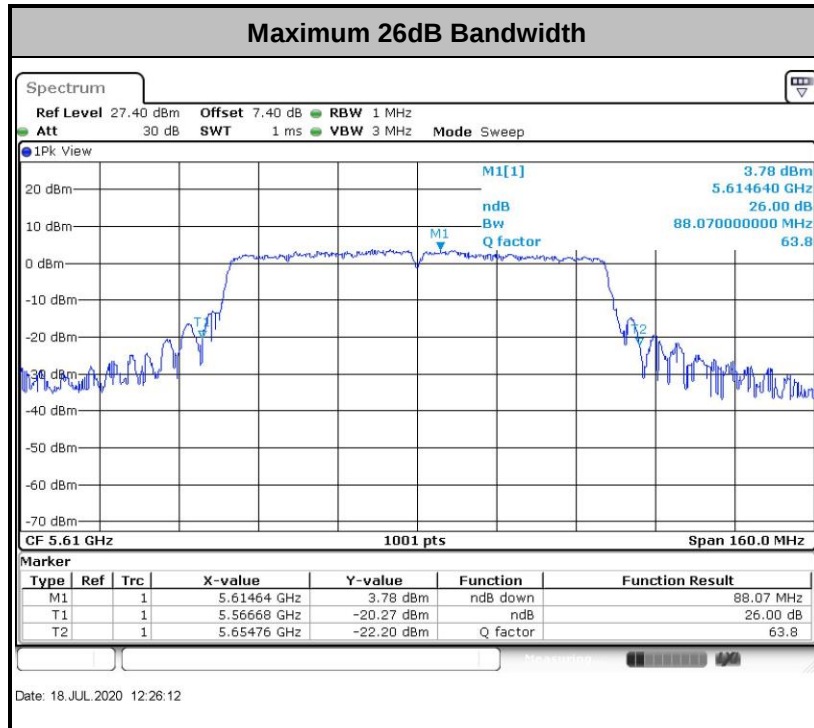

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

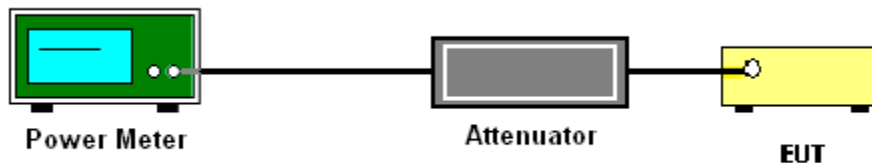

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
-
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

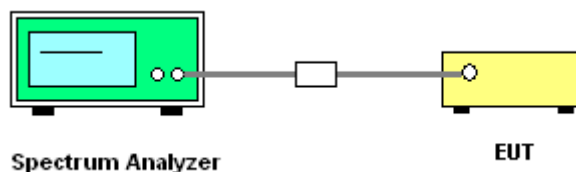

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

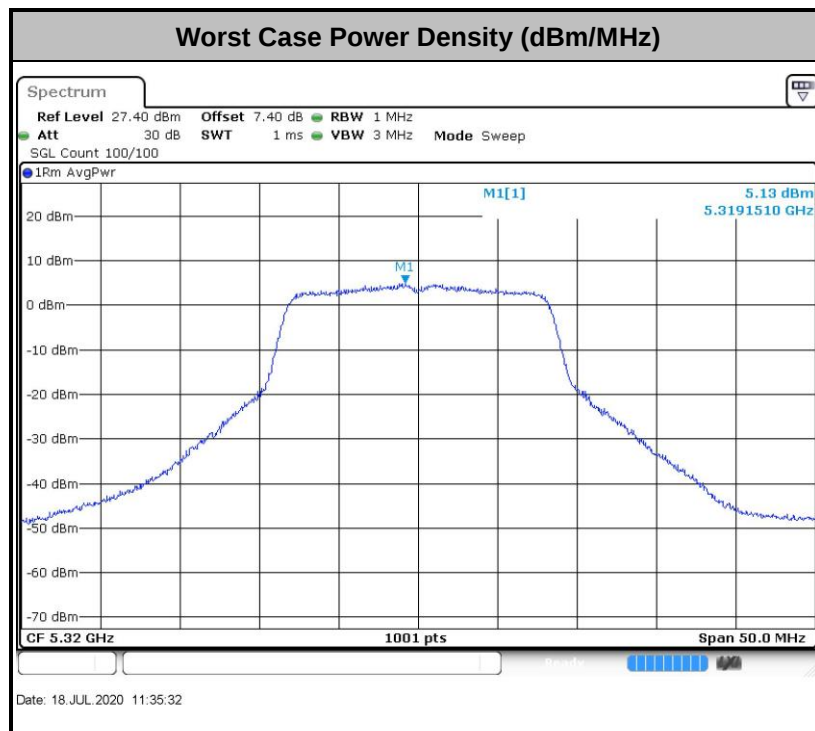

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

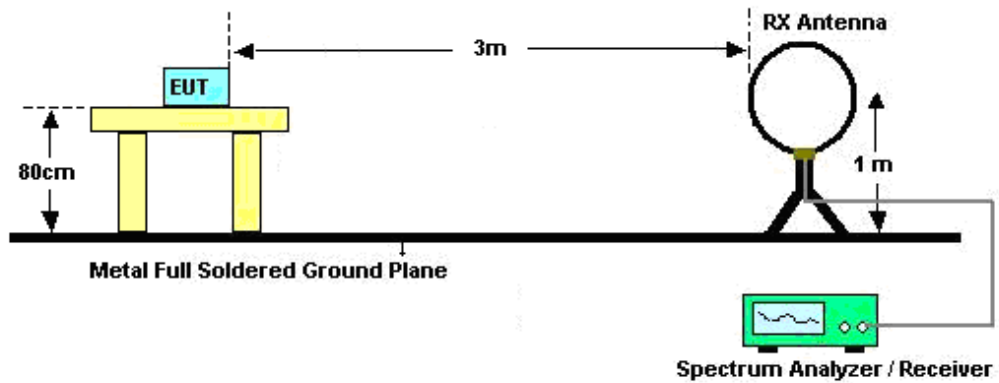

For radiated emissions from 30MHz to 1GHz

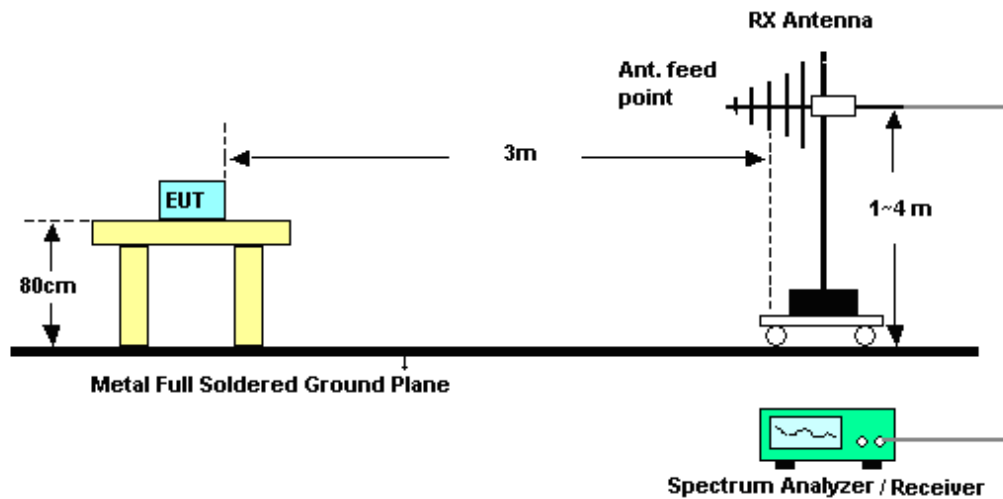

For radiated emissions above 1GHz

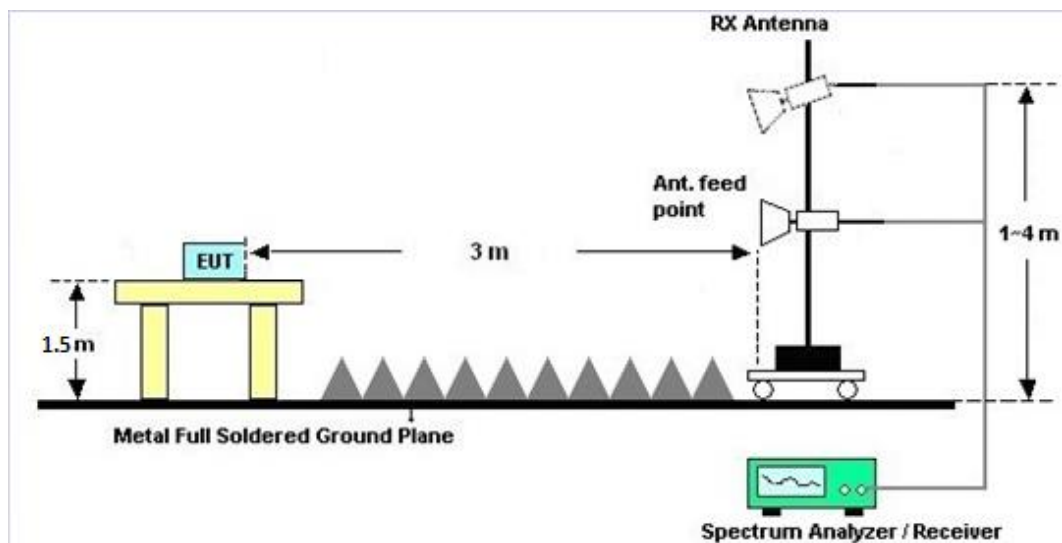

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)



The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

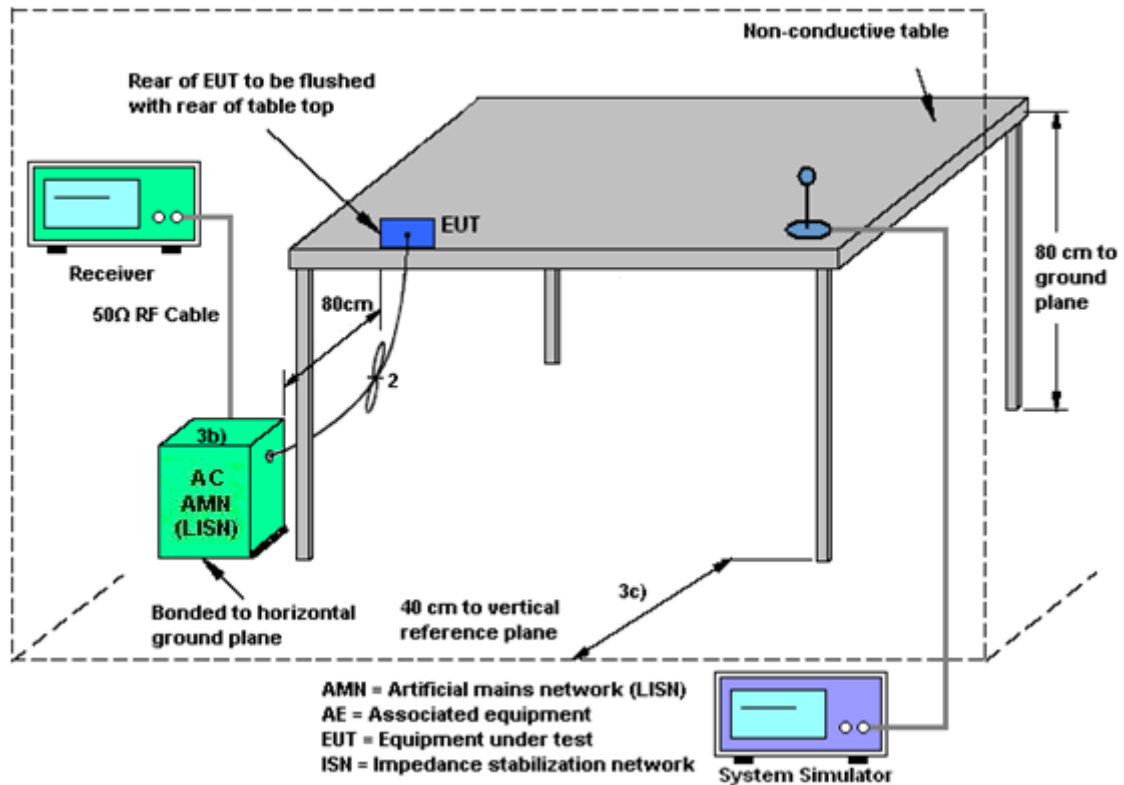

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Jul. 18, 2020~ Jul. 28, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 08, 2020	Jul. 18, 2020~ Jul. 28, 2020	Jan. 07, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	Jul. 18, 2020~ Jul. 28, 2020	Jan. 07, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Apr. 13, 2020	Jul. 28, 2020	Apr. 12, 2021	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz, MAX 30dB	Apr. 15, 2020	Jul. 28, 2020	Apr. 14, 2021	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 10, 2019	Jul. 28, 2020	Nov. 09, 2020	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 30, 2020	Jul. 28, 2020	May 29, 2021	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 26, 2020	Jul. 28, 2020	Apr. 25, 2021	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Jul. 28, 2020	Nov. 09, 2020	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Aug. 06, 2019	Jul. 28, 2020	Aug. 05, 2020	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Jul. 28, 2020	Jan. 07, 2021	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz~18Ghz	Jan. 02, 2020	Jul. 28, 2020	Jan. 03, 2021	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 18, 2019	Jul. 28, 2020	Oct. 17, 2020	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 28, 2020	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 28, 2020	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 28, 2020	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Jul. 21, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Jul. 21, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Jul. 21, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Jul. 21, 2020	Oct. 17, 2020	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	Tizzy T	Temperature:	21~25	°C
Test Date:	2020/7/18~2020/7/28	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	17.43	23.48	-	22.41		
11a	6Mbps	1	44	5220	17.48	23.73	-	22.43		
11a	6Mbps	1	48	5240	17.53	24.08	-	22.44		
HT20	MCS0	1	36	5180	18.58	23.98	-	22.69		
HT20	MCS0	1	44	5220	18.63	25.03	-	22.70		
HT20	MCS0	1	48	5240	18.73	24.48	-	22.73		
HT40	MCS0	1	38	5190	36.56	41.72	-	23.01		
HT40	MCS0	1	46	5230	36.46	41.63	-	23.01		
VHT80	MCS0	1	42	5210	76.00	83.44	-	23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.08	15.76	24.00	0.60		Pass
11a	6Mbps	1	44	5220	0.08	16.02	24.00	0.60		Pass
11a	6Mbps	1	48	5240	0.08	15.79	24.00	0.60		Pass
HT20	MCS0	1	36	5180	0.08	15.80	24.00	0.60		Pass
HT20	MCS0	1	44	5220	0.08	16.04	24.00	0.60		Pass
HT20	MCS0	1	48	5240	0.08	15.82	24.00	0.60		Pass
HT40	MCS0	1	38	5190	0.16	13.26	24.00	0.60		Pass
HT40	MCS0	1	46	5230	0.16	13.92	24.00	0.60		Pass
VHT20	MCS0	1	36	5180	0.08	12.78	24.00	0.60		Pass
VHT20	MCS0	1	44	5220	0.08	13.02	24.00	0.60		Pass
VHT20	MCS0	1	48	5240	0.08	12.80	24.00	0.60		Pass
VHT40	MCS0	1	38	5190	0.16	13.24	24.00	0.60		Pass
VHT40	MCS0	1	46	5230	0.16	13.28	24.00	0.60		Pass
VHT80	MCS0	1	42	5210	0.30	11.78	24.00	0.60		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.08	4.84	11.00	0.60		Pass
11a	6Mbps	1	44	5220	0.08	4.83	11.00	0.60		Pass
11a	6Mbps	1	48	5240	0.08	4.59	11.00	0.60		Pass
HT20	MCS0	1	36	5180	0.08	4.66	11.00	0.60		Pass
HT20	MCS0	1	44	5220	0.08	4.47	11.00	0.60		Pass
HT20	MCS0	1	48	5240	0.08	4.07	11.00	0.60		Pass
HT40	MCS0	1	38	5190	0.16	-0.80	11.00	0.60		Pass
HT40	MCS0	1	46	5230	0.16	-0.56	11.00	0.60		Pass
VHT80	MCS0	1	42	5210	0.30	-5.19	11.00	0.60		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	17.33	24.12	23.39	29.39	23.98	
11a	6M bps	1	60	5300	17.43	23.98	23.41	29.41	23.98	
11a	6M bps	1	64	5320	17.43	23.43	23.41	29.41	23.98	
HT20	MCS 0	1	52	5260	18.63	24.98	23.70	29.70	23.98	
HT20	MCS 0	1	60	5300	18.63	24.88	23.70	29.70	23.98	
HT20	MCS 0	1	64	5320	18.73	24.63	23.73	29.73	23.98	
HT40	MCS 0	1	54	5270	36.46	41.63	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.46	41.63	23.98	30.00	23.98	
VHT80	MCS 0	1	58	5290	75.64	83.60	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.08	15.41	23.98	0.90	26.99	Pass
11a	6M bps	1	60	5300	0.08	15.93	23.98	0.90	26.99	Pass
11a	6M bps	1	64	5320	0.08	15.91	23.98	0.90	26.99	Pass
HT20	MCS 0	1	52	5260	0.08	15.48	23.98	0.90	26.99	Pass
HT20	MCS 0	1	60	5300	0.08	15.98	23.98	0.90	26.99	Pass
HT20	MCS 0	1	64	5320	0.08	15.90	23.98	0.90	26.99	Pass
HT40	MCS 0	1	54	5270	0.16	13.88	23.98	0.90	26.99	Pass
HT40	MCS 0	1	62	5310	0.16	13.78	23.98	0.90	26.99	Pass
VHT20	MCS 0	1	52	5260	0.08	12.50	23.98	0.90	26.99	Pass
VHT20	MCS 0	1	60	5300	0.08	13.00	23.98	0.90	26.99	Pass
VHT20	MCS 0	1	64	5320	0.08	12.87	23.98	0.90	26.99	Pass
VHT40	MCS 0	1	54	5270	0.16	12.88	23.98	0.90	26.99	Pass
VHT40	MCS 0	1	62	5310	0.16	13.22	23.98	0.90	26.99	Pass
VHT80	MCS 0	1	58	5290	0.30	10.84	23.98	0.90	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.08	4.46	11.00	0.90		Pass
11a	6M bps	1	60	5300	0.08	4.77	11.00	0.90		Pass
11a	6M bps	1	64	5320	0.08	5.21	11.00	0.90		Pass
HT20	MCS 0	1	52	5260	0.08	4.03	11.00	0.90		Pass
HT20	MCS 0	1	60	5300	0.08	4.29	11.00	0.90		Pass
HT20	MCS 0	1	64	5320	0.08	4.52	11.00	0.90		Pass
HT40	MCS 0	1	54	5270	0.16	-0.21	11.00	0.90		Pass
HT40	MCS 0	1	62	5310	0.16	-0.30	11.00	0.90		Pass
VHT80	MCS 0	1	58	5290	0.30	-6.30	11.00	0.90		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	17.53	23.93	23.44	29.44	23.98	
11a	6M bps	1	116	5580	17.38	23.93	23.40	29.40	23.98	
11a	6M bps	1	140	5700	17.43	23.73	23.41	29.41	23.98	
HT20	MCS 0	1	100	5500	18.58	24.78	23.69	29.69	23.98	
HT20	MCS 0	1	116	5580	18.58	24.43	23.69	29.69	23.98	
HT20	MCS 0	1	140	5700	18.63	24.63	23.70	29.70	23.98	
HT40	MCS 0	1	102	5510	36.46	41.90	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	36.46	41.63	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	36.56	41.81	23.98	30.00	23.98	
VHT80	MCS 0	1	106	5530	75.64	83.44	23.98	30.00	23.98	
VHT80	MCS 0	1	122	5610	75.88	88.07	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.08	15.74	23.98	0.20	26.99	Pass
11a	6M bps	1	116	5580	0.08	15.80	23.98	0.20	26.99	Pass
11a	6M bps	1	140	5700	0.08	16.19	23.98	0.20	26.99	Pass
HT20	MCS 0	1	100	5500	0.08	15.76	23.98	0.20	26.99	Pass
HT20	MCS 0	1	116	5580	0.08	15.82	23.98	0.20	26.99	Pass
HT20	MCS 0	1	140	5700	0.08	15.46	23.98	0.20	26.99	Pass
HT40	MCS 0	1	102	5510	0.16	13.45	23.98	0.20	26.99	Pass
HT40	MCS 0	1	110	5550	0.16	13.90	23.98	0.20	26.99	Pass
HT40	MCS 0	1	134	5670	0.16	14.04	23.98	0.20	26.99	Pass
VHT20	MCS 0	1	100	5500	0.08	12.85	23.98	0.20	26.99	Pass
VHT20	MCS 0	1	116	5580	0.08	12.74	23.98	0.20	26.99	Pass
VHT20	MCS 0	1	140	5700	0.08	13.19	23.98	0.20	26.99	Pass
VHT40	MCS 0	1	102	5510	0.16	12.88	23.98	0.20	26.99	Pass
VHT40	MCS 0	1	110	5550	0.16	12.95	23.98	0.20	26.99	Pass
VHT40	MCS 0	1	134	5670	0.16	13.07	23.98	0.20	26.99	Pass
VHT80	MCS 0	1	106	5530	0.30	10.38	23.98	0.20	26.99	Pass
VHT80	MCS 0	1	122	5610	0.30	12.88	23.98	0.20	26.99	Pass


TEST RESULTS DATA
Power Spectral Density

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.08	4.74	11.00	0.20		Pass
11a	6M bps	1	116	5580	0.08	4.87	11.00	0.20		Pass
11a	6M bps	1	140	5700	0.08	5.07	11.00	0.20		Pass
HT20	MCS 0	1	100	5500	0.08	4.60	11.00	0.20		Pass
HT20	MCS 0	1	116	5580	0.08	4.93	11.00	0.20		Pass
HT20	MCS 0	1	140	5700	0.08	4.55	11.00	0.20		Pass
HT40	MCS 0	1	102	5510	0.16	-0.56	11.00	0.20		Pass
HT40	MCS 0	1	110	5550	0.16	-0.41	11.00	0.20		Pass
HT40	MCS 0	1	134	5670	0.16	0.07	11.00	0.20		Pass
VHT80	MCS 0	1	106	5530	0.30	-6.53	11.00	0.20		Pass
VHT80	MCS 0	1	122	5610	0.30	-4.54	11.00	0.20		Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2℃
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

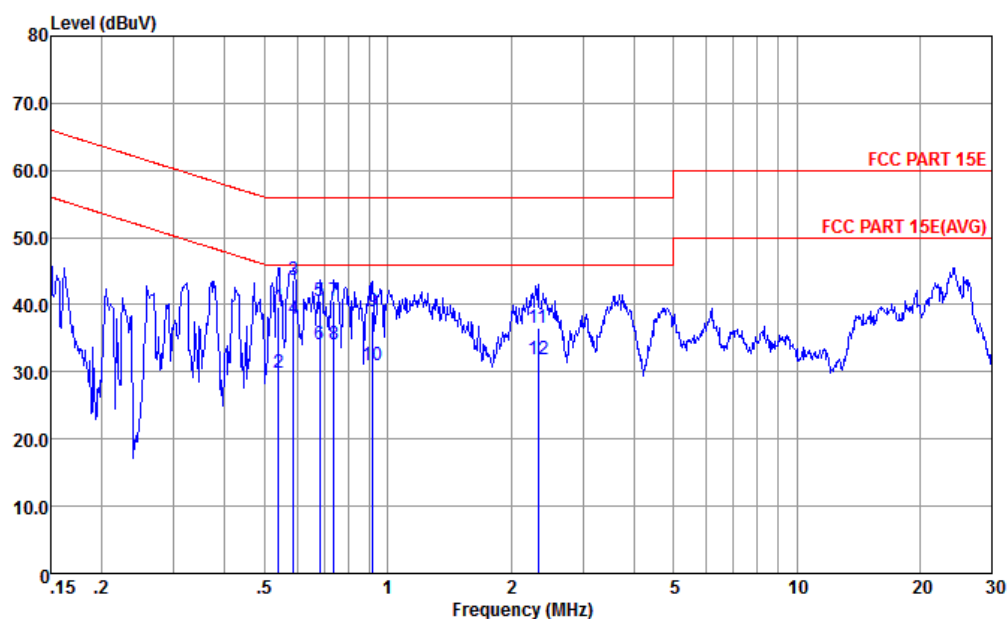


Site : CO01-KS
Condition : FCC PART 15E LISN-L-191028-CN02 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.541	39.67	-16.33	56.00	29.29	0.14	10.24	QP
2	0.541	29.97	-16.03	46.00	19.59	0.14	10.24	Average
3	0.589	43.68	-12.32	56.00	33.30	0.14	10.24	QP
4 *	0.589	37.98	-8.02	46.00	27.60	0.14	10.24	Average
5	0.683	40.59	-15.41	56.00	30.20	0.15	10.24	QP
6	0.683	33.99	-12.01	46.00	23.60	0.15	10.24	Average
7	0.739	40.50	-15.50	56.00	30.10	0.16	10.24	QP
8	0.739	34.10	-11.90	46.00	23.70	0.16	10.24	Average
9	0.918	38.91	-17.09	56.00	28.50	0.17	10.24	QP
10	0.918	31.01	-14.99	46.00	20.60	0.17	10.24	Average
11	2.334	36.47	-19.53	56.00	25.80	0.44	10.23	QP
12	2.334	31.97	-14.03	46.00	21.30	0.44	10.23	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2℃
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

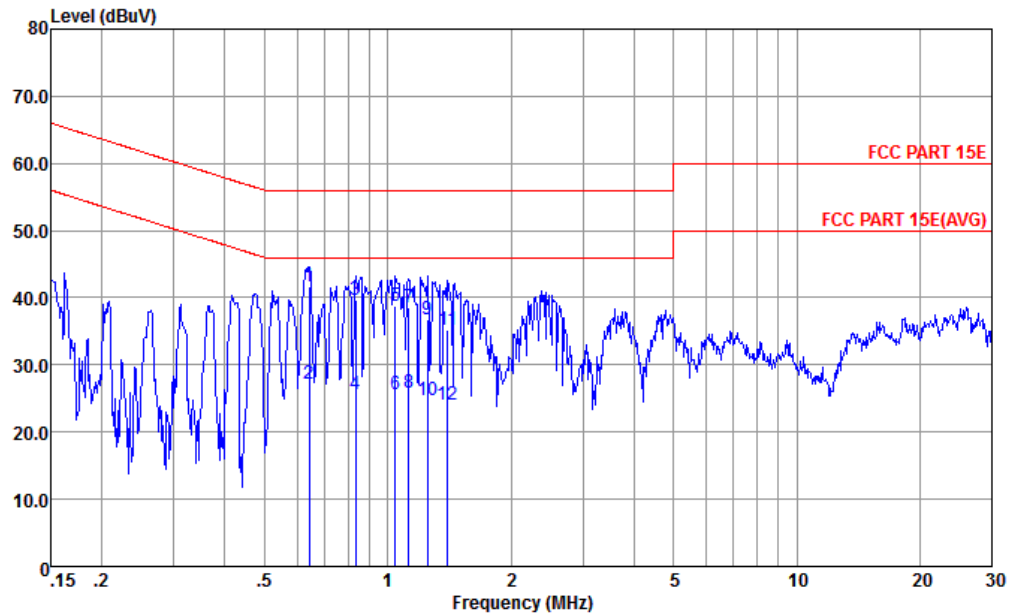

Site : CO01-KS
Condition : FCC PART 15E LISN-N-191028-CN02 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.644	41.59	-14.41	56.00	31.10	0.25	10.24	QP
2	0.644	27.09	-18.91	46.00	16.60	0.25	10.24	Average
3	0.835	39.71	-16.29	56.00	29.20	0.27	10.24	QP
4	0.835	25.61	-20.39	46.00	15.10	0.27	10.24	Average
5	1.043	38.74	-17.26	56.00	28.21	0.30	10.23	QP
6	1.043	25.74	-20.26	46.00	15.21	0.30	10.23	Average
7	1.123	38.66	-17.34	56.00	28.10	0.33	10.23	QP
8	1.123	25.86	-20.14	46.00	15.30	0.33	10.23	Average
9	1.249	36.80	-19.20	56.00	26.21	0.36	10.23	QP
10	1.249	24.80	-21.20	46.00	14.21	0.36	10.23	Average
11	1.403	35.13	-20.87	56.00	24.50	0.40	10.23	QP
12	1.403	24.13	-21.87	46.00	13.50	0.40	10.23	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149.6	60.42	-13.58	74	45.9	34.07	11.06	30.61	100	73	P	H
	!	5149.98	49.14	-4.86	54	34.62	34.07	11.06	30.61	100	73	A	H
	*	5176	108	-	-	93.43	34.12	11.07	30.62	100	73	P	H
		5176	100.8	-	-	86.23	34.12	11.07	30.62	100	73	A	H
		5143.52	58.22	-15.78	74	43.7	34.07	11.06	30.61	155	78	P	V
		5148.96	47.42	-6.58	54	32.9	34.07	11.06	30.61	155	78	A	V
	*	5176	104.75	-	-	90.18	34.12	11.07	30.62	155	78	P	V
		5176	97.21	-	-	82.64	34.12	11.07	30.62	155	78	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36		10358.36	41	-27.3	68.3	48.93	37.01	15.74	60.68	100	360	P	H
5180MHz		10358.36	41.68	-26.62	68.3	49.61	37.01	15.74	60.68	100	360	P	V
802.11a CH 44		10438.44	42.53	-25.77	68.3	50.29	37.06	15.84	60.66	100	360	P	H
5220MHz		10438.44	42.68	-25.62	68.3	50.44	37.06	15.84	60.66	100	360	P	V
802.11a CH 48		10478.47	42.65	-25.65	68.3	50.32	37.09	15.89	60.65	100	360	P	H
5240MHz		10478.47	42.15	-26.15	68.3	49.82	37.09	15.89	60.65	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5147.52	58.18	-15.82	74	43.66	34.07	11.06	30.61	100	70	P	H
		5149.92	47.87	-6.13	54	33.35	34.07	11.06	30.61	100	70	A	H
	*	5182	108.33	-	-	93.76	34.12	11.07	30.62	100	70	P	H
		5182	100.93	-	-	86.36	34.12	11.07	30.62	100	70	A	H
		5112	57.46	-16.54	74	42.98	34.03	11.05	30.6	100	97	P	V
		5149.98	46.82	-7.18	54	32.3	34.07	11.06	30.61	100	97	A	V
	*	5176	103.54	-	-	88.97	34.12	11.07	30.62	100	97	P	V
		5176	96.05	-	-	81.48	34.12	11.07	30.62	100	97	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10358.36	40.85	-27.45	68.3	48.78	37.01	15.74	60.68	100	360	P	H
		10358.36	42.28	-26.02	68.3	50.21	37.01	15.74	60.68	100	360	P	V
802.11n HT20 CH 44 5220MHz		10438.44	42.32	-25.98	68.3	50.08	37.06	15.84	60.66	100	360	P	H
		10438.44	42.2	-26.1	68.3	49.96	37.06	15.84	60.66	100	360	P	V
802.11n HT20 CH 48 5240MHz		10478.47	42.97	-25.33	68.3	50.64	37.09	15.89	60.65	100	360	P	H
		10478.47	43.27	-25.03	68.3	50.94	37.09	15.89	60.65	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5148.32	60.18	-13.82	74	45.66	34.07	11.06	30.61	257	67	P	H
	!	5149.98	50.67	-3.33	54	36.15	34.07	11.06	30.61	257	67	A	H
	*	5194	104.41	-	-	89.82	34.14	11.08	30.63	257	67	P	H
		5194	97.16	-	-	82.57	34.14	11.08	30.63	257	67	A	H
		5361.48	55.5	-18.5	74	40.6	34.35	11.24	30.69	257	67	P	H
		5358.78	45.67	-8.33	54	30.8	34.33	11.22	30.68	257	67	A	H
		5146.24	58.07	-15.93	74	43.55	34.07	11.06	30.61	100	87	P	V
	!	5149.92	48.79	-5.21	54	34.27	34.07	11.06	30.61	100	87	A	V
	*	5194	100.82	-	-	86.23	34.14	11.08	30.63	100	87	P	V
		5194	92.86	-	-	78.27	34.14	11.08	30.63	100	87	A	V
		5371.02	54.57	-19.43	74	39.67	34.35	11.24	30.69	100	87	P	V
		5381.82	45.47	-8.53	54	30.52	34.38	11.26	30.69	100	87	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10378.38	41.51	-26.79	68.3	49.37	37.03	15.78	60.67	300	0	P	H
		10378.38	41.41	-26.89	68.3	49.27	37.03	15.78	60.67	300	0	P	V
802.11n HT40 CH 46 5230MHz		10458.46	42.14	-26.16	68.3	49.87	37.07	15.86	60.66	100	360	P	H
		10458.46	42.12	-26.18	68.3	49.85	37.07	15.86	60.66	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5149.76	62.26	-11.74	74	47.74	34.07	11.06	30.61	275	71	P	H
		5148.48	50.81	-3.19	54	36.29	34.07	11.06	30.61	275	71	A	H
		5218	99.41	-	-	84.79	34.16	11.09	30.63	275	71	P	H
		5218	92.3	-	-	77.68	34.16	11.09	30.63	275	71	A	H
		5361.84	54.5	-19.5	74	39.6	34.35	11.24	30.69	275	71	P	H
		5357.34	46.17	-7.83	54	31.3	34.33	11.22	30.68	275	71	A	H
		5139.04	58.68	-15.32	74	44.19	34.05	11.05	30.61	100	93	P	V
		5141.44	49.43	-4.57	54	34.91	34.07	11.06	30.61	100	93	A	V
		5218	95.21	-	-	80.59	34.16	11.09	30.63	100	93	P	V
		5218	87.68	-	-	73.06	34.16	11.09	30.63	100	93	A	V
		5399.1	55.23	-18.77	74	40.26	34.4	11.27	30.7	100	93	P	V
		5358.6	45.77	-8.23	54	30.9	34.33	11.22	30.68	100	93	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 1 5150~5250MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10418.42	42.64	-25.66	68.3	Peak	50.44	37.05	15.82	60.67	300	P	H
CH 42 5210MHz		10418.42	42.47	-25.83	68.3	Peak	50.27	37.05	15.82	60.67	300	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 64 5320MHz		5350.2	56.63	-17.37	74	41.76	34.33	11.22	30.68	115	73	P	H
		5350.1	47.37	-6.63	54	32.5	34.33	11.22	30.68	115	73	A	H
	*	5320	109.52	-	-	94.71	34.29	11.19	30.67	115	73	P	H
		5320	102.06	-	-	87.25	34.29	11.19	30.67	115	73	A	H
		5364.6	55.88	-18.12	74	40.98	34.35	11.24	30.69	107	91	P	V
		5350.7	45.74	-8.26	54	30.87	34.33	11.22	30.68	107	91	A	V
	*	5320	104.75	-	-	89.94	34.29	11.19	30.67	107	91	P	V
		5320	97.52	-	-	82.71	34.29	11.19	30.67	107	91	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		7015.015	54.52	-13.78	68.3	66.71	35.33	12.93	60.45	300	0	P	H
		10520	42.12	-26.18	68.3	49.73	37.11	15.93	60.65	300	0	P	H
		7015.015	51.96	-16.34	68.3	64.15	35.33	12.93	60.45	300	0	P	V
		10520	42.67	-25.63	68.3	50.28	37.11	15.93	60.65	300	0	P	V
802.11a CH 60 5300MHz		7065.065	54.27	-14.03	68.3	66.31	35.42	13	60.46	300	0	P	H
		10600	42.37	-31.63	74	49.81	37.16	16.03	60.63	300	0	P	H
		7065.065	52.19	-16.11	68.3	64.23	35.42	13	60.46	300	0	P	V
		10600	43.54	-30.46	74	50.98	37.16	16.03	60.63	300	0	P	V
802.11a CH 64 5320MHz		7095.095	54.04	-14.26	68.3	65.98	35.49	13.04	60.47	300	0	P	H
		10640	43.32	-30.68	74	50.69	37.18	16.07	60.62	300	0	P	H
		7095.095	51.93	-16.37	68.3	63.87	35.49	13.04	60.47	300	0	P	V
		10640	42.54	-31.46	74	49.91	37.18	16.07	60.62	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 64 5320MHz		5354.1	57.15	-16.85	74	42.28	34.33	11.22	30.68	117	71	P	H
		5350	47.18	-6.82	54	32.31	34.33	11.22	30.68	117	71	A	H
	*	5320	109.55	-	-	94.74	34.29	11.19	30.67	117	71	P	H
		5320	101.61	-	-	86.8	34.29	11.19	30.67	117	71	A	H
		5368.3	55.07	-18.93	74	40.17	34.35	11.24	30.69	106	92	P	V
		5350.2	45.7	-8.3	54	30.83	34.33	11.22	30.68	106	92	A	V
	*	5320	104.71	-	-	89.9	34.29	11.19	30.67	106	92	P	V
		5320	97.65	-	-	82.84	34.29	11.19	30.67	106	92	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		7015.015	55.42	-12.88	68.3	67.61	35.33	12.93	60.45	300	0	P	H
HT20		10518.52	42.71	-25.59	68.3	50.32	37.11	15.93	60.65	300	0	P	H
CH 52		7015.015	52.17	-16.13	68.3	64.36	35.33	12.93	60.45	300	0	P	V
5260MHz		10518.52	42.3	-26	68.3	49.91	37.11	15.93	60.65	300	0	P	V
802.11n		7065.065	54.25	-14.05	68.3	66.29	35.42	13	60.46	100	360	P	H
HT20		10600	43.47	-30.53	74	50.91	37.16	16.03	60.63	100	360	P	H
CH 60		7065.065	53.12	-15.18	68.3	65.16	35.42	13	60.46	100	360	P	V
5300MHz		10600	43.99	-30.01	74	51.43	37.16	16.03	60.63	100	360	P	V
802.11n		7095.095	54.57	-13.73	68.3	66.51	35.49	13.04	60.47	100	360	P	H
HT20		10640	42.2	-31.8	74	49.57	37.18	16.07	60.62	100	360	P	H
CH 64		7095.095	51.87	-16.43	68.3	63.81	35.49	13.04	60.47	100	360	P	V
5320MHz		10640	43.2	-30.8	74	50.57	37.18	16.07	60.62	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 62 5310MHz		5146.72	56.68	-17.32	74	42.16	34.07	11.06	30.61	243	72	P	H
		5114.56	47.11	-6.89	54	32.63	34.03	11.05	30.6	243	72	A	H
	*	5314	104.67	-	-	89.86	34.29	11.19	30.67	243	72	P	H
		5314	97	-	-	82.19	34.29	11.19	30.67	243	72	A	H
		5353.8	60.29	-13.71	74	45.42	34.33	11.22	30.68	243	72	P	H
	!	5350.2	50.7	-3.3	54	35.83	34.33	11.22	30.68	243	72	A	H
		5102.08	57.69	-16.31	74	43.24	34.01	11.04	30.6	100	94	P	V
		5117.44	47.1	-6.9	54	32.62	34.03	11.05	30.6	100	94	A	V
	*	5302	100.75	-	-	85.96	34.27	11.18	30.66	100	94	P	V
		5302	93.28	-	-	78.49	34.27	11.18	30.66	100	94	A	V
		5352.4	57.93	-16.07	74	43.06	34.33	11.22	30.68	100	94	P	V
	!	5350.2	48.71	-5.29	54	33.84	34.33	11.22	30.68	100	94	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		7025.025	54.81	-13.49	68.3	67	35.33	12.93	60.45	100	360	P	H
HT40		10538.54	41.8	-26.5	68.3	49.37	37.12	15.95	60.64	100	360	P	H
CH 54		7025.025	52.88	-15.42	68.3	65.07	35.33	12.93	60.45	100	360	P	V
5270MHz		10540	41.95	-26.35	68.3	49.52	37.12	15.95	60.64	100	360	P	V
802.11n		7080.08	54.4	-13.9	68.3	66.39	35.46	13.02	60.47	100	360	P	H
HT40		10620	43.39	-30.61	74	50.79	37.17	16.05	60.62	100	360	P	H
CH 62		7080.08	52.38	-15.92	68.3	64.37	35.46	13.02	60.47	100	360	P	V
5310MHz		10620	43.46	-30.54	74	50.86	37.17	16.05	60.62	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5131.36	56.89	-17.11	74	42.39	34.05	11.05	30.6	239	71	P	H
		5109.44	47.54	-6.46	54	33.06	34.03	11.05	30.6	239	71	A	H
	*	5284	98.01	-	-	83.25	34.25	11.16	30.65	239	71	P	H
		5284	90.52	-	-	75.76	34.25	11.16	30.65	239	71	A	H
		5350.4	59.15	-14.85	74	44.28	34.33	11.22	30.68	239	71	P	H
	!	5356	50.15	-3.85	54	35.28	34.33	11.22	30.68	239	71	A	H
		5144.48	56.31	-17.69	74	41.79	34.07	11.06	30.61	100	99	P	V
		5138.4	47.71	-6.29	54	33.22	34.05	11.05	30.61	100	99	A	V
	*	5296	95.32	-	-	80.53	34.27	11.18	30.66	100	99	P	V
		5296	87.97	-	-	73.18	34.27	11.18	30.66	100	99	A	V
		5361.1	57.41	-16.59	74	42.51	34.35	11.24	30.69	100	99	P	V
	!	5362.3	49.02	-4.98	54	34.12	34.35	11.24	30.69	100	99	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 2 5250~5350MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		7055.055	56.26	-12.04	68.3	68.36	35.39	12.97	60.46	106	100	P	H
VHT80		10578.58	43.39	-24.91	68.3	50.89	37.14	15.99	60.63	300	0	P	H
CH 58		7055.055	54.14	-14.16	68.3	66.24	35.39	12.97	60.46	107	89	P	V
5290MHz		10578.58	43.12	-25.18	68.3	50.62	37.14	15.99	60.63	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		5456.24	57.18	-16.82	74	42.15	34.46	11.29	30.72	114	74	P	H
	!	5467.76	64.63	-3.67	68.3	49.57	34.48	11.3	30.72	114	74	P	H
	!	5459.98	48.08	-5.92	54	33.05	34.46	11.29	30.72	114	74	A	H
	*	5500	112.21	-	-	97.1	34.53	11.31	30.73	114	74	P	H
		5500	104.3	-	-	89.19	34.53	11.31	30.73	114	74	A	H
		5439.92	55.69	-18.31	74	40.67	34.44	11.29	30.71	100	92	P	V
		5469.04	59.64	-8.66	68.3	44.58	34.48	11.3	30.72	100	92	P	V
		5459.92	46.59	-7.41	54	31.56	34.46	11.29	30.72	100	92	A	V
	*	5500	108.06	-	-	92.95	34.53	11.31	30.73	100	92	P	V
		5500	100.6	-	-	85.49	34.53	11.31	30.73	100	92	A	V
802.11a CH 140 5700MHz	!	5730.12	62.89	-5.41	68.3	47.29	34.78	11.64	30.82	115	72	P	H
	*	5704	111.15	-	-	95.6	34.76	11.6	30.81	115	72	P	H
		5704	103.91	-	-	88.36	34.76	11.6	30.81	115	72	A	H
		5726.36	61.23	-7.07	68.3	45.63	34.78	11.64	30.82	100	97	P	V
	*	5704	108.25	-	-	92.7	34.76	11.6	30.81	100	97	P	V
		5704	100.85	-	-	85.3	34.76	11.6	30.81	100	97	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		7335.335	51.06	-22.94	74	62.44	35.92	13.22	60.52	261	104	P	H
	!	7335.335	48.72	-5.28	54	60.1	35.92	13.22	60.52	261	104	A	H
		10999	42.51	-31.49	74	49.18	37.4	16.47	60.54	300	0	P	H
		7335.335	50.86	-23.14	74	62.24	35.92	13.22	60.52	101	91	P	V
	!	7335.335	48.36	-5.64	54	59.74	35.92	13.22	60.52	101	91	A	V
		10999	42.24	-31.76	74	48.91	37.4	16.47	60.54	300	0	P	V
802.11a CH 116 5580MHz		7440.44	49	-25	74	60.13	36.11	13.3	60.54	268	106	P	H
		7440.44	45.37	-8.63	54	56.5	36.11	13.3	60.54	268	106	A	H
		11160	42.47	-31.53	74	48.9	37.5	16.57	60.5	100	360	P	H
		7440.44	50.02	-23.98	74	61.15	36.11	13.3	60.54	100	91	P	V
		7440.44	46.69	-7.31	54	57.82	36.11	13.3	60.54	100	91	A	V
		11160	42.18	-31.82	74	48.61	37.5	16.57	60.5	100	360	P	V
802.11a CH 140 5700MHz		7600.6	47.46	-26.54	74	58.37	36.18	13.48	60.57	100	116	P	H
		7600.6	43.15	-10.85	54	54.06	36.18	13.48	60.57	100	116	A	H
		11399.39	43.14	-30.86	74	49.23	37.64	16.72	60.45	100	360	P	H
		7600.6	48.62	-25.38	74	59.53	36.18	13.48	60.57	100	91	P	V
		7600.6	45.82	-8.18	54	56.73	36.18	13.48	60.57	100	91	A	V
		11399.39	41.83	-32.17	74	47.92	37.64	16.72	60.45	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5455.12	56.38	-17.62	74	41.34	34.46	11.29	30.71	113	74	P	H
		5468.88	61.56	-6.74	68.3	46.5	34.48	11.3	30.72	113	74	P	H
	!	5459.98	48.22	-5.78	54	33.19	34.46	11.29	30.72	113	74	A	H
	*	5500	110.87	-	-	95.76	34.53	11.31	30.73	113	74	P	H
		5500	104.07	-	-	88.96	34.53	11.31	30.73	113	74	A	H
		5435.28	55.45	-18.55	74	40.42	34.44	11.29	30.7	100	100	P	V
		5469.84	60.11	-8.19	68.3	45.05	34.48	11.3	30.72	100	100	P	V
		5459.98	46.64	-7.36	54	31.61	34.46	11.29	30.72	100	100	A	V
	*	5494	107.81	-	-	92.72	34.51	11.31	30.73	100	100	P	V
		5494	100.62	-	-	85.53	34.51	11.31	30.73	100	100	A	V
802.11n HT20 CH 140 5700MHz	!	5725.08	63.97	-4.33	68.3	48.37	34.78	11.64	30.82	250	71	P	H
	*	5698	110.37	-	-	94.87	34.75	11.55	30.8	250	71	P	H
		5698	103.14	-	-	87.64	34.75	11.55	30.8	250	71	A	H
		5725.8	60.87	-7.43	68.3	45.27	34.78	11.64	30.82	100	92	P	V
	*	5704	107.03	-	-	91.48	34.76	11.6	30.81	100	92	P	V
		5704	100.79	-	-	85.24	34.76	11.6	30.81	100	92	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		7335.335	51.34	-22.66	74	62.72	35.92	13.22	60.52	259	106	P	H
	!	7335.335	48.82	-5.18	54	60.2	35.92	13.22	60.52	259	106	A	H
		11000	42.81	-31.19	74	49.48	37.4	16.47	60.54	100	360	P	H
		7335.335	51.12	-22.88	74	62.5	35.92	13.22	60.52	103	91	P	V
	!	7335.335	48.34	-5.66	54	59.72	35.92	13.22	60.52	103	91	A	V
		11000	42.26	-31.74	74	48.93	37.4	16.47	60.54	100	360	P	V
802.11n HT20 CH 116 5580MHz		7440.44	46.54	-27.46	74	57.67	36.11	13.3	60.54	100	360	P	H
		11160	42.53	-31.47	74	48.96	37.5	16.57	60.5	100	360	P	H
		7440.44	50.3	-23.7	74	61.43	36.11	13.3	60.54	100	90	P	V
		7440.44	46.99	-7.01	54	58.12	36.11	13.3	60.54	100	90	A	V
		11160	42.19	-31.81	74	48.62	37.5	16.57	60.5	100	360	P	V
802.11n HT20 CH 140 5700MHz		7600.6	47.53	-26.47	74	58.44	36.18	13.48	60.57	100	120	P	H
		7600.6	43.38	-10.62	54	54.29	36.18	13.48	60.57	100	120	A	H
		11400	42.33	-31.67	74	48.42	37.64	16.72	60.45	100	360	P	H
		7600.6	49.74	-24.26	74	60.65	36.18	13.48	60.57	100	91	P	V
		7600.6	46.63	-7.37	54	57.54	36.18	13.48	60.57	100	91	A	V
		11400	43.01	-30.99	74	49.1	37.64	16.72	60.45	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5454.96	58.39	-15.61	74	43.35	34.46	11.29	30.71	222	73	P	H
		5467.44	61.53	-6.77	68.3	46.47	34.48	11.3	30.72	222	73	P	H
	!	5459.76	50.43	-3.57	54	35.4	34.46	11.29	30.72	222	73	A	H
	*	5512	106.6	-	-	91.49	34.53	11.31	30.73	222	73	P	H
		5512	99.48	-	-	84.37	34.53	11.31	30.73	222	73	A	H
		5734.6	56.56	-11.74	68.3	40.91	34.79	11.68	30.82	222	73	P	H
		5459.67	56.14	-17.86	74	40.92	34.46	11.48	30.72	102	93	P	V
		5467.28	59.17	-9.13	68.3	44.11	34.48	11.3	30.72	102	93	P	V
	!	5459.12	48.67	-5.33	54	33.64	34.46	11.29	30.72	102	93	A	V
	*	5506	103.24	-	-	88.13	34.53	11.31	30.73	102	93	P	V
		5506	96.14	-	-	81.03	34.53	11.31	30.73	102	93	A	V
		5730.28	57.61	-10.69	68.3	42.01	34.78	11.64	30.82	102	93	P	V
802.11n HT40 CH 134 5670MHz		5439.6	55.37	-18.63	74	40.35	34.44	11.29	30.71	250	69	P	H
		5465.04	55.74	-12.56	68.3	40.68	34.48	11.3	30.72	250	69	P	H
		5451.92	45.85	-8.15	54	30.81	34.46	11.29	30.71	250	69	A	H
	*	5674	107.44	-	-	91.99	34.73	11.51	30.79	250	69	P	H
		5674	100.12	-	-	84.67	34.73	11.51	30.79	250	69	A	H
		5726.28	60.86	-7.44	68.3	45.26	34.78	11.64	30.82	250	69	P	H
		5400.88	54.74	-19.26	74	39.77	34.4	11.27	30.7	101	92	P	V
		5466.64	53.55	-14.75	68.3	38.49	34.48	11.3	30.72	101	92	P	V
		5446.64	45.68	-8.32	54	30.64	34.46	11.29	30.71	101	92	A	V
	*	5674	104.27	-	-	88.82	34.73	11.51	30.79	101	92	P	V
		5674	104.27	-	-	88.82	34.73	11.51	30.79	101	92	A	V
		5726.44	58.04	-10.26	68.3	42.44	34.78	11.64	30.82	101	92	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		7345.345	51.47	-22.53	74	62.85	35.92	13.22	60.52	268	106	P	H
	!	7345.345	49.17	-4.83	54	60.55	35.92	13.22	60.52	268	106	A	H
		11019.02	41.86	-32.14	74	48.51	37.41	16.48	60.54	300	0	P	H
		7345.345	51.44	-22.56	74	62.82	35.92	13.22	60.52	100	88	P	V
	!	7345.345	49.4	-4.6	54	60.78	35.92	13.22	60.52	100	88	A	V
		11019.02	42.45	-31.55	74	49.1	37.41	16.48	60.54	300	0	P	V
802.11n HT40 CH 110 5550MHz		7400.4	46.76	-27.24	74	58.04	36.01	13.24	60.53	300	0	P	H
		11099.1	43.43	-30.57	74	49.96	37.46	16.53	60.52	300	0	P	H
		7400.4	50.28	-23.72	74	61.56	36.01	13.24	60.53	100	280	P	V
	!	7400.4	48.75	-5.25	54	60.03	36.01	13.24	60.53	100	280	A	V
		11099.1	43.01	-30.99	74	49.54	37.46	16.53	60.52	300	0	P	V
802.11n HT40 CH 134 5670MHz		7560.56	46.49	-27.51	74	57.42	36.19	13.44	60.56	300	0	P	H
		11339.33	42.58	-31.42	74	48.77	37.6	16.68	60.47	300	0	P	H
		7560.56	50.67	-23.33	74	61.6	36.19	13.44	60.56	100	89	P	V
		7560.56	47.41	-6.59	54	58.34	36.19	13.44	60.56	100	89	A	V
		11339.33	42.47	-31.53	74	48.66	37.6	16.68	60.47	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5455.28	59.37	-14.63	74	44.33	34.46	11.29	30.71	239	71	P	H
		5461.2	59.84	-8.46	68.3	44.81	34.46	11.29	30.72	239	71	P	H
	!	5459.98	50.95	-3.05	54	35.92	34.46	11.29	30.72	239	71	A	H
	*	5536	100.23	-	-	85.08	34.57	11.32	30.74	239	71	P	H
		5536	92.9	-	-	77.75	34.57	11.32	30.74	239	71	A	H
		5745.56	56.81	-11.49	68.3	41.17	34.79	11.68	30.83	239	71	P	H
		5452.4	57.82	-16.18	74	42.78	34.46	11.29	30.71	100	99	P	V
		5462.64	56.8	-11.5	68.3	41.74	34.48	11.3	30.72	100	99	P	V
	!	5459.98	49.64	-4.36	54	34.61	34.46	11.29	30.72	100	99	A	V
	*	5536	98.68	-	-	83.53	34.57	11.32	30.74	100	99	P	V
		5536	91.04	-	-	75.89	34.57	11.32	30.74	100	99	A	V
		5757.56	57.34	-10.96	68.3	41.64	34.81	11.72	30.83	100	99	P	V
802.11ac VHT80 CH 122 5610MHz		5422.48	55.25	-18.75	74	40.25	34.42	11.28	30.7	231	76	P	H
		5461.36	54.26	-14.04	68.3	39.23	34.46	11.29	30.72	231	76	P	H
		5458.16	46.49	-7.51	54	31.46	34.46	11.29	30.72	231	76	A	H
	*	5608	101.96	-	-	86.72	34.66	11.35	30.77	231	76	P	H
		5608	94.21	-	-	78.97	34.66	11.35	30.77	231	76	A	H
		5733.56	57.87	-10.43	68.3	42.27	34.78	11.64	30.82	231	76	P	H
		5388.08	54.63	-19.37	74	39.68	34.38	11.26	30.69	100	94	P	V
		5467.6	54.34	-13.96	68.3	39.28	34.48	11.3	30.72	100	94	P	V
		5451.92	46.46	-7.54	54	31.42	34.46	11.29	30.71	100	94	A	V
	*	5602	100.53	-	-	85.28	34.66	11.35	30.76	100	94	P	V
		5602	92.97	-	-	77.72	34.66	11.35	30.76	100	94	A	V
		5759.8	57.14	-11.16	68.3	41.45	34.81	11.72	30.84	100	94	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		7345.345	52.13	-21.87	74	63.51	35.92	13.22	60.52	257	105	P	H
	!	7345.345	50.05	-3.95	54	61.43	35.92	13.22	60.52	257	105	A	H
		11060	42.87	-31.13	74	49.45	37.44	16.51	60.53	300	0	P	H
		7345.345	51.63	-22.37	74	63.01	35.92	13.22	60.52	100	89	P	V
	!	7345.345	48.97	-5.03	54	60.35	35.92	13.22	60.52	100	89	A	V
		11059.05	42.53	-31.47	74	49.11	37.44	16.51	60.53	300	0	P	V
802.11ac VHT80 CH 122 5610MHz		7480.48	46.18	-27.82	74	57.22	36.17	13.34	60.55	300	0	P	H
		11219.21	42.96	-31.04	74	49.32	37.53	16.6	60.49	300	0	P	H
		7480.48	48.19	-25.81	74	59.23	36.17	13.34	60.55	300	0	P	V
		11219.21	42.25	-31.75	74	48.61	37.53	16.6	60.49	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 144 5720MHz	*	5722	112.72	-	-	97.12	34.78	11.64	30.82	243	73	P	H
		5722	105.07	-	-	89.47	34.78	11.64	30.82	243	73	A	H
	*	5716	108.52	-	-	92.97	34.76	11.6	30.81	105	94	P	V
		5716	101.06	-	-	85.51	34.76	11.6	30.81	105	94	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 144 5720MHz		7625.625	45.53	-28.47	74	56.26	36.17	13.67	60.57	300	0	P	H
		11440	44.14	-29.86	74	49.87	37.66	17.05	60.44	300	0	P	H
		7625.625	46.56	-27.44	74	57.29	36.17	13.67	60.57	300	0	P	V
		11440	44.42	-29.58	74	50.15	37.66	17.05	60.44	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n	*	5716	112.62	-	-	97.07	34.76	11.6	30.81	246	73	P	H
HT20		5716	104.57	-	-	89.02	34.76	11.6	30.81	246	73	A	H
CH 144	*	5716	107.58	-	-	92.03	34.76	11.6	30.81	100	89	P	V
5720MHz		5716	100.06	-	-	84.51	34.76	11.6	30.81	100	89	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		7625.625	46.61	-27.39	74	57.34	36.17	13.67	60.57	300	0	P	H
HT20		11440	44.99	-29.01	74	50.72	37.66	17.05	60.44	300	0	P	H
CH 144		7625.625	46.13	-27.87	74	56.86	36.17	13.67	60.57	300	0	P	V
5720MHz		11439.44	44.15	-29.85	74	49.88	37.66	17.05	60.44	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n	*	5716	106.3	-	-	90.75	34.76	11.6	30.81	270	74	P	H
HT40		5716	99.03	-	-	83.48	34.76	11.6	30.81	270	74	A	H
CH 142	*	5704	103.43	-	-	87.88	34.76	11.6	30.81	100	93	P	V
5710MHz		5704	96.06	-	-	80.51	34.76	11.6	30.81	100	93	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		7615.615	45.59	-28.41	74	56.32	36.18	13.66	60.57	300	0	P	H
HT40		11420	43.37	-30.63	74	49.14	37.65	17.03	60.45	300	0	P	H
CH 142		7615.615	47.35	-26.65	74	58.08	36.18	13.66	60.57	300	0	P	V
5710MHz		11420	43.11	-30.89	74	48.88	37.65	17.03	60.45	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac	*	5686	103.03	-	-	87.53	34.75	11.55	30.8	236	74	P	H
VHT80		5686	95.14	-	-	79.64	34.75	11.55	30.8	236	74	A	H
CH 138	*	5680	99.84	-	-	84.39	34.73	11.51	30.79	106	90	P	V
5690MHz		5680	91.9	-	-	76.45	34.73	11.51	30.79	106	90	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		7585.585	45.61	-28.39	74	56.36	36.18	13.63	60.56	300	0	P	H
VHT80		11380	43.82	-30.18	74	49.64	37.63	17.01	60.46	300	0	P	H
CH 138		7585.585	47.49	-26.51	74	58.24	36.18	13.63	60.56	300	0	P	V
5690MHz		11380	42.83	-31.17	74	48.65	37.63	17.01	60.46	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 LF		31.94	18.76	-21.24	40	25.72	24.04	0.97	31.97	100	26	P	H
		157.07	18.53	-24.97	43.5	31.29	16.68	2.49	31.93	-	-	P	H
		215.27	19.5	-24	43.5	33.25	15.25	2.92	31.92	-	-	P	H
		266.68	20.73	-25.27	46	29.56	19.93	3.24	32	-	-	P	H
		318.09	22.76	-23.24	46	31.66	19.58	3.55	32.03	-	-	P	H
		367.56	23.94	-22.06	46	31.27	20.95	3.81	32.09	-	-	P	H
		31.94	19.19	-20.81	40	26.15	24.04	0.97	31.97	-	-	P	V
		54.25	18.84	-21.16	40	36.09	13.4	1.3	31.95	-	-	P	V
		91.11	20.63	-22.87	43.5	35.75	14.93	1.87	31.92	-	-	P	V
		212.36	20.55	-22.95	43.5	34.34	15.22	2.9	31.91	-	-	P	V
		552.83	22.74	-23.26	46	24.99	25.42	4.67	32.34	-	-	P	V
		945.68	29.65	-16.35	46	23.73	30.85	6.1	31.03	100	10	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.28	-	-	10Hz
802.11n HT20	98.16	-	-	10Hz
802.11n HT40	96.32	0.949	1.053	1.1kHz
802.11ac VHT80	93.31	0.465	2.150	2.2kHz


802.11a

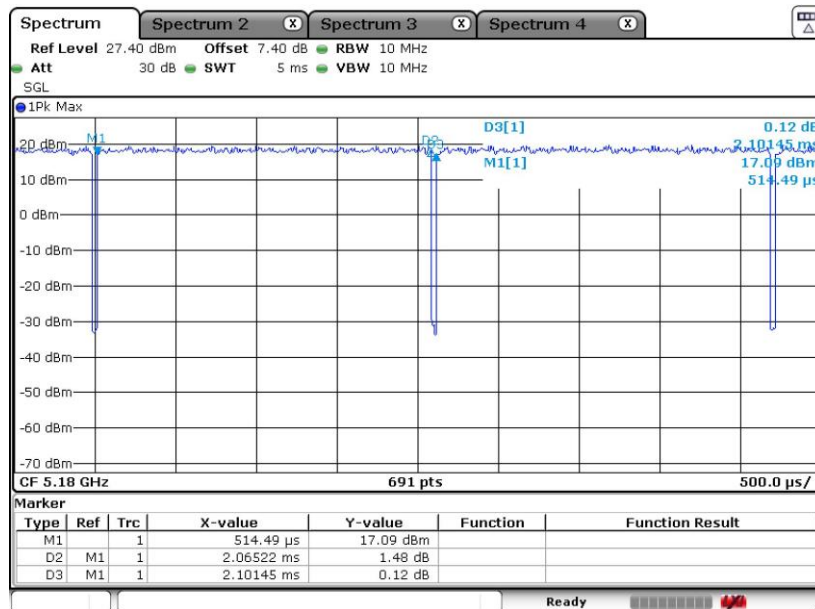

Date: 10.JUL.2020 12:43:43




802.11n HT20

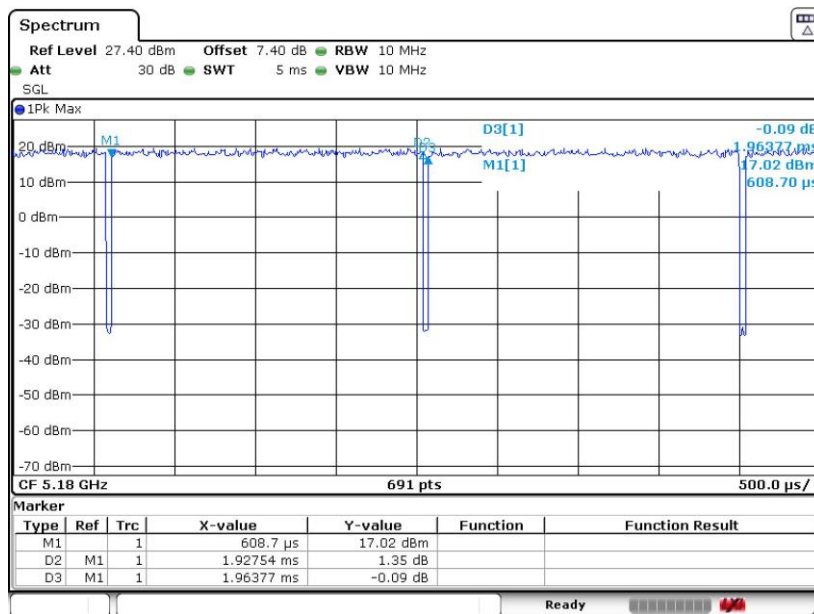


Date: 10 JUL 2020 14:22:14

802.11n HT40

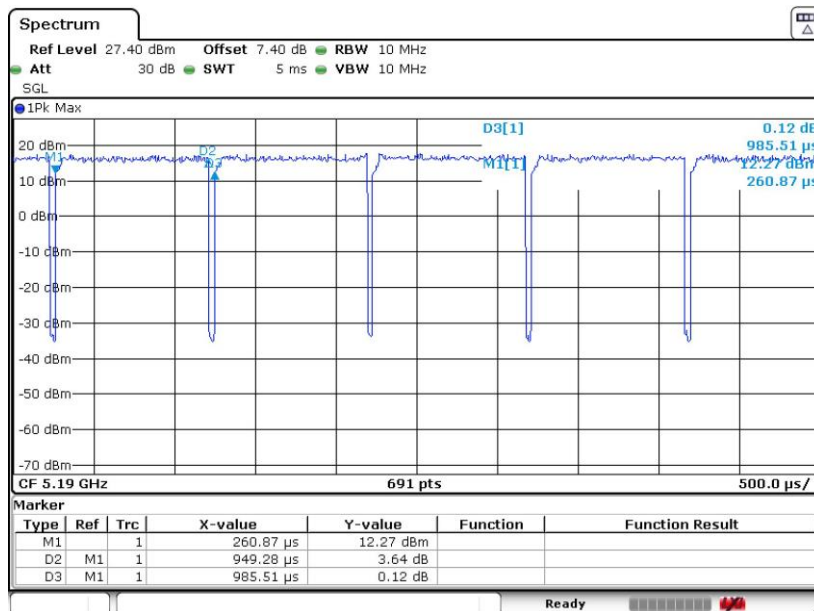

Date: 10 JUL 2020 14:24:08

802.11ac VHT80

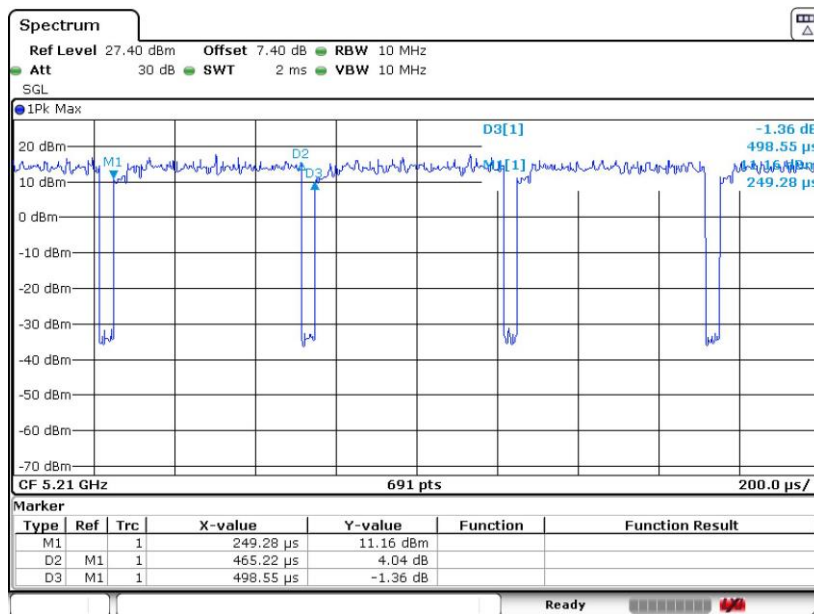

Date: 10 JUL 2020 14:24:55