



FCC RF Test Report

APPLICANT : Lenovo(Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : Lenovo PB-6505M, Lenovo PB-6505MC
FCC ID : O57PB6505M
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Oct. 27, 2018 and testing was completed on Dec. 28, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

James Huang



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Specification of Accessory.....	7
1.6 Modification of EUT	7
1.7 Testing Location	8
1.8 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	13
2.6 Measurement Results Explanation Example.....	13
3 TEST RESULT	14
3.1 26dB & 99% Occupied Bandwidth Measurement	14
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement	18
3.4 Unwanted Emissions Measurement.....	21
3.5 AC Conducted Emission Measurement.....	26
3.6 Automatically Discontinue Transmission	28
3.7 Antenna Requirements	29
4 LIST OF MEASURING EQUIPMENT	30
5 UNCERTAINTY OF EVALUATION	31
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR8O2704D	Rev. 01	Initial issue of report	Jan. 21, 2019

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.16 dB at 5469.68 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.73 dB at 0.561 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.

NO.68 BUILDING, 199 FENJU RD, Pilot Free Trade Zone, 200131, China

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	Lenovo PB-6505M, Lenovo PB-6505MC
FCC ID	O57PB6505M
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+ (16QAM uplink is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40 Bluetooth BR/EDR/LE
IMEI Code	Conducted: 868922040015410 Radiation: 868922040015238/868922040015246 Conduction: 868922040015253/868922040015261
HW Version	Lenovo Tablet PB-6505M Lenovo Tablet PB-6505MC
SW Version	PB-6505M_RF01_190214 PB-6505MC_RF01_190214
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 15.09 dBm / 0.0323 W 802.11n HT20 : 15.07 dBm / 0.0321 W 802.11n HT40 : 15.01 dBm / 0.0317 W 802.11ac VHT20 : 14.89 dBm / 0.0308 W 802.11ac VHT40 : 14.78 dBm / 0.0301 W <5260 MHz ~ 5320 MHz> 802.11a : 15.29 dBm / 0.0338 W 802.11n HT20 : 15.24 dBm / 0.0334 W 802.11n HT40 : 15.13 dBm / 0.0326 W 802.11ac VHT20 : 15.22 dBm / 0.0333 W 802.11ac VHT40 : 15.12 dBm / 0.0325 W <5500 MHz ~ 5700 MHz > 802.11a : 15.13 dBm / 0.0326 W 802.11n HT20 : 15.24 dBm / 0.0334 W 802.11n HT40 : 15.12 dBm / 0.0325 W 802.11ac VHT20 : 15.08 dBm / 0.0322 W 802.11ac VHT40 : 15.11 dBm / 0.0324 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 18.33 MHz 802.11n HT20 : 19.08 MHz 802.11n HT40 : 36.56 MHz <5260 MHz ~ 5320 MHz> 802.11a : 18.53 MHz 802.11n HT20 : 19.28 MHz 802.11n HT40 : 36.56 MHz <5500 MHz ~ 5700 MHz > 802.11a : 18.48 MHz 802.11n HT20 : 19.38 MHz 802.11n HT40 : 36.76 MHz
Antenna Gain / Gain	<5180 MHz ~ 5240 MHz> PIFA Antenna with gain -2.8 dBi <5260 MHz ~ 5320 MHz> PIFA Antenna with gain -2.6 dBi <5500 MHz ~ 5700 MHz > PIFA Antenna with gain -2.4 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Note: WLAN operation in 5600 MHz ~ 5650 MHz is notched.

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1 (US)	Brand Name	Lenovo (Salom)	Model Name	SC-41
	Power Rating	I/P: 100 - 240 Vac, 300mA, O/P: 5Vdc, 2000mA		
AC Adapter 1 (UK)	Brand Name	Lenovo (Salom)	Model Name	SC-43
	Power Rating	I/P: 100 - 240 Vac, 300mA, O/P: 5Vdc, 2000mA		
AC Adapter 1 (AR)	Brand Name	Lenovo (Salom)	Model Name	SC-46
	Power Rating	I/P: 100 - 240 Vac, 300mA, O/P: 5Vdc, 2000mA		
AC Adapter 2 (US)	Brand Name	Lenovo (Acbel)	Model Name	SC-41
	Power Rating	I/P: 100 - 240 Vac, 300mA, O/P: 5Vdc, 2000mA		
AC Adapter 2 (UK)	Brand Name	Lenovo (Acbel)	Model Name	SC-43
	Power Rating	I/P: 100 - 240 Vac, 300mA, O/P: 5Vdc, 2000mA		
AC Adapter 2 (AR)	Brand Name	Lenovo (Acbel)	Model Name	SC-46
	Power Rating	I/P: 100 - 240 Vac, 300mA, O/P: 5Vdc, 2000mA		
Battery 1	Brand Name	Lenovo (NVT)	Model Name	L18D1P33
	Power Rating	3.85Vdc, 5180mAh	Type	Li-ion
Battery 2	Brand Name	Lenovo (Sunwoda)	Model Name	L18D1P33
	Power Rating	3.85Vdc, 5180mAh	Type	Li-ion
USB Cable 1	Brand Name	Lenovo (Leagtech)	Model Name	711300000371
	Signal Line	1.0 meter, shielded cable, without ferrite core		
USB Cable 2	Brand Name	Lenovo (Chinapysind)	Model Name	711300000441
	Signal Line	1.0 meter, shielded cable, without ferrite core		

1.6 Modification of EUT

No modifications are made to the EUT during all test items.



1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS 03CH04-KS	CN5013	630927

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	-	-	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Note: The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable 2 (Charging from adapter 2) + Earphone
Remark: For Radiated Test Cases, The tests were performance with Adapter 1, USB Cable 1 and Earphone.	




Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134

2.3 Connection Diagram of Test System

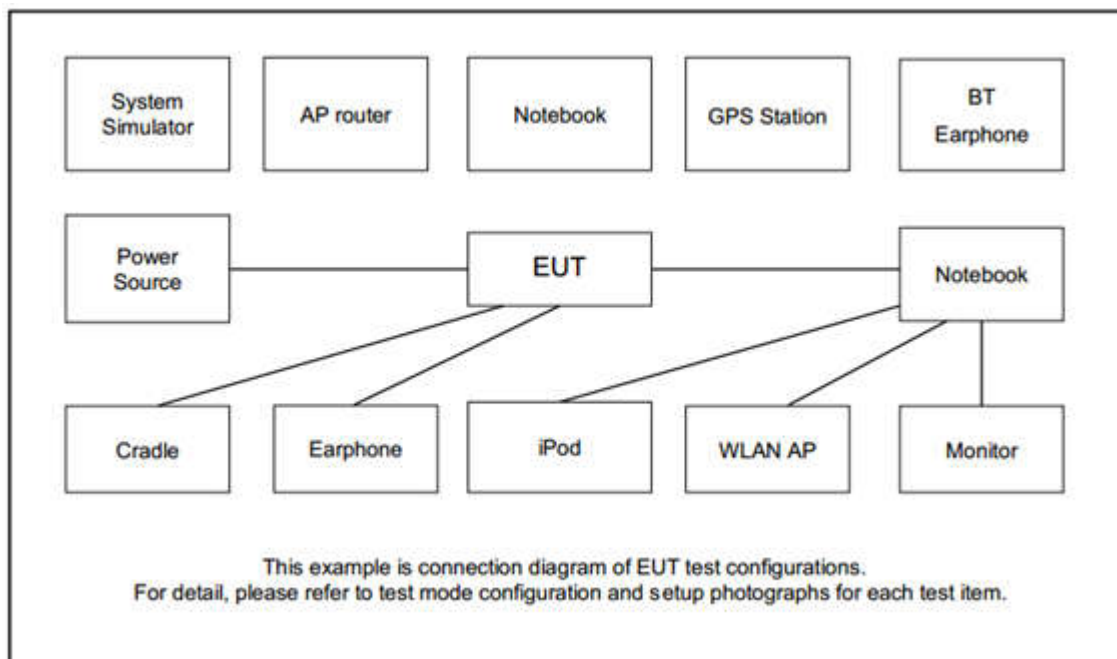

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	WLAN AP	DIR-855	KA2DIR855A2	N/A	N/A	Unshielded, 1.8 m
4.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss

Following shows an offset computation example with cable loss 7.0 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 7.0 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

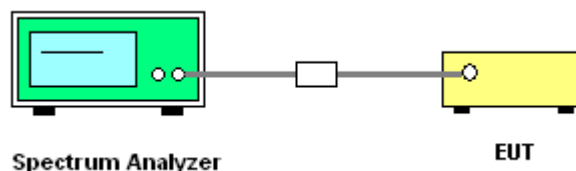

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

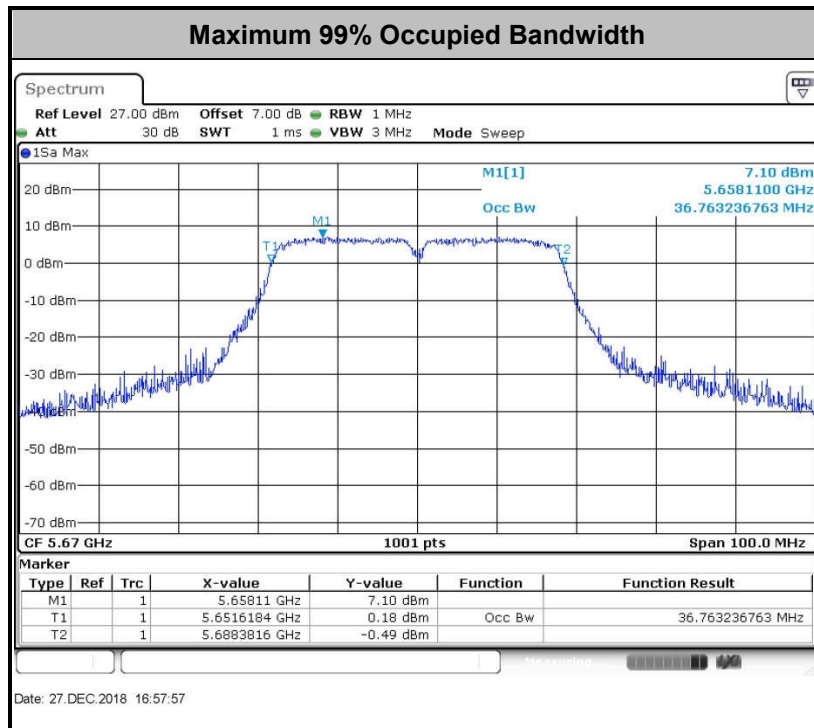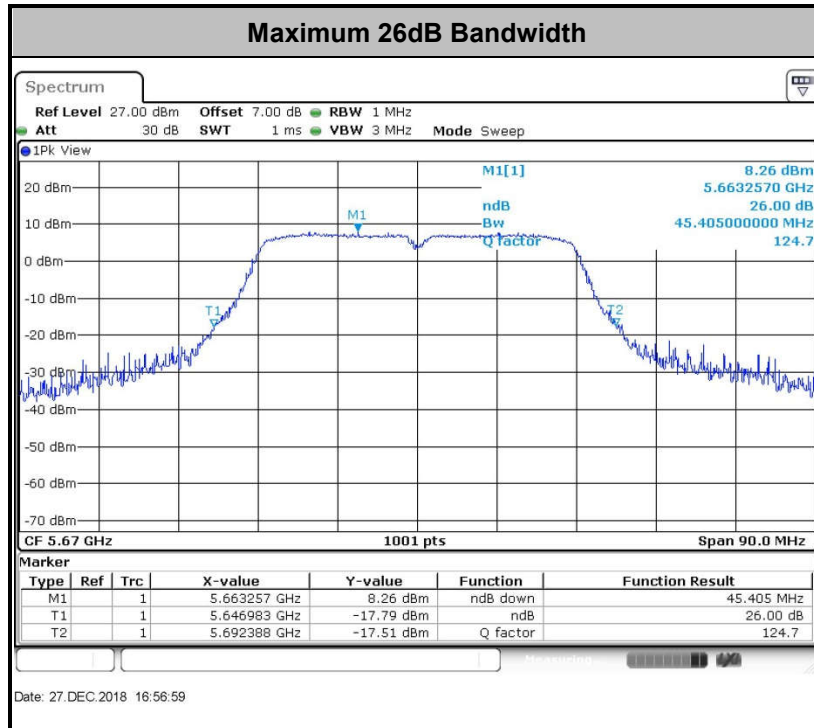

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

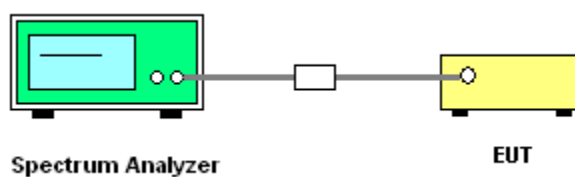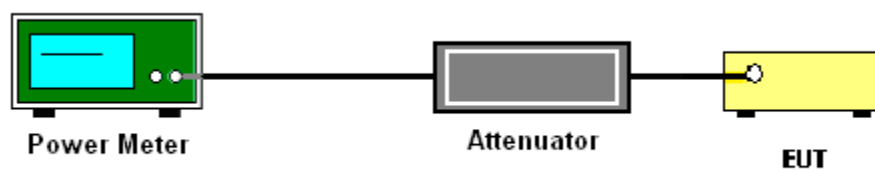

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

3.3.4 Test Setup

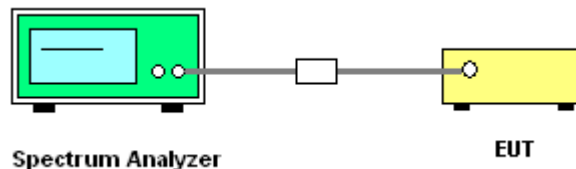

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

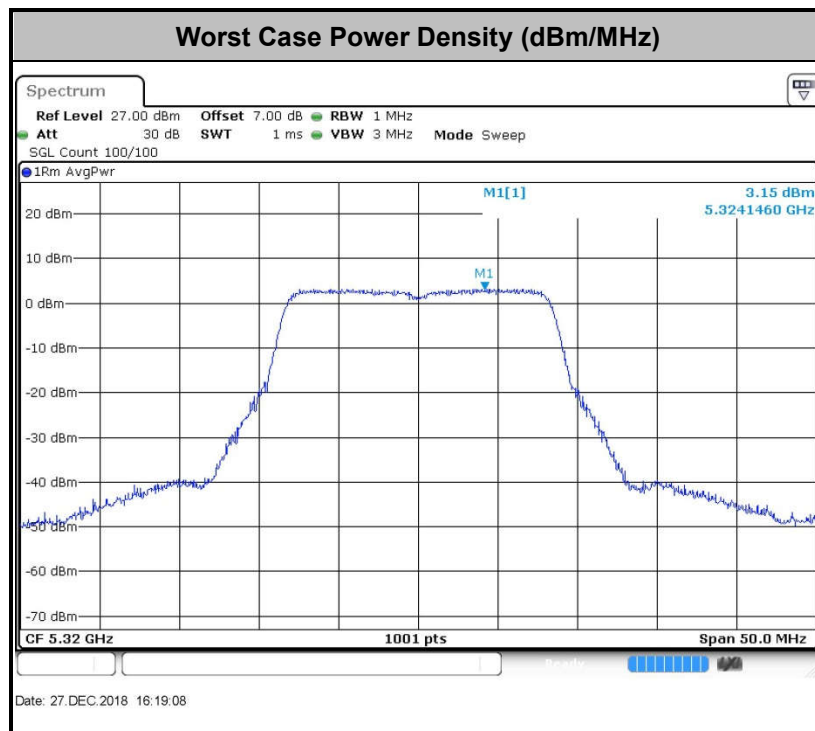

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

(3) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

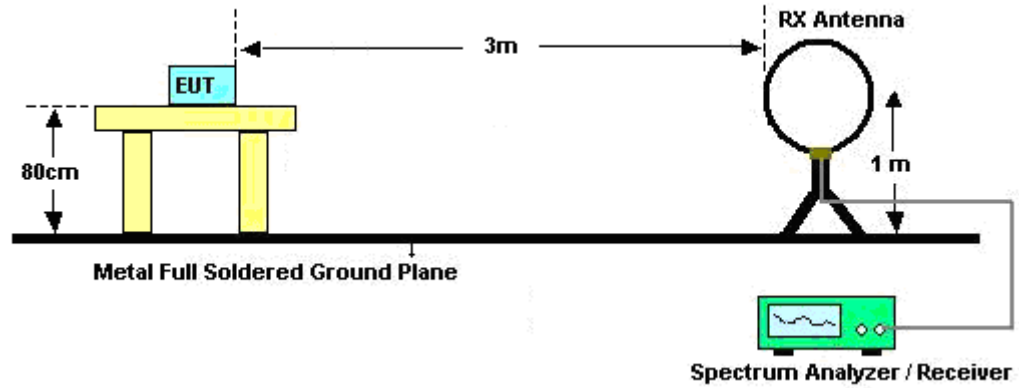

For radiated emissions from 30MHz to 1GHz

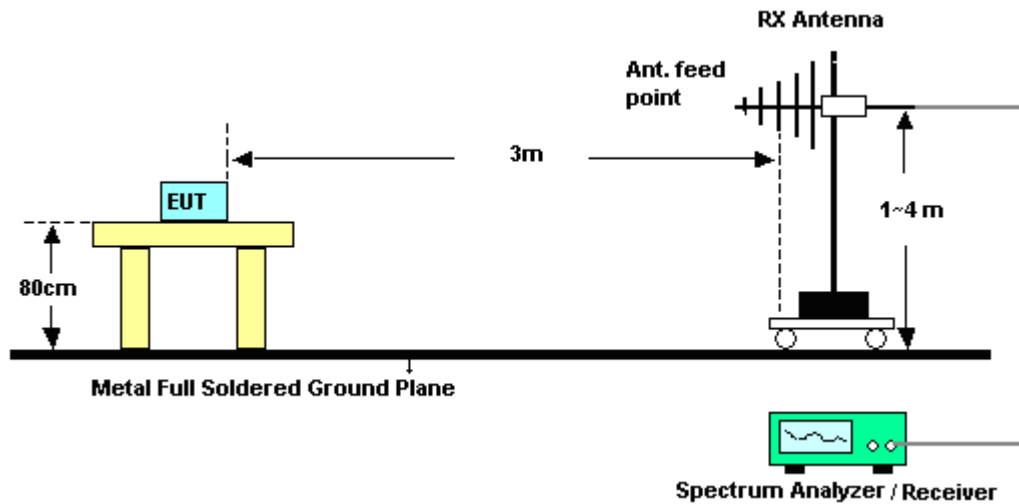

For radiated emissions above 1GHz

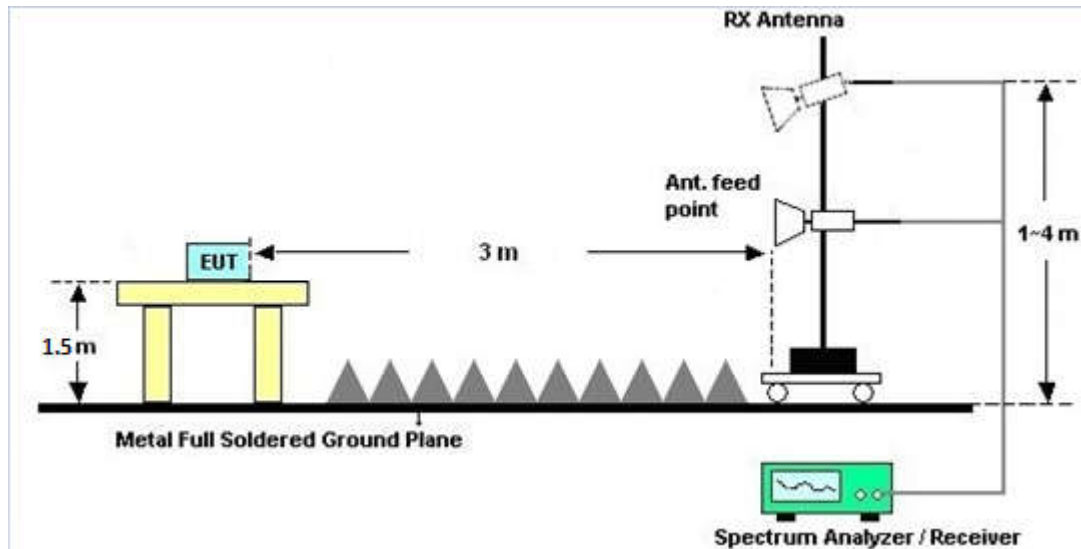

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

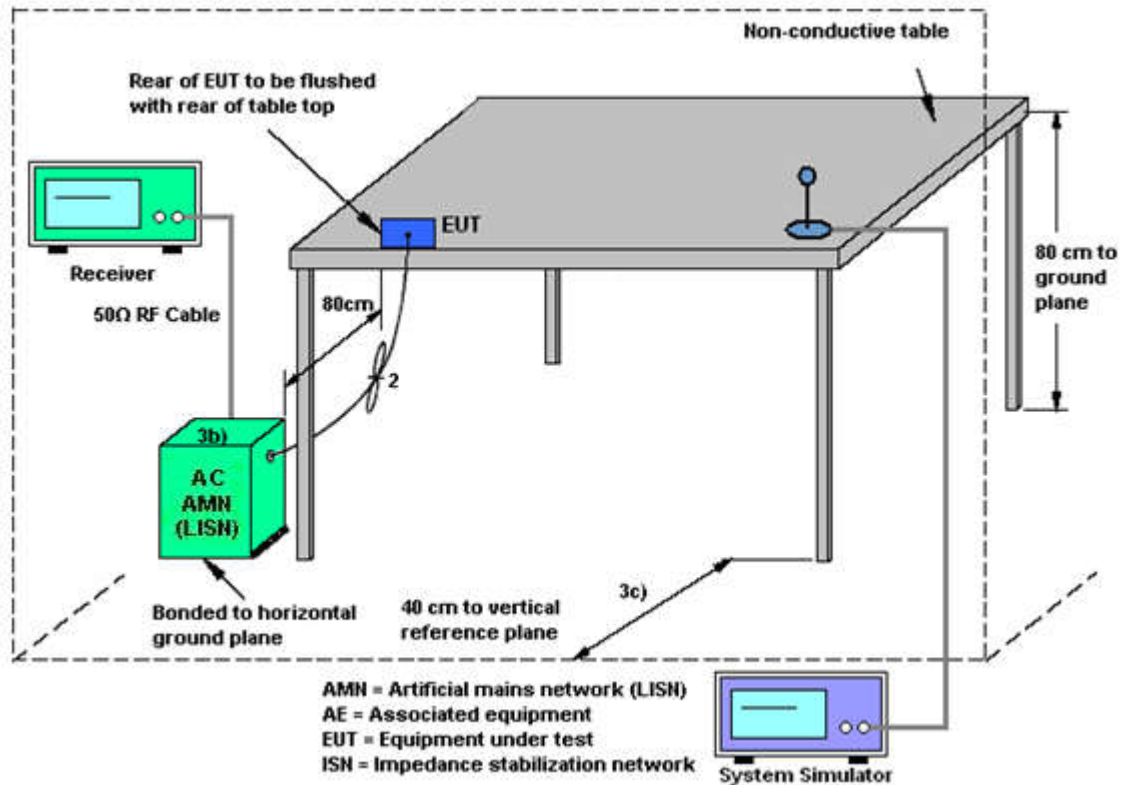

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Dec. 27, 2018	Aug. 06, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 18, 2018	Dec. 27, 2018	Jan. 17, 2019	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 18, 2018	Dec. 27, 2018	Jan. 17, 2019	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1435004	50MHz Bandwidth	Jan. 18, 2018	Dec. 27, 2018	Jan. 17, 2019	Conducted (TH01-KS)
Thermal Chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jun. 27, 2018	Dec. 27, 2018	Jun. 26, 2019	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 12, 2018	Dec. 28, 2018	Oct. 11, 2019	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 17, 2018	Dec. 28, 2018	Apr. 16, 2019	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Dec. 28, 2018	Oct. 17, 2019	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Jan. 29, 2018	Dec. 28, 2018	Jan. 28, 2019	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1648	1GHz~18GHz	Jan. 27, 2018	Dec. 28, 2018	Jan. 26, 2019	Radiation (03CH04-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 07, 2018	Dec. 28, 2018	Feb. 06, 2019	Radiation (03CH04-KS)
Amplifier	Burgeon	BPA-530	102219	0.01MHz~3000MHz	Nov. 19, 2018	Dec. 28, 2018	Nov. 18, 2019	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 12, 2018	Dec. 28, 2018	Oct. 11, 2019	Radiation (03CH04-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Feb. 08, 2018	Dec. 28, 2018	Feb. 07, 2019	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 28, 2018	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 28, 2018	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 28, 2018	NCR	Radiation (03CH04-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 19, 2018	Dec. 25, 2018	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Dec. 25, 2018	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 19, 2018	Dec. 25, 2018	Nov. 18, 2019	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Dec. 25, 2018	Oct. 11, 2019	Conduction (CO01-KS)

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

	5.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Report Number : FR8O2704D

Test Engineer:	Ivan Zhang	Temperature:	24~25	°C
Test Date:	2018/12/27	Relative Humidity:	49~51	%

TEST RESULTS DATA
26dB and 99% OBW

Band I										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	18.28	23.53	-	22.62		
11a	6Mbps	1	44	5220	18.18	23.43	-	22.60		
11a	6Mbps	1	48	5240	18.33	23.68	-	22.63		
HT20	MCS0	1	36	5180	19.08	23.68	-	22.81		
HT20	MCS0	1	44	5220	19.03	23.83	-	22.79		
HT20	MCS0	1	48	5240	18.98	23.83	-	22.78		
HT40	MCS0	1	38	5190	36.56	44.78	-	23.01		
HT40	MCS0	1	46	5230	36.36	44.42	-	23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.07	15.09	24.00	-2.80		Pass
11a	6Mbps	1	44	5220	0.07	14.92	24.00	-2.80		Pass
11a	6Mbps	1	48	5240	0.07	14.99	24.00	-2.80		Pass
HT20	MCS0	1	36	5180	0.05	15.07	24.00	-2.80		Pass
HT20	MCS0	1	44	5220	0.05	14.87	24.00	-2.80		Pass
HT20	MCS0	1	48	5240	0.05	14.90	24.00	-2.80		Pass
HT40	MCS0	1	38	5190	0.08	15.01	24.00	-2.80		Pass
HT40	MCS0	1	46	5230	0.08	14.89	24.00	-2.80		Pass
VHT20	MCS0	1	36	5180	0.10	14.89	24.00	-2.80		Pass
VHT20	MCS0	1	44	5220	0.10	14.89	24.00	-2.80		Pass
VHT20	MCS0	1	48	5240	0.10	14.66	24.00	-2.80		Pass
VHT40	MCS0	1	38	5190	0.16	14.78	24.00	-2.80		Pass
VHT40	MCS0	1	46	5230	0.16	14.71	24.00	-2.80		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.07	2.45	11.00	-2.80		Pass
11a	6Mbps	1	44	5220	0.07	2.99	11.00	-2.80		Pass
11a	6Mbps	1	48	5240	0.07	3.05	11.00	-2.80		Pass
HT20	MCS0	1	36	5180	0.05	2.69	11.00	-2.80		Pass
HT20	MCS0	1	44	5220	0.05	2.83	11.00	-2.80		Pass
HT20	MCS0	1	48	5240	0.05	2.56	11.00	-2.80		Pass
HT40	MCS0	1	38	5190	0.08	0.17	11.00	-2.80		Pass
HT40	MCS0	1	46	5230	0.08	-0.41	11.00	-2.80		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	18.33	23.48	23.63	29.63	23.98	
11a	6M bps	1	60	5300	18.53	23.68	23.68	29.68	23.98	
11a	6M bps	1	64	5320	18.43	23.48	23.66	29.66	23.98	
HT20	MCS 0	1	52	5260	19.23	23.93	23.84	29.84	23.98	
HT20	MCS 0	1	60	5300	19.28	23.78	23.85	29.85	23.98	
HT20	MCS 0	1	64	5320	19.18	23.73	23.83	29.83	23.98	
HT40	MCS 0	1	54	5270	36.46	44.51	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.56	44.51	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.07	15.25	23.98	-2.60	26.99	Pass
11a	6M bps	1	60	5300	0.07	15.28	23.98	-2.60	26.99	Pass
11a	6M bps	1	64	5320	0.07	15.29	23.98	-2.60	26.99	Pass
HT20	MCS 0	1	52	5260	0.05	14.94	23.98	-2.60	26.99	Pass
HT20	MCS 0	1	60	5300	0.05	15.24	23.98	-2.60	26.99	Pass
HT20	MCS 0	1	64	5320	0.05	14.93	23.98	-2.60	26.99	Pass
HT40	MCS 0	1	54	5270	0.08	15.13	23.98	-2.60	26.99	Pass
HT40	MCS 0	1	62	5310	0.08	14.81	23.98	-2.60	26.99	Pass
VHT20	MCS 0	1	52	5260	0.10	15.14	23.98	-2.60	26.99	Pass
VHT20	MCS 0	1	60	5300	0.10	15.22	23.98	-2.60	26.99	Pass
VHT20	MCS 0	1	64	5320	0.10	15.19	23.98	-2.60	26.99	Pass
VHT40	MCS 0	1	54	5270	0.16	15.09	23.98	-2.60	26.99	Pass
VHT40	MCS 0	1	62	5310	0.16	15.12	23.98	-2.60	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.07	3.19	11.00	-2.60		Pass
11a	6M bps	1	60	5300	0.07	3.12	11.00	-2.60		Pass
11a	6M bps	1	64	5320	0.07	3.22	11.00	-2.60		Pass
HT20	MCS 0	1	52	5260	0.05	2.37	11.00	-2.60		Pass
HT20	MCS 0	1	60	5300	0.05	2.81	11.00	-2.60		Pass
HT20	MCS 0	1	64	5320	0.05	2.90	11.00	-2.60		Pass
HT40	MCS 0	1	54	5270	0.08	-0.59	11.00	-2.60		Pass
HT40	MCS 0	1	62	5310	0.08	-0.13	11.00	-2.60		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band III										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	18.48	23.48	23.67	29.67	23.98	
11a	6M bps	1	116	5580	18.43	23.53	23.66	29.66	23.98	
11a	6M bps	1	140	5700	18.48	23.23	23.67	29.67	23.98	
HT20	MCS 0	1	100	5500	18.93	23.83	23.77	29.77	23.98	
HT20	MCS 0	1	116	5580	19.38	23.98	23.87	29.87	23.98	
HT20	MCS 0	1	140	5700	19.23	23.83	23.84	29.84	23.98	
HT40	MCS 0	1	102	5510	36.76	44.42	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	36.56	45.05	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	36.76	45.41	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table


FCC Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.07	14.92	23.98	-2.40	26.99	Pass
11a	6M bps	1	116	5580	0.07	15.00	23.98	-2.40	26.99	Pass
11a	6M bps	1	140	5700	0.07	15.13	23.98	-2.40	26.99	Pass
HT20	MCS 0	1	100	5500	0.05	14.87	23.98	-2.40	26.99	Pass
HT20	MCS 0	1	116	5580	0.05	15.06	23.98	-2.40	26.99	Pass
HT20	MCS 0	1	140	5700	0.05	15.24	23.98	-2.40	26.99	Pass
HT40	MCS 0	1	102	5510	0.08	14.54	23.98	-2.40	26.99	Pass
HT40	MCS 0	1	110	5550	0.08	14.50	23.98	-2.40	26.99	Pass
HT40	MCS 0	1	134	5670	0.08	15.12	23.98	-2.40	26.99	Pass
VHT20	MCS 0	1	100	5500	0.10	14.68	23.98	-2.40	26.99	Pass
VHT20	MCS 0	1	116	5580	0.10	14.67	23.98	-2.40	26.99	Pass
VHT20	MCS 0	1	140	5700	0.10	15.08	23.98	-2.40	26.99	Pass
VHT40	MCS 0	1	102	5510	0.16	14.45	23.98	-2.40	26.99	Pass
VHT40	MCS 0	1	110	5550	0.16	14.44	23.98	-2.40	26.99	Pass
VHT40	MCS 0	1	134	5670	0.16	15.11	23.98	-2.40	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.07	2.83	11.00	-2.40		Pass
11a	6M bps	1	116	5580	0.07	2.10	11.00	-2.40		Pass
11a	6M bps	1	140	5700	0.07	2.30	11.00	-2.40		Pass
HT20	MCS 0	1	100	5500	0.05	2.38	11.00	-2.40		Pass
HT20	MCS 0	1	116	5580	0.05	1.94	11.00	-2.40		Pass
HT20	MCS 0	1	140	5700	0.05	2.29	11.00	-2.40		Pass
HT40	MCS 0	1	102	5510	0.08	-1.23	11.00	-2.40		Pass
HT40	MCS 0	1	110	5550	0.08	-1.20	11.00	-2.40		Pass
HT40	MCS 0	1	134	5670	0.08	-1.21	11.00	-2.40		Pass




Appendix B. AC Conducted Emission Test Results

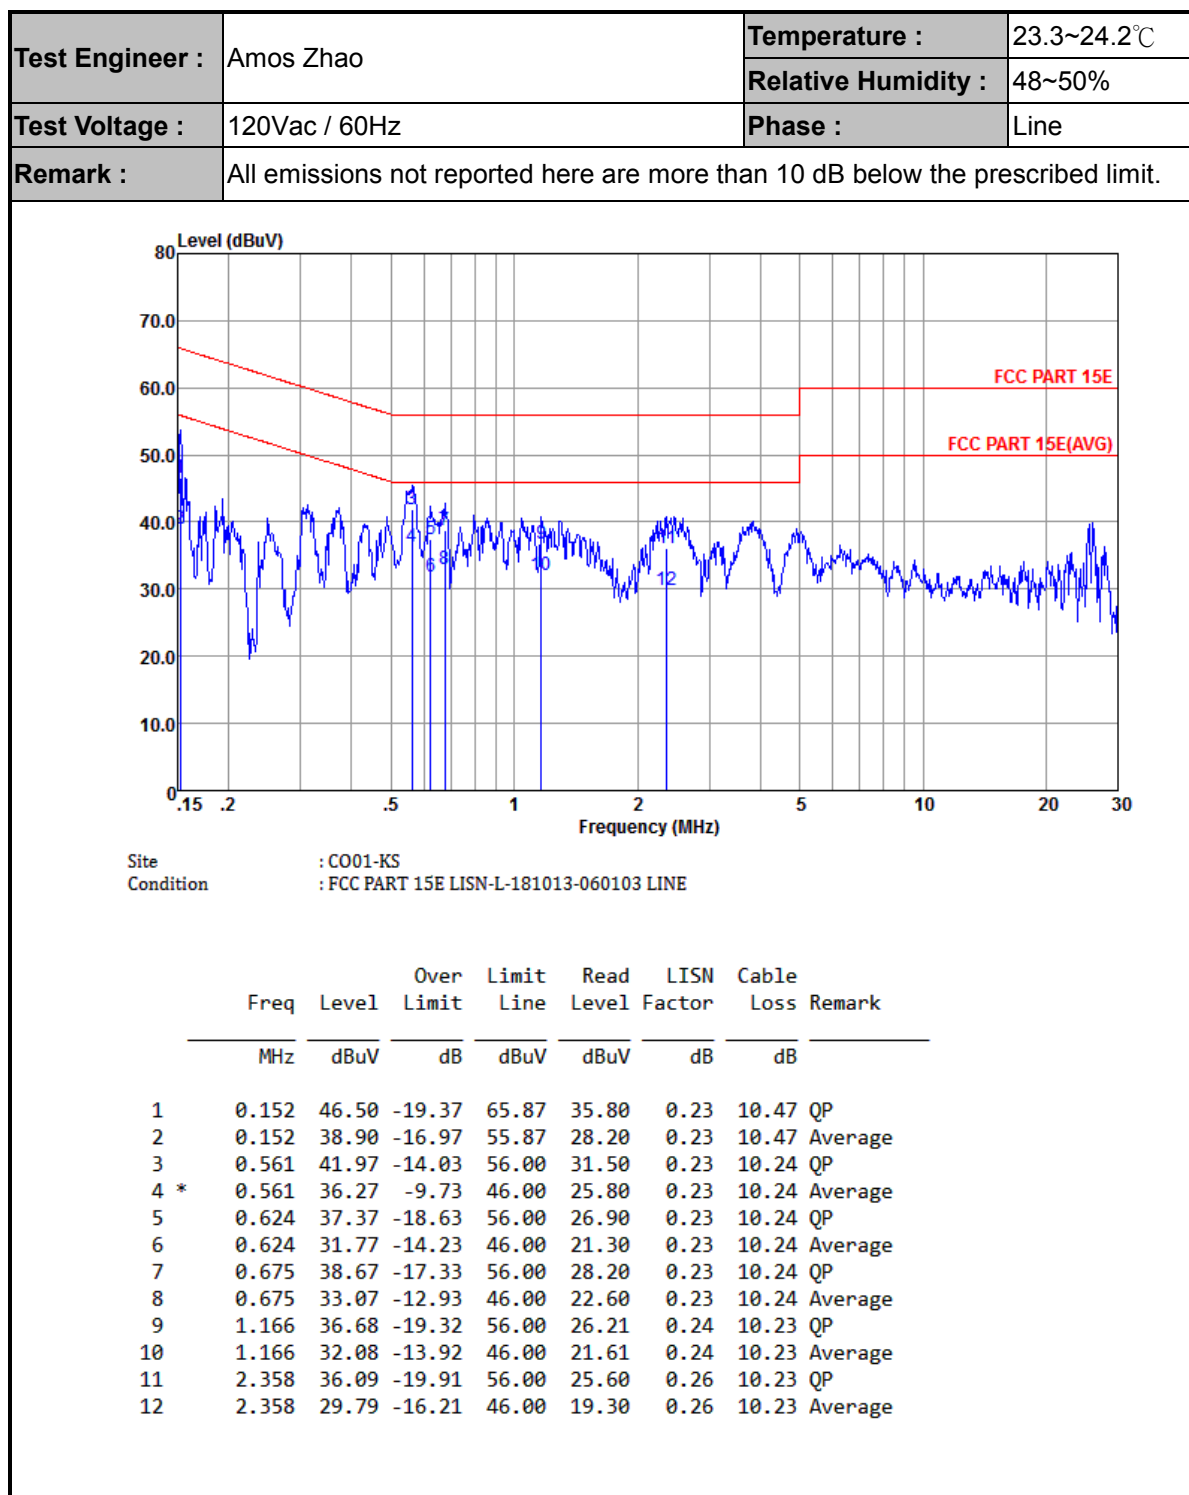



Test Engineer :	Amos Zhao	Temperature :	23.3~24.2℃
		Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

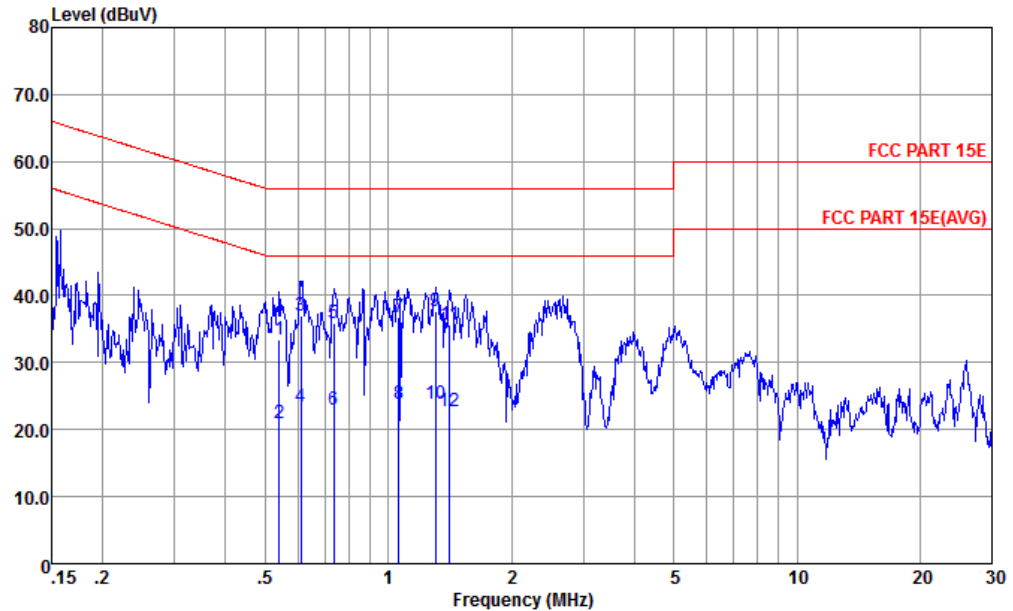

Site : CO01-KS
Condition : FCC PART 15E LISN-N-181013-060103 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.541	33.33	-22.67	56.00	22.90	0.19	10.24	QP
2	0.541	21.03	-24.97	46.00	10.60	0.19	10.24	Average
3	0.611	37.03	-18.97	56.00	26.59	0.20	10.24	QP
4	0.611	23.33	-22.67	46.00	12.89	0.20	10.24	Average
5	0.735	35.94	-20.06	56.00	25.50	0.20	10.24	QP
6	0.735	23.04	-22.96	46.00	12.60	0.20	10.24	Average
7	1.060	36.74	-19.26	56.00	26.30	0.21	10.23	QP
8	1.060	23.94	-22.06	46.00	13.50	0.21	10.23	Average
9 *	1.303	37.65	-18.35	56.00	27.21	0.21	10.23	QP
10	1.303	23.75	-22.25	46.00	13.31	0.21	10.23	Average
11	1.411	35.75	-20.25	56.00	25.31	0.21	10.23	QP
12	1.411	22.65	-23.35	46.00	12.21	0.21	10.23	Average



Appendix C. Radiated Spurious Emission

Band 1 - 5150~5250MHz

5150.WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149.96	55.37	-18.63	74	47.41	31.16	8.47	31.67	300	143	P	H
		5127.68	43.35	-10.65	54	35.38	31.19	8.47	31.69	300	143	A	H
	*	5182	103.61	-	-	95.69	31.1	8.48	31.66	300	143	P	H
	*	5182	96.79	-	-	88.87	31.1	8.48	31.66	300	143	A	H
		5149.76	56.8	-17.2	74	48.84	31.16	8.47	31.67	196	324	P	V
		5127.68	43.37	-10.63	54	35.4	31.19	8.47	31.69	196	324	A	V
	*	5186	102.79	-	-	94.87	31.1	8.48	31.66	196	324	P	V
	*	5186	95.62	-	-	87.7	31.1	8.48	31.66	196	324	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10360	41.91	-26.39	68.3	56.65	38.04	12.29	65.07	150	360	P	H
		10360	43	-25.3	68.3	57.74	38.04	12.29	65.07	150	0	P	V
802.11a CH 44 5220MHz		10440	43.53	-24.77	68.3	58.13	38.14	12.35	65.09	150	360	P	H
		10440	44.07	-24.23	68.3	58.67	38.14	12.35	65.09	150	0	P	V
802.11a CH 48 5240MHz		10480	43.41	-24.89	68.3	57.9	38.22	12.4	65.11	150	360	P	H
		10480	44.19	-24.11	68.3	58.68	38.22	12.4	65.11	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5149.92	59.35	-14.65	74	51.39	31.16	8.47	31.67	236	148	P	H
		5143.52	45.29	-8.71	54	37.35	31.16	8.47	31.69	236	148	A	H
	*	5172	103.56	-	-	95.62	31.13	8.47	31.66	236	148	P	H
	*	5172	95.9	-	-	87.96	31.13	8.47	31.66	236	148	A	H
		5149.96	58.92	-15.08	74	50.96	31.16	8.47	31.67	100	337	P	V
		5146.56	47.06	-6.94	54	39.1	31.16	8.47	31.67	100	337	A	V
	*	5186	100.79	-	-	92.87	31.1	8.48	31.66	100	337	P	V
	*	5186	92.44	-	-	84.52	31.1	8.48	31.66	100	337	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10360	44.17	-24.13	68.3	58.91	38.04	12.29	65.07	150	360	P	H
		10360	42.26	-26.04	68.3	57	38.04	12.29	65.07	150	0	P	V
802.11n HT20 CH 44 5220MHz		10440	43.91	-24.39	68.3	58.51	38.14	12.35	65.09	150	360	P	H
		10440	42.61	-25.69	68.3	57.21	38.14	12.35	65.09	150	0	P	V
802.11n HT20 CH 48 5240MHz		10480	42.38	-25.92	68.3	56.87	38.22	12.4	65.11	150	360	P	H
		10480	43.6	-24.7	68.3	58.09	38.22	12.4	65.11	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5146.56	61.84	-12.16	74	53.88	31.16	8.47	31.67	363	31	P	H
	!	5149.96	50.03	-3.97	54	42.07	31.16	8.47	31.67	363	31	A	H
	*	5188	100.03	-	-	92.11	31.1	8.48	31.66	363	31	P	H
	*	5188	92.32	-	-	84.4	31.1	8.48	31.66	363	31	A	H
		5380.3	48.23	-25.77	74	40.33	30.75	8.7	31.55	363	31	P	H
		5399.2	37.6	-16.4	54	29.7	30.72	8.72	31.54	363	31	A	H
		5147.68	62.45	-11.55	74	54.49	31.16	8.47	31.67	170	322	P	V
	!	5149.96	50.35	-3.65	54	42.39	31.16	8.47	31.67	170	322	A	V
	*	5202	99.04	-	-	91.14	31.07	8.48	31.65	170	322	P	V
	*	5202	88.39	-	-	80.49	31.07	8.48	31.65	170	322	A	V
		5381.2	47.42	-26.58	74	39.52	30.75	8.7	31.55	170	322	P	V
		5399	37.44	-16.56	54	29.54	30.72	8.72	31.54	170	322	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10380	44.86	-23.44	68.3	59.57	38.07	12.3	65.08	150	360	P	H
		10380	42.29	-26.01	68.3	57	38.07	12.3	65.08	150	0	P	V
802.11n HT40 CH 46 5230MHz		10460	42.42	-25.88	68.3	56.98	38.17	12.37	65.1	150	360	P	H
		10460	43.25	-25.05	68.3	57.81	38.17	12.37	65.1	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 64 5320MHz	*	5314	103.62	-	-	95.73	30.86	8.62	31.59	100	20	P	H
	*	5314	96.58	-	-	88.69	30.86	8.62	31.59	100	20	A	H
		5351.5	55.45	-18.55	74	47.55	30.81	8.66	31.57	100	20	P	H
		5372.5	43.85	-10.15	54	35.96	30.78	8.68	31.57	100	20	A	H
	*	5316	103.05	-	-	95.16	30.86	8.62	31.59	277	0	P	V
	*	5316	95.79	-	-	87.9	30.86	8.62	31.59	277	0	A	V
		5352.8	58.69	-15.31	74	50.79	30.81	8.66	31.57	277	0	P	V
		5372.4	42.71	-11.29	54	34.82	30.78	8.68	31.57	277	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10520	43.6	-24.7	68.3	58.02	38.27	12.43	65.12	150	360	P	H
		10520	44.04	-24.26	68.3	58.46	38.27	12.43	65.12	150	0	P	V
802.11a CH 60 5300MHz		10600.1	43.03	-30.97	74	57.27	38.39	12.52	65.15	150	360	P	H
		10600.1	44.41	-29.59	74	58.65	38.39	12.52	65.15	150	0	P	V
802.11a CH 64 5320MHz		10640	42.79	-31.21	74	56.96	38.44	12.55	65.16	150	360	P	H
		10640	44.67	-29.33	74	58.84	38.44	12.55	65.16	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 64 5320MHz	*	5312	103.98	-	-	96.09	30.86	8.62	31.59	233	150	P	H
	*	5312	96.51	-	-	88.62	30.86	8.62	31.59	233	150	A	H
		5351.76	61.63	-12.37	74	53.73	30.81	8.66	31.57	233	150	P	H
		5355	46.07	-7.93	54	38.17	30.81	8.66	31.57	233	150	A	H
	*	5314	101.87	-	-	93.98	30.86	8.62	31.59	142	325	P	V
	*	5314	93.48	-	-	85.59	30.86	8.62	31.59	142	325	A	V
		5351.4	53.78	-20.22	74	45.88	30.81	8.66	31.57	142	325	P	V
		5372.64	41.82	-12.18	54	33.93	30.78	8.68	31.57	142	325	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 52 5260MHz		10520	43.37	-24.93	68.3	57.79	38.27	12.43	65.12	150	360	P	H
		10520	43.64	-24.66	68.3	58.06	38.27	12.43	65.12	150	0	P	V
802.11n HT20 CH 60 5300MHz		10600.1	44.38	-29.62	74	58.62	38.39	12.52	65.15	150	360	P	H
		10600.1	43.57	-30.43	74	57.81	38.39	12.52	65.15	150	0	P	V
802.11n HT20 CH 64 5320MHz		10640	42.86	-31.14	74	57.03	38.44	12.55	65.16	150	360	P	H
		10640	43.24	-30.76	74	57.41	38.44	12.55	65.16	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 62 5310MHz		5115.36	49.86	-24.14	74	41.88	31.22	8.46	31.7	300	19	P	H
		5105.76	39.39	-14.61	54	31.41	31.22	8.46	31.7	300	19	A	H
	*	5312	100.53	-	-	92.64	30.86	8.62	31.59	300	19	P	H
	*	5312	93.16	-	-	85.27	30.86	8.62	31.59	300	19	A	H
		5359.1	61.83	-12.17	74	53.93	30.81	8.66	31.57	300	19	P	H
		5350	46.26	-7.74	54	38.36	30.81	8.66	31.57	300	19	A	H
		5106.4	49.34	-24.66	74	41.36	31.22	8.46	31.7	179	0	P	V
		5104.96	39.35	-14.65	54	31.34	31.25	8.46	31.7	179	0	A	V
	*	5300	98.66	-	-	90.76	30.89	8.6	31.59	179	0	P	V
	*	5300	91.36	-	-	83.46	30.89	8.6	31.59	179	0	A	V
		5352.5	62.52	-11.48	74	54.62	30.81	8.66	31.57	179	0	P	V
		5350	44.54	-9.46	54	36.64	30.81	8.66	31.57	179	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		10540	41.87	-26.43	68.3	56.26	38.29	12.45	65.13	150	360	P	H
		10540	43.14	-25.16	68.3	57.53	38.29	12.45	65.13	150	0	P	V
802.11n HT40 CH 62 5310MHz		10620	43.3	-30.7	74	57.51	38.41	12.53	65.15	150	360	P	H
		10620	43.17	-30.83	74	57.38	38.41	12.53	65.15	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		5447.44	50.72	-23.28	74	42.85	30.63	8.77	31.53	201	136	P	H
		5464.72	55.77	-12.53	68.3	47.9	30.6	8.78	31.51	201	136	P	H
		5447.6	43.89	-10.11	54	36.02	30.63	8.77	31.53	201	136	A	H
	*	5498	104.24	-	-	96.39	30.54	8.81	31.5	201	136	P	H
	*	5498	97.02	-	-	89.17	30.54	8.81	31.5	201	136	A	H
		5444.72	49.78	-24.22	74	41.9	30.66	8.75	31.53	263	0	P	V
		5468.88	55.58	-12.72	68.3	47.71	30.6	8.78	31.51	263	0	P	V
		5447.6	42.41	-11.59	54	34.54	30.63	8.77	31.53	263	0	A	V
	*	5498	102.47	-	-	94.62	30.54	8.81	31.5	263	0	P	V
	*	5498	95.13	-	-	87.28	30.54	8.81	31.5	263	0	A	V
802.11a CH 140 5700MHz	*	5694	106.09	-	-	97.88	30.72	8.98	31.49	338	148	P	H
	*	5694	98.81	-	-	90.6	30.72	8.98	31.49	338	148	A	H
	!	5726.68	63.83	-4.47	68.3	55.35	30.99	9.01	31.52	338	148	P	H
	*	5694	105.03	-	-	96.82	30.72	8.98	31.49	244	0	P	V
	*	5694	97.64	-	-	89.43	30.72	8.98	31.49	244	0	A	V
	!	5726.36	63.42	-4.88	68.3	54.94	30.99	9.01	31.52	244	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		11000	44.71	-29.29	74	58.12	38.96	12.89	65.26	150	360	P	H
		11000	44.75	-29.25	74	58.16	38.96	12.89	65.26	150	0	P	V
802.11a CH 116 5580MHz		11160	44.08	-29.92	74	57.14	39.21	13.05	65.32	150	360	P	H
		11160	45.09	-28.91	74	58.15	39.21	13.05	65.32	150	0	P	V
802.11a CH 140 5700MHz		11400	45.64	-28.36	74	58.2	39.55	13.28	65.39	150	360	P	H
		11400	45.56	-28.44	74	58.12	39.55	13.28	65.39	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5447.92	51.54	-22.46	74	43.67	30.63	8.77	31.53	216	150	P	H
		5469.36	54.83	-13.47	68.3	46.96	30.6	8.78	31.51	216	150	P	H
		5448.24	44.69	-9.31	54	36.82	30.63	8.77	31.53	216	150	A	H
	*	5496	104.74	-	-	96.87	30.57	8.8	31.5	216	150	P	H
	*	5496	97.42	-	-	89.55	30.57	8.8	31.5	216	150	A	H
		5447.28	50.92	-23.08	74	43.05	30.63	8.77	31.53	227	335	P	V
		5468.24	53.19	-15.11	68.3	45.32	30.6	8.78	31.51	227	335	P	V
		5448.24	42.18	-11.82	54	34.31	30.63	8.77	31.53	227	335	A	V
	*	5494	102.01	-	-	94.14	30.57	8.8	31.5	227	335	P	V
	*	5494	94.05	-	-	86.18	30.57	8.8	31.5	227	335	A	V
802.11n HT20 CH 140 5700MHz	*	5694	104.61	-	-	96.4	30.72	8.98	31.49	300	22	P	H
	*	5694	97.22	-	-	89.01	30.72	8.98	31.49	300	22	A	H
	!	5732.92	64.38	-3.92	68.3	55.93	30.99	9.01	31.55	300	22	P	H
	*	5694	101.87	-	-	93.66	30.72	8.98	31.49	100	158	P	V
	*	5694	93.15	-	-	84.94	30.72	8.98	31.49	100	158	A	V
		5726.12	59.4	-8.9	68.3	50.92	30.99	9.01	31.52	100	158	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11000	44.22	-29.78	74	57.63	38.96	12.89	65.26	150	360	P	H
CH 100 5500MHz		11000	44.11	-29.89	74	57.52	38.96	12.89	65.26	150	0	P	V
802.11n HT20		11160	44.08	-29.92	74	57.14	39.21	13.05	65.32	150	360	P	H
CH 116 5580MHz		11160	44.19	-29.81	74	57.25	39.21	13.05	65.32	150	0	P	V
802.11n HT20		11400	45.16	-28.84	74	57.72	39.55	13.28	65.39	150	360	P	H
CH 140 5700MHz		11400	45.21	-28.79	74	57.77	39.55	13.28	65.39	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5458	53.72	-20.28	74	45.83	30.63	8.77	31.51	300	144	P	H
	!	5469.68	65.14	-3.16	68.3	57.27	30.6	8.78	31.51	300	144	P	H
		5459.96	39.9	-14.1	54	32.01	30.63	8.77	31.51	300	144	A	H
	*	5524	100.72	-	-	92.88	30.51	8.82	31.49	300	144	P	H
	*	5524	93.43	-	-	85.59	30.51	8.82	31.49	300	144	A	H
		5755.88	49.14	-19.16	68.3	40.4	31.27	9.05	31.58	300	144	P	H
		5457.52	50.37	-23.63	74	42.48	30.63	8.77	31.51	288	147	P	V
		5469.36	56.73	-11.57	68.3	48.86	30.6	8.78	31.51	288	147	P	V
		5459.96	39.08	-14.92	54	31.19	30.63	8.77	31.51	288	147	A	V
	*	5498	97.53	-	-	89.68	30.54	8.81	31.5	288	147	P	V
	*	5498	89.97	-	-	82.12	30.54	8.81	31.5	288	147	A	V
		5745.48	49.24	-19.06	68.3	40.63	31.13	9.03	31.55	288	147	P	V
802.11n HT40 CH 134 5670MHz		5436.4	47.9	-26.1	74	40.02	30.66	8.75	31.53	156	135	P	H
		5468.24	47.81	-20.49	68.3	39.94	30.6	8.78	31.51	156	135	P	H
		5459.76	38.03	-15.97	54	30.14	30.63	8.77	31.51	156	135	A	H
	*	5658	104.41	-	-	96.47	30.44	8.95	31.45	156	135	P	H
	*	5658	95.48	-	-	87.54	30.44	8.95	31.45	156	135	A	H
		5729.16	59.58	-8.72	68.3	51.1	30.99	9.01	31.52	156	135	P	H
		5432.88	48.16	-25.84	74	40.28	30.66	8.75	31.53	155	221	P	V
		5467.92	48.01	-20.29	68.3	40.14	30.6	8.78	31.51	155	221	P	V
		5459.92	37.98	-16.02	54	30.09	30.63	8.77	31.51	155	221	A	V
	*	5678	100.92	-	-	92.82	30.58	8.97	31.45	155	221	P	V
	*	5678	93.17	-	-	85.07	30.58	8.97	31.45	155	221	A	V
		5725.08	56.88	-11.42	68.3	48.4	30.99	9.01	31.52	155	221	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		11020	44.35	-29.65	74	57.73	38.98	12.91	65.27	150	360	P	H
		11020	44.73	-29.27	74	58.11	38.98	12.91	65.27	150	0	P	V
802.11n HT40 CH 110 5550MHz		11100	45.02	-28.98	74	58.22	39.11	12.99	65.3	150	360	P	H
		11100	44.36	-29.64	74	57.56	39.11	12.99	65.3	150	0	P	V
802.11n HT40 CH 134 5670MHz		11340	45.82	-28.18	74	58.53	39.45	13.21	65.37	150	360	P	H
		11340	44.53	-29.47	74	57.24	39.45	13.21	65.37	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 LF		37.76	23.89	-16.11	40	36.62	19.72	0.52	32.97			P	H
		116.33	22.62	-20.88	43.5	36.81	17.67	1.07	32.93			P	H
		262.8	24.57	-21.43	46	35.96	19.93	1.68	33			P	H
		298.69	31.45	-14.55	46	43.47	19.19	1.81	33.02	100	0	P	H
		643.04	24.88	-21.12	46	30.77	24.73	2.69	33.31			P	H
		965.08	25.8	-28.2	54	26.8	27.09	3.48	31.57			P	H
		37.76	35.92	-4.08	40	48.65	19.72	0.52	32.97	100	0	P	V
		109.54	23.16	-20.34	43.5	37.79	17.27	1.03	32.93			P	V
		187.14	22.14	-21.36	43.5	38.32	15.34	1.4	32.92			P	V
		278.32	24.58	-21.42	46	36.84	19.01	1.74	33.01			P	V
		772.05	25.93	-20.07	46	30.16	25.76	3.07	33.06			P	V
		833.16	26.26	-19.74	46	29.53	26.23	3.23	32.73			P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is not under limit 6dB .
P/A	Peak or Average
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11a	98.91	–	–	10Hz
5GHz 802.11n HT20	98.46	–	–	10Hz
5GHz 802.11n HT40	98.40	–	–	10Hz

802.11a

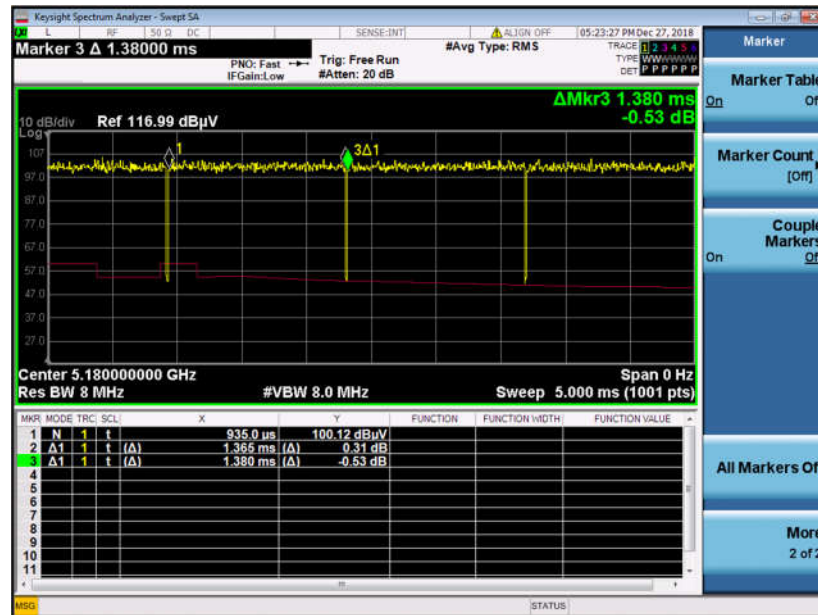

802.11n HT20

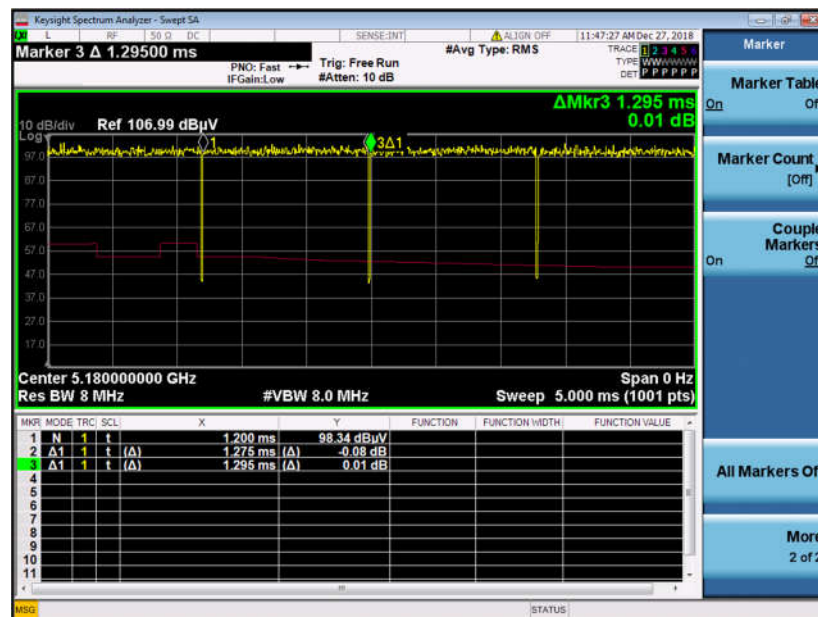

802.11n HT40

