










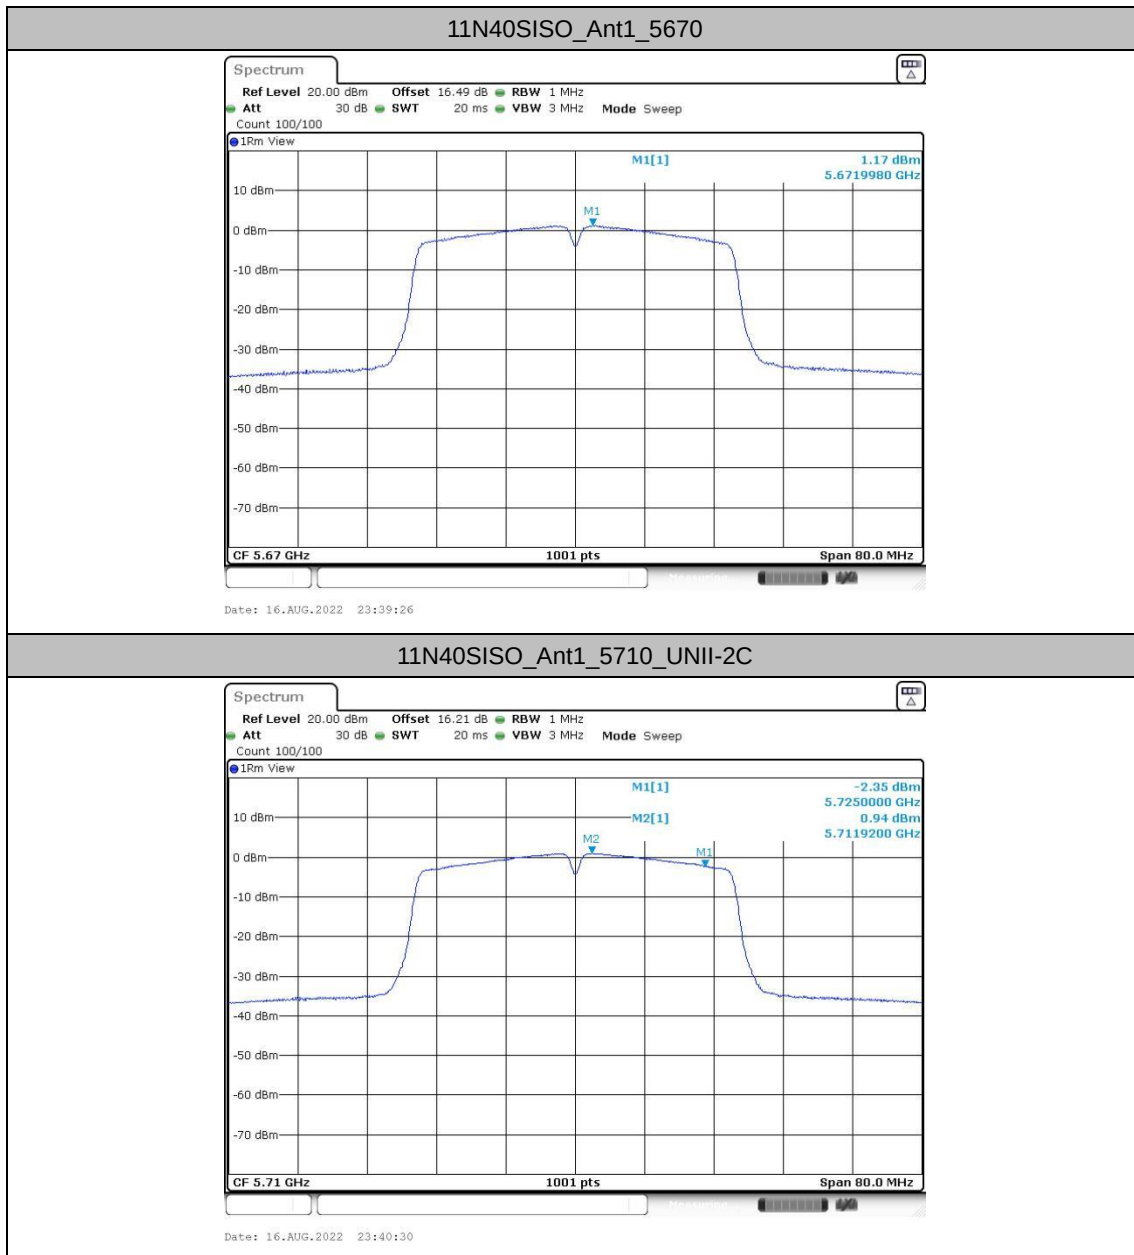


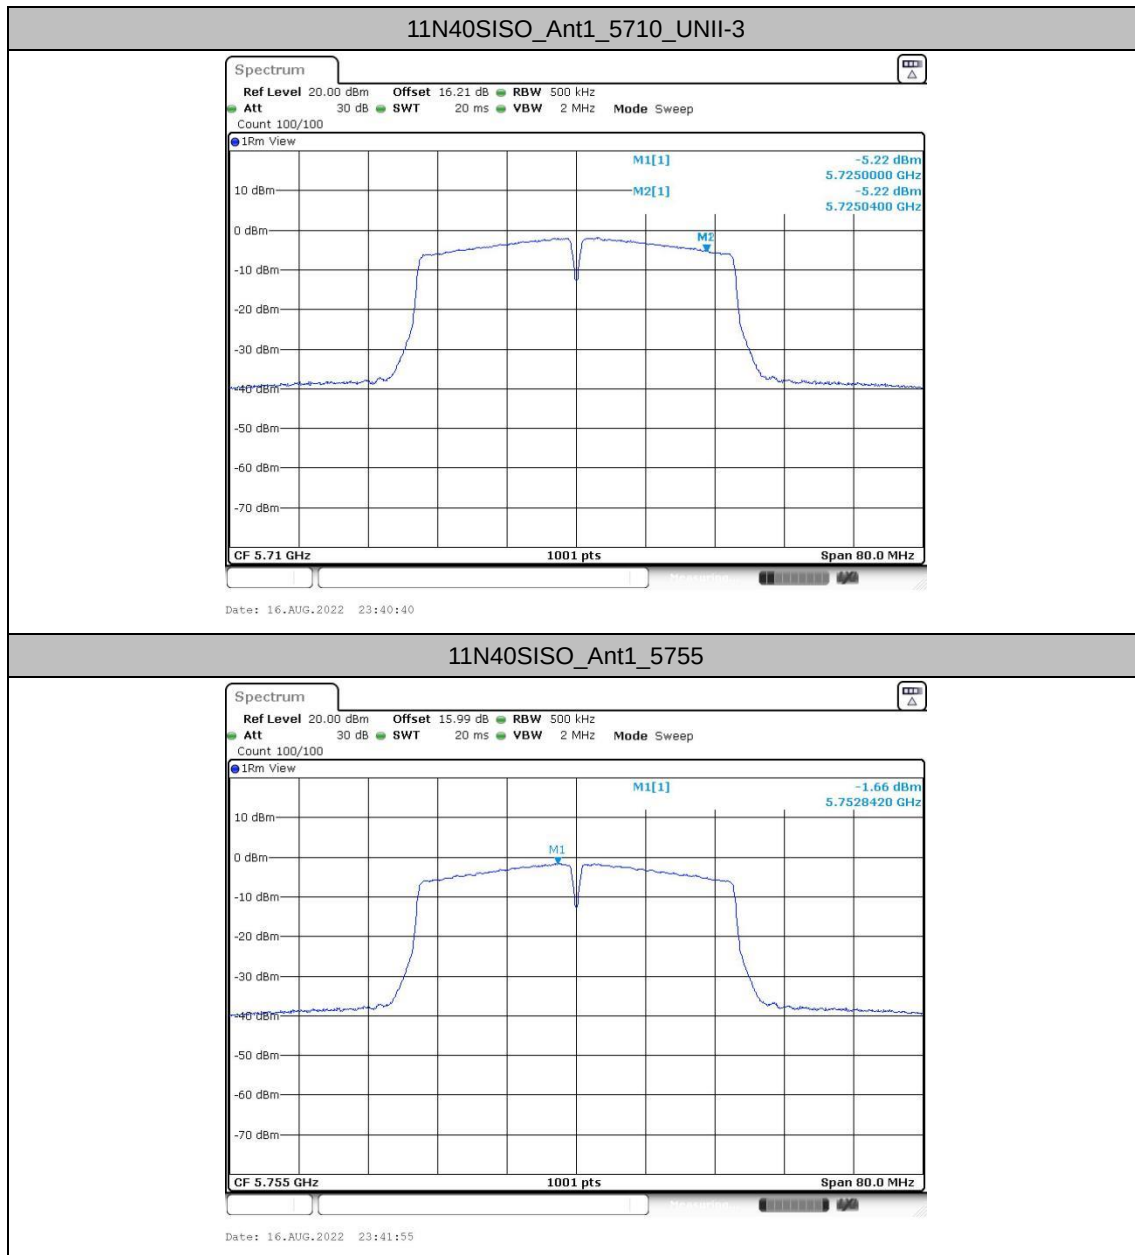






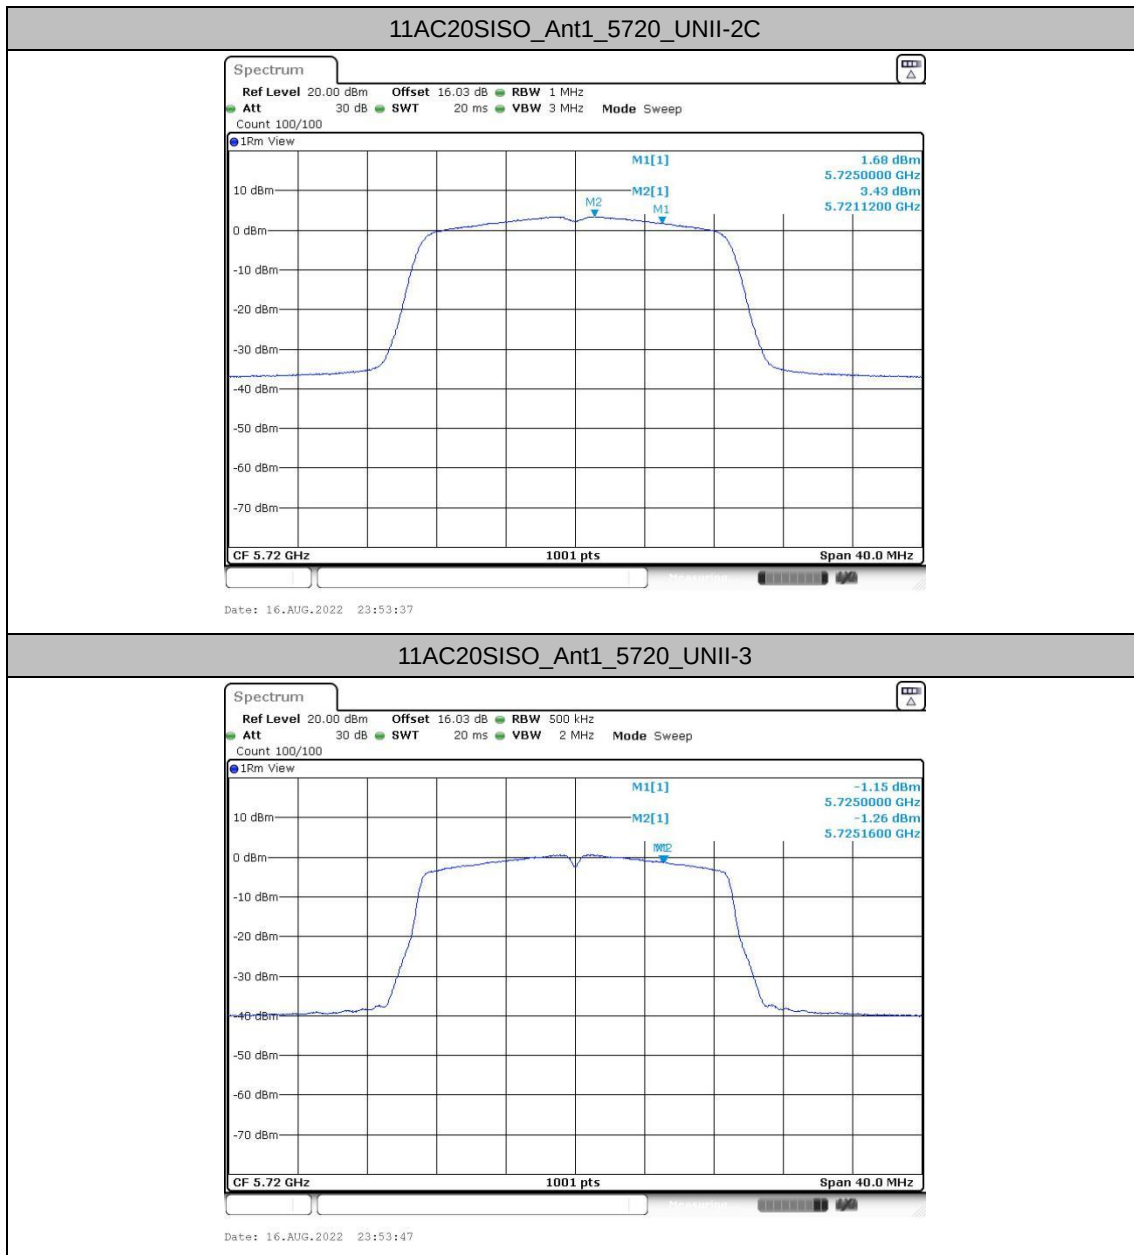


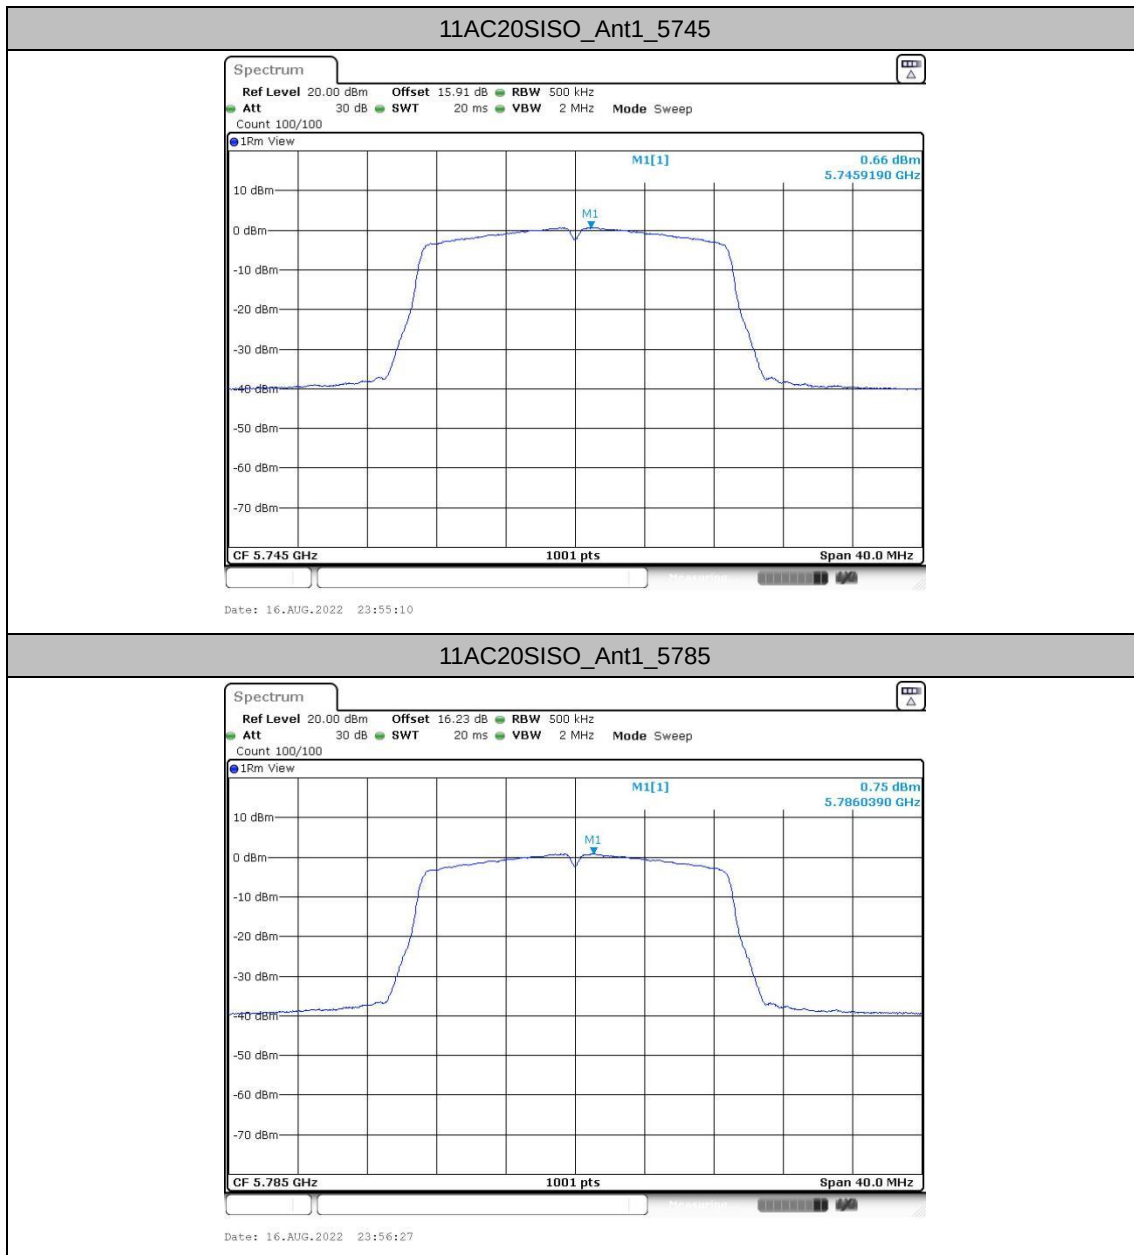






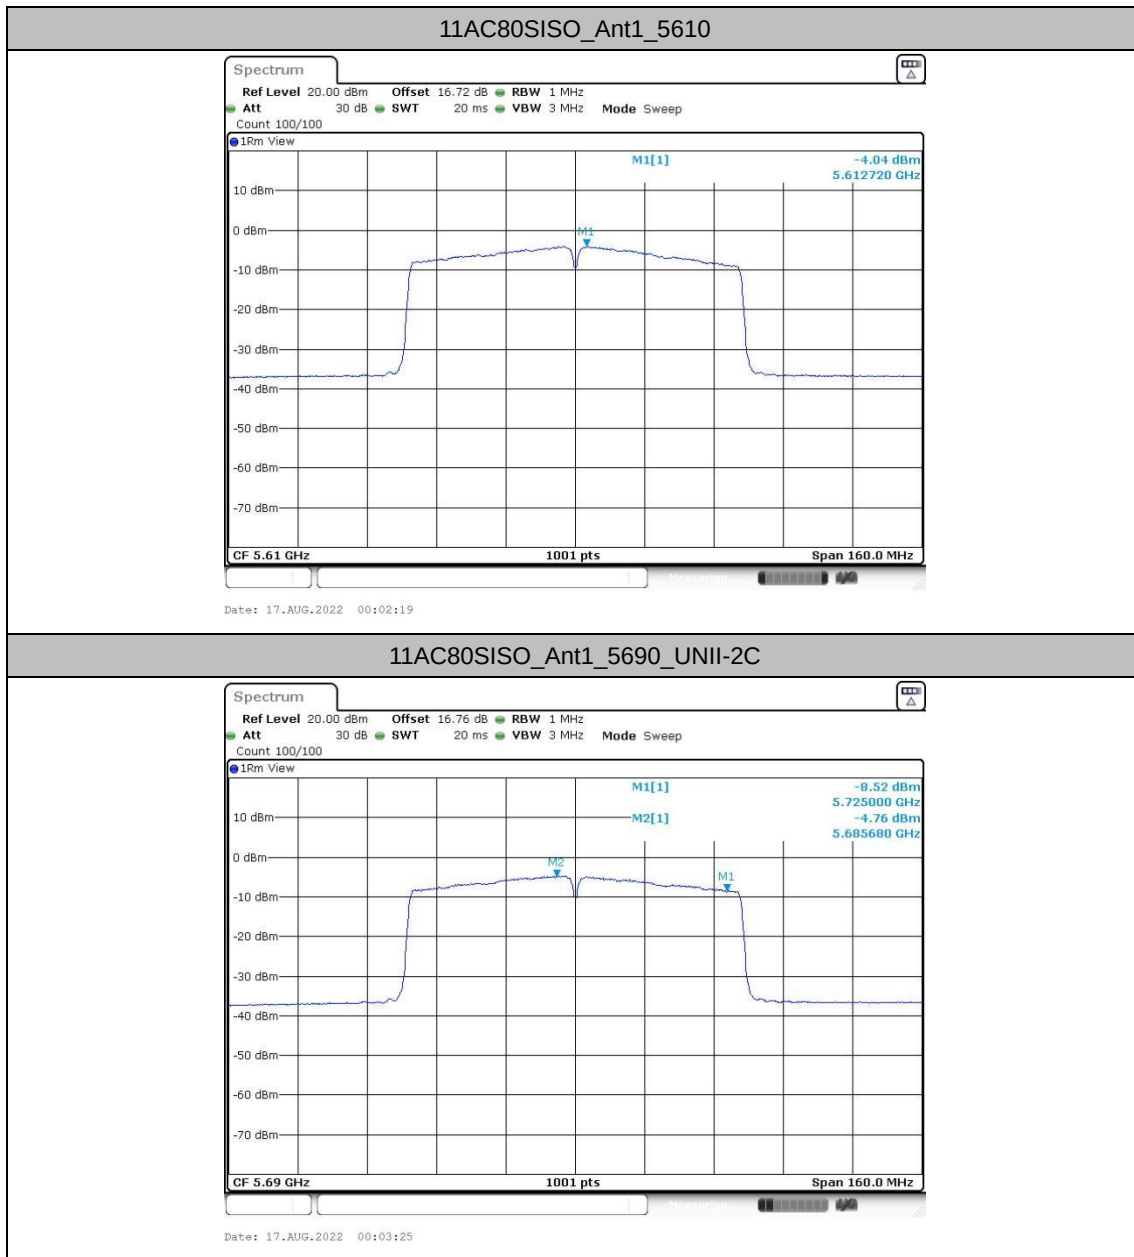

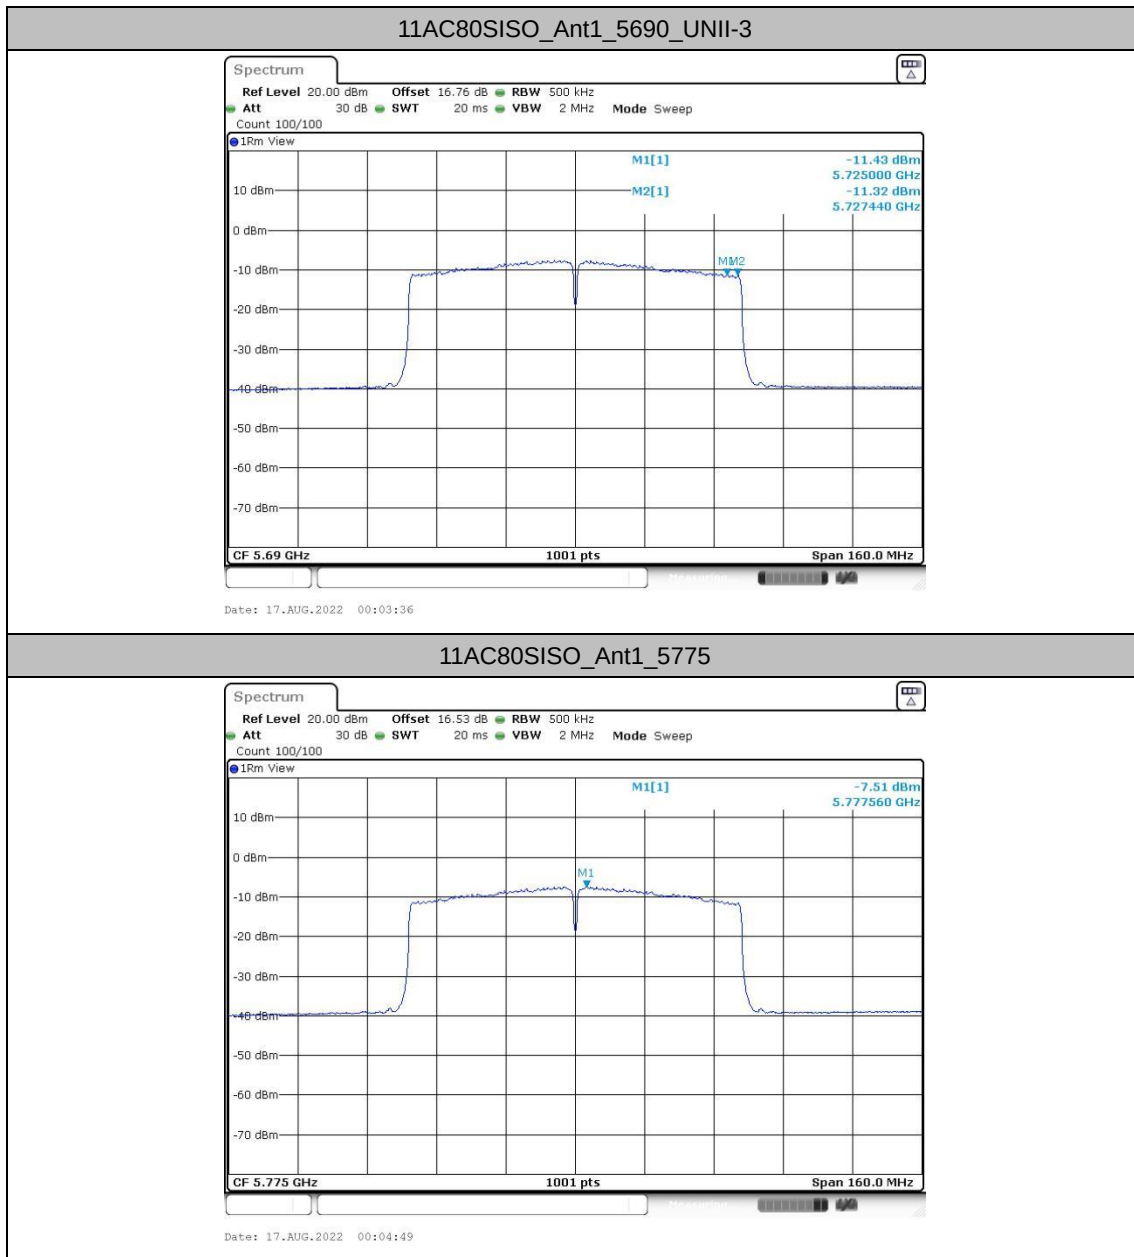




Appendix B. AC Conducted Emission Test Results

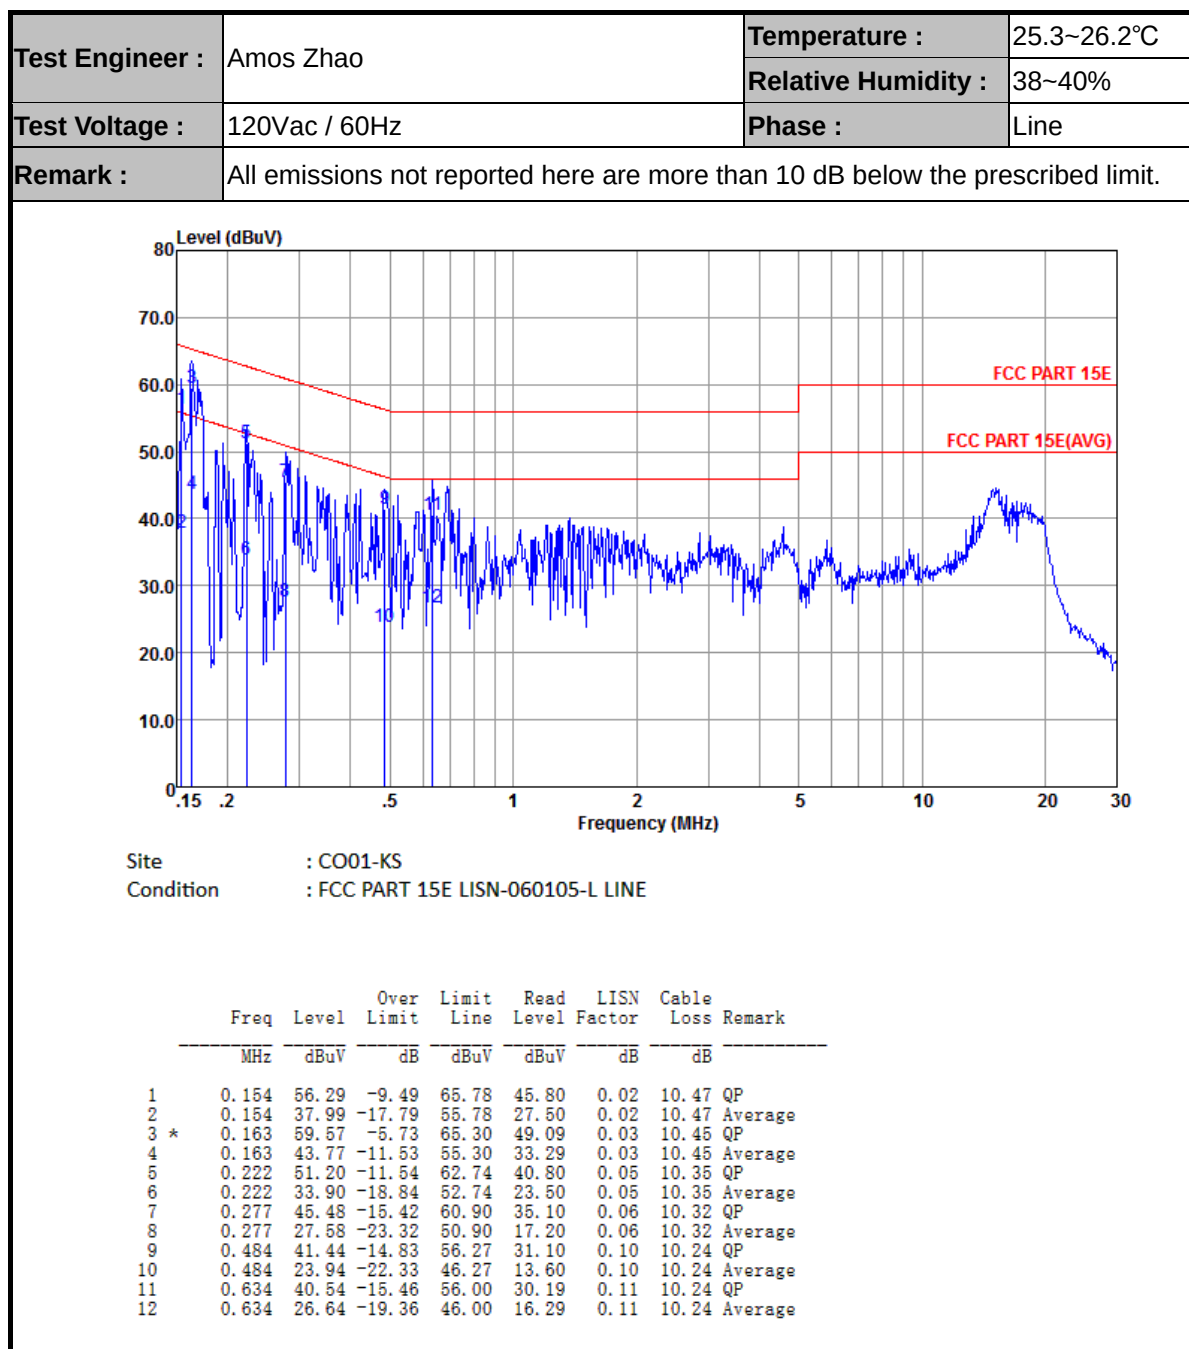



Test Engineer :	Amos Zhao	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

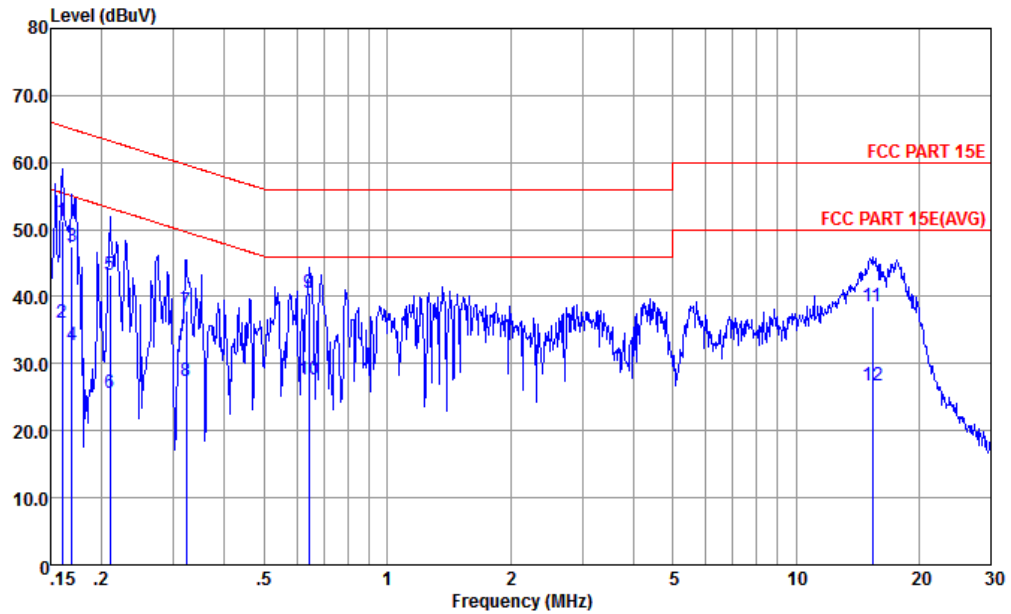

Site : CO01-KS
Condition : FCC PART 15E LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.160	51.16	-14.31	65.47	40.60	0.11	10.45	QP
2	0.160	36.16	-19.31	55.47	25.60	0.11	10.45	Average
3	0.169	47.44	-17.55	64.99	36.90	0.11	10.43	QP
4	0.169	32.74	-22.25	54.99	22.20	0.11	10.43	Average
5	0.209	43.26	-19.97	63.23	32.80	0.10	10.36	QP
6	0.209	25.66	-27.57	53.23	15.20	0.10	10.36	Average
7	0.322	37.90	-21.76	59.66	27.50	0.10	10.30	QP
8	0.322	27.30	-22.36	49.66	16.90	0.10	10.30	Average
9	0.644	40.55	-15.45	56.00	30.20	0.11	10.24	QP
10	0.644	27.55	-18.45	46.00	17.20	0.11	10.24	Average
11	15.388	38.53	-21.47	60.00	27.80	0.33	10.40	QP
12	15.388	26.63	-23.37	50.00	15.90	0.33	10.40	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

UNII-1- 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5147.36	63.83	-10.17	74	55.54	34.42	10.6	36.73	100	99	P	H
		5149.92	49.68	-4.32	54	41.39	34.42	10.6	36.73	100	99	A	H
	*	5182	105.58	-	-	97.18	34.45	10.64	36.69	100	99	P	H
		5182	99.67	-	-	91.27	34.45	10.64	36.69	100	99	A	H
		5149.76	60.02	-13.98	74	51.73	34.42	10.6	36.73	295	86	P	V
		5149.92	48.17	-5.83	54	39.88	34.42	10.6	36.73	295	86	A	V
	*	5176	105.18	-	-	96.78	34.45	10.64	36.69	295	86	P	V
		5176	98.96	-	-	90.56	34.45	10.64	36.69	295	86	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-15150~5250MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10355	44.08	-24.22	68.3	58.29	37.38	15.44	67.03	300	0	P	H
		10355	44.1	-24.2	68.3	58.31	37.38	15.44	67.03	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2A - 5250~5350MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5140.64	50.72	-23.28	74	42.43	34.42	10.6	36.73	113	100	P	H
		5148.48	42.2	-11.8	54	33.91	34.42	10.6	36.73	113	100	A	H
	*	5278	95.7	-	-	87.06	34.53	10.7	36.59	113	100	P	H
		5278	89.18	-	-	80.54	34.53	10.7	36.59	113	100	A	H
		5350.7	57.6	-16.4	74	48.79	34.58	10.75	36.52	113	100	P	H
		5350	49.26	-4.74	54	40.45	34.58	10.75	36.52	113	100	A	H
		5136.64	49.8	-24.2	74	41.53	34.41	10.6	36.74	298	73	P	V
		5138.08	42.2	-11.8	54	33.93	34.41	10.6	36.74	298	73	A	V
	*	5284	96.19	-	-	87.55	34.53	10.7	36.59	298	73	P	V
		5284	88.51	-	-	79.87	34.53	10.7	36.59	298	73	A	V
		5351.4	55.01	-18.99	74	46.2	34.58	10.75	36.52	298	73	P	V
		5350.4	48.01	-5.99	54	39.2	34.58	10.75	36.52	298	73	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**UNII-2A 5250~5350MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10575	44.31	-23.99	68.3	58.01	37.54	15.65	66.89	100	0	P	H
CH 58 5290MHz		10575	44.36	-23.94	68.3	58.06	37.54	15.65	66.89	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - 5470~5725MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5457.04	57.22	-16.78	74	48.13	34.66	10.85	36.42	128	102	P	H
		5467.92	63.54	-4.76	68.3	54.42	34.67	10.85	36.4	128	102	P	H
		5459.92	44.5	-9.5	54	35.41	34.66	10.85	36.42	128	102	A	H
	*	5506	102.08	-	-	92.86	34.7	10.89	36.37	128	102	P	H
		5506	95.61	-	-	86.39	34.7	10.89	36.37	128	102	A	H
		5742.6	50.11	-18.19	68.3	40.53	34.99	11.21	36.62	128	102	P	H
		5457.52	56.07	-17.93	74	46.98	34.66	10.85	36.42	294	85	P	V
		5468.72	65.03	-3.27	68.3	55.91	34.67	10.85	36.4	294	85	P	V
		5458.8	45.1	-8.9	54	36.01	34.66	10.85	36.42	294	85	A	V
	*	5512	102.43	-	-	93.21	34.7	10.89	36.37	294	85	P	V
		5512	95.86	-	-	86.64	34.7	10.89	36.37	294	85	A	V
		5733.32	50.46	-17.84	68.3	40.91	34.97	11.18	36.6	294	85	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		11015	45.55	-28.45	74	58.18	37.81	16.05	66.49	100	0	P	H
CH 102 5510MHz		11015	44.89	-29.11	74	57.52	37.81	16.05	66.49	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 LF		30	20.34	-19.66	40	26.83	25.5	0.71	32.7			P	H
		134.76	16.63	-26.87	43.5	30.02	17.68	1.76	32.83			P	H
		167.74	19.9	-23.6	43.5	33.76	17.08	1.97	32.91			P	H
		286.08	23.08	-22.92	46	33.47	19.98	2.58	32.95			P	H
		381.14	22.43	-23.57	46	30.07	22.22	2.98	32.84			P	H
		704.15	31.56	-14.44	46	34.53	25.76	4.06	32.79			P	H
		34.85	30.91	-9.09	40	40	22.9	0.71	32.7			P	V
		54.25	20.12	-19.88	40	37.82	14.36	1.1	33.16			P	V
		140.58	18.91	-24.59	43.5	32.31	17.62	1.8	32.82			P	V
		273.47	20.72	-25.28	46	31.43	19.78	2.52	33.01			P	V
		606.18	26.32	-19.68	46	29.53	25.55	3.76	32.52			P	V
		750.71	28.8	-17.2	46	30.8	26.51	4.19	32.7			P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5637.2	50.68	-17.62	68.3	41.27	34.87	11.05	36.51	116	112	P	H
		5697.6	53.15	-50.38	103.53	43.65	34.93	11.13	36.56	116	112	P	H
		5720	62.46	-48.44	110.9	52.93	34.97	11.16	36.6	116	112	P	H
		5723.6	67.98	-51.13	119.11	58.43	34.97	11.18	36.6	116	112	P	H
		5746	105.79	-	-	96.21	34.99	11.21	36.62	116	112	P	H
		5746	99.2	-	-	89.62	34.99	11.21	36.62	116	112	A	H
		5630.8	49.47	-18.83	68.3	40.07	34.84	11.05	36.49	290	84	P	V
		5699.2	55.49	-49.22	104.71	45.99	34.93	11.13	36.56	290	84	P	V
		5717.2	64.14	-45.98	110.12	54.61	34.95	11.16	36.58	290	84	P	V
		5724	70.19	-49.83	120.02	60.64	34.97	11.18	36.6	290	84	P	V
		5746	107.81	-	-	98.23	34.99	11.21	36.62	290	84	P	V
		5746	100.86	-	-	91.28	34.99	11.21	36.62	290	84	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11488	44.88	-29.12	74	56.82	38.19	16.35	66.48	300	0	P	H
		11488	45	-29	74	56.94	38.19	16.35	66.48	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5650	51.46	-16.84	68.3	42.02	34.89	11.08	36.53	100	113	P	H
		5687.2	55.68	-40.18	95.86	46.18	34.93	11.13	36.56	100	113	P	H
		5718.8	73.42	-37.14	110.56	63.89	34.97	11.16	36.6	100	113	P	H
		5721.6	75.16	-39.39	114.55	65.61	34.97	11.18	36.6	100	113	P	H
		5752	101.66	-	-	92.07	35.01	11.21	36.63	100	113	P	H
		5752	94.45	-	-	84.86	35.01	11.21	36.63	100	113	A	H
		5852.8	49.47	-66.45	115.92	39.75	35.11	11.33	36.72	100	113	P	H
		5857.6	50.1	-60.07	110.17	40.37	35.13	11.34	36.74	100	113	P	H
		5885.6	49.79	-47.64	97.43	40.03	35.16	11.36	36.76	100	113	P	H
		5940.8	49.52	-18.78	68.3	39.69	35.24	11.42	36.83	100	113	P	H
		5636.8	49.58	-18.72	68.3	40.17	34.87	11.05	36.51	300	88	P	V
		5694.4	58.32	-42.85	101.17	48.82	34.93	11.13	36.56	300	88	P	V
		5716.8	71.33	-38.68	110.01	61.8	34.95	11.16	36.58	300	88	P	V
		5721.6	75.63	-38.92	114.55	66.08	34.97	11.18	36.6	300	88	P	V
		5758	103.68	-	-	94.09	35.01	11.21	36.63	300	88	P	V
		5758	95.31	-	-	85.72	35.01	11.21	36.63	300	88	A	V
		5851.6	48.61	-70.04	118.65	38.89	35.11	11.33	36.72	300	88	P	V
		5864	50.02	-58.36	108.38	40.29	35.13	11.34	36.74	300	88	P	V
		5879.2	49.71	-52.47	102.18	39.95	35.16	11.36	36.76	300	88	P	V
		5973.6	49.69	-18.61	68.3	39.82	35.28	11.45	36.86	300	88	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		11510	44.52	-29.48	74	56.43	38.2	16.37	66.48	300	0	P	H
CH 151 5755MHz		11510	45.64	-28.36	74	57.55	38.2	16.37	66.48	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5648.8	49.96	-18.34	68.3	40.52	34.87	11.08	36.51	109	112	P	H
		5679.2	55.57	-34.38	89.95	46.1	34.91	11.11	36.55	109	112	P	H
		5716.4	60.51	-49.38	109.89	50.98	34.95	11.16	36.58	109	112	P	H
		5721.6	60.36	-54.19	114.55	50.81	34.97	11.18	36.6	109	112	P	H
		5770	98.11	-	-	88.49	35.03	11.24	36.65	109	112	P	H
		5770	90.64	-	-	81.02	35.03	11.24	36.65	109	112	A	H
		5851.2	55.13	-64.43	119.56	45.41	35.11	11.33	36.72	109	112	P	H
		5870.8	57.33	-49.14	106.47	47.59	35.16	11.34	36.76	109	112	P	H
		5878	50.15	-52.92	103.07	40.39	35.16	11.36	36.76	109	112	P	H
		5968	50.12	-18.18	68.3	40.27	35.26	11.43	36.84	109	112	P	H
		5637.6	48.73	-19.57	68.3	39.32	34.87	11.05	36.51	287	80	P	V
		5689.6	55.1	-42.53	97.63	45.6	34.93	11.13	36.56	287	80	P	V
		5716.8	60.5	-49.51	110.01	50.97	34.95	11.16	36.58	287	80	P	V
		5722	59.36	-56.1	115.46	49.81	34.97	11.18	36.6	287	80	P	V
		5770	97.27	-	-	87.65	35.03	11.24	36.65	287	80	P	V
		5770	89.89	-	-	80.27	35.03	11.24	36.65	287	80	A	V
		5852	56.59	-61.15	117.74	46.87	35.11	11.33	36.72	287	80	P	V
		5864	56.14	-52.24	108.38	46.41	35.13	11.34	36.74	287	80	P	V
		5876.34	53.13	-51.17	104.3	43.37	35.16	11.36	36.76	287	80	P	V
		5966	49.59	-18.71	68.3	39.74	35.26	11.43	36.84	287	80	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11554	43.96	-30.04	74	55.77	38.23	16.39	66.43	300	0	P	H
CH 155 5775MHz		11554	44.45	-29.55	74	56.26	38.23	16.39	66.43	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 LF		30	20.09	-19.91	40	26.58	25.5	0.71	32.7			P	H
		107.6	13.57	-29.93	43.5	26.87	18.01	1.57	32.88			P	H
		172.59	17.91	-25.59	43.5	31.89	16.96	2	32.94			P	H
		287.05	17.83	-28.17	46	28.2	20	2.58	32.95			P	H
		568.35	24.34	-21.66	46	27.51	25.75	3.64	32.56			P	H
		832.19	35.04	-10.96	46	36.11	27.09	4.4	32.56			P	H
		34.85	28.88	-11.12	40	37.97	22.9	0.71	32.7			P	V
		52.31	19.85	-20.15	40	37.17	14.68	1.08	33.08			P	V
		69.77	16.93	-23.07	40	35.47	13.2	1.26	33			P	V
		134.76	16.33	-27.17	43.5	29.72	17.68	1.76	32.83			P	V
		495.6	23.51	-22.49	46	28.49	24.41	3.4	32.79			P	V
		832.19	31.43	-14.57	46	32.5	27.09	4.4	32.56			P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Over Limit(dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:


1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.


Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	96.97	1.391	0.719	0.75KHz
802.11ac VHT20	96.79	1.312	0.762	0.82KHz
802.11n HT40	93.71	0.648	1.544	1.6KHz
802.11ac VHT80	87.50	0.325	3.080	3.3KHz


802.11a

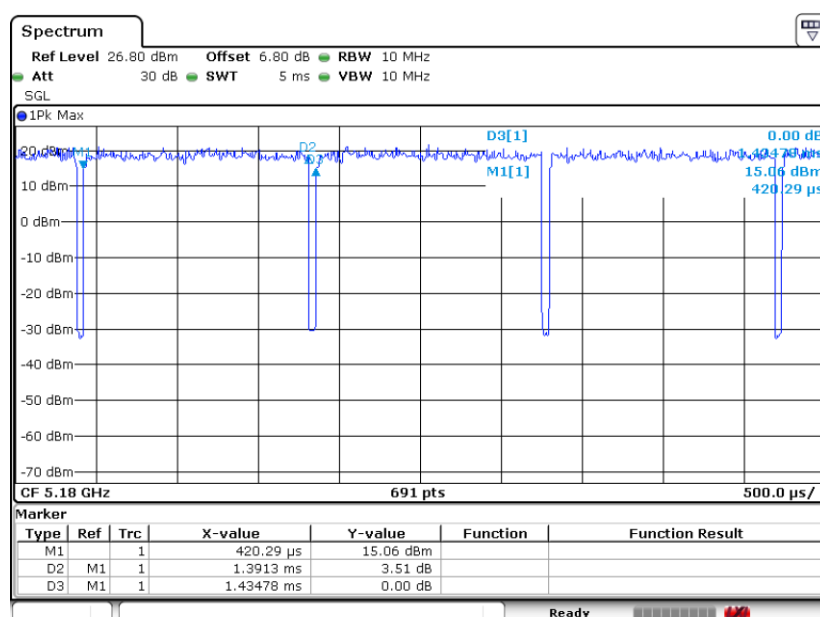

802.11ac VHT 20

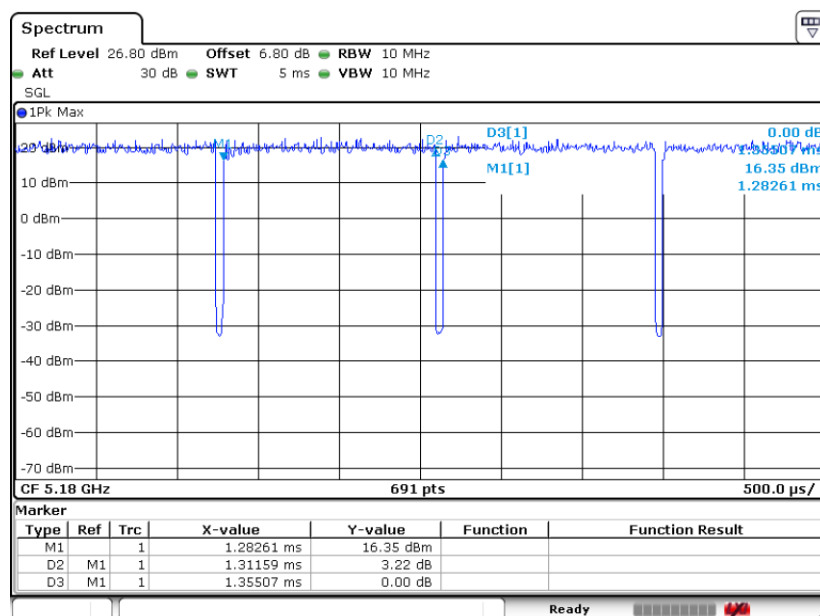

802.11n HT40

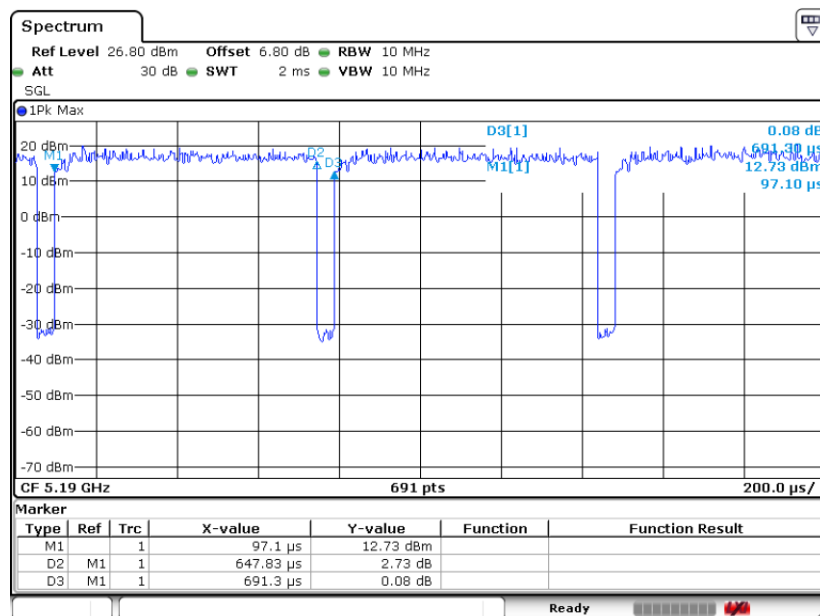

802.11ac VHT80

