





CSE Plot on Ch 78 between 30MHz ~ 3 GHz

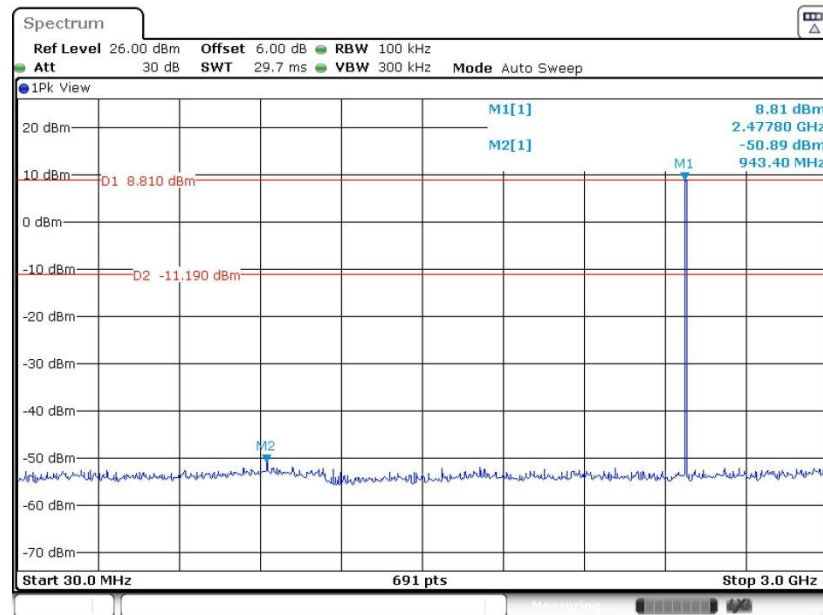

Date: 14.OCT.2022 03:35:43

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

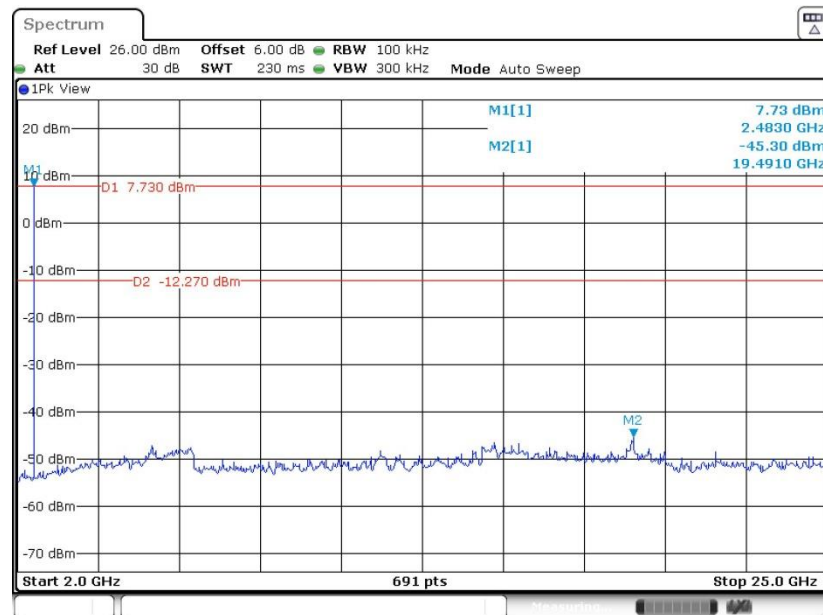

Date: 14.OCT.2022 03:36:10

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.8.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

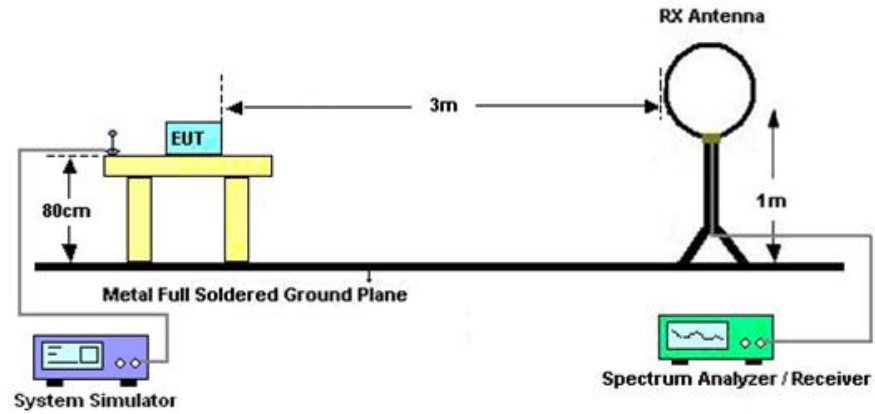

For radiated emissions from 30MHz to 1GHz

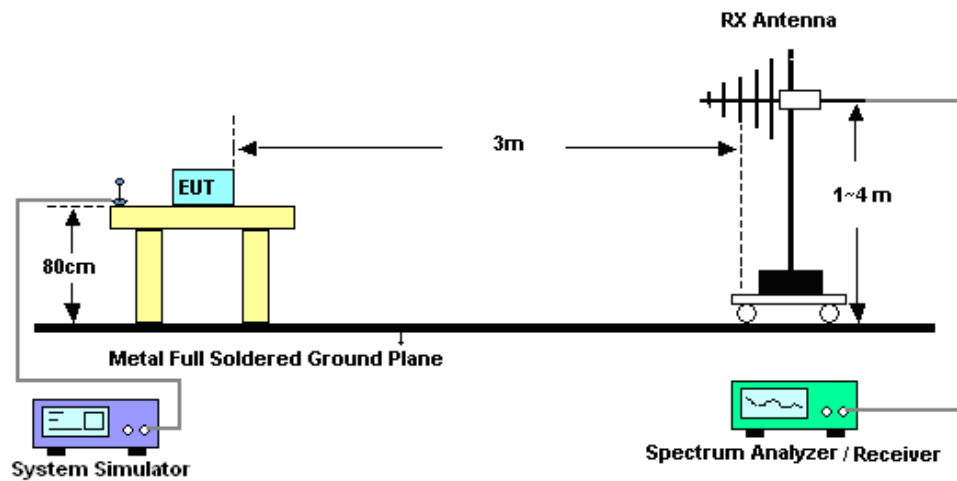

For radiated emissions above 1GHz

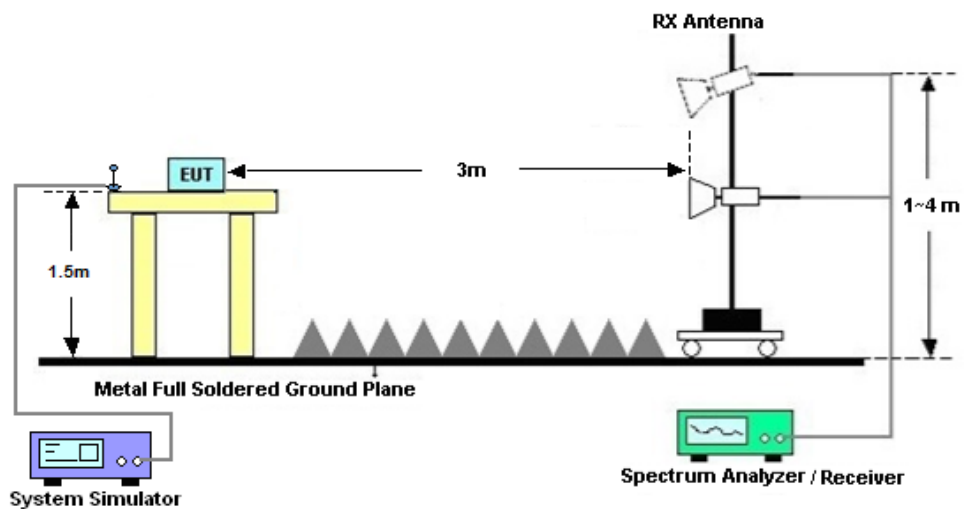

**3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

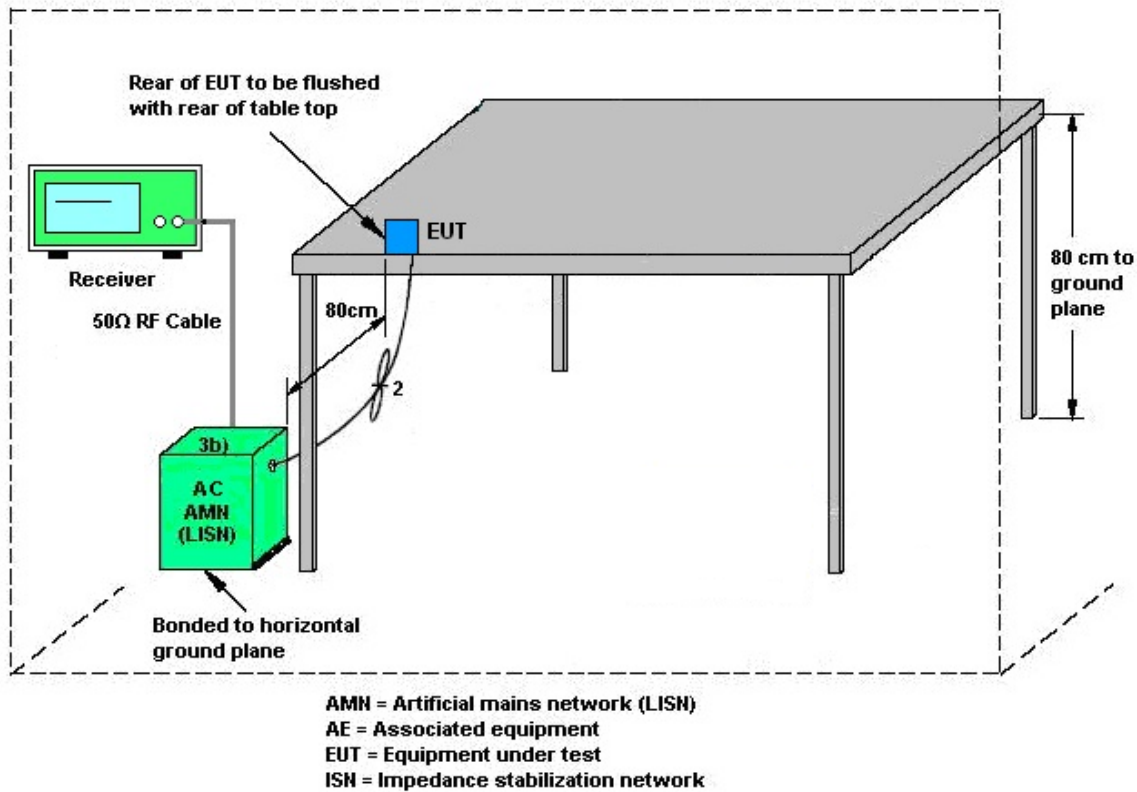

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Oct. 14, 2022	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Oct. 14, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Oct. 14, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec.27, 2021	Oct. 11, 2022	Dec.26, 2022	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2022	Oct. 11, 2022	Jul. 06, 2023	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Oct. 11, 2022	Jun. 27, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Sep. 28, 2021	Oct. 11, 2022	Sep. 27, 2023	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 07, 2022	Oct. 11, 2022	Jul. 06, 2023	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr.10, 2022	Oct. 11, 2022	Apr. 09, 2023	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Oct. 11, 2022	Apr. 05, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct.22,2021	Oct. 11, 2022	Oct.21,2022	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct.22, 2021	Oct. 11, 2022	Oct.21, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 06. 2022	Oct. 11, 2022	Jul. 05. 2023	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Oct. 11, 2022	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 11, 2022	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 11, 2022	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May. 24, 2022	Oct. 11, 2022	May. 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Oct. 11, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 13, 2022	Oct. 11, 2022	Oct. 12, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Oct. 11, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.001 %

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.78dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Bluetooth

Test Engineer:	Jacob Zhang	Temperature:	20~26	°C
Test Date:	2022/10/14	Relative Humidity:	40~51	%

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.857	0.761	1.0029	0.5711	Pass
DH	1Mbps	1	39	2441	0.857	0.758	0.9986	0.5711	Pass
DH	1Mbps	1	78	2480	0.813	0.758	1.0029	0.5422	Pass
2DH	2Mbps	1	0	2402	1.237	1.140	1.1158	0.8249	Pass
2DH	2Mbps	1	39	2441	1.237	1.137	1.2677	0.8249	Pass
2DH	2Mbps	1	78	2480	1.237	1.140	0.9682	0.8249	Pass
3DH	3Mbps	1	0	2402	1.211	1.120	1.0246	0.8075	Pass
3DH	3Mbps	1	39	2441	1.211	1.117	1.3155	0.8075	Pass
3DH	3Mbps	1	78	2480	1.211	1.120	0.9161	0.8075	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.89	0.31	0.4	Pass
AFH	20	53.33	2.89	0.15	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	10.79	20.97	Pass
	39	1	10.66	20.97	Pass
	78	1	10.31	20.97	Pass
2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	9.75	20.97	Pass
	39	1	9.77	20.97	Pass
	78	1	9.68	20.97	Pass
3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	9.85	20.97	Pass
	39	1	9.99	20.97	Pass
	78	1	9.85	20.97	Pass


TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

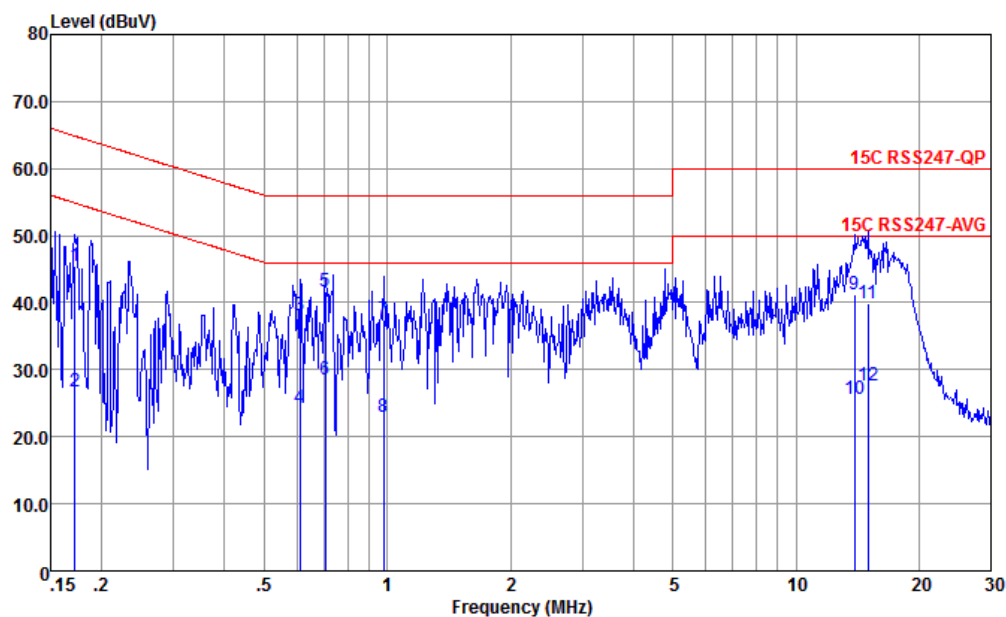


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.172	45.57	-19.29	64.86	35.09	0.05	10.43	QP
2	0.172	26.77	-28.09	54.86	16.29	0.05	10.43	Average
3	0.611	38.21	-17.79	56.00	28.10	-0.07	10.18	QP
4	0.611	24.31	-21.69	46.00	14.20	-0.07	10.18	Average
5 *	0.705	41.57	-14.43	56.00	31.50	-0.09	10.16	QP
6	0.705	28.57	-17.43	46.00	18.50	-0.09	10.16	Average
7	0.979	37.51	-18.49	56.00	27.50	-0.10	10.11	QP
8	0.979	22.91	-23.09	46.00	12.90	-0.10	10.11	Average
9	13.915	41.15	-18.85	60.00	30.20	-0.20	11.15	QP
10	13.915	25.55	-24.45	50.00	14.60	-0.20	11.15	Average
11	14.986	39.92	-20.08	60.00	28.90	-0.21	11.23	QP
12	14.986	27.62	-22.38	50.00	16.60	-0.21	11.23	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

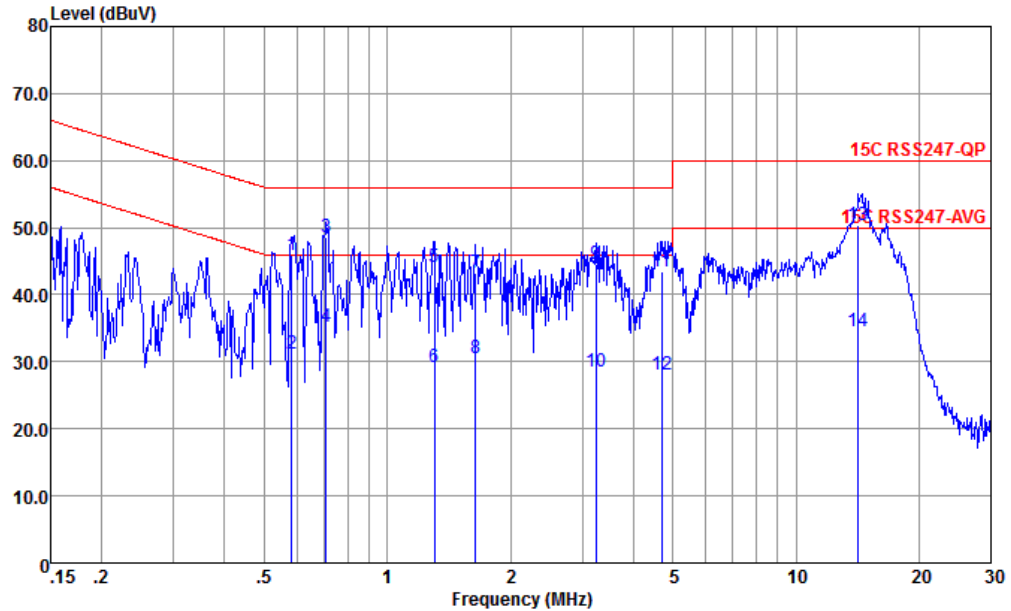

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.582	46.00	-10.00	56.00	35.89	-0.08	10.19	QP
2	0.582	31.30	-14.70	46.00	21.19	-0.08	10.19	Average
3 *	0.708	48.67	-7.33	56.00	38.60	-0.09	10.16	QP
4	0.708	35.27	-10.73	46.00	25.20	-0.09	10.16	Average
5	1.303	44.08	-11.92	56.00	34.10	-0.11	10.09	QP
6	1.303	29.28	-16.72	46.00	19.30	-0.11	10.09	Average
7	1.645	43.16	-12.84	56.00	33.21	-0.12	10.07	QP
8	1.645	30.56	-15.44	46.00	20.61	-0.12	10.07	Average
9	3.241	44.53	-11.47	56.00	34.60	-0.13	10.06	QP
10	3.241	28.53	-17.47	46.00	18.60	-0.13	10.06	Average
11	4.696	43.45	-12.55	56.00	33.50	-0.11	10.06	QP
12	4.696	28.15	-17.85	46.00	18.20	-0.11	10.06	Average
13	14.213	50.29	-9.71	60.00	39.30	-0.18	11.17	QP
14	14.213	34.49	-15.51	50.00	23.50	-0.18	11.17	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2384.34	45.71	-28.29	74	38.59	32.25	7.57	32.7	117	299	P	H
		2384.34	20.92	-33.08	54	-	-	-	-	-	-	A	H
	*	2402	100.39	-	-	93.22	32.28	7.59	32.7	117	299	P	H
	*	2402	75.6	-	-	-	-	-	-	-	-	A	H
		2348.43	45.4	-28.6	74	38.41	32.17	7.52	32.7	379	179	P	V
		2348.43	20.61	-33.39	54	-	-	-	-			A	V
	*	2402	98.47	-	-	91.3	32.28	7.59	32.7	379	179	P	V
	*	2402	73.68	-	-	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		2369.92	45.25	-28.75	74	38.19	32.21	7.55	32.7	104	299	P	H
		2369.92	20.46	-33.54	54	-	-	-	-	-	-	A	H
	*	2441	100.73	-	-	93.42	32.37	7.64	32.7	104	299	P	H
	*	2441	75.94	-	-	-	-	-	-	-	-	A	H
		2496.57	45.44	-28.56	74	37.93	32.49	7.72	32.7	104	299	P	H
		2496.57	20.65	-33.35	54	-	-	-	-	-	-	A	H
		2389.52	45.72	-28.28	74	38.58	32.26	7.58	32.7	389	17	P	V
		2389.52	20.93	-33.07	54	-	-	-	-	-	-	A	V
	*	2441	92.37	-	-	85.06	32.37	7.64	32.7	389	17	P	V
	*	2441	67.58	-	-	-	-	-	-	-	-	A	V
		2487.89	46.48	-27.52	74	39.01	32.47	7.7	32.7	389	17	P	V
		2487.89	21.69	-32.31	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz	*	2480	99.36	-	-	91.91	32.46	7.69	32.7	122	300	P	H
	*	2480	74.57	-	-	-	-	-	-	-	-	A	H
		2490.4	46.07	-27.93	74	38.58	32.48	7.71	32.7	122	300	P	H
		2490.4	21.28	-32.72	54	-	-	-	-	-	-	A	H
	*	2480	89.45	-	-	82	32.46	7.69	32.7	380	19	P	V
	*	2480	64.66	-	-	-	-	-	-	-	-	A	V
		2496.28	45.83	-28.17	74	38.32	32.49	7.72	32.7	380	19	P	V
		2496.28	21.04	-32.96	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz		4804	51.26	-22.74	74	57.7	34.82	10.89	52.15	-	-	P	H
		4804	26.47	-27.53	54	-	-	-	-	-	-	A	H
		4804	50.38	-23.62	74	56.82	34.82	10.89	52.15	-	-	P	V
		4804	25.59	-28.41	54	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		4882	50.4	-23.6	74	56.64	34.85	11.01	52.1	-	-	P	H
		4882	25.61	-28.39	54					-	-	A	H
		7323	47.83	-26.17	74	49.92	36.33	13.35	51.77	-	-	P	H
		7323	23.04	-30.96	54					-	-	A	H
		4882	49.11	-24.89	74	55.35	34.85	11.01	52.1	-	-	P	V
		4882	24.32	-29.68	54					-	-	A	V
		7323	46.38	-27.62	74	48.47	36.33	13.35	51.77	-	-	P	V
		7323	21.59	-32.41	54					-	-	A	V
BT CH 78 2480MHz		4960	49.44	-24.56	74	55.45	34.88	11.14	52.03	-	-	P	H
		4960	24.65	-29.35	54					-	-	A	H
		7440	46.77	-27.23	74	48.86	36.38	13.18	51.65	-	-	P	H
		7440	21.98	-32.02	54					-	-	A	H
		4960	49.54	-24.46	74	55.55	34.88	11.14	52.03	-	-	P	V
		4960	24.75	-29.25	54					-	-	A	V
		7440	46.77	-27.23	74	48.86	36.38	13.18	51.65	-	-	P	V
		7440	21.98	-32.02	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		48.43	19.18	-20.82	40	32.22	20.28	1.66	34.98	-	-	P	H
		165.8	24.16	-19.34	43.5	37.13	19.27	2.46	34.7	-	-	P	H
		264.74	29.05	-16.95	46	42.2	18.65	2.87	34.67	-	-	P	H
		455.83	25.24	-20.76	46	32.89	23.25	3.6	34.5	-	-	P	H
		552.83	26.51	-19.49	46	32.34	24.82	3.86	34.51	-	-	P	H
		768.17	28.92	-17.08	46	30.89	27.98	4.41	34.36	-	-	P	H
		50.37	27.57	-12.43	40	40.6	20.29	1.68	35	-	-	P	V
		77.53	25.27	-14.73	40	42.1	15.98	1.91	34.72	-	-	P	V
		160.95	26.4	-17.1	43.5	39.33	19.32	2.45	34.7	-	-	P	V
		271.53	21	-25	46	33.81	18.95	2.9	34.66	-	-	P	V
		397.63	23.41	-22.59	46	32.5	22.06	3.35	34.5	-	-	P	V
		838.01	29.65	-16.35	46	30.87	28.53	4.55	34.3	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:


1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

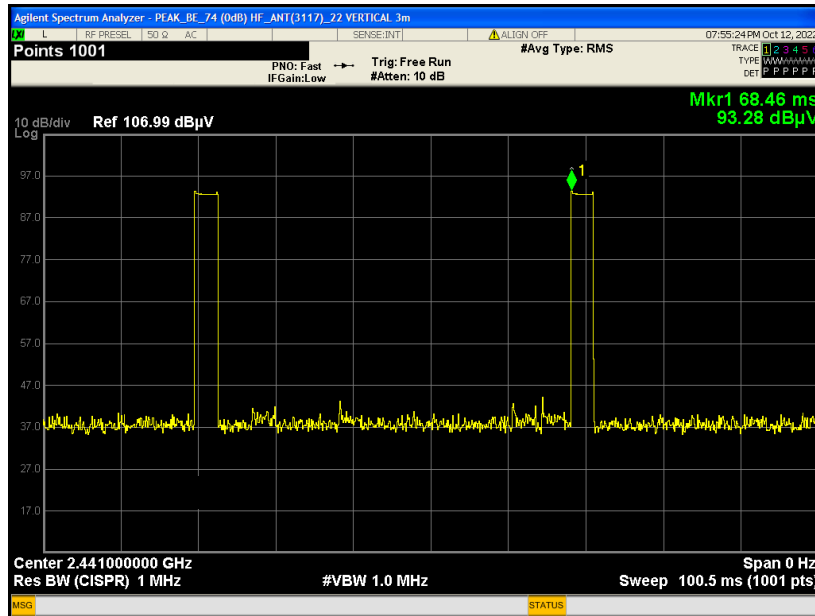

DH5 on time (Count Pulses) Plot on Channel 39

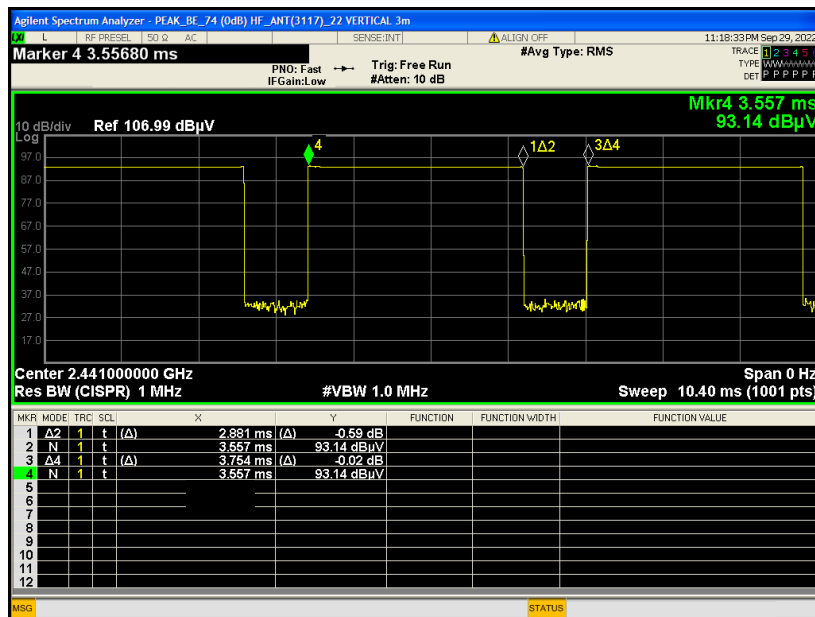

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.881 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.