

Date: 2026-03-16

01_WLAN2.4GHz_802.11b 1Mbps_Edge 1_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2462.000MHz; Duty Cycle: 1:1

Medium: HSL_2450_260316 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.7, 7.41, 7.62); Calibrated: 2026-02-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2135; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (42.0 mm x 320.0 mm): Measurement Grid: 7.0 mm x 10.0 mm

SAR (1g) = 0.104 W/kg; SAR (10g) = 0.050 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 0.109 W/kg; SAR (10g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

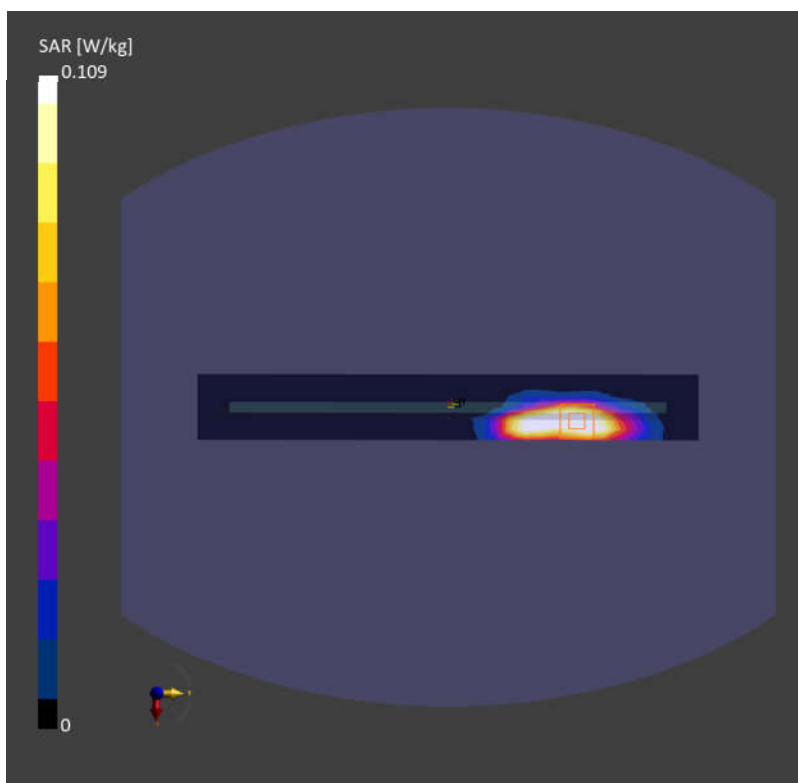

Date: 2026-03-17

02_WLAN5GHz_802.11n-HT40 MCS0_Edge 1_0mm_Ch54

Communication System: IEEE 802.11ac WiFi

Frequency: 5270.000 MHz; Duty Cycle: 1:1

Medium: HSL_5250_260317 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(5.83, 5.62, 5.77); Calibrated: 2026-02-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2135; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-

Area Scan (42.0 mm x 320.0 mm): Measurement Grid: 7.0 mm x 10.0 mm

SAR (1g) = 0.562 W/kg; SAR (10g) = 0.262 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.05 dB

SAR (1g) = 0.674 W/kg; SAR (10g) = 0.303 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.0 %

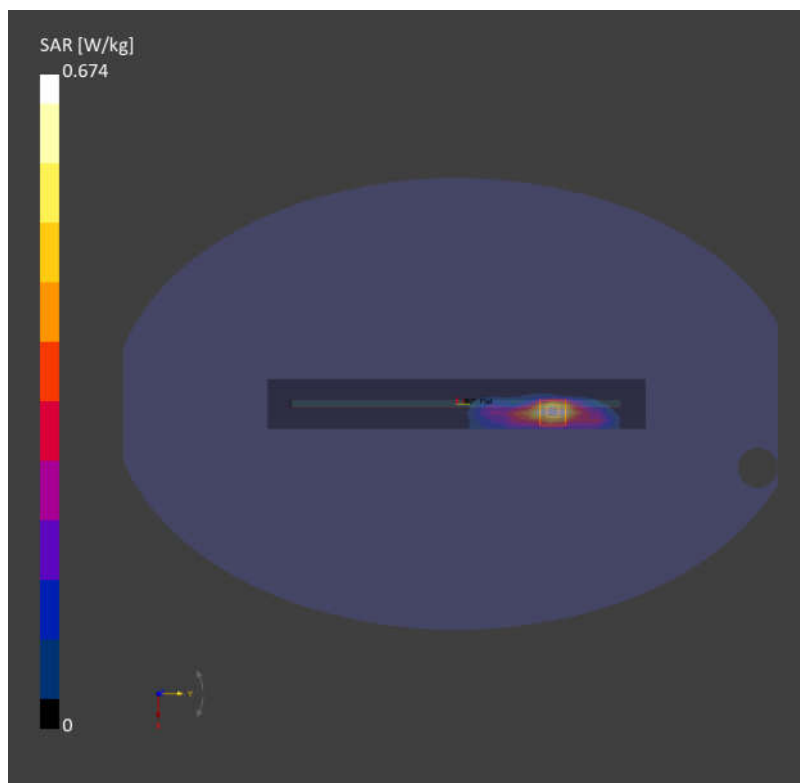

Date: 2026-03-18

03_WLAN5GHz_802.11ac-VHT80 MCS0_Edge 1_0mm_Ch122

Communication System: IEEE 802.11ac WiFi

Frequency: 5610.000 MHz; Duty Cycle: 1:1

Medium: HSL_5600_260318 Medium parameters used: $f = 5610.000$ MHz; $\sigma = 5.03$ S/m; $\epsilon_r = 34.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(5.33, 5.13, 5.27); Calibrated: 2026-02-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2135; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-

Area Scan (42.0 mm x 320.0 mm): Measurement Grid: 7.0 mm x 10.0 mm

SAR (1g) = 0.587 W/kg; SAR (10g) = 0.278 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.704 W/kg; SAR (10g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.1 %

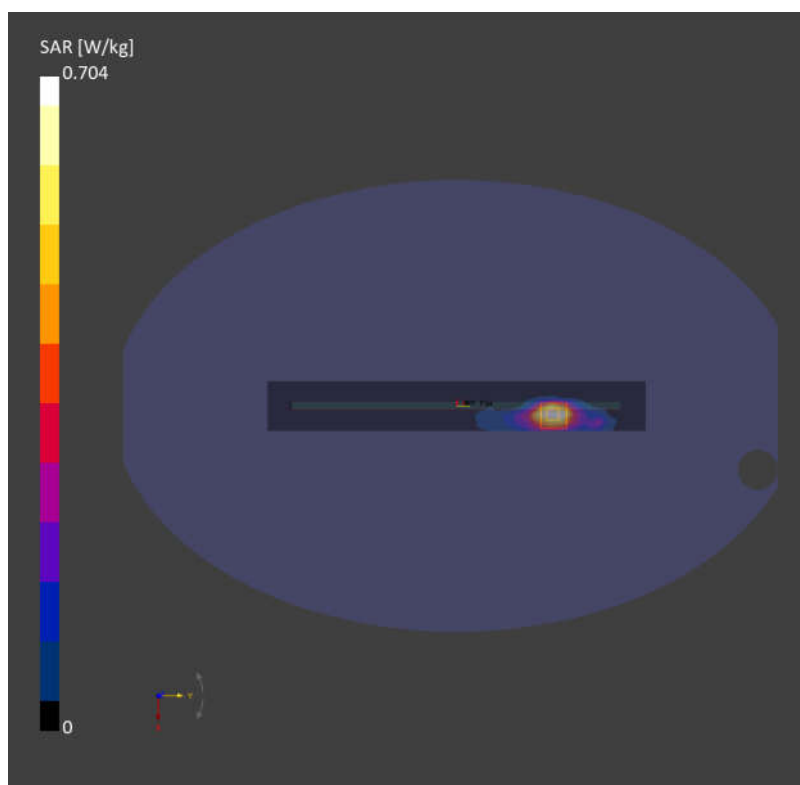

Date: 2026-03-19

04_WLAN5GHz_802.11ac-VHT80 MCS0_Edge 1_0mm_Ch155

Communication System: IEEE 802.11ac WiFi

Frequency: 5775.000 MHz; Duty Cycle: 1:1

Medium: HSL_5800_260319 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.20$ S/m; $\epsilon_r = 34.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(5.45, 5.25, 5.39); Calibrated: 2026-02-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2135; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-

Area Scan (42.0 mm x 320.0 mm): Measurement Grid: 7.0 mm x 10.0 mm

SAR (1g) = 0.703 W/kg; SAR (10g) = 0.268 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.708 W/kg; SAR (10g) = 0.304 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.0 %

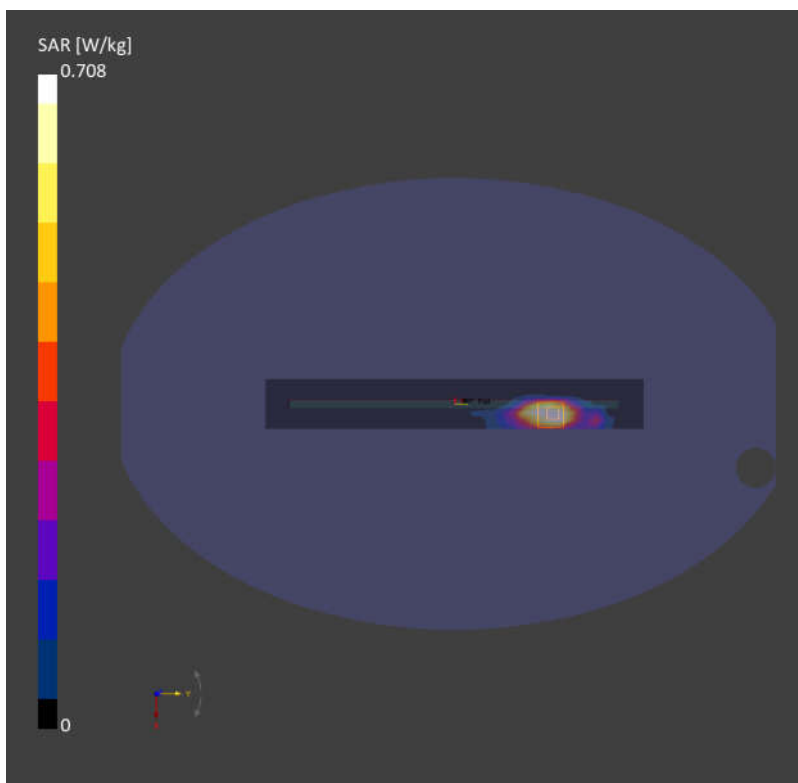

Date: 2026-03-16

05_Bluetooth_1Mbps_Edge 1_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth

Frequency: 2441.000 MHz; Duty Cycle: 1:1.305

Medium: HSL_2450_260316 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.7, 7.41, 7.62); Calibrated: 2026-02-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2135; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-

Area Scan (42.0 mm x 320.0 mm): Measurement Grid: 7.0 mm x 10.0 mm

SAR (1g) = 0.057 W/kg; SAR (10g) = 0.029 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.059 W/kg; SAR (10g) = 0.030 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.5 %

