


5MHz / QPSK


CHANNEL 19975

FREQUENCY RANG2E : 30MHz~17.55GHz

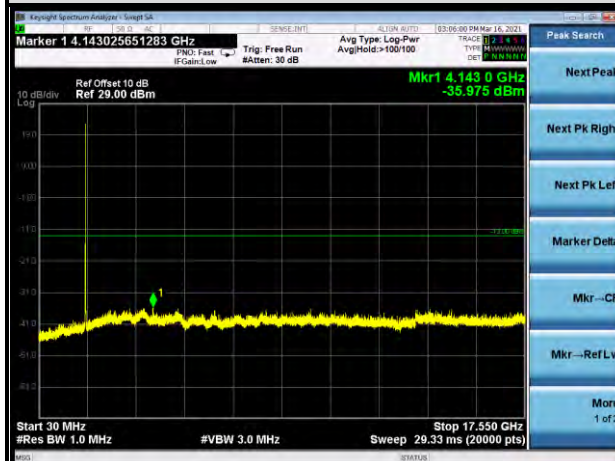


CHANNEL 20175

FREQUENCY RANG2E : 30MHz~17.55GHz

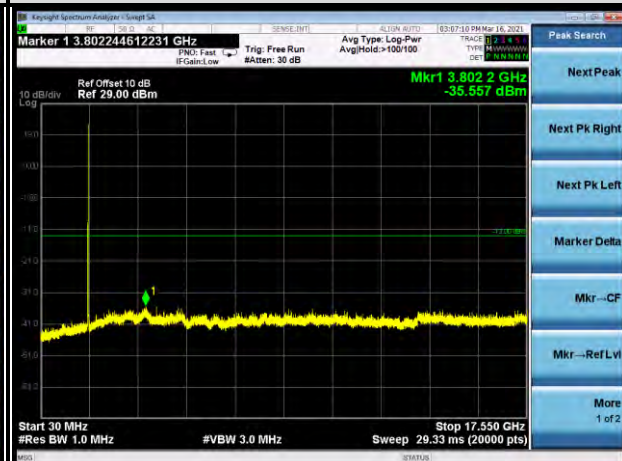

CHANNEL 20375


FREQUENCY RANG2E : 30MHz~17.55GHz

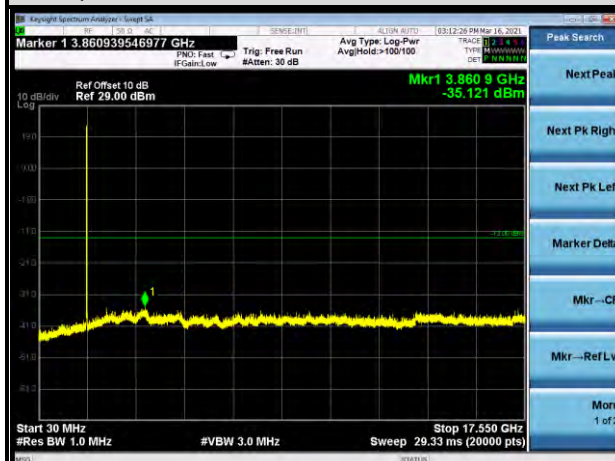

10MHz / QPSK


CHANNEL 20000

FREQUENCY RANG2E : 30MHz~17.55GHz

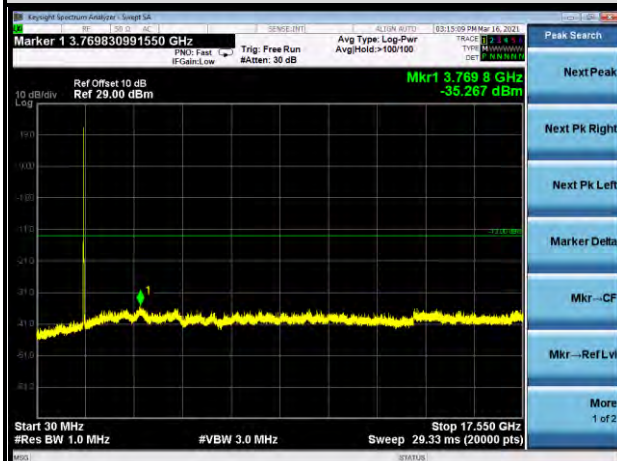


CHANNEL 20175

FREQUENCY RANG2E : 30MHz~17.55GHz

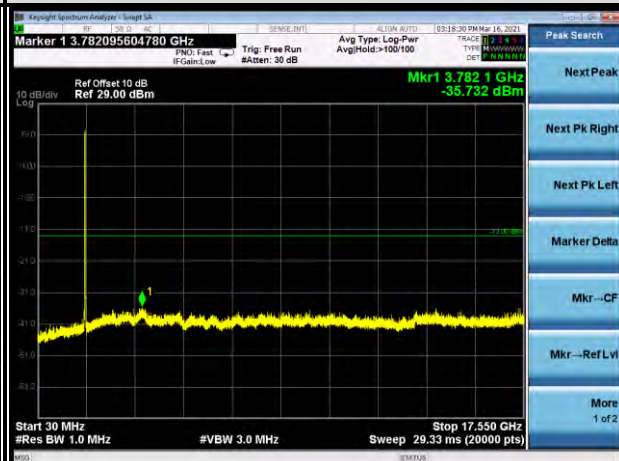

CHANNEL 20350


FREQUENCY RANG2E : 30MHz~17.55GHz

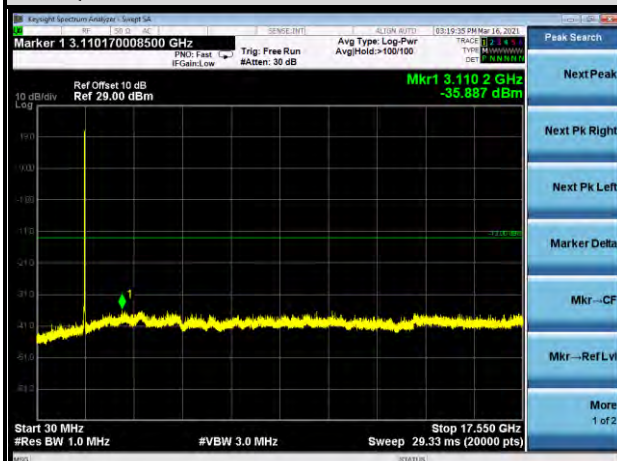

15MHz / QPSK


CHANNEL 20025

FREQUENCY RANG2E : 30MHz~17.55GHz

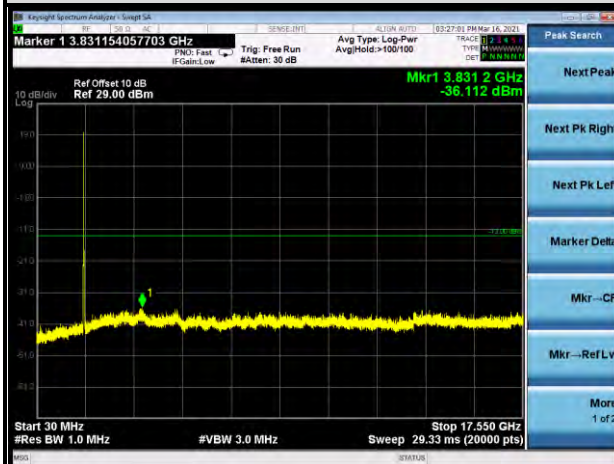


CHANNEL 20175

FREQUENCY RANG2E : 30MHz~17.55GHz

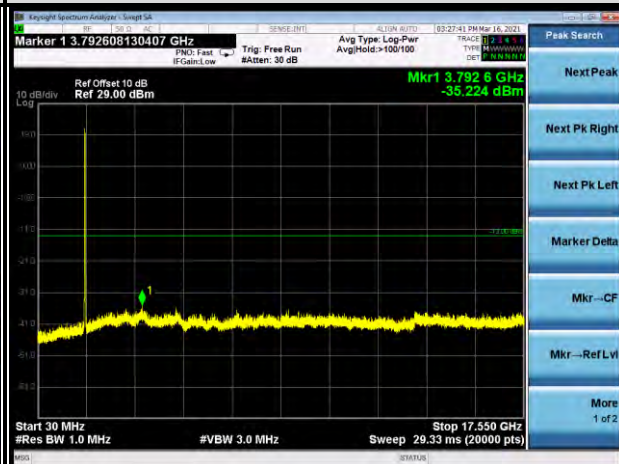

CHANNEL 20325


FREQUENCY RANG2E : 30MHz~17.55GHz

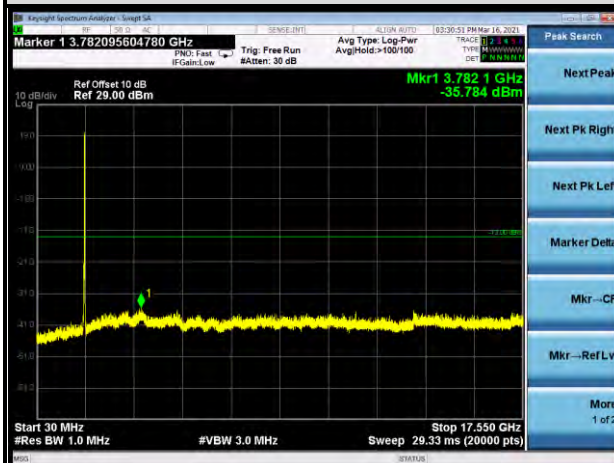

20MHz / QPSK


CHANNEL 20050

FREQUENCY RANG2E : 30MHz~17.55GHz

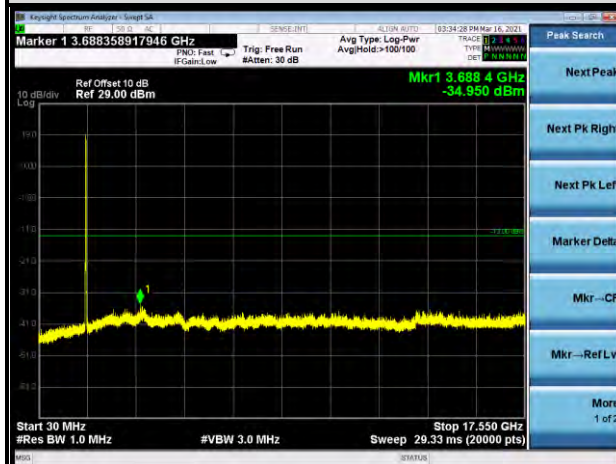


CHANNEL 20175

FREQUENCY RANG2E : 30MHz~17.55GHz

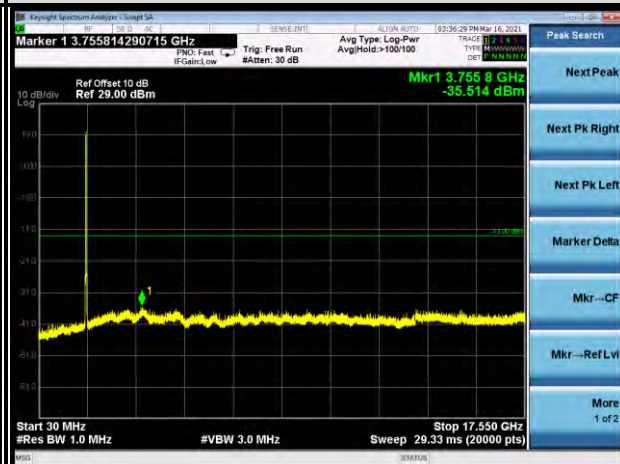

CHANNEL 20300

FREQUENCY RANG2E : 30MHz~17.55GHz

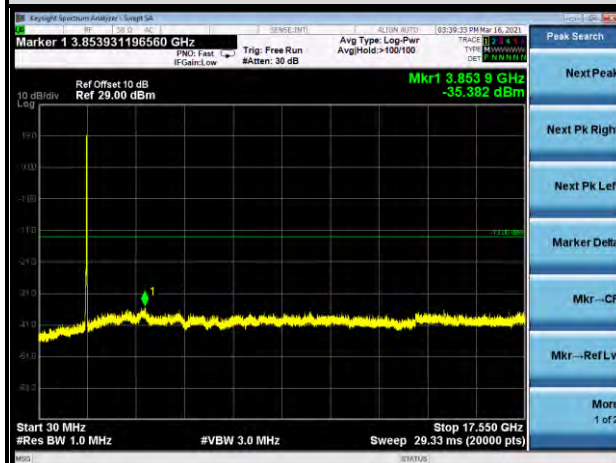



BUREAU
VERITAS


LTE BAND 12

Test Report No.: RFA210222W001-3

1.4MHz / QPSK


CHANNEL 23017

FREQUENCY RANGE : 30MHz~7.16GHz

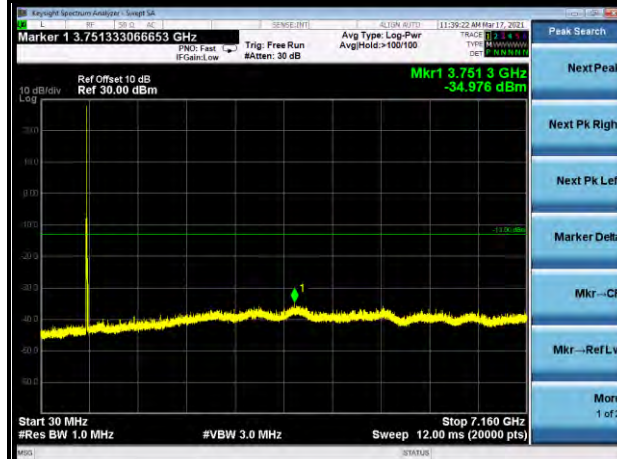



CHANNEL 23095

FREQUENCY RANGE : 30MHz~7.16GHz

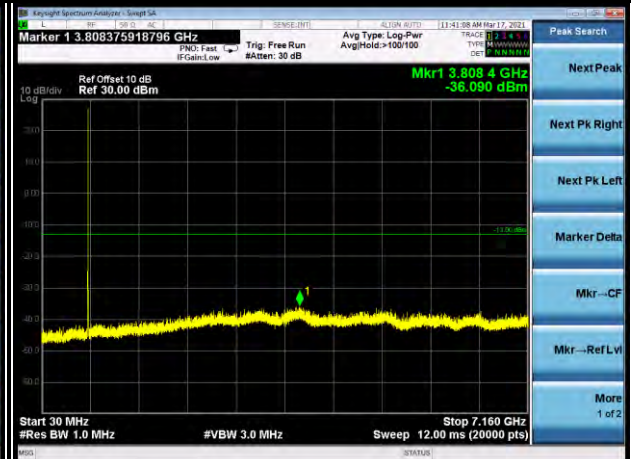

CHANNEL 23173


FREQUENCY RANGE : 30MHz~7.16GHz

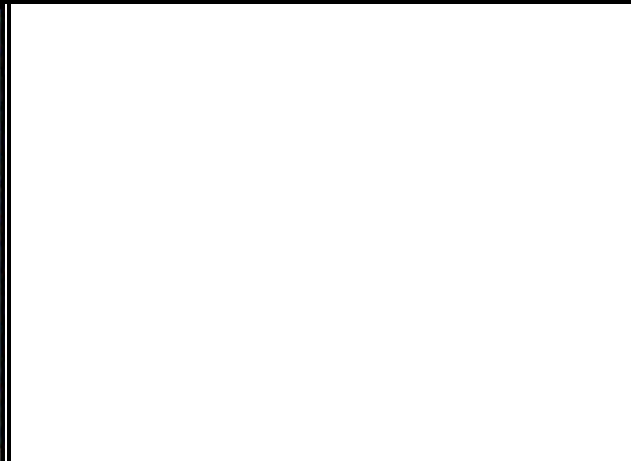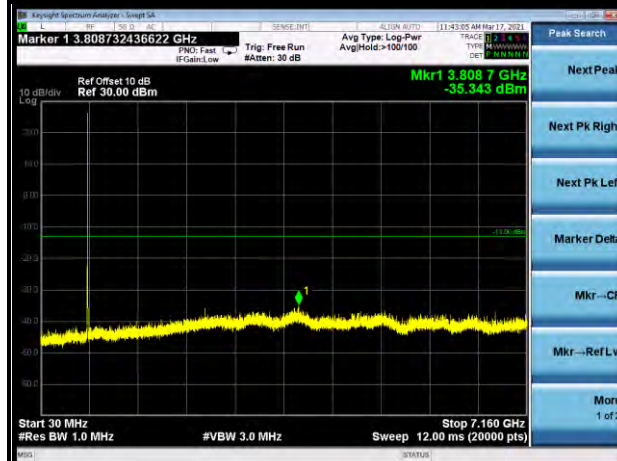

3MHz / QPSK


CHANNEL 23025

FREQUENCY RANGE : 30MHz~7.16GHz

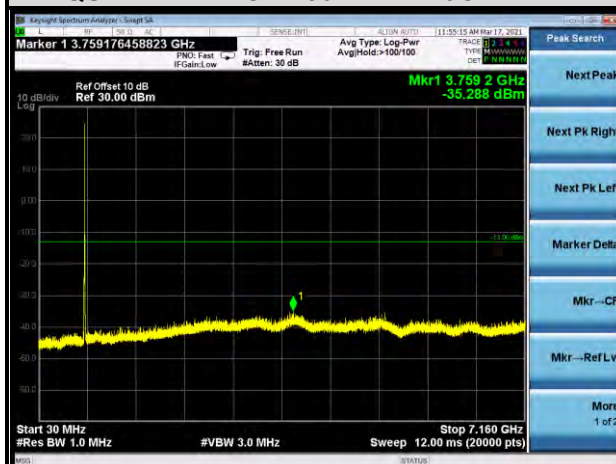


CHANNEL 23095

FREQUENCY RANGE : 30MHz~7.16GHz

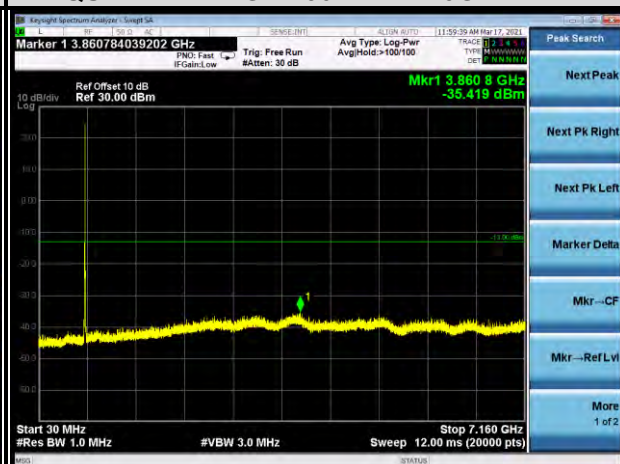

CHANNEL 23165

FREQUENCY RANGE : 30MHz~7.16GHz

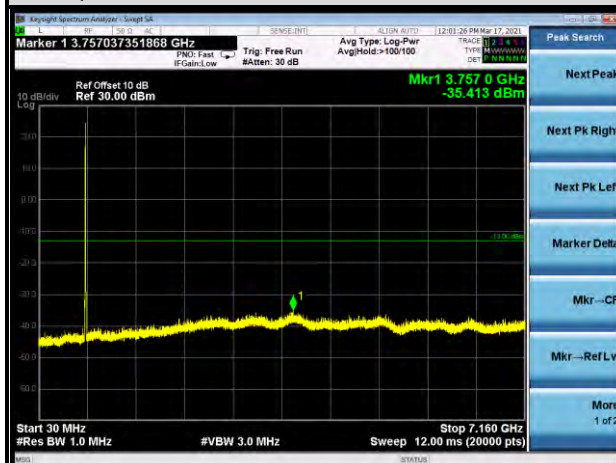



10MHz / QPSK


CHANNEL 23060

FREQUENCY RANGE : 30MHz~7.16GHz




CHANNEL 23095

FREQUENCY RANGE : 30MHz~7.16GHz

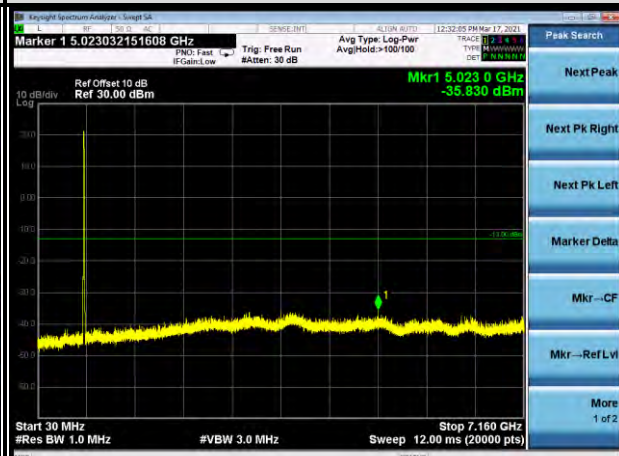

CHANNEL 23130

FREQUENCY RANGE : 30MHz~7.16GHz

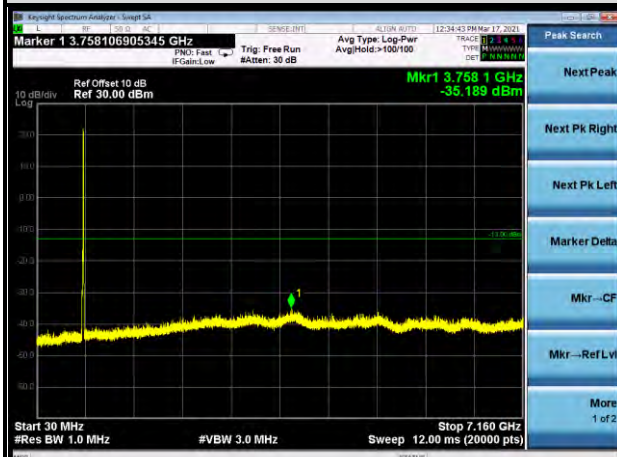



BUREAU
VERITAS


Test Report No.: RFA210222W001-3

LTE BAND 13

5MHz / QPSK


CHANNEL 23205

FREQUENCY RANGE : 30MHz~7.16GHz

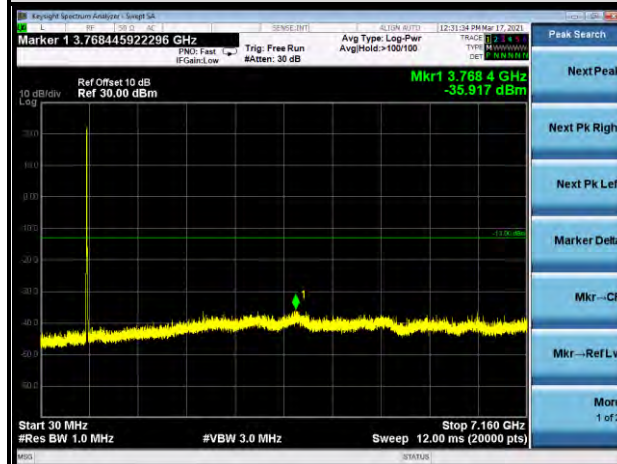


CHANNEL 23230

FREQUENCY RANGE : 30MHz~7.87GHz

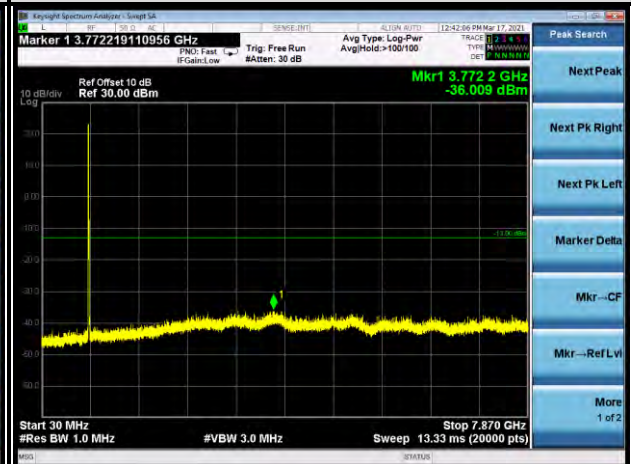

CHANNEL 23255


FREQUENCY RANGE : 30MHz~7.87GHz

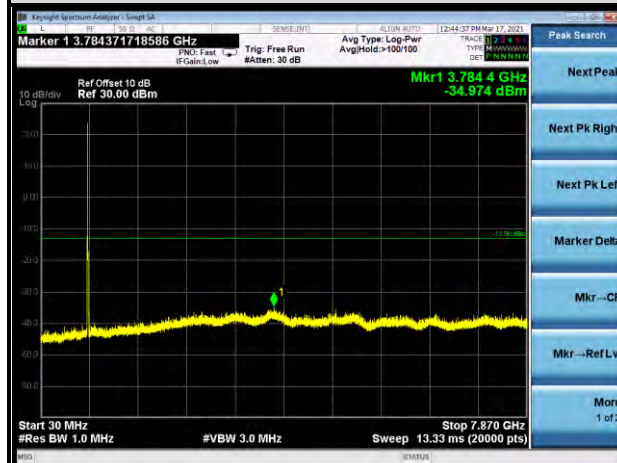

10MHz / QPSK

CHANNEL 23230

FREQUENCY RANGE : 30MHz~7.87GHz

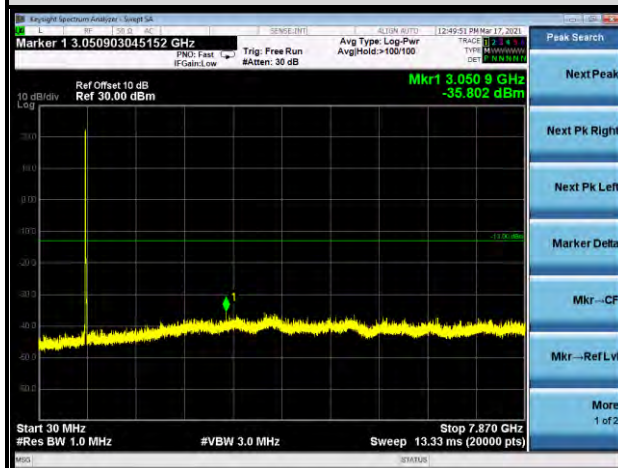


LTE BAND 14

5MHz / QPSK


CHANNEL 23305

FREQUENCY RANGE : 30MHz~7.980GHz

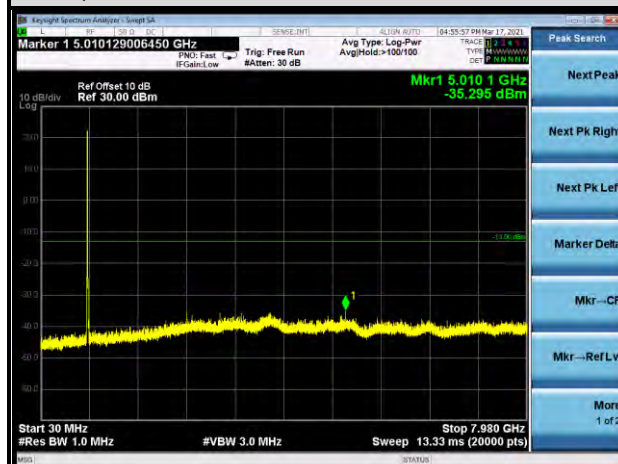


CHANNEL 23330


FREQUENCY RANGE : 30MHz~7.980GHz

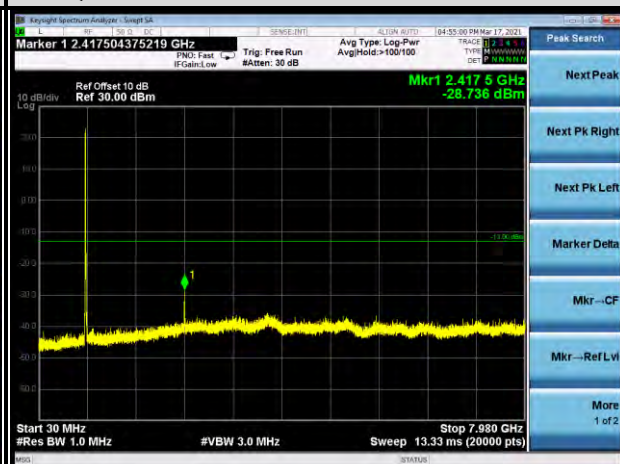

CHANNEL 23355

FREQUENCY RANGE : 30MHz~7.980GHz

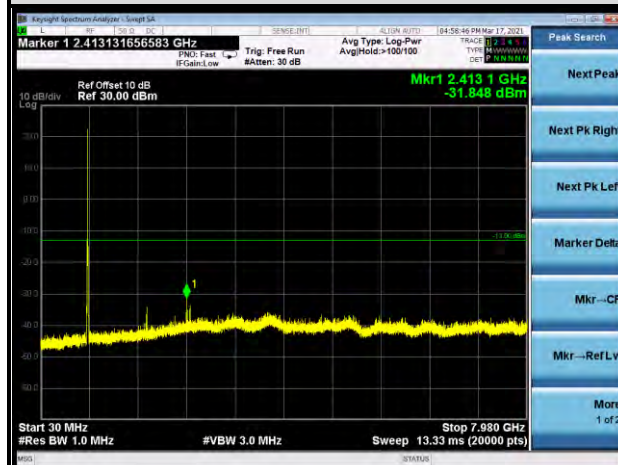

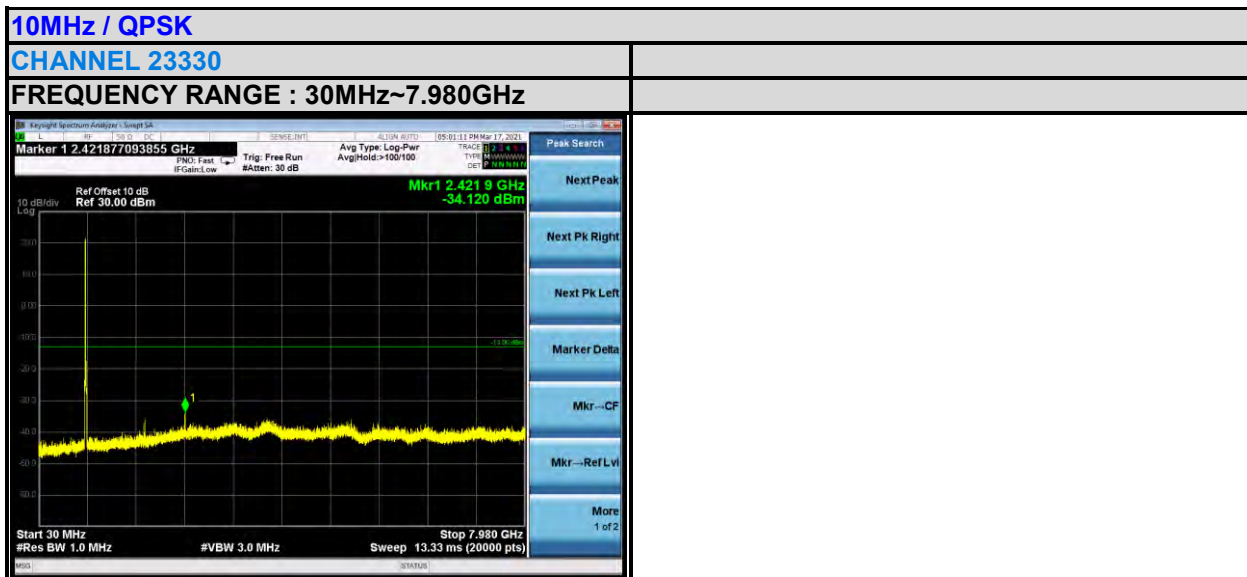

LTE BAND 17






BUREAU
VERITAS

Test Report No.: RFA210222W001-3

10MHz / QPSK

CHANNEL 23780

FREQUENCY RANGE : 30MHz~7.160GHz

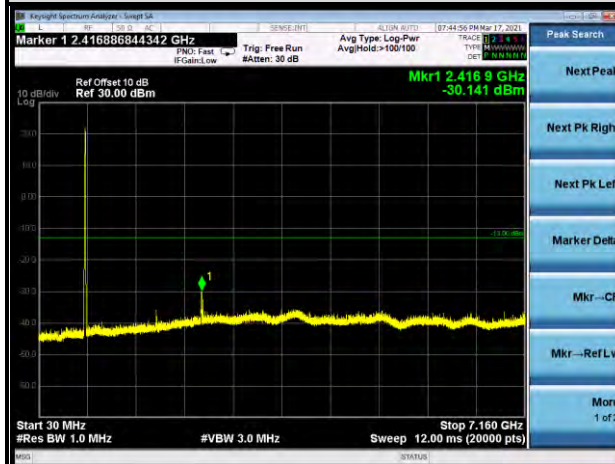


CHANNEL 23790

FREQUENCY RANGE : 30MHz~7.160GHz



CHANNEL 23800

FREQUENCY RANGE : 30MHz~7.160GHz

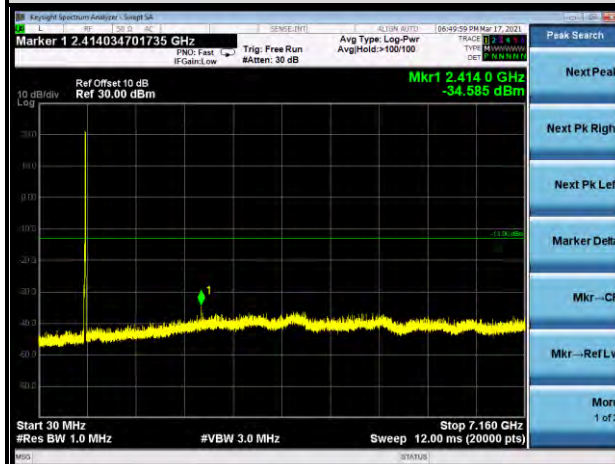



BUREAU
VERITAS

Test Report No.: RFA210222W001-3


LTE BAND 30



10MHz / QPSK

CHANNEL 27710

FREQUENCY RANGE : 30MHz~23.15GHz

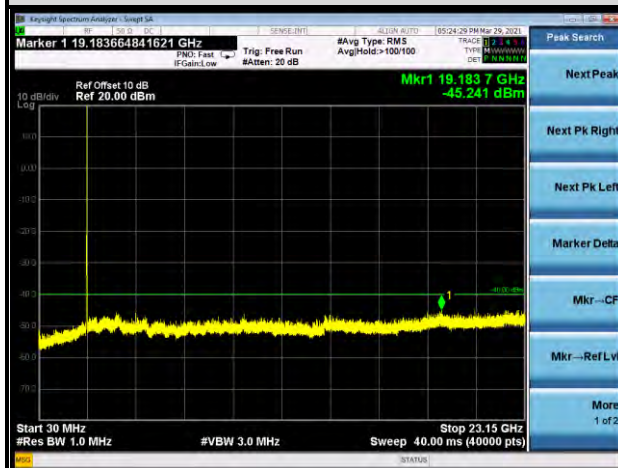



BUREAU
VERITAS

Test Report No.: RFA210222W001-3


LTE BAND 66



3MHz / QPSK


CHANNEL 131987

FREQUENCY RANGE : 30MHz~17.80GHz

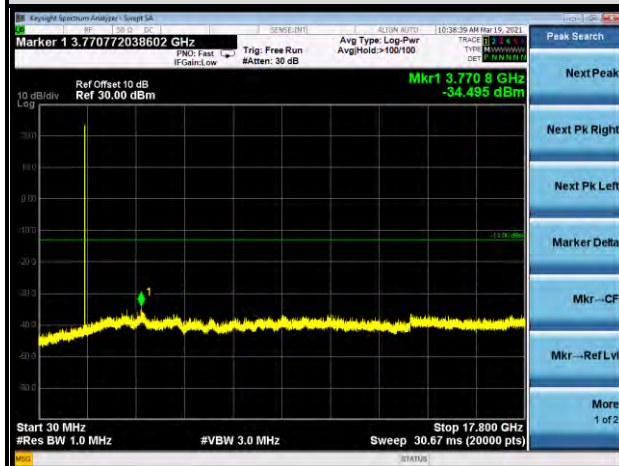


CHANNEL 132322

FREQUENCY RANGE : 30MHz~17.80GHz

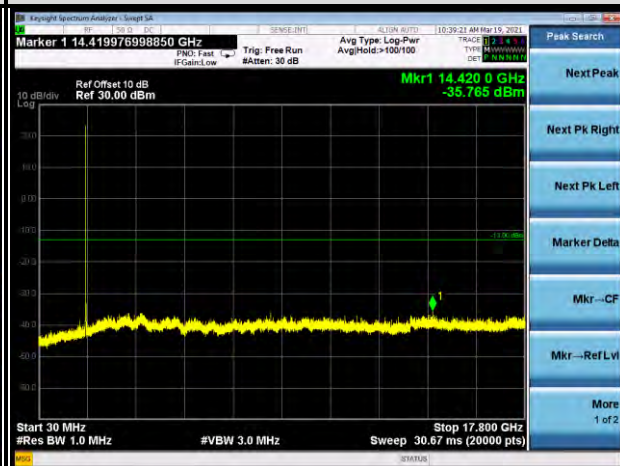

CHANNEL 132657

FREQUENCY RANGE : 30MHz~17.80GHz

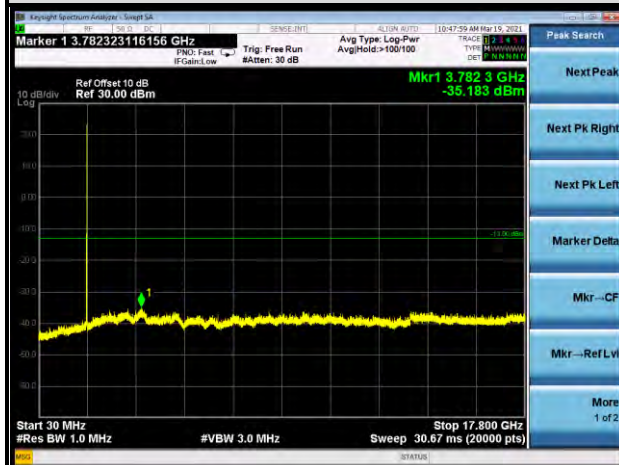




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

5MHz / QPSK


CHANNEL 131997

FREQUENCY RANGE : 30MHz~17.80GHz

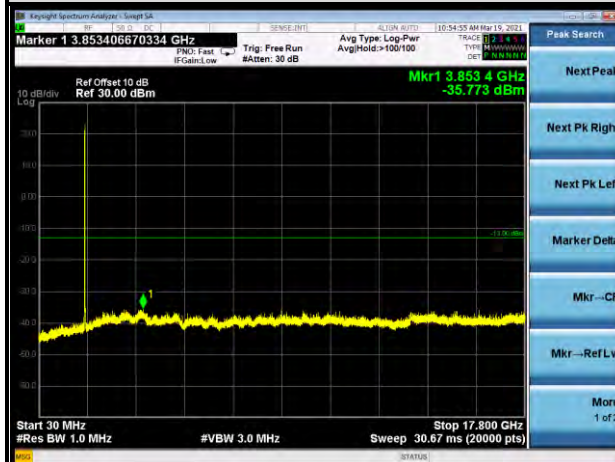


CHANNEL 132322

FREQUENCY RANGE : 30MHz~17.80GHz

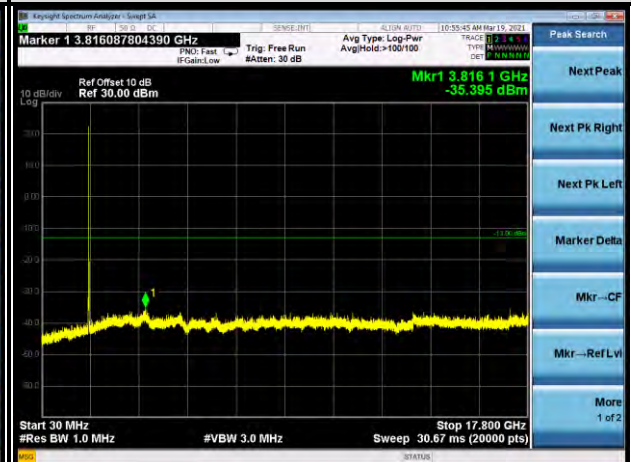

CHANNEL 132647


FREQUENCY RANGE : 30MHz~17.80GHz

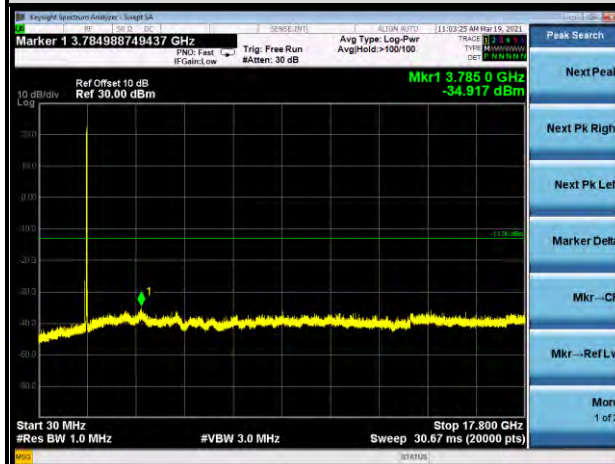

10MHz / QPSK


CHANNEL 132022

FREQUENCY RANGE : 30MHz~17.80GHz

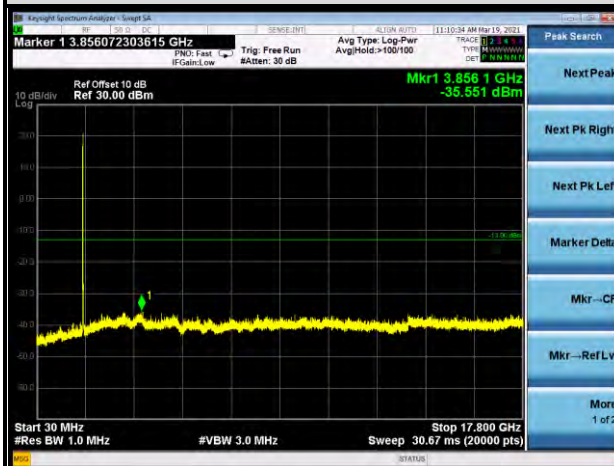


CHANNEL 132322

FREQUENCY RANGE : 30MHz~17.80GHz

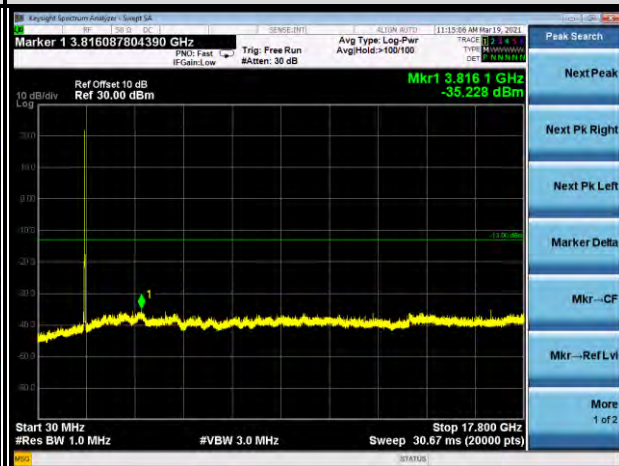

CHANNEL 132622

FREQUENCY RANGE : 30MHz~17.80GHz

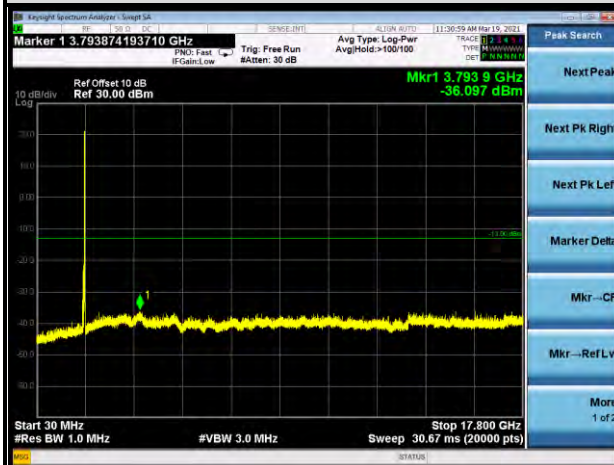




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

15MHz / QPSK


CHANNEL 132322

FREQUENCY RANGE : 30MHz~17.80GHz

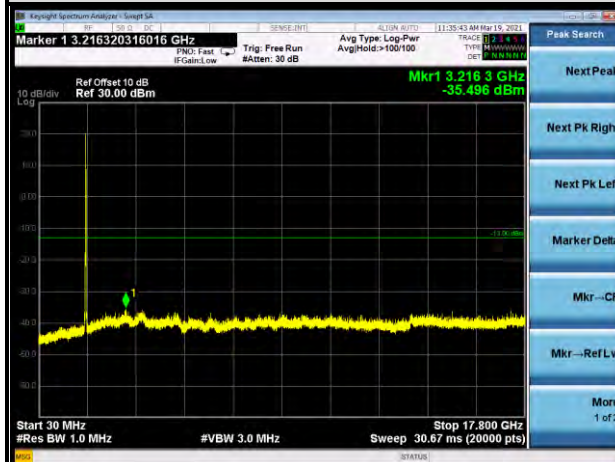


CHANNEL 132407

FREQUENCY RANGE : 30MHz~17.80GHz

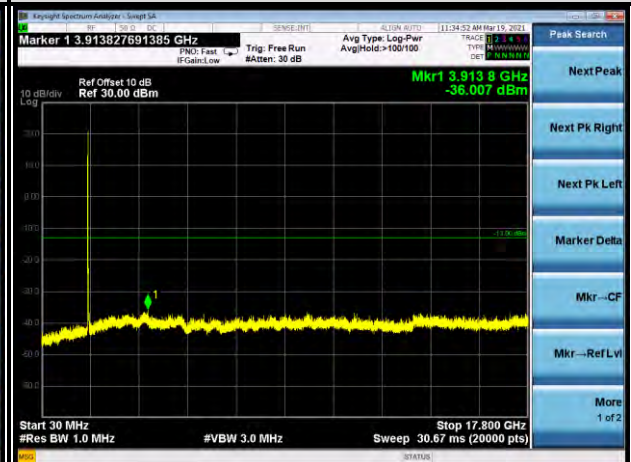

CHANNEL 132597


FREQUENCY RANGE : 30MHz~17.80GHz

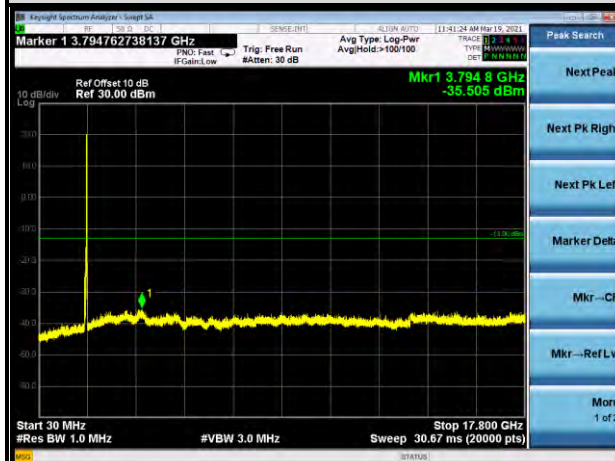

20MHz / QPSK


CHANNEL 132072

FREQUENCY RANGE : 30MHz~17.80GHz

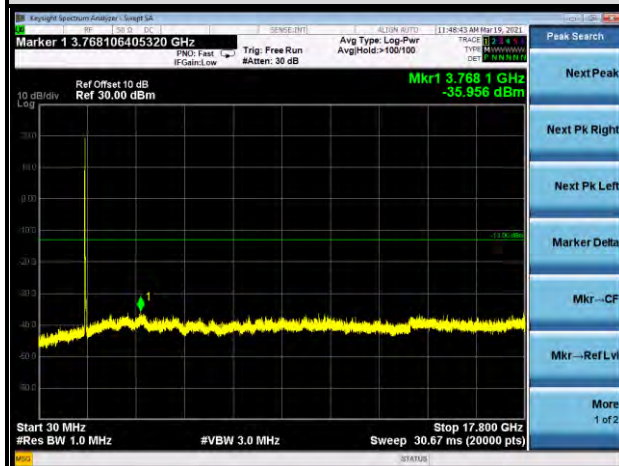


CHANNEL 132322

FREQUENCY RANGE : 30MHz~17.80GHz

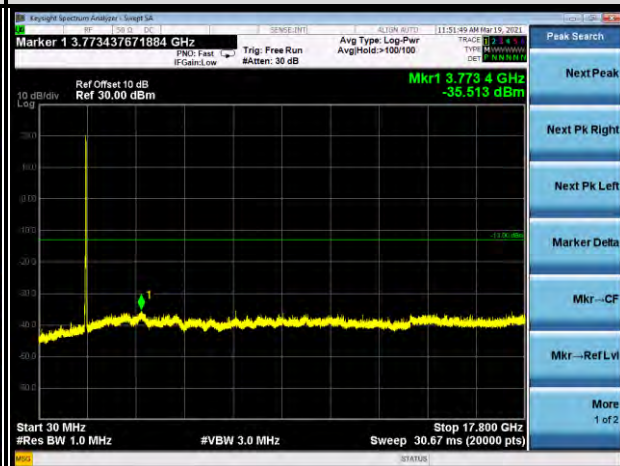

CHANNEL 132572

FREQUENCY RANGE : 30MHz~17.80GHz

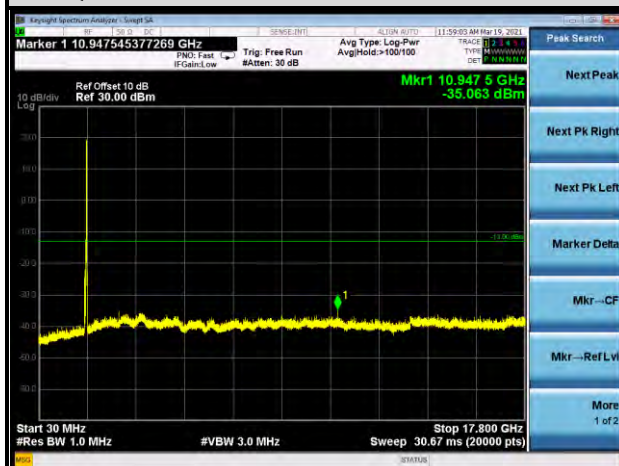



BUREAU
VERITAS


LTE BAND 71

Test Report No.: RFA210222W001-3

5MHz / QPSK

CHANNEL 133147

FREQUENCY RANGE : 30MHz~6.980GHz

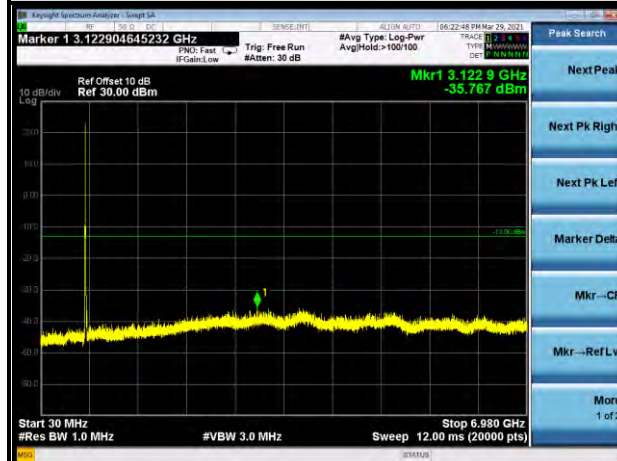



CHANNEL 133297

FREQUENCY RANGE : 30MHz~6.980GHz



CHANNEL 133447

FREQUENCY RANGE : 30MHz~6.980GHz

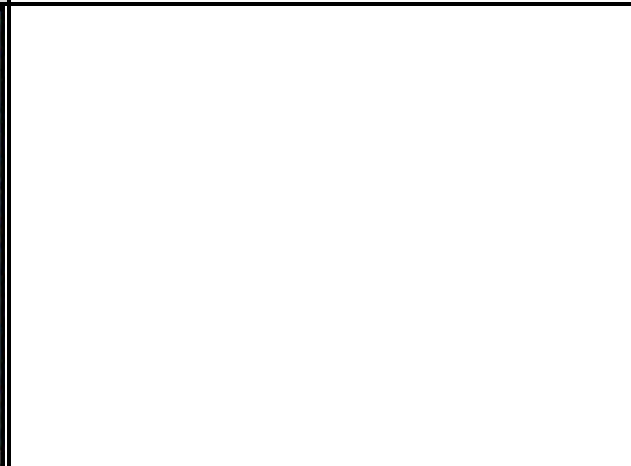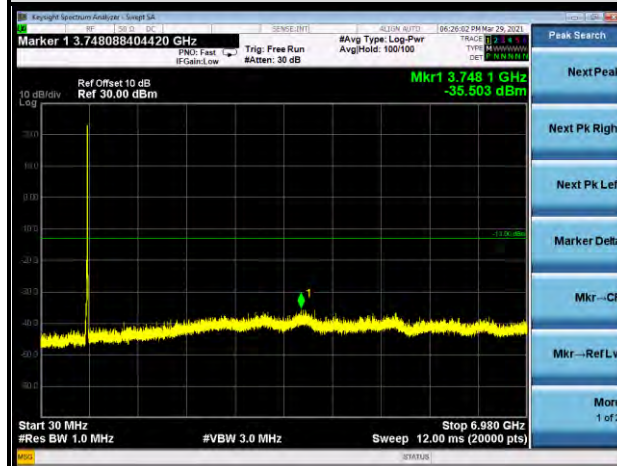




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

10MHz / QPSK


CHANNEL 133172

FREQUENCY RANGE : 30MHz~6.980GHz

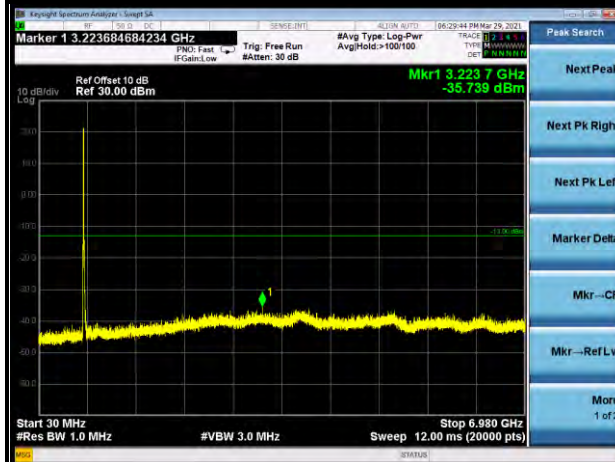


CHANNEL 133297

FREQUENCY RANGE : 30MHz~6.980GHz

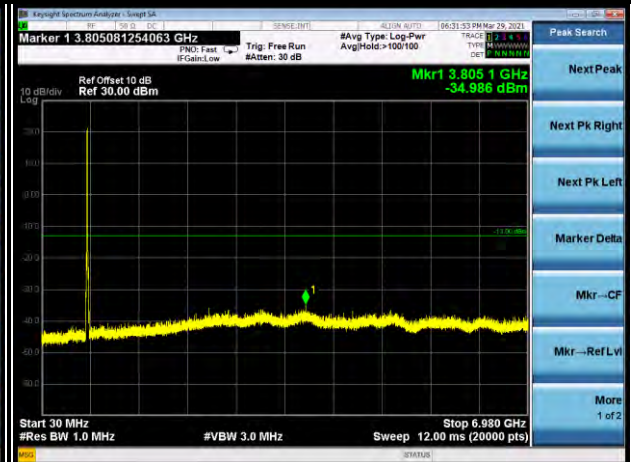

CHANNEL 133422

FREQUENCY RANGE : 30MHz~6.980GHz

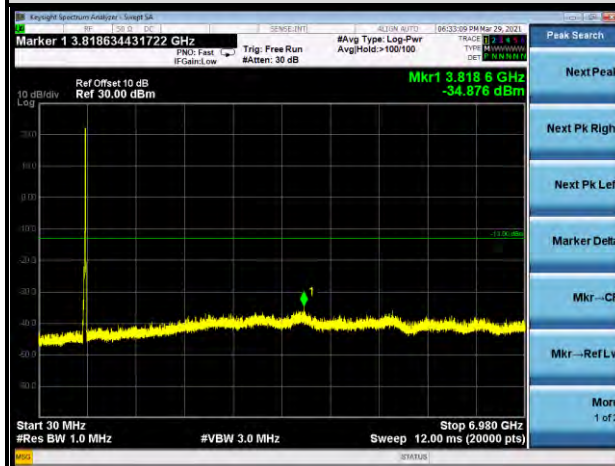




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

15MHz / QPSK


CHANNEL 133197

FREQUENCY RANGE : 30MHz~6.980GHz

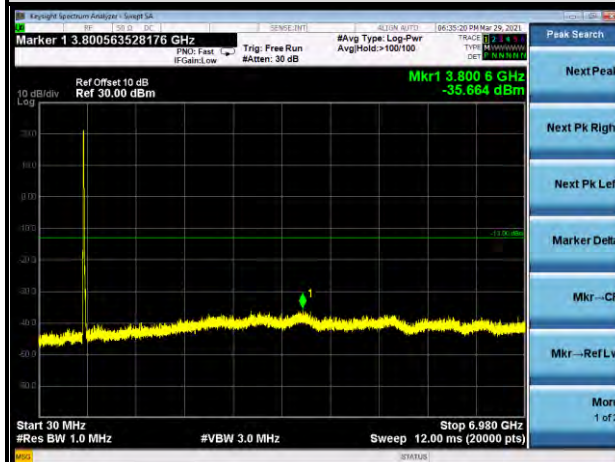



CHANNEL 133297

FREQUENCY RANGE : 30MHz~6.980GHz

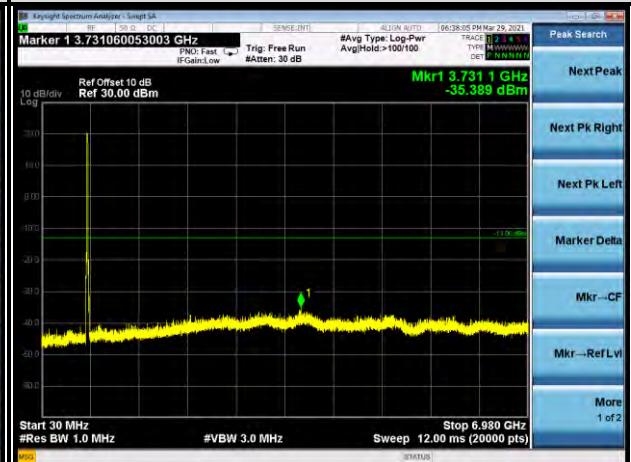

CHANNEL 133397

FREQUENCY RANGE : 30MHz~6.980GHz

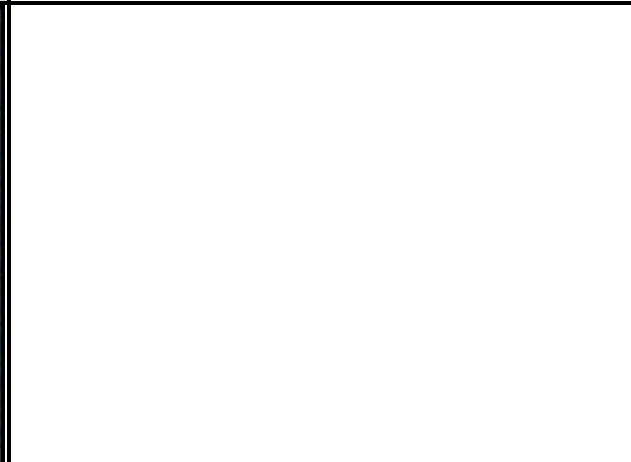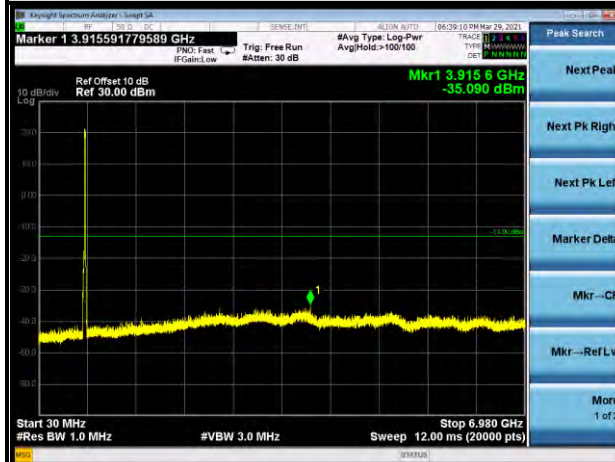




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

20MHz / QPSK


CHANNEL 133222

FREQUENCY RANGE : 30MHz~6.980GHz

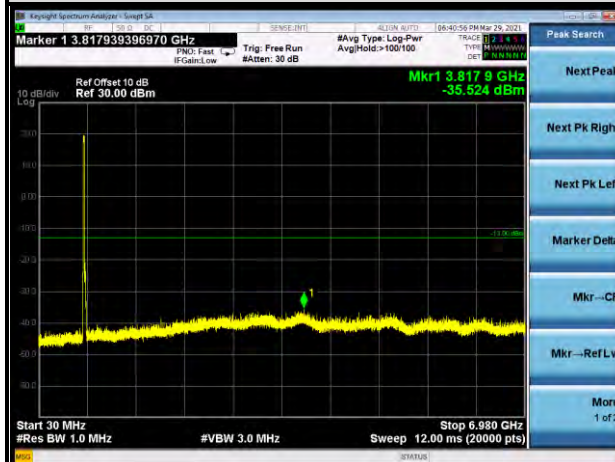


CHANNEL 133297

FREQUENCY RANGE : 30MHz~6.980GHz

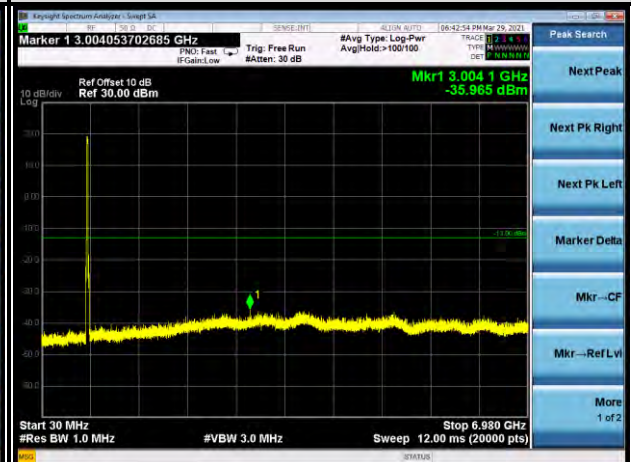

CHANNEL 133372

FREQUENCY RANGE : 30MHz~6.980GHz

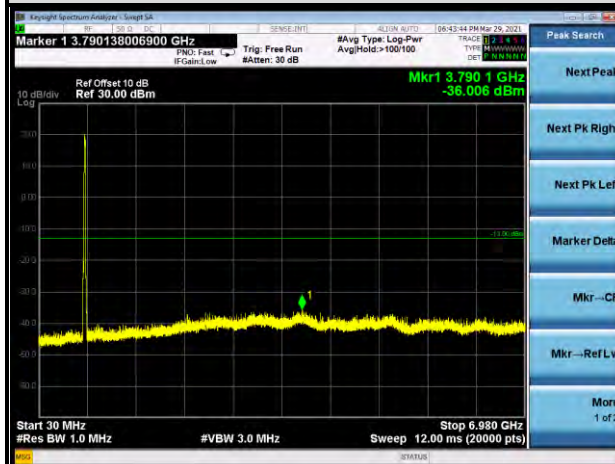

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm.

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi}$.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP

< Frequency Range 30MHz~1GHz >

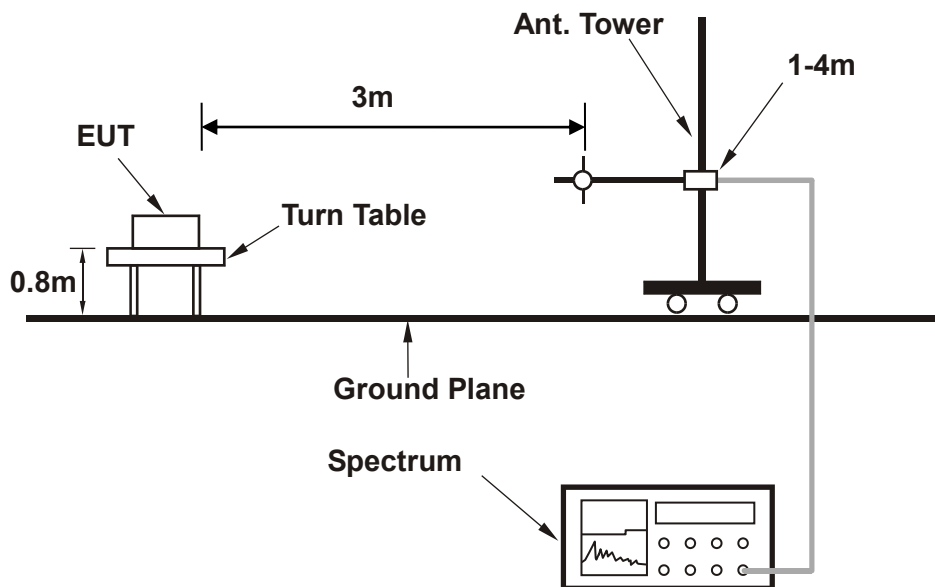

<Frequency Range above 1GHz>

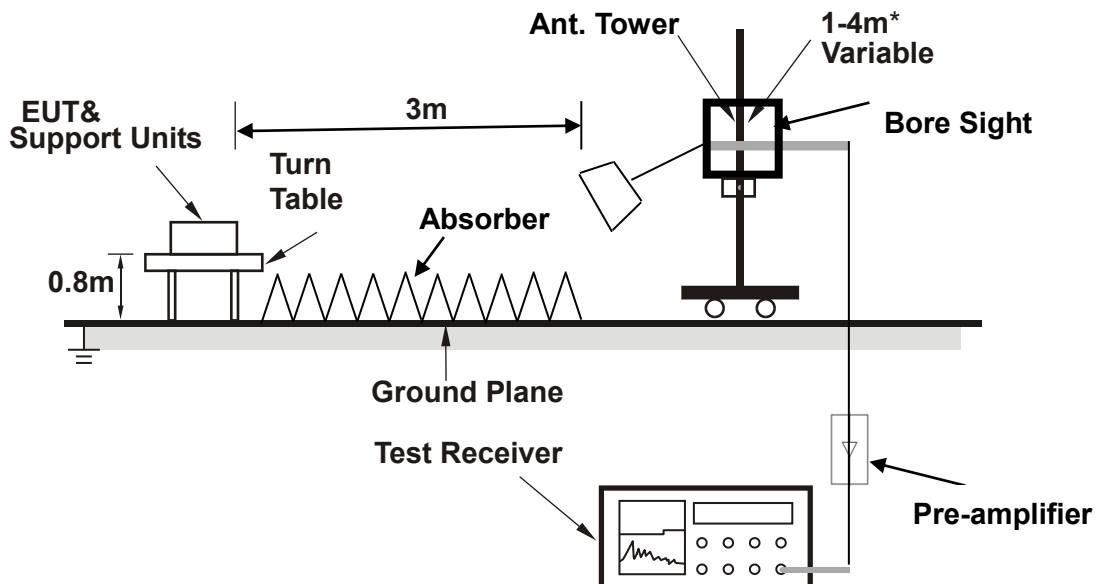

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.6.5 TEST RESULTS

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 4

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 20175	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	31.940	-42.18	-62.11	-13.00	-29.18	19.93	Peak	Horizontal
2 PP	164.830	-41.47	-51.98	-13.00	-28.47	10.51	Peak	Horizontal
3	189.080	-42.62	-52.57	-13.00	-29.62	9.95	Peak	Horizontal
4	241.460	-44.50	-57.40	-13.00	-31.50	12.90	Peak	Horizontal
5	277.350	-43.06	-56.61	-13.00	-30.06	13.55	Peak	Horizontal
6	553.800	-42.55	-62.13	-13.00	-29.55	19.58	Peak	Horizontal

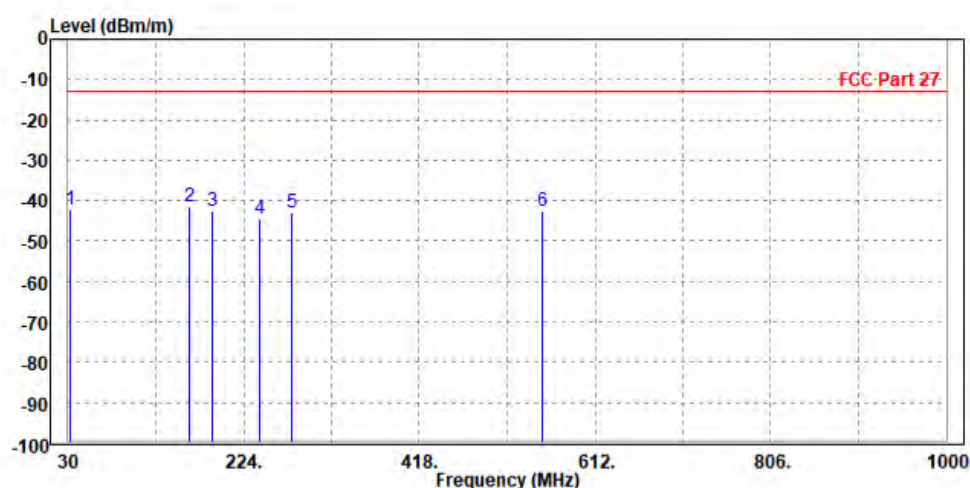

MODE	TX channel 20175	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	30.970	-41.07	-61.49	-13.00	-28.07	20.42	Peak	Vertical
2	187.140	-40.89	-50.83	-13.00	-27.89	9.94	Peak	Vertical
3 PP	278.320	-36.84	-50.40	-13.00	-23.84	13.56	Peak	Vertical
4	399.570	-43.00	-59.79	-13.00	-30.00	16.79	Peak	Vertical
5	594.540	-42.33	-62.19	-13.00	-29.33	19.86	Peak	Vertical
6	686.690	-38.97	-61.38	-13.00	-25.97	22.41	Peak	Vertical

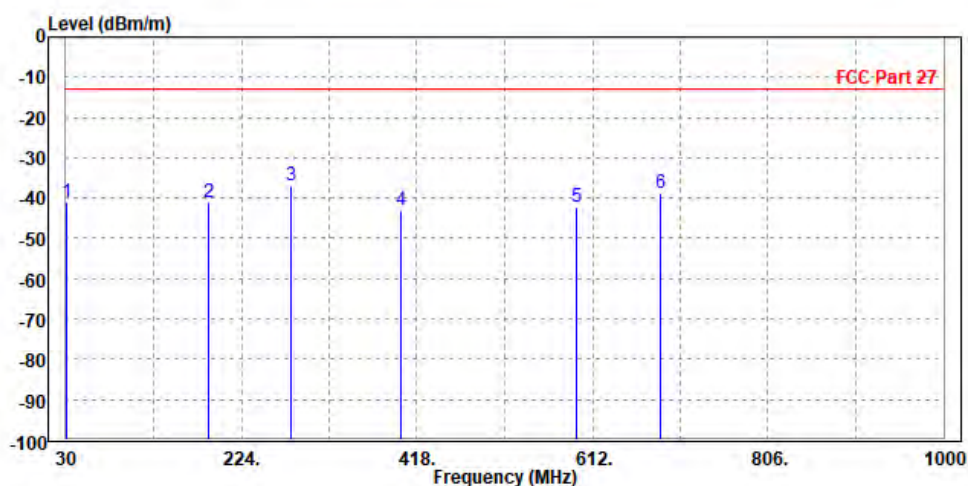



Test Report No.: RFA210222W001-3

ABOVE 1GHz


Note: For higher frequency, the emission is too low to be detected.

WCDMA Band IV:

CH 1312

MODE	TX channel 1312	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3430.000	-49.16	-57.75	-13.00	-36.16	8.59	Peak	Horizontal
2		5136.000	-51.72	-60.65	-13.00	-38.72	8.93	Peak	Horizontal

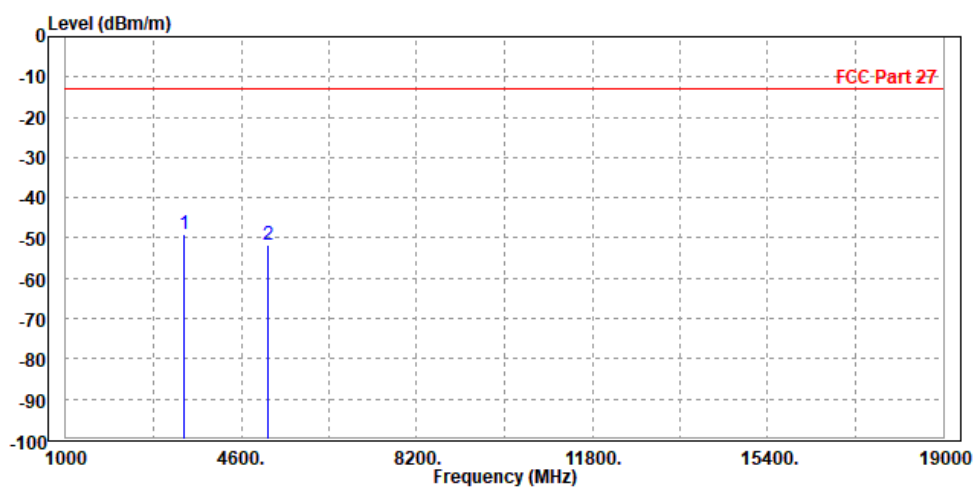




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

MODE	TX channel 1312	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3424.000	-49.69	-58.81	-13.00	-36.69	9.12	Peak	Vertical
2		5140.000	-51.44	-61.28	-13.00	-38.44	9.84	Peak	Vertical

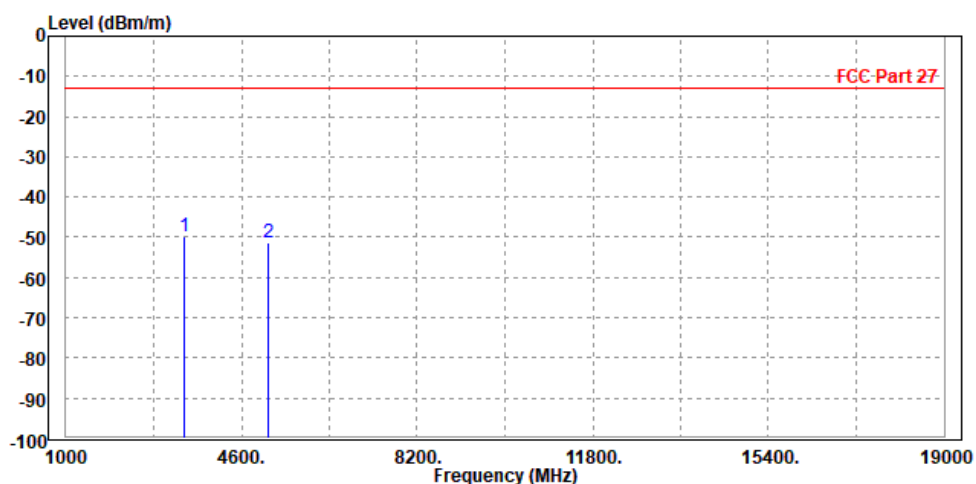

CH 1413


MODE	TX channel 1413	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3466.000	-47.58	-56.16	-13.00	-34.58	8.58	Peak	Horizontal
2	5197.000	-50.55	-59.66	-13.00	-37.55	9.11	Peak	Horizontal

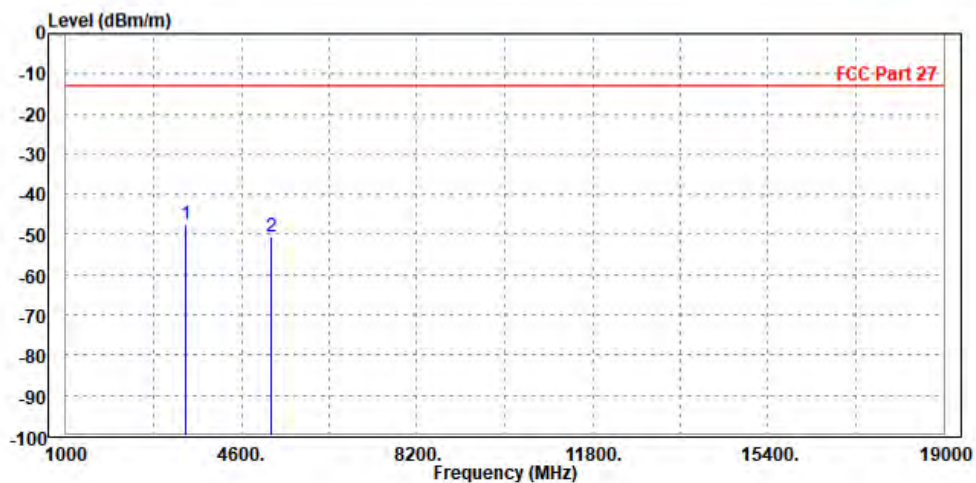


MODE	TX channel 1413	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3465.000	-46.58	-55.16	-13.00	-33.58	8.58	Peak	Horizontal
2	5194.000	-50.29	-59.40	-13.00	-37.29	9.11	Peak	Horizontal

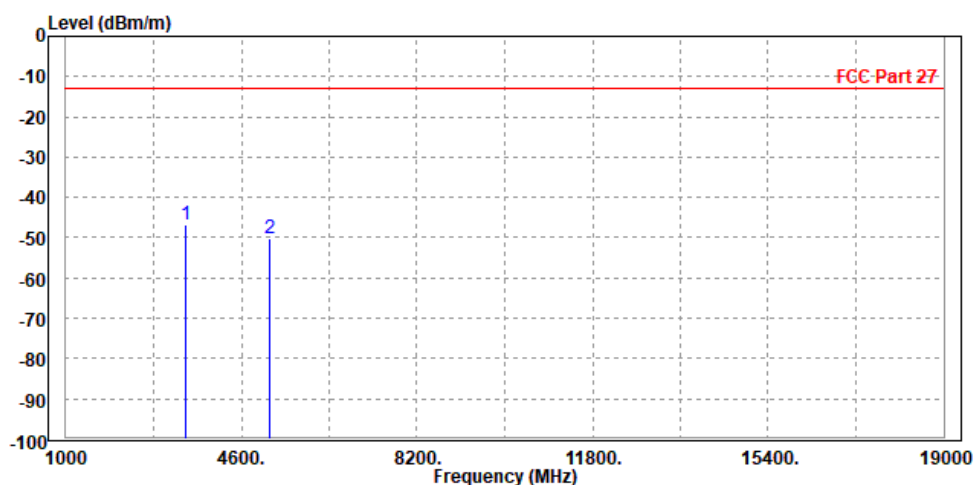

MODE	TX channel 1513	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3502.000	-51.82	-60.40	-13.00	-38.82	8.58	Peak	Horizontal
2 PP	5258.000	-51.42	-60.72	-13.00	-38.42	9.30	Peak	Horizontal

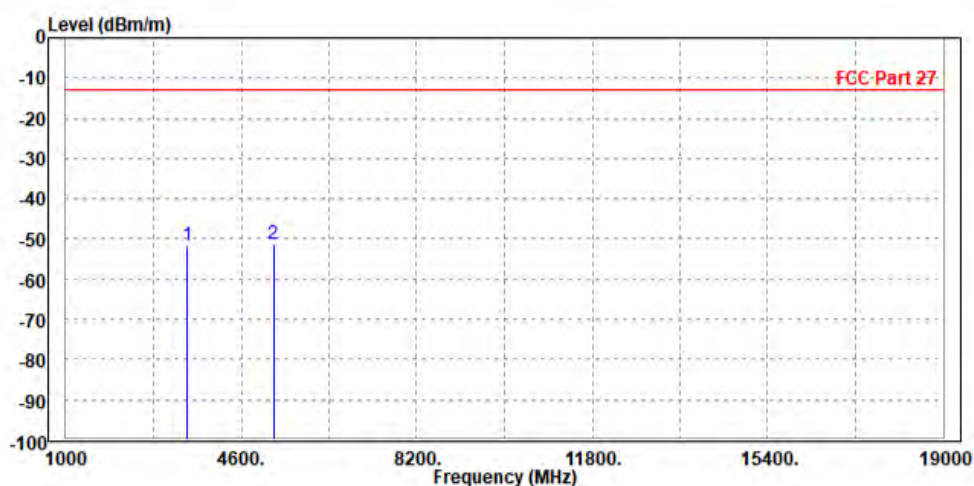




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

MODE	TX channel 1513	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3502.000	-49.41	-58.60	-13.00	-36.41	9.19	Peak	Vertical
2		5258.000	-51.15	-60.95	-13.00	-38.15	9.80	Peak	Vertical

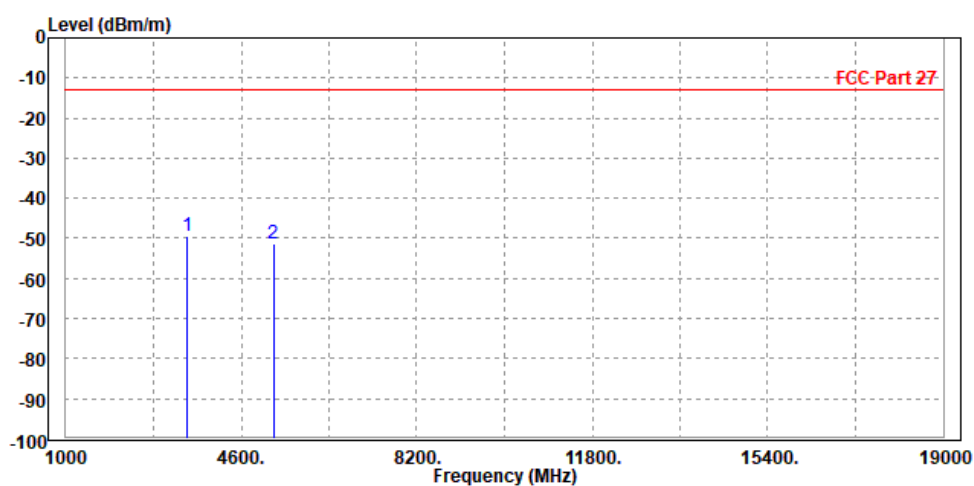

LTE Band 4
CHANNEL BANDWIDTH: 1.4MHz / QPSK
CH 20175


MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3465.000	-44.97	-53.55	-13.00	-31.97	8.58	Peak	Horizontal
2	5194.000	-51.56	-60.67	-13.00	-38.56	9.11	Peak	Horizontal

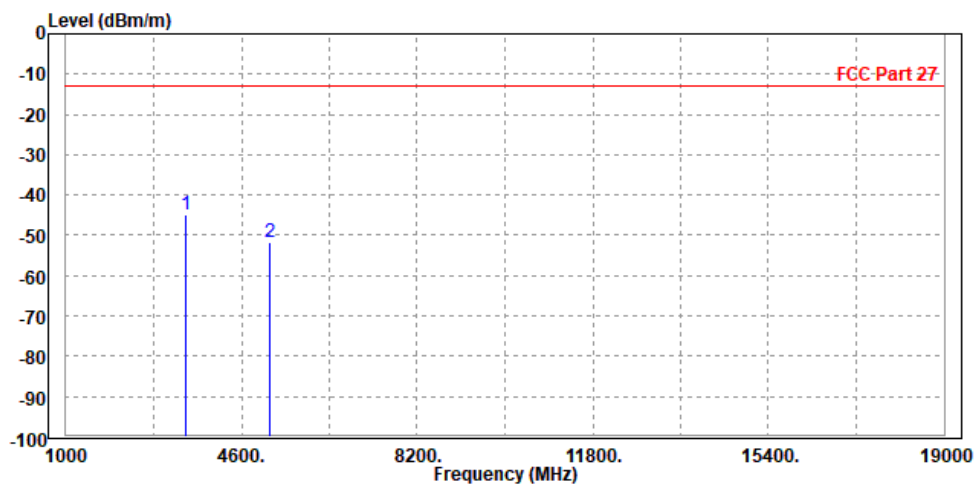

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3465.000	-46.02	-55.18	-13.00	-33.02	9.16	Peak	Vertical
2	5194.000	-49.80	-59.62	-13.00	-36.80	9.82	Peak	Vertical

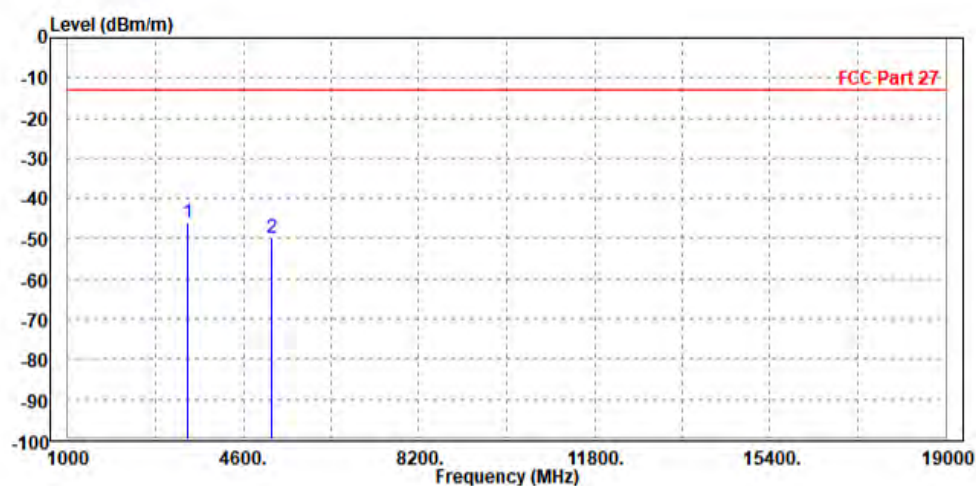



**BUREAU
VERITAS**


Test Report No.: RFA210222W001-3

CHANNEL BANDWIDTH: 3MHz / QPSK

CH 20175


MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3465.000	-47.41	-55.99	-13.00	-34.41	8.58	Peak	Horizontal
2	5194.000	-50.40	-59.51	-13.00	-37.40	9.11	Peak	Horizontal

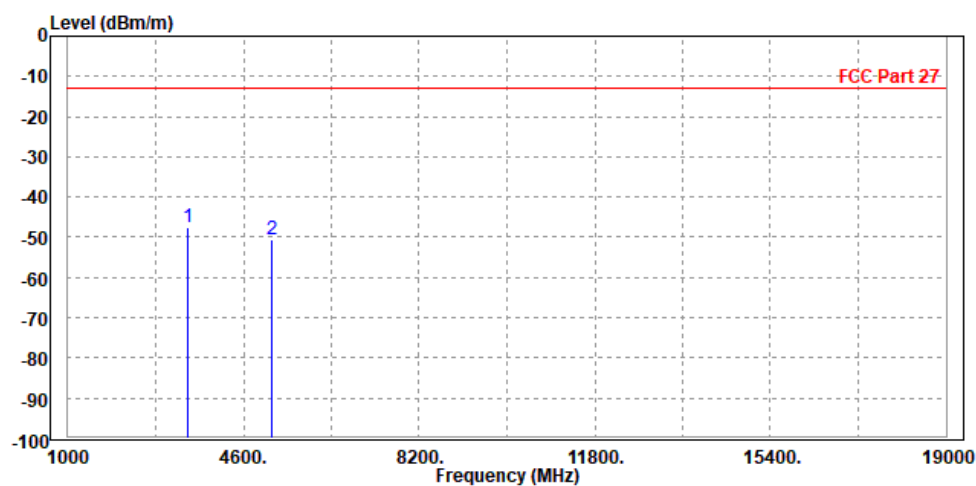

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3466.000	-44.38	-53.54	-13.00	-31.38	9.16	Peak	Vertical
2	5197.000	-47.44	-57.26	-13.00	-34.44	9.82	Peak	Vertical

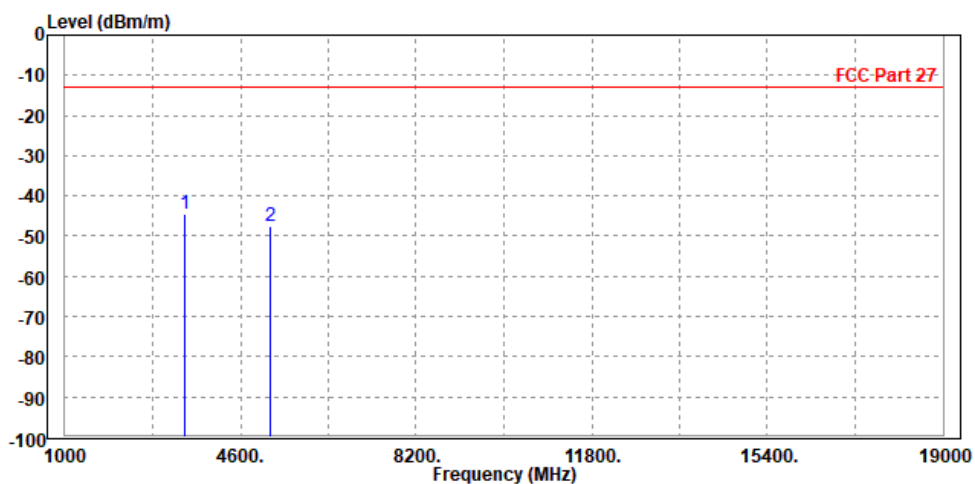



**BUREAU
VERITAS**


Test Report No.: RFA210222W001-3

CHANNEL BANDWIDTH: 5MHz / QPSK

CH 20175


MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3466.000	-45.59	-54.17	-13.00	-32.59	8.58	Peak	Horizontal
2	5197.000	-49.58	-58.69	-13.00	-36.58	9.11	Peak	Horizontal

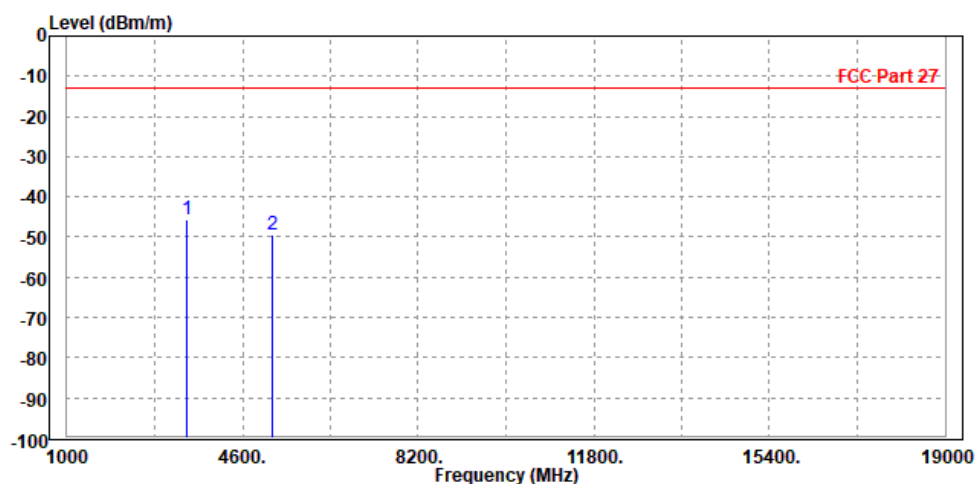

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3465.000	-45.85	-55.01	-13.00	-32.85	9.16	Peak	Vertical
2	5194.000	-47.97	-57.79	-13.00	-34.97	9.82	Peak	Vertical

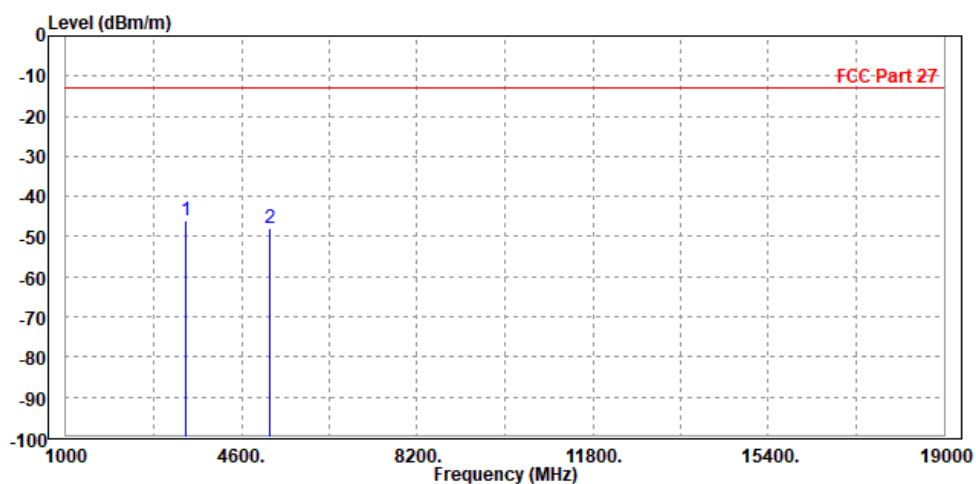



**BUREAU
VERITAS**


Test Report No.: RFA210222W001-3

CHANNEL BANDWIDTH: 10MHz / QPSK

CH 20000


MODE	TX channel 20000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3430.000	-49.29	-57.88	-13.00	-36.29	8.59	Peak	Horizontal
2	5145.000	-50.02	-58.98	-13.00	-37.02	8.96	Peak	Horizontal

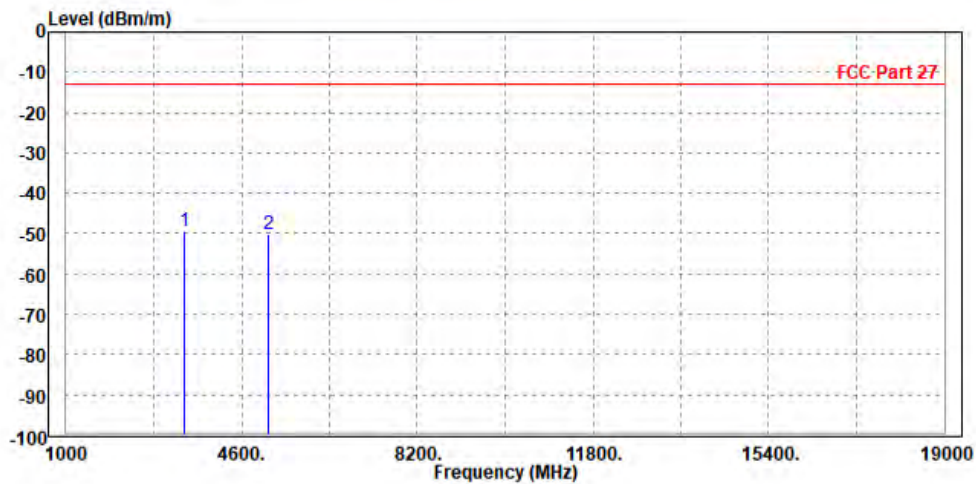

MODE	TX channel 20000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3430.000	-48.95	-58.07	-13.00	-35.95	9.12	Peak	Vertical
2	5140.000	-49.77	-59.61	-13.00	-36.77	9.84	Peak	Vertical

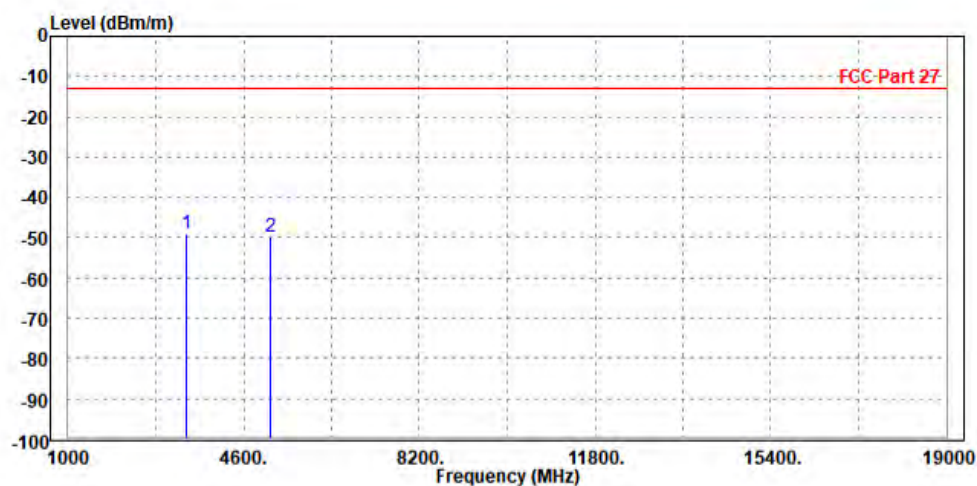




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

CH 20175


MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3465.000	-43.42	-52.00	-13.00	-30.42	8.58	Peak	Horizontal
2		5197.000	-45.63	-54.74	-13.00	-32.63	9.11	Peak	Horizontal

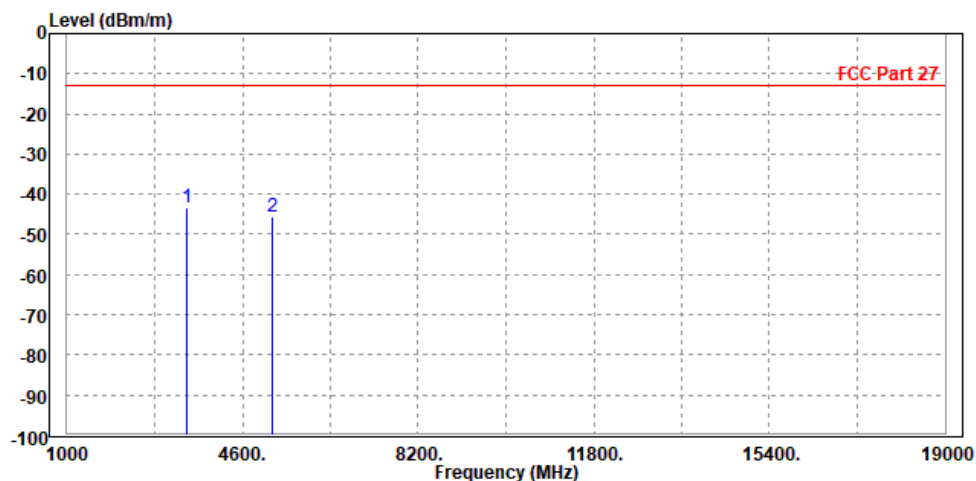

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3465.000	-42.42	-51.58	-13.00	-29.42	9.16	Peak	Vertical
2	5197.000	-44.70	-54.52	-13.00	-31.70	9.82	Peak	Vertical

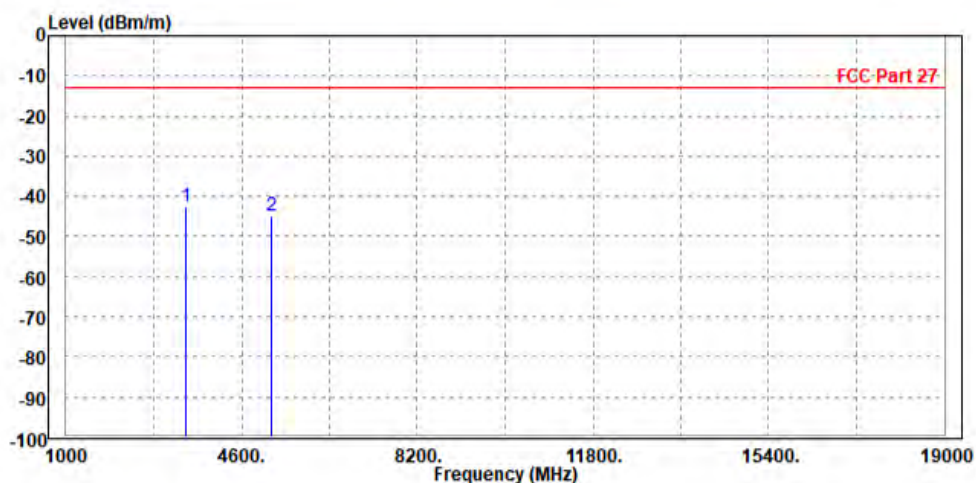



BUREAU
VERITAS


Test Report No.: RFA210222W001-3

CH20350

CH20000


MODE	TX channel 20350	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3502.000	-49.20	-57.78	-13.00	-36.20	8.58	Peak	Horizontal
2	5250.000	-49.74	-59.01	-13.00	-36.74	9.27	Peak	Horizontal

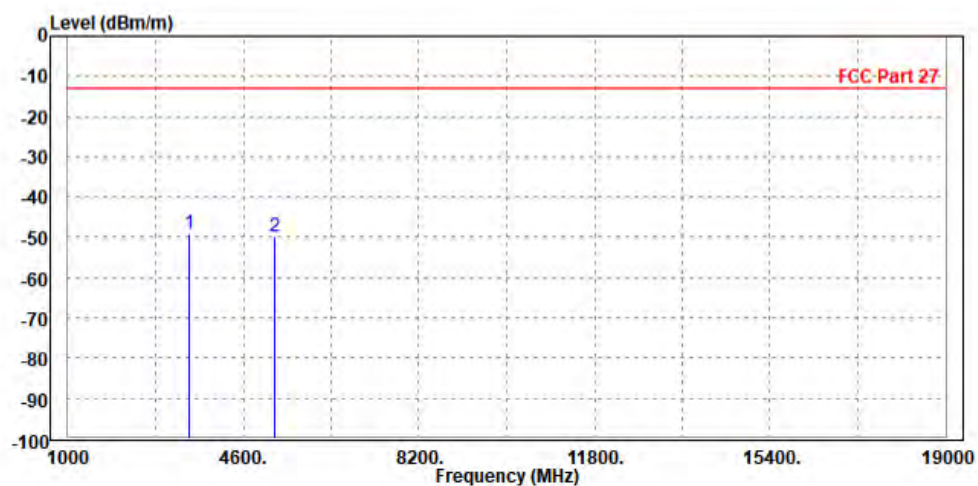

MODE	TX channel 20350	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3500.000	-47.02	-56.21	-13.00	-34.02	9.19	Peak	Vertical
2	5248.000	-50.05	-59.85	-13.00	-37.05	9.80	Peak	Vertical

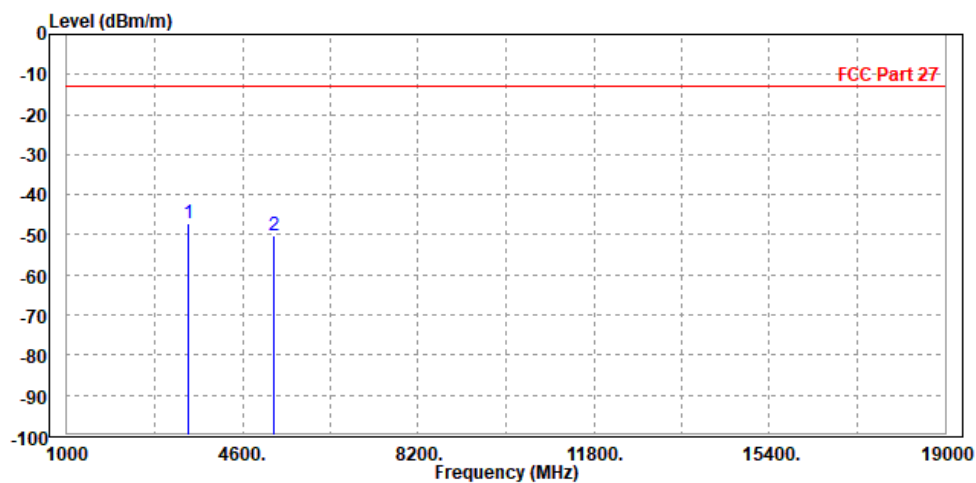



BUREAU
VERITAS

Test Report No.: RFA210222W001-3


CHANNEL BANDWIDTH: 15MHz / QPSK

CH 20175

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3465.000	-45.58	-54.16	-13.00	-32.58	8.58	Peak	Horizontal
2	5194.000	-47.42	-56.53	-13.00	-34.42	9.11	Peak	Horizontal

C

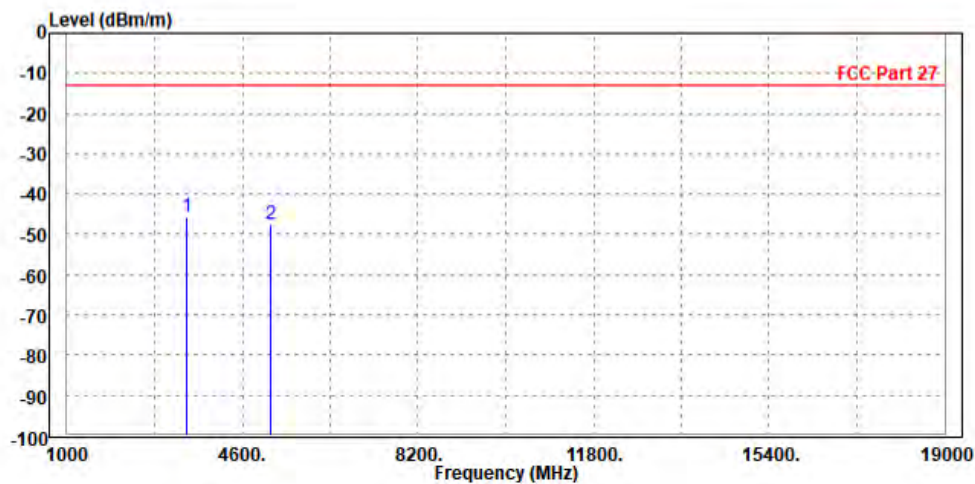




Test Report No.: RFA210222W001-3

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3466.000	-45.40	-54.56	-13.00	-32.40	9.16	Peak	Vertical
2		5197.000	-49.61	-59.43	-13.00	-36.61	9.82	Peak	Vertical

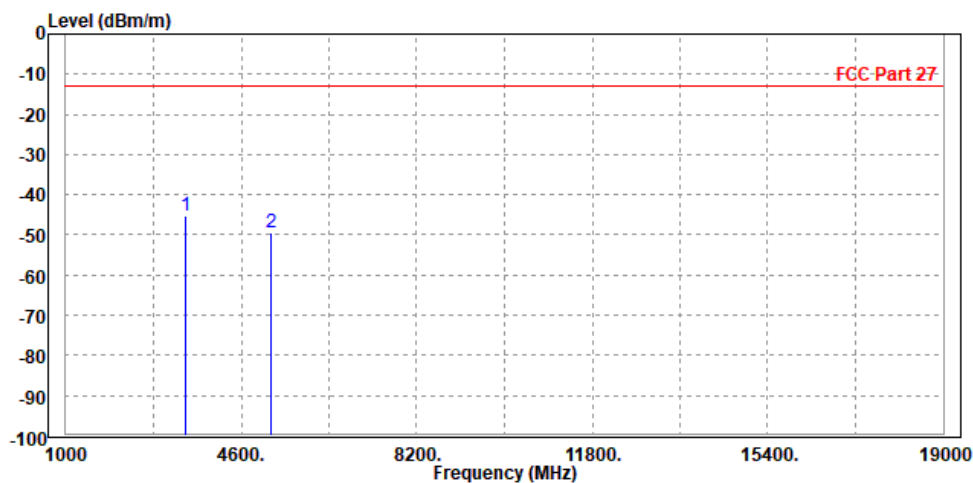



**BUREAU
VERITAS**


Test Report No.: RFA210222W001-3

CHANNEL BANDWIDTH: 20MHz / QPSK

CH 20175


MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3466.000	-46.28	-54.86	-13.00	-33.28	8.58	Peak	Horizontal
2		5197.000	-49.61	-58.72	-13.00	-36.61	9.11	Peak	Horizontal

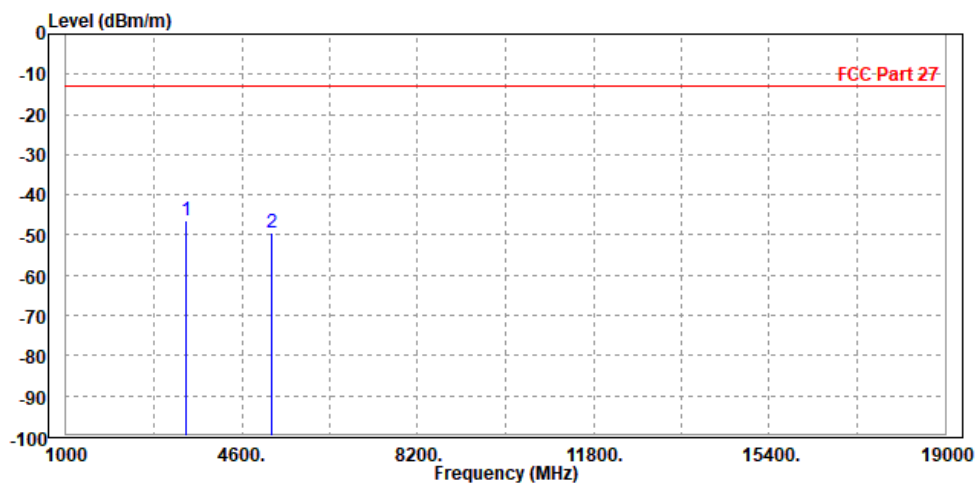

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3465.000	-44.99	-54.15	-13.00	-31.99	9.16	Peak	Vertical
2	5194.000	-47.79	-57.61	-13.00	-34.79	9.82	Peak	Vertical

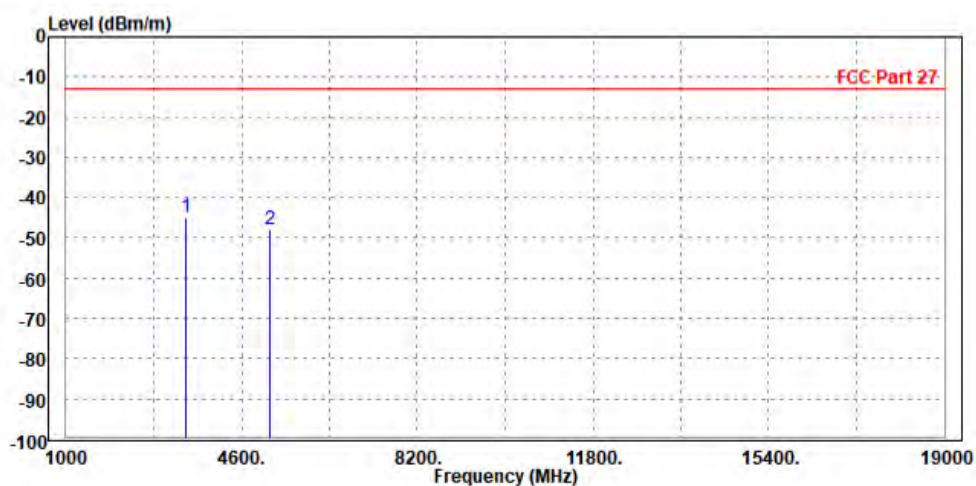


LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz / QPSK


MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1415.000	-42.04	-43.11	-13.00	-29.04	1.07	Peak	Horizontal
2 PP	2116.000	-27.49	-35.15	-13.00	-14.49	7.66	Peak	Horizontal

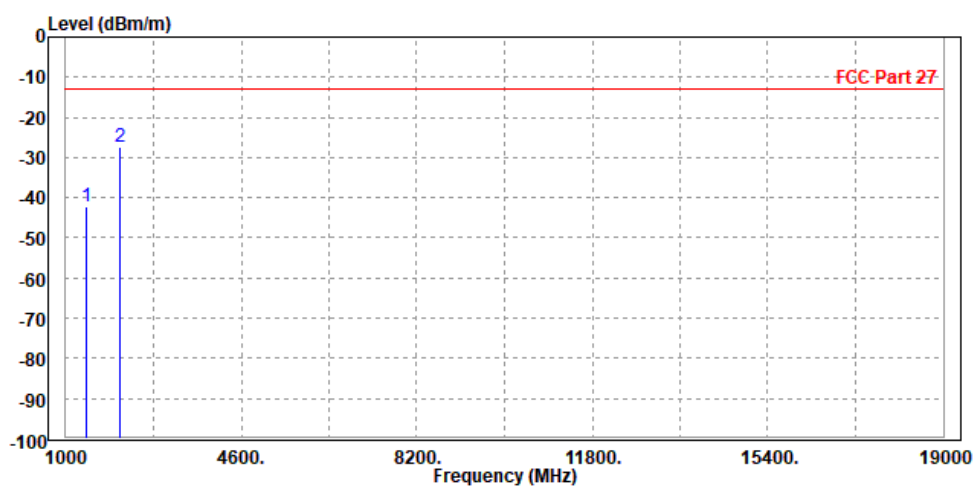

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1414.000	-46.60	-48.28	-13.00	-33.60	1.68	Peak	Vertical
2 PP	2122.000	-30.40	-37.09	-13.00	-17.40	6.69	Peak	Vertical

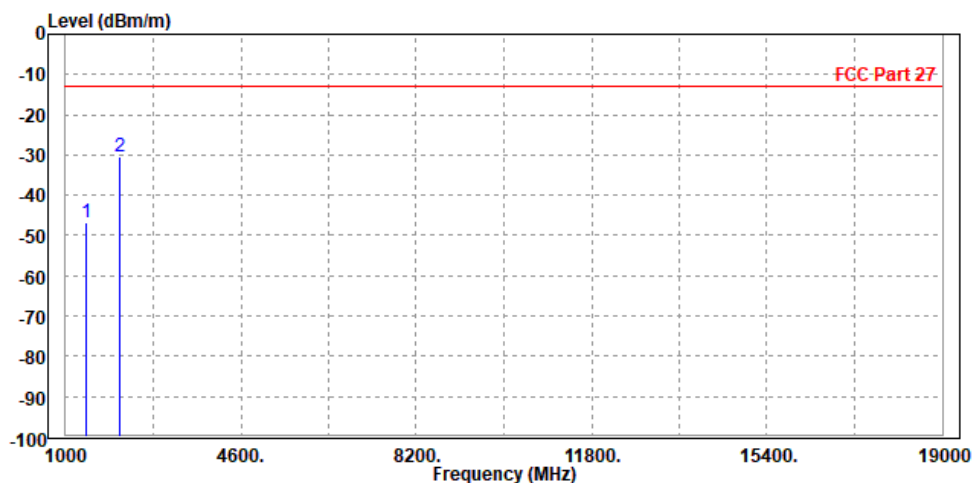




Test Report No.: RFA210222W001-3

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1414.000	-44.30	-45.37	-13.00	-31.30	1.07	Peak	Horizontal
2 PP	2122.000	-30.92	-38.59	-13.00	-17.92	7.67	Peak	Horizontal

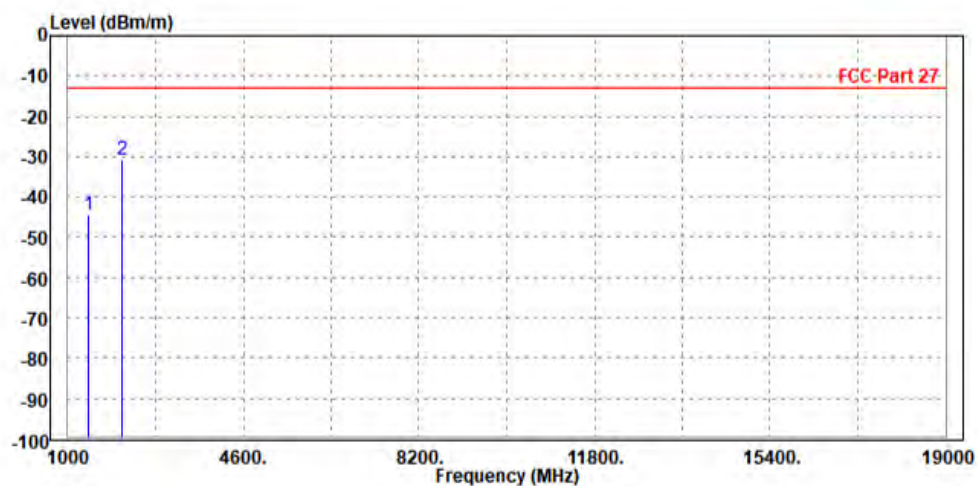

Plan :
Remark : IMEI:868535050004833
Temperature(°C): 23 Humidity(%):70
Test By : Star
Reviewer By : Simon.wang




	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1414.000	-45.07	-46.75	-13.00	-32.07	1.68	Peak	Vertical
2 PP	2122.000	-32.94	-39.63	-13.00	-19.94	6.69	Peak	Vertical

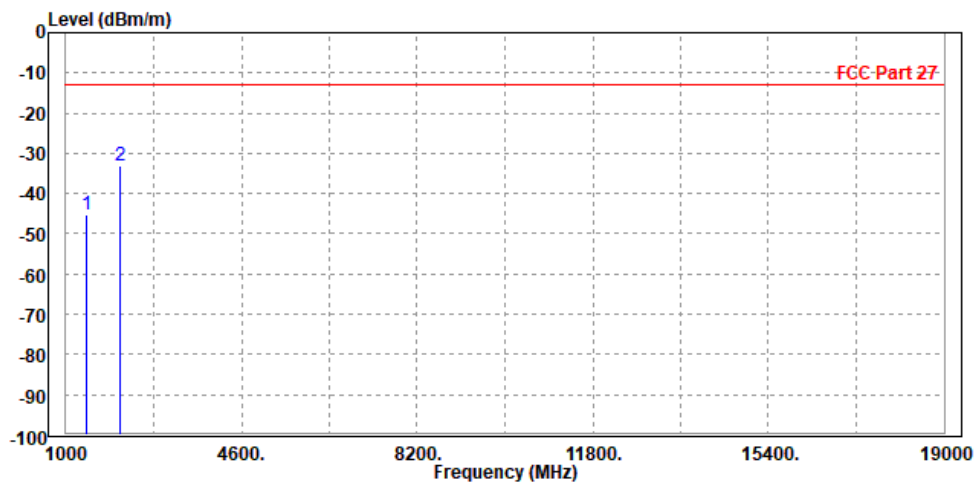

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1415.000	-44.05	-45.12	-13.00	-31.05	1.07	Peak	Horizontal
2 PP	2116.000	-29.58	-37.24	-13.00	-16.58	7.66	Peak	Horizontal

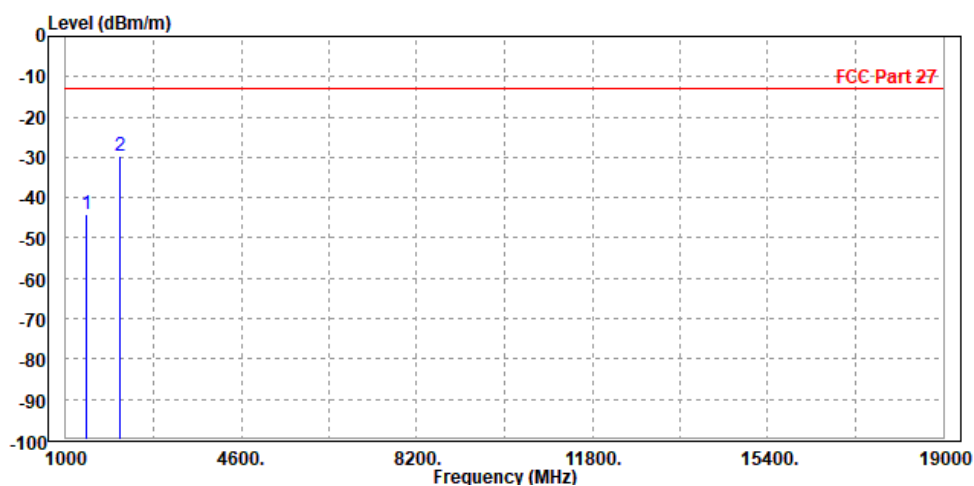

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1414.000	-45.07	-46.75	-13.00	-32.07	1.68	Peak	Vertical
2 PP	2122.000	-32.94	-39.63	-13.00	-19.94	6.69	Peak	Vertical

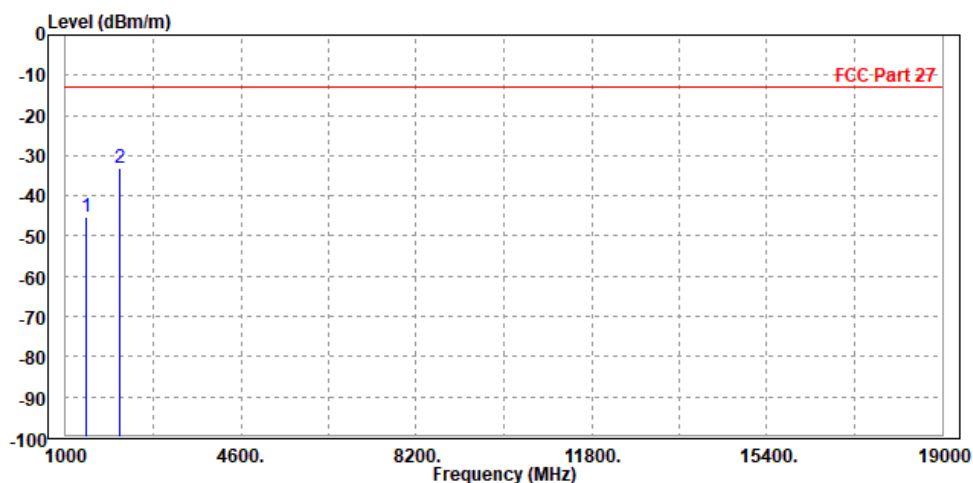




Test Report No.: RFA210222W001-3

CHANNEL BANDWIDTH: 10MHz / QPSK

CH23060


MODE	TX channel 23060	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1408.000	-42.04	-43.08	-13.00	-29.04	1.04	Peak	Horizontal
2 PP	2116.000	-32.92	-40.58	-13.00	-19.92	7.66	Peak	Horizontal

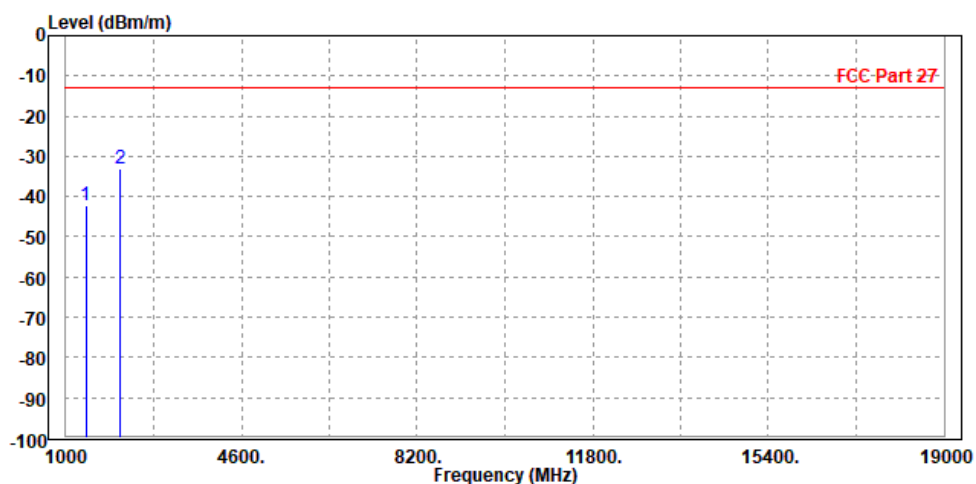

MODE	TX channel 23060	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1414.000	-47.08	-48.76	-13.00	-34.08	1.68	Peak	Vertical
2 PP	2112.000	-35.43	-42.11	-13.00	-22.43	6.68	Peak	Vertical

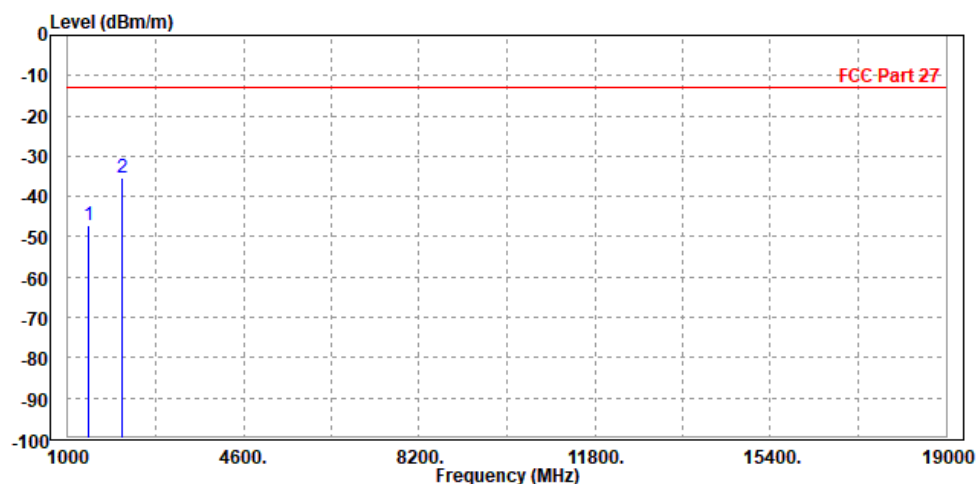




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

CH23095


MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1415.000	-44.12	-45.19	-13.00	-31.12	1.07	Peak	Horizontal
2 PP	2116.000	-25.29	-32.95	-13.00	-12.29	7.66	Peak	Horizontal

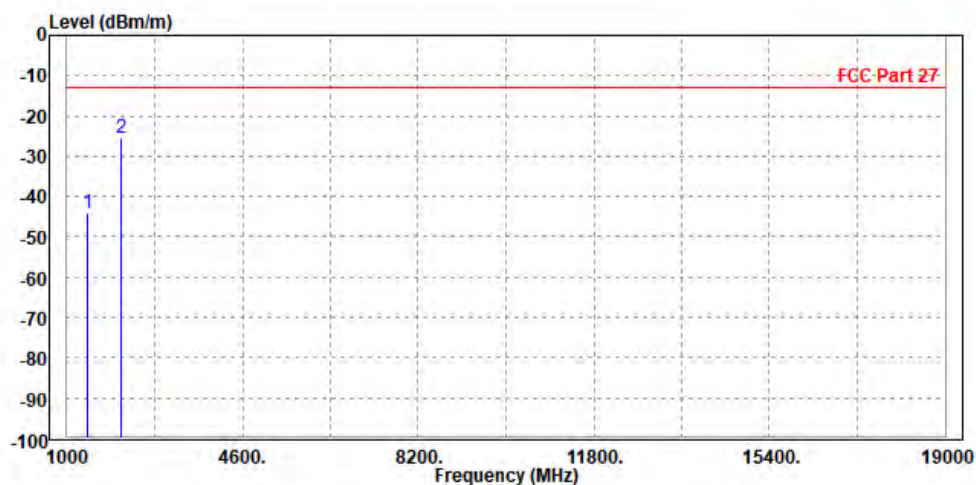

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1414.000	-46.23	-47.91	-13.00	-33.23	1.68	Peak	Vertical
2 PP	2122.000	-29.36	-36.05	-13.00	-16.36	6.69	Peak	Vertical

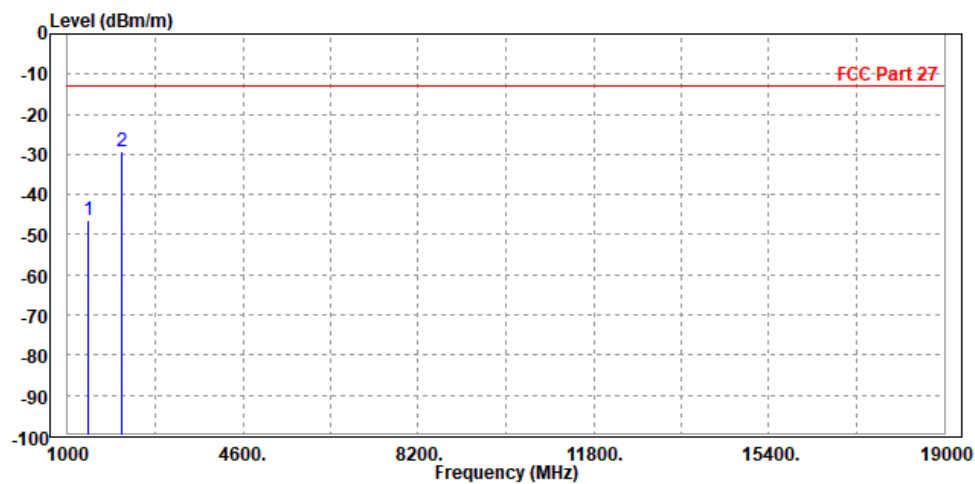

CH23130


MODE	TX channel 23130	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1422.000	-41.65	-42.76	-13.00	-28.65	1.11	Peak	Horizontal
2 PP	2133.000	-31.24	-38.92	-13.00	-18.24	7.68	Peak	Horizontal

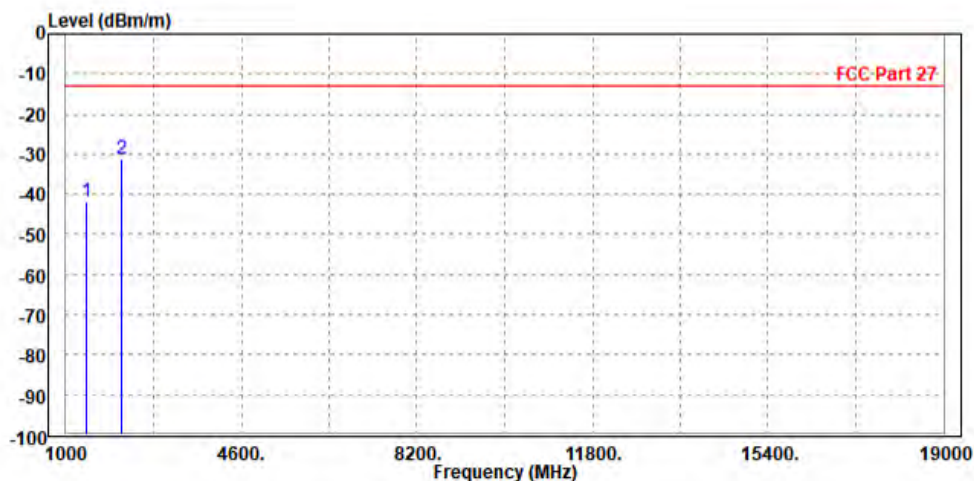

MODE	TX channel 23130	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1422.000	-45.68	-47.40	-13.00	-32.68	1.72	Peak	Vertical
2 PP	2133.000	-30.86	-37.56	-13.00	-17.86	6.70	Peak	Vertical

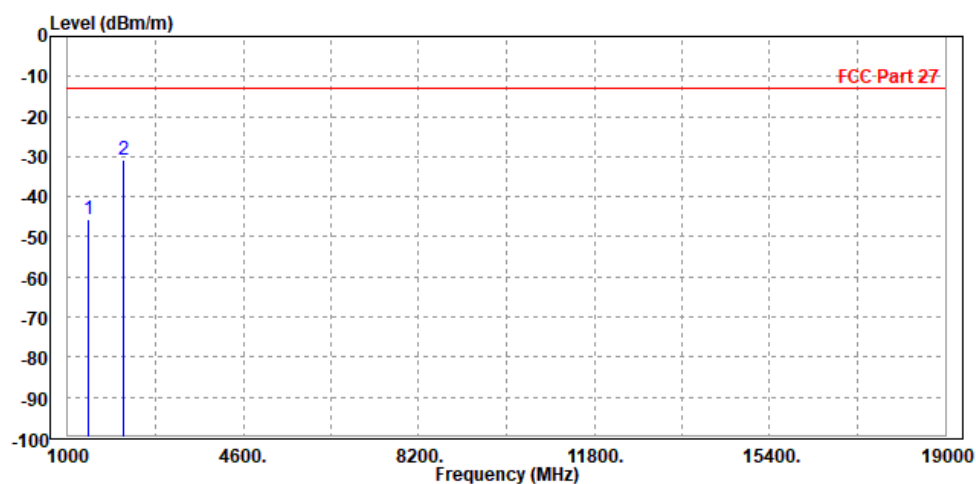


LTE B13

CHANNEL BANDWIDTH: 5MHz / QPSK

CH23205


MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

			Read	Limit	Over			
	Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1560.000	-54.81	-56.99	-40.00	-14.81	2.18	Peak	Horizontal
2	2340.000	-48.96	-56.85	-13.00	-35.96	7.89	Peak	Horizontal

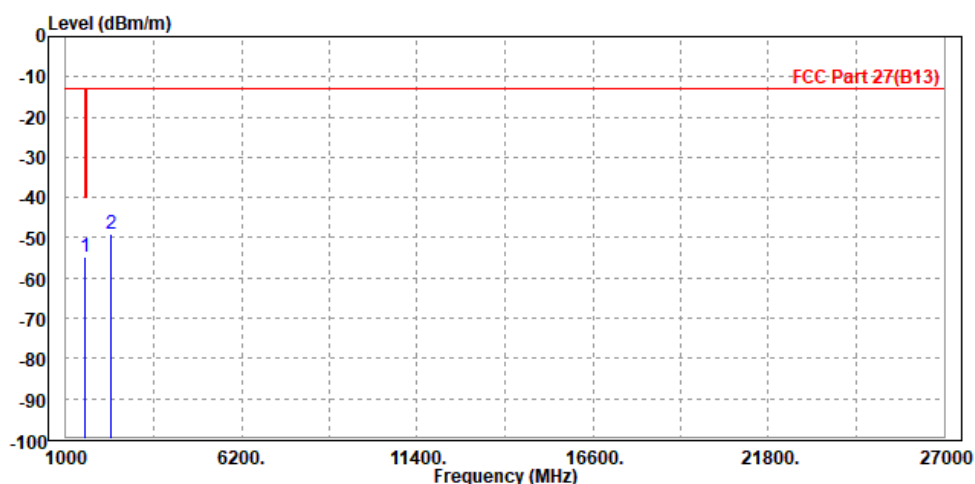

MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	1560.000	-55.38	-57.97	-40.00	-15.38	2.59	Peak	Vertical
2		2340.000	-50.22	-57.13	-13.00	-37.22	6.91	Peak	Vertical

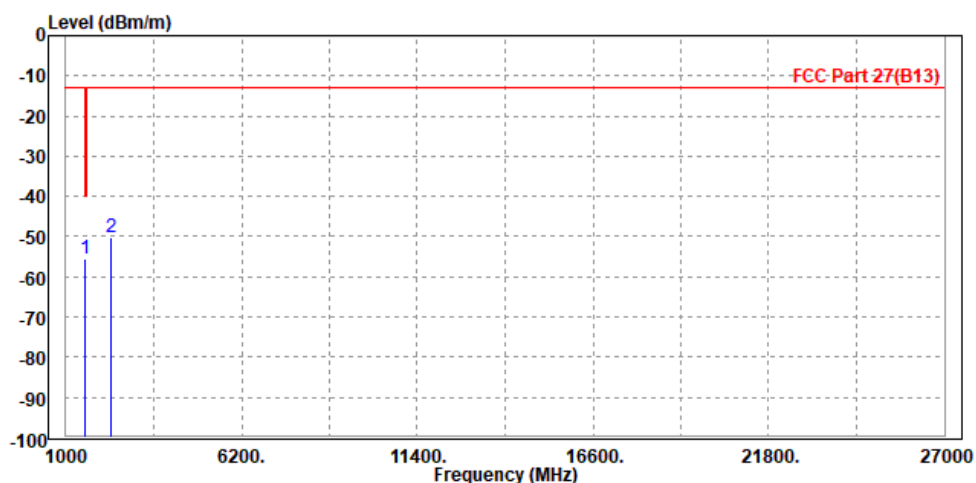




Test Report No.: RFA210222W001-3

CH23230


MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1564.000	-56.18	-58.41	-40.00	-16.18	2.23	Peak	Horizontal
2	2346.000	-49.79	-57.69	-13.00	-36.79	7.90	Peak	Horizontal

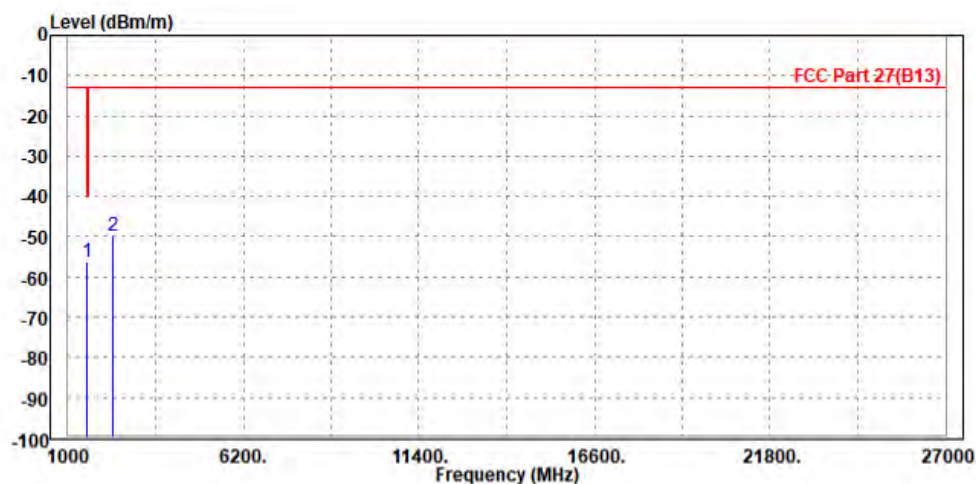

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	1564.000	-52.17	-54.79	-40.00	-12.17	2.62	Peak	Vertical
2		2346.000	-48.31	-55.22	-13.00	-35.31	6.91	Peak	Vertical

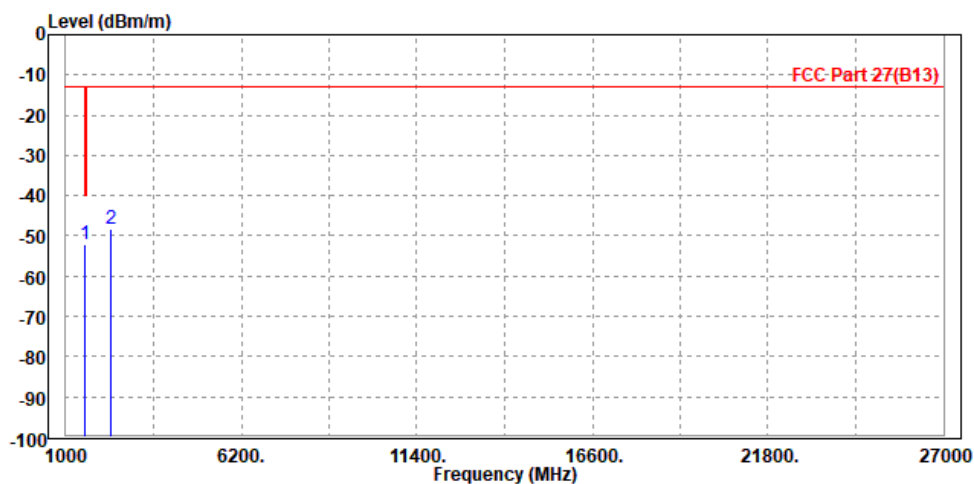




Test Report No.: RFA210222W001-3

CH23255


MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	1572.000	-54.84	-57.16	-40.00	-14.84	2.32	Peak	Horizontal
2		2355.000	-47.64	-55.54	-13.00	-34.64	7.90	Peak	Horizontal

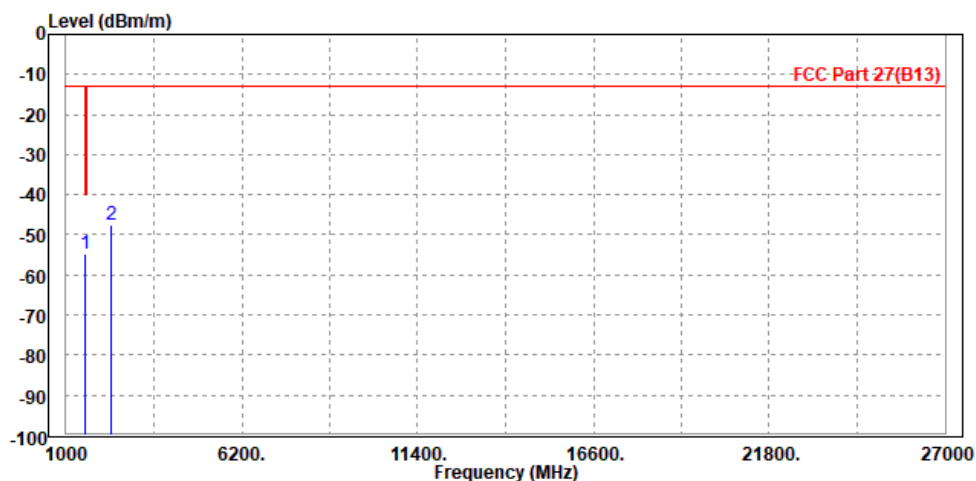

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	1570.000	-53.97	-56.65	-40.00	-13.97	2.68	Peak	Vertical
2		2355.000	-48.80	-55.72	-13.00	-35.80	6.92	Peak	Vertical

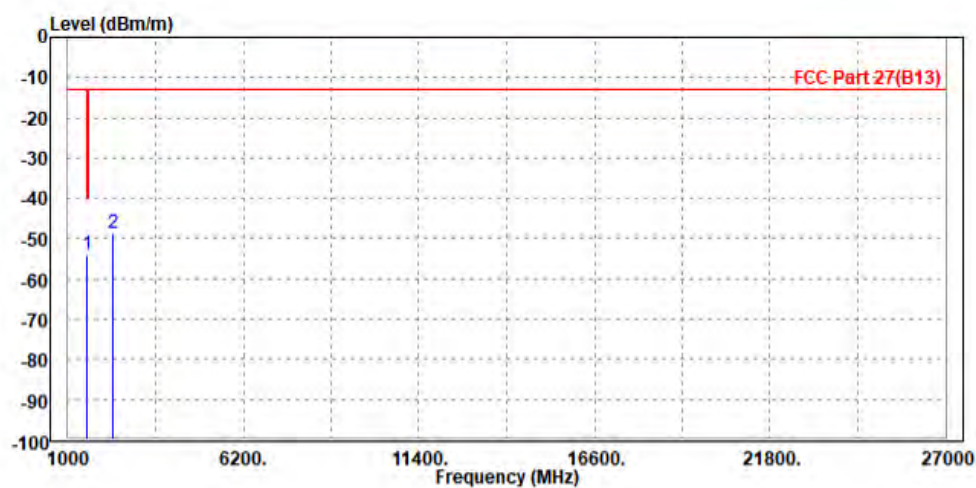


CHANNEL BANDWIDTH: 10MHz /QPSK

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1564.000	-52.81	-55.04	-40.00	-12.81	2.23	Peak	Horizontal
2	2346.000	-46.30	-54.20	-13.00	-33.30	7.90	Peak	Horizontal

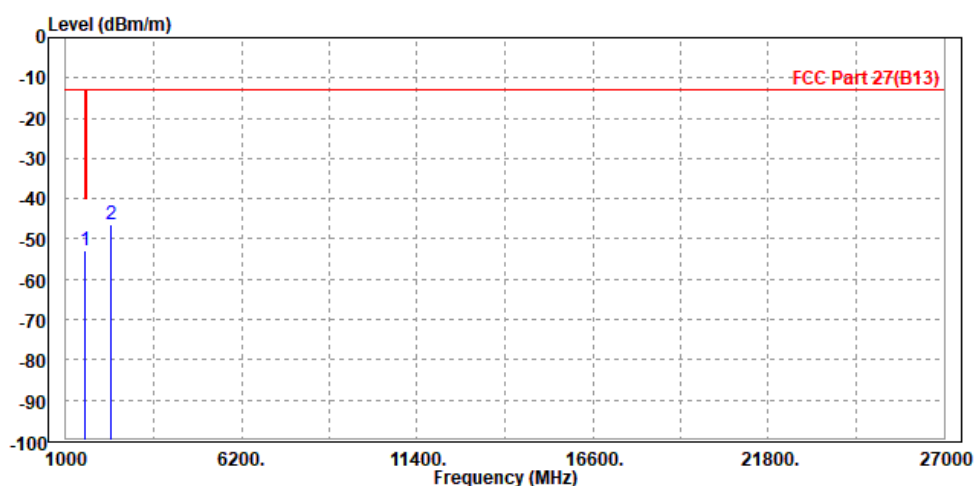

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

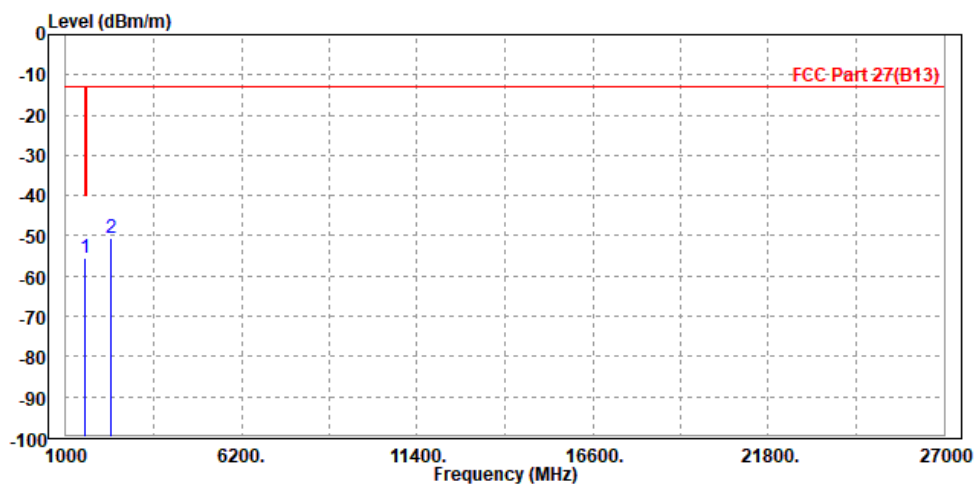

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1564.000	-55.70	-58.32	-40.00	-15.70	2.62	Peak	Vertical
2	2346.000	-50.65	-57.56	-13.00	-37.65	6.91	Peak	Vertical



Test Report No.: RFA210222W001-3


LTE B14

CHANNEL BANDWIDTH: 5MHz / QPSK

CH23305


MODE	TX channel 23305	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1581.000	-54.75	-57.18	-13.00	-41.75	2.43	Peak	Horizontal
2 PP	2368.000	-48.10	-56.02	-13.00	-35.10	7.92	Peak	Horizontal

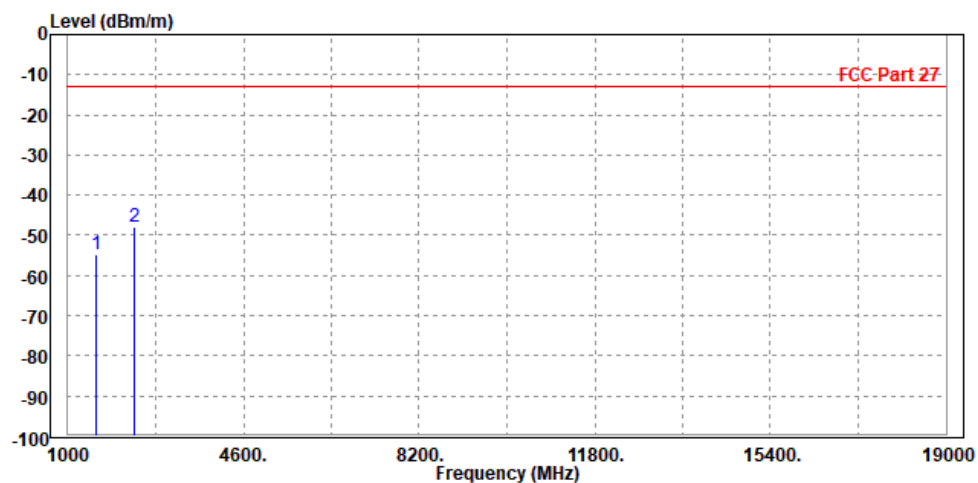

MODE	TX channel 23305	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1581.000	-52.85	-55.63	-13.00	-39.85	2.78	Peak	Vertical
2 PP	2371.000	-49.00	-55.94	-13.00	-36.00	6.94	Peak	Vertical

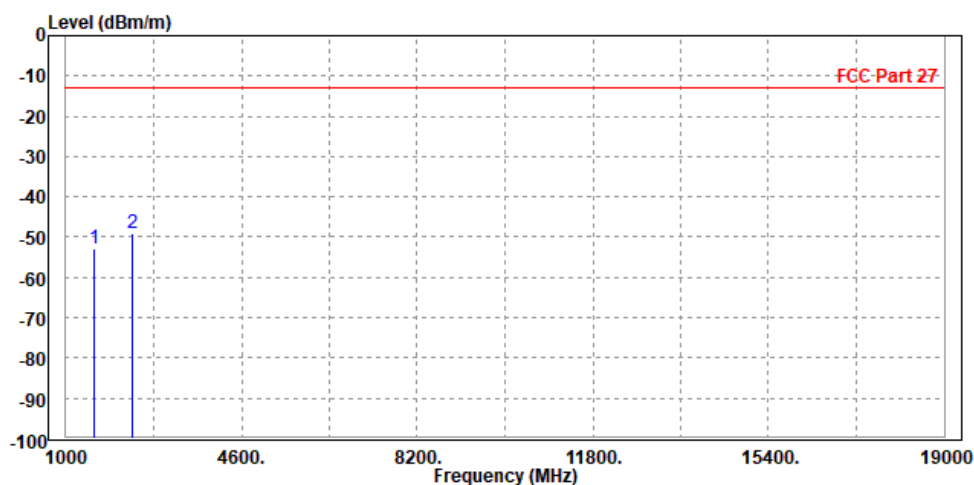

CH23330


MODE	TX channel 23330	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1586.000	-51.16	-53.65	-13.00	-38.16	2.49	Peak	Horizontal
2 PP	2379.000	-43.58	-51.51	-13.00	-30.58	7.93	Peak	Horizontal

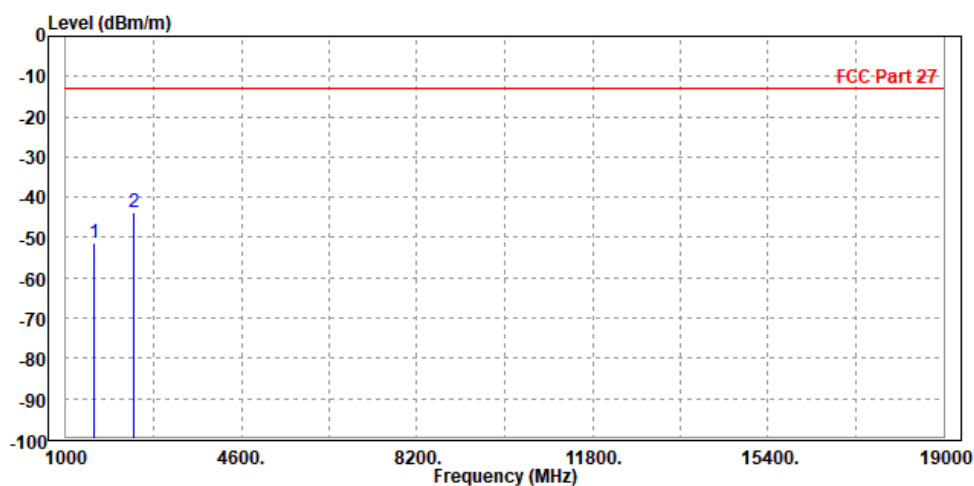

MODE	TX channel 23330	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1586.000	-51.95	-54.77	-13.00	-38.95	2.82	Peak	Vertical
2 PP	2379.000	-48.57	-55.51	-13.00	-35.57	6.94	Peak	Vertical

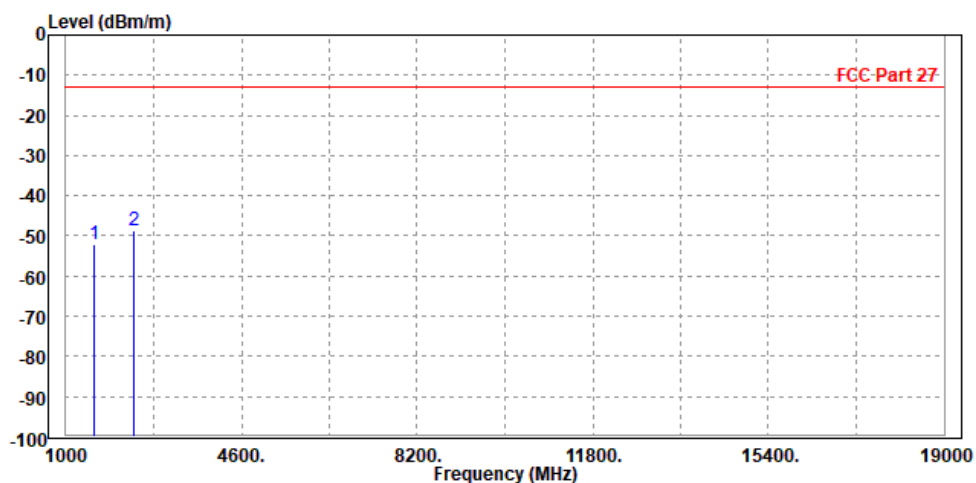

CH23355


MODE	TX channel 23355	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1586.000	-51.16	-53.65	-13.00	-38.16	2.49	Peak	Horizontal
2 PP	2379.000	-43.58	-51.51	-13.00	-30.58	7.93	Peak	Horizontal

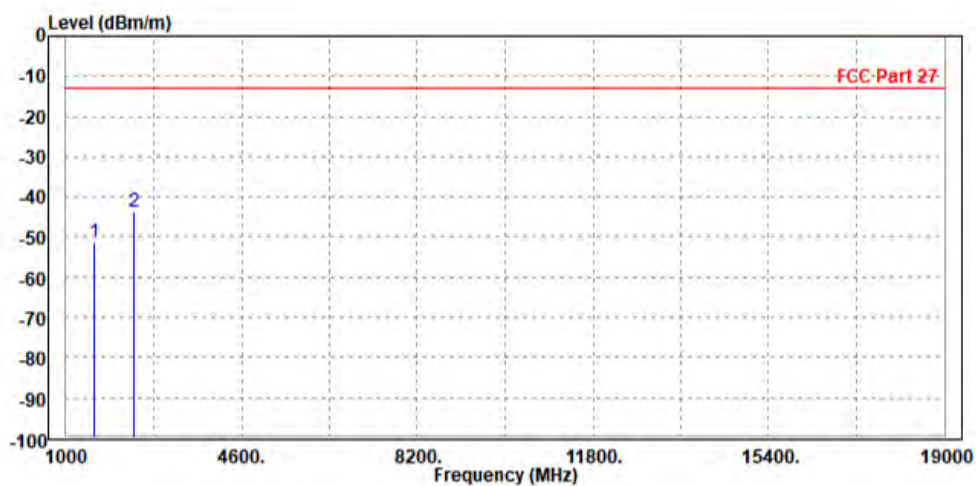

MODE	TX channel 23355	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1586.000	-51.95	-54.77	-13.00	-38.95	2.82	Peak	Vertical
2 PP	2379.000	-48.57	-55.51	-13.00	-35.57	6.94	Peak	Vertical

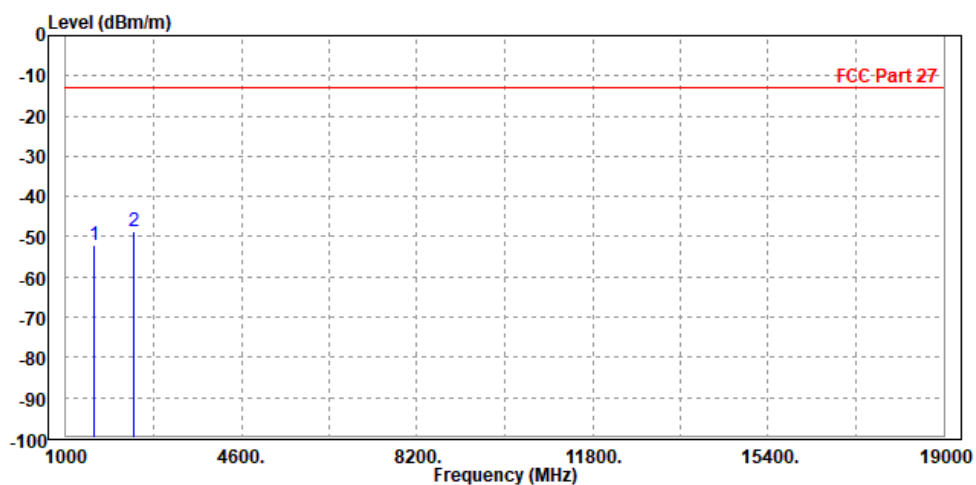


CHANNEL BANDWIDTH: 10MHz / QPSK

CH23330


MODE	TX channel 23330	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1586.000	-52.11	-54.60	-13.00	-39.11	2.49	Peak	Horizontal
2 PP	2379.000	-44.01	-51.94	-13.00	-31.01	7.93	Peak	Horizontal

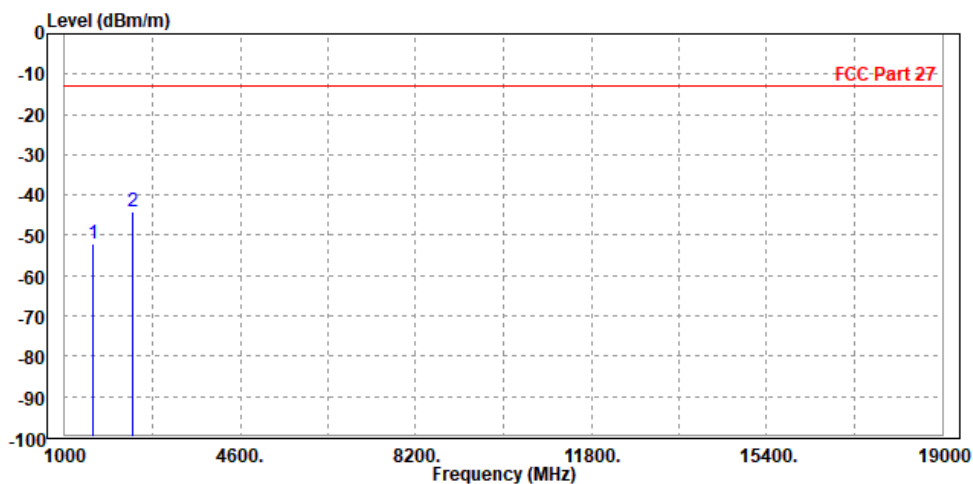

MODE	TX channel 23330	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1586.000	-51.53	-54.35	-13.00	-38.53	2.82	Peak	Vertical
2 PP	2379.000	-48.58	-55.52	-13.00	-35.58	6.94	Peak	Vertical

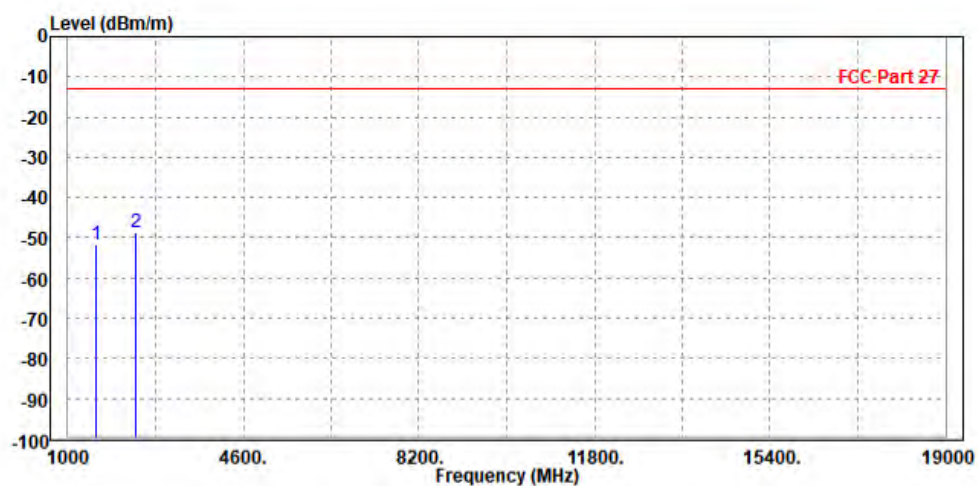




Test Report No.: RFA210222W001-3

LTE B17

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 23790	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1420.000	-55.51	-56.61	-13.00	-42.51	1.10	Peak	Horizontal
2 PP	2130.000	-49.28	-56.96	-13.00	-36.28	7.68	Peak	Horizontal

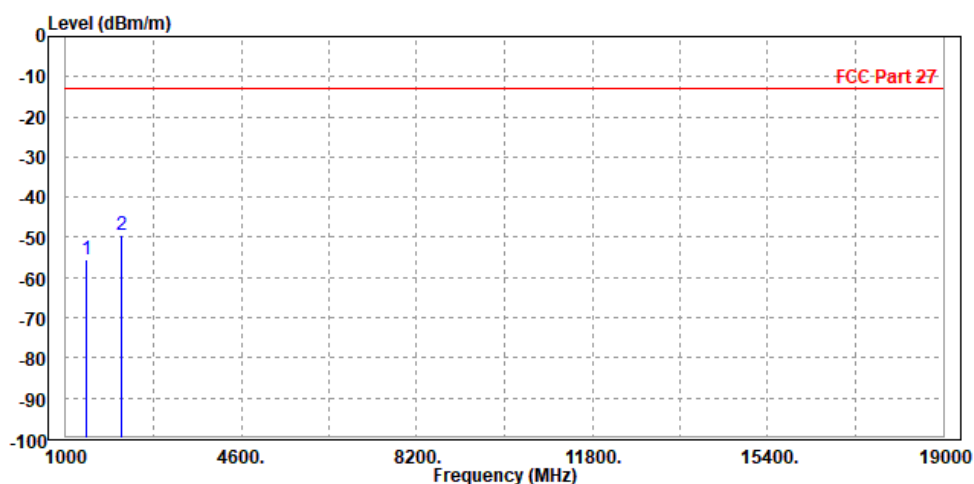

MODE	TX channel 23790	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1420.000	-53.68	-55.39	-13.00	-40.68	1.71	Peak	Vertical
2 PP	2130.000	-50.29	-56.99	-13.00	-37.29	6.70	Peak	Vertical

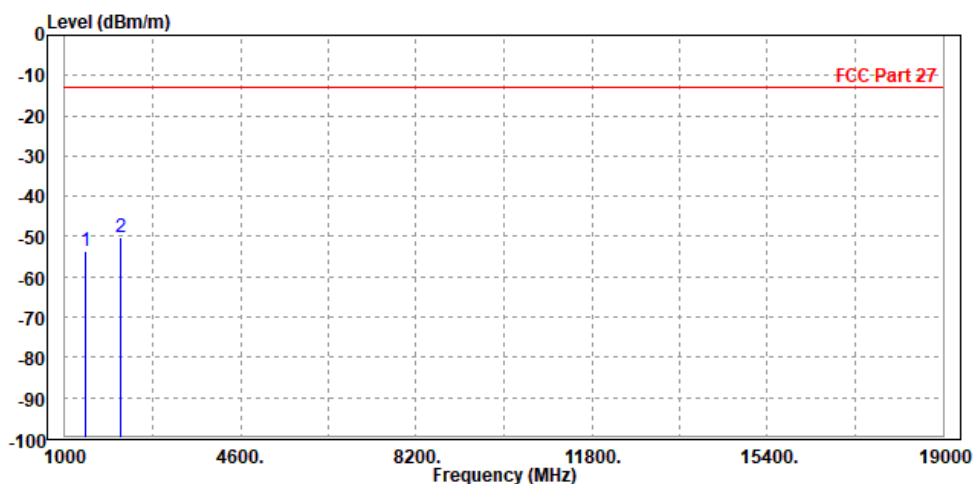



Test Report No.: RFA210222W001-3


CHANNEL BANDWIDTH: 10MHz / QPSK

CH23780

CH20700


MODE	TX channel 23780	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1414.000	-55.55	-56.62	-13.00	-42.55	1.07	Peak	Horizontal
2 PP	2127.000	-48.86	-56.53	-13.00	-35.86	7.67	Peak	Horizontal

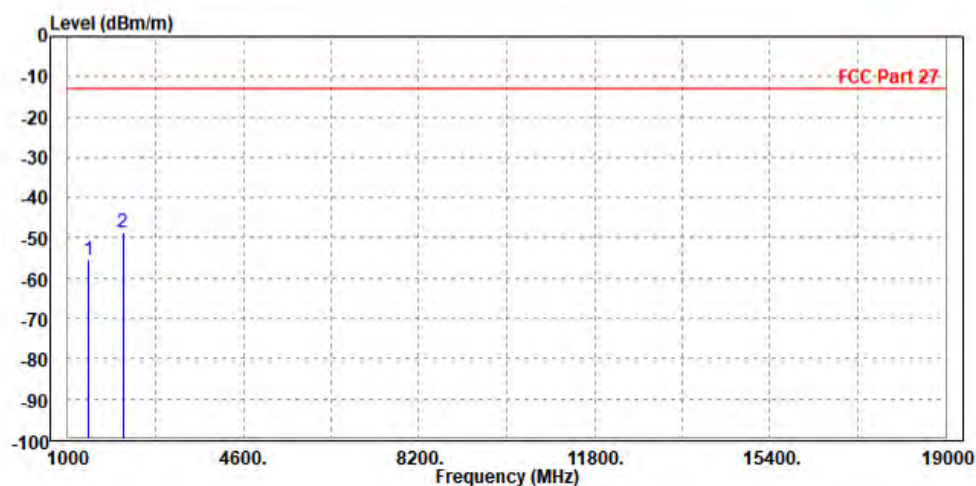

MODE	TX channel 23780	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1418.000	-54.55	-56.25	-13.00	-41.55	1.70	Peak	Vertical
2 PP	2127.000	-50.46	-57.15	-13.00	-37.46	6.69	Peak	Vertical

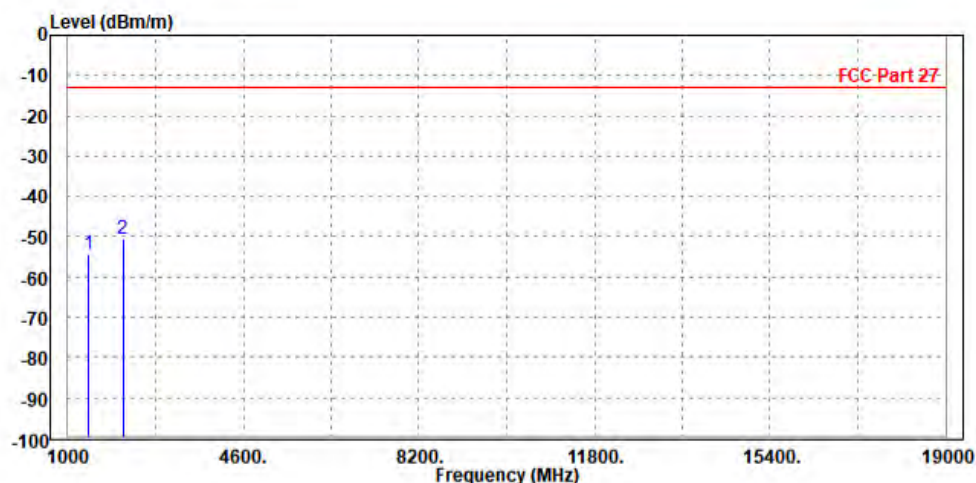

CH23790

MODE	TX channel 23790	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1420.000	-53.81	-54.91	-13.00	-40.81	1.10	Peak	Horizontal
2 PP	2130.000	-48.17	-55.85	-13.00	-35.17	7.68	Peak	Horizontal

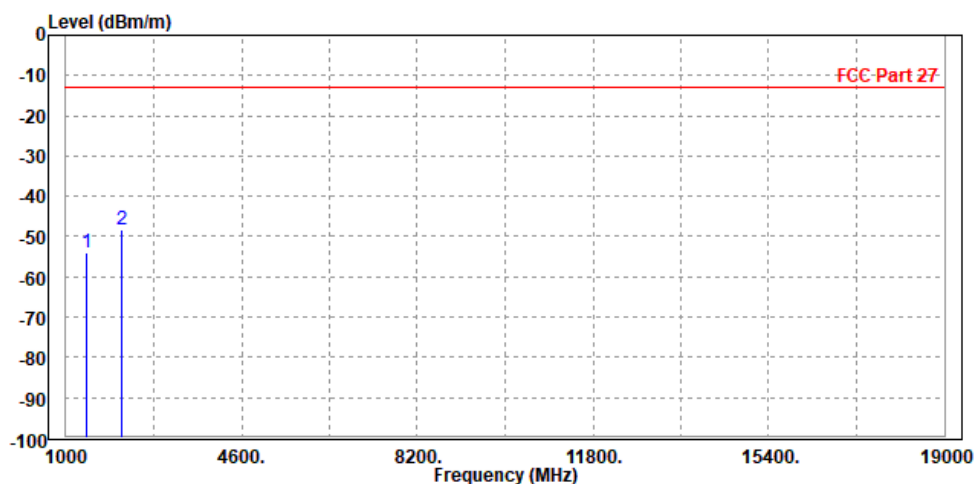




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-3

MODE	TX channel 23790	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1420.000	-53.30	-55.01	-13.00	-40.30	1.71	Peak	Vertical
2 PP	2130.000	-48.81	-55.51	-13.00	-35.81	6.70	Peak	Vertical

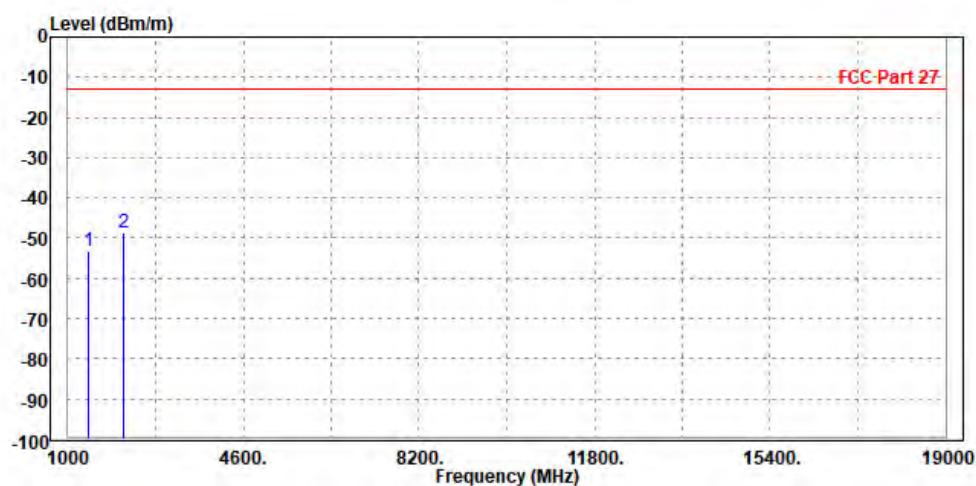

CH23800


MODE	TX channel 23800	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1422.000	-52.49	-53.60	-13.00	-39.49	1.11	Peak	Horizontal
2 PP	2134.000	-47.52	-55.20	-13.00	-34.52	7.68	Peak	Horizontal

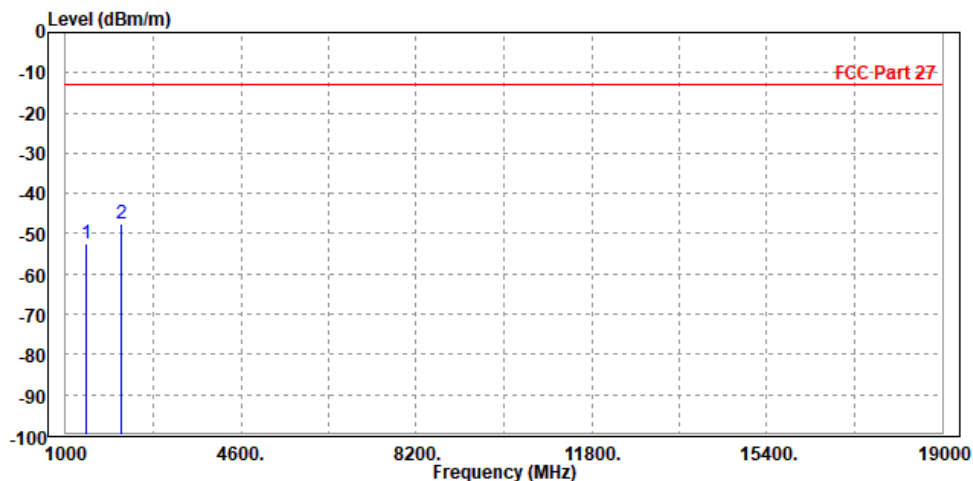

MODE	TX channel 23800	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1422.000	-53.04	-54.76	-13.00	-40.04	1.72	Peak	Vertical
2 PP	2133.000	-49.47	-56.17	-13.00	-36.47	6.70	Peak	Vertical

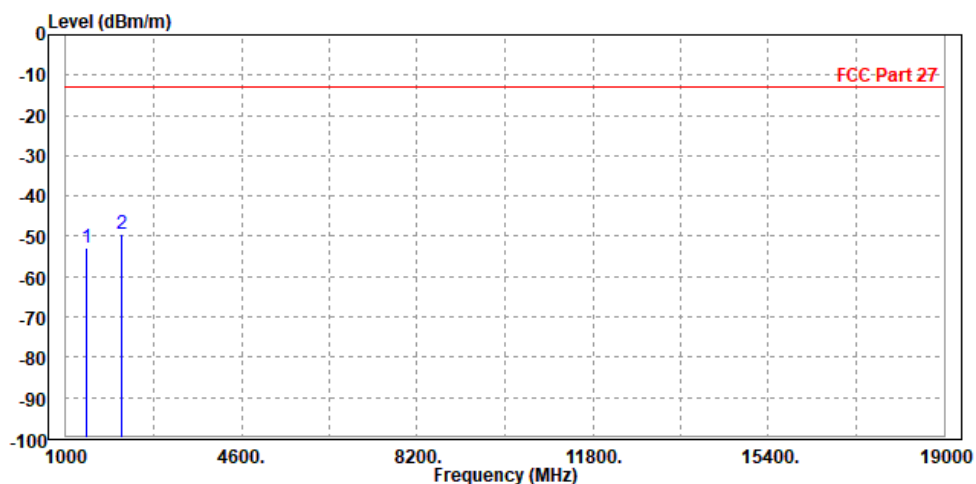



Test Report No.: RFA210222W001-3


LTE B30

CHANNEL BANDWIDTH: 5MHz / QPSK

CH27685


MODE	TX channel 27685	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	4618.000	-43.73	-53.29	-40.00	-3.73	9.56	Peak	Horizontal
2 PP	6922.500	-43.16	-54.54	-40.00	-3.16	11.38	Peak	Horizontal

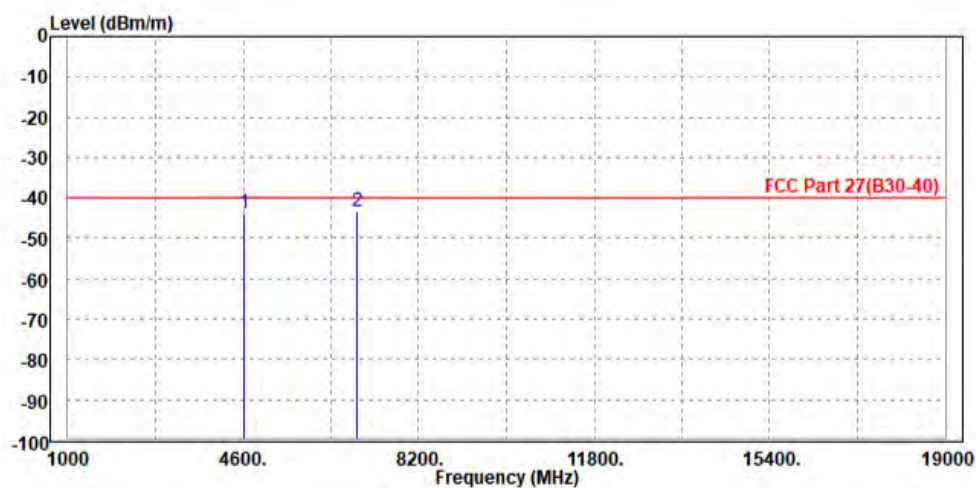

MODE	TX channel 27685	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	4618.000	-47.47	-57.41	-40.00	-7.47	9.94	Peak	Vertical
2 PP	6922.500	-43.51	-56.29	-40.00	-3.51	12.78	Peak	Vertical

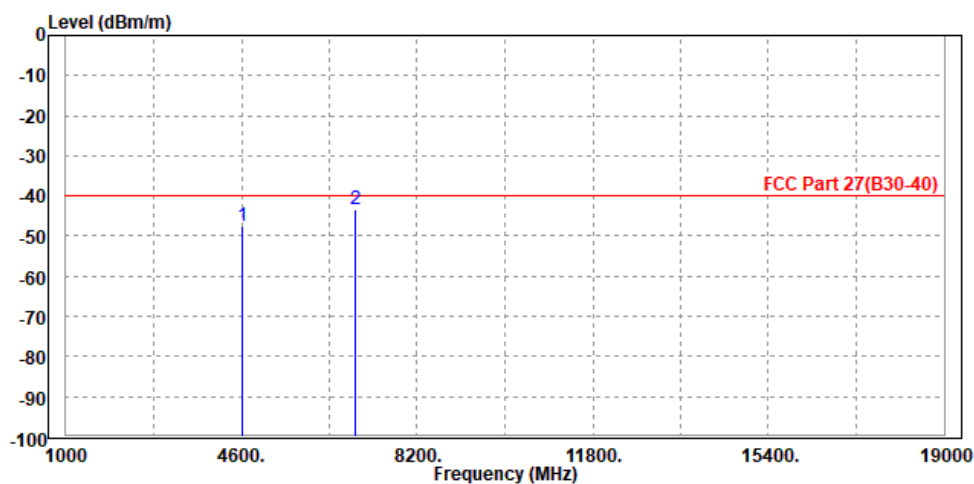

CH27710


MODE	TX channel 27710	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	4618.000	-45.30	-54.86	-40.00	-5.30	9.56	Peak	Horizontal
2 PP	6922.000	-43.76	-55.14	-40.00	-3.76	11.38	Peak	Horizontal

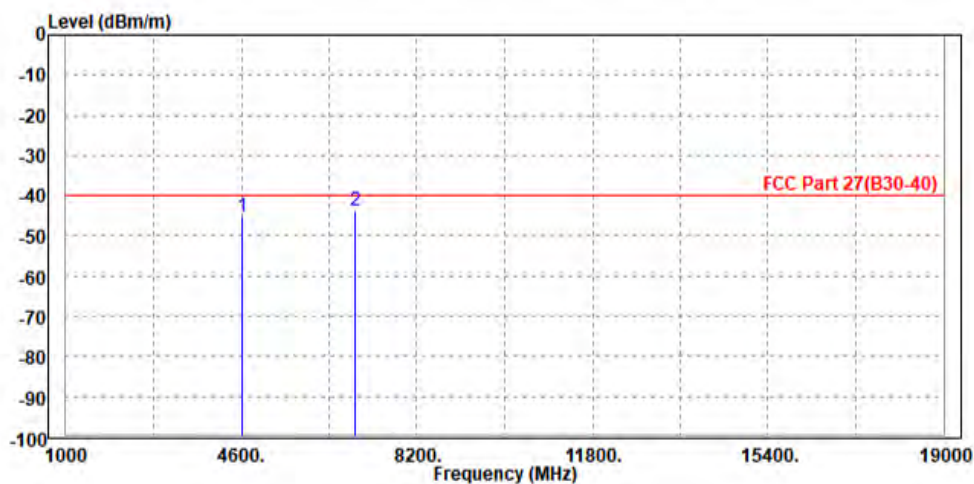

MODE	TX channel 27710	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	4618.000	-46.12	-56.06	-40.00	-6.12	9.94	Peak	Vertical
2 PP	6930.000	-43.45	-56.23	-40.00	-3.45	12.78	Peak	Vertical

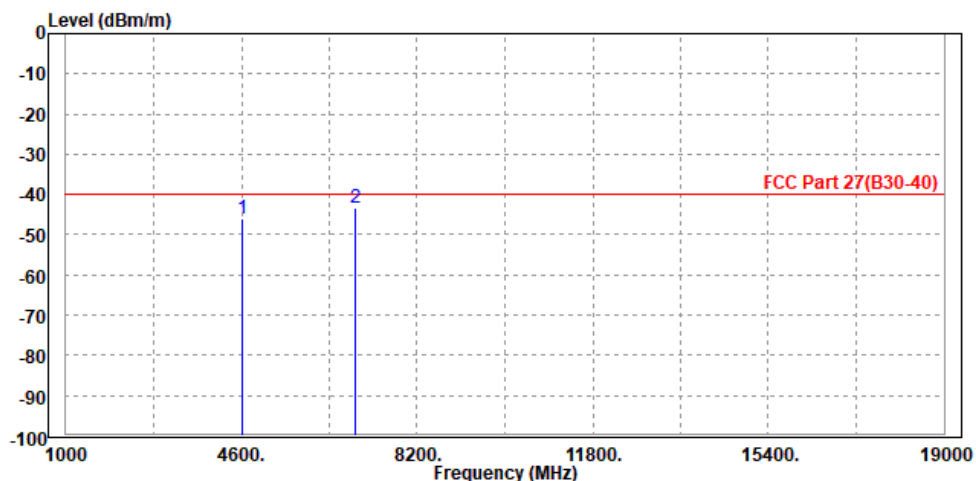

CH27735

MODE	TX channel 27735	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	4622.500	-46.00	-55.55	-40.00	-6.00	9.55	Peak	Horizontal
2 PP	6940.000	-44.06	-55.41	-40.00	-4.06	11.35	Peak	Horizontal

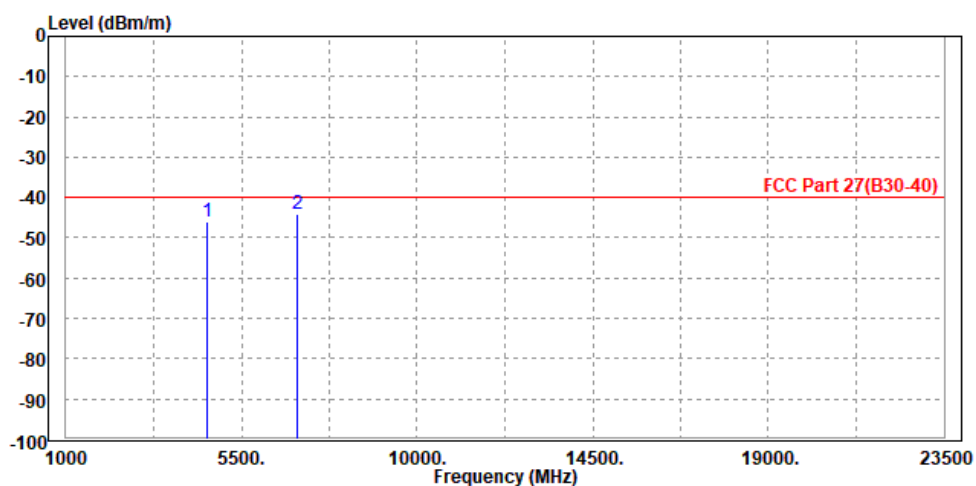




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-3

MODE	TX channel 27735	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	4618.000	-47.67	-57.61	-40.00	-7.67	9.94	Peak	Vertical
2 PP	6937.500	-45.19	-57.97	-40.00	-5.19	12.78	Peak	Vertical

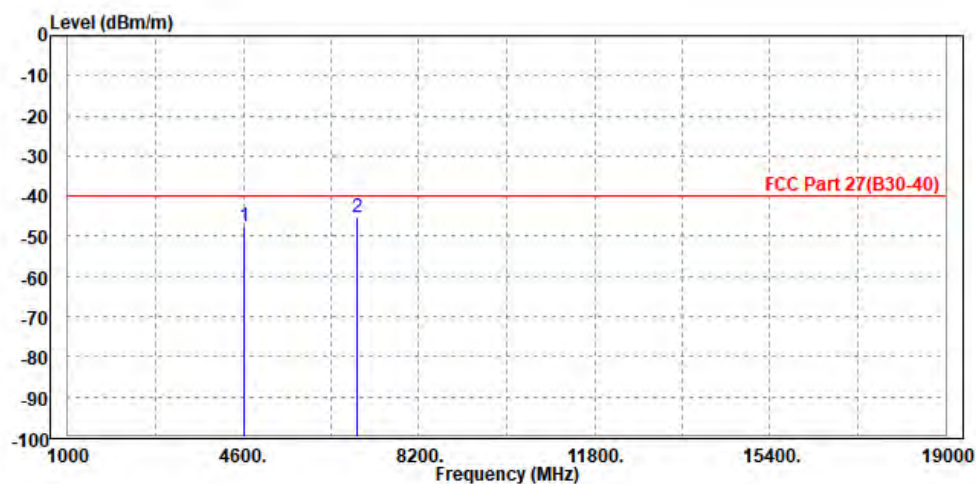

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 27710	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	4622.500	-48.06	-57.61	-40.00	-8.06	9.55	Peak	Horizontal
2 PP	6930.000	-47.98	-59.35	-40.00	-7.98	11.37	Peak	Horizontal

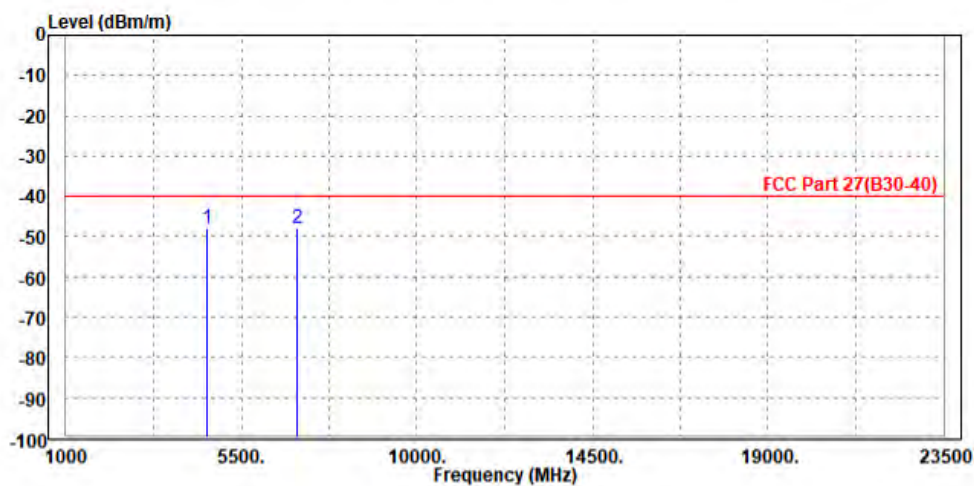




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-3

MODE	TX channel 27710	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	4618.000	-45.48	-55.42	-40.00	-5.48	9.94	Peak	Vertical
2 PP	6930.000	-44.88	-57.66	-40.00	-4.88	12.78	Peak	Vertical

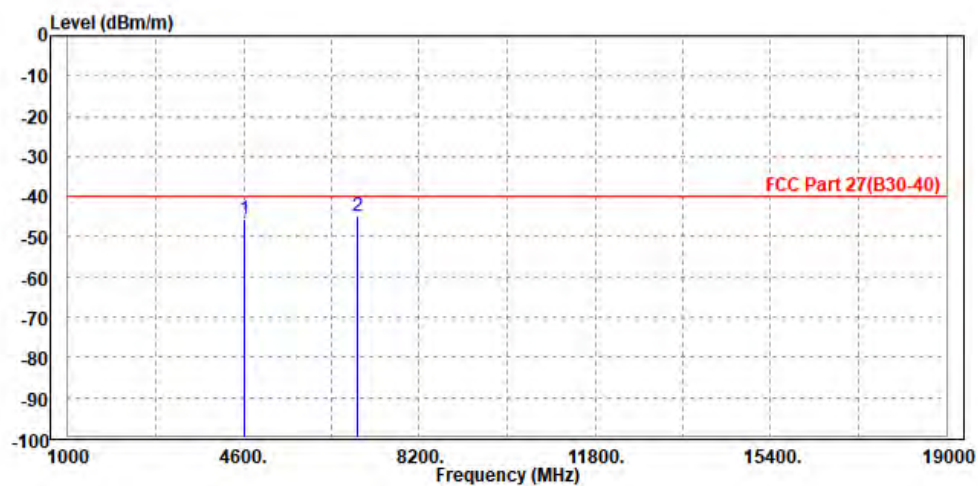


LTE B66

CHANNEL BANDWIDTH: 1.4MHz / QPSK


MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3496.000	-38.29	-46.86	-13.00	-25.29	8.57	Peak	Horizontal
2 PP	5238.000	-37.43	-46.67	-13.00	-24.43	9.24	Peak	Horizontal

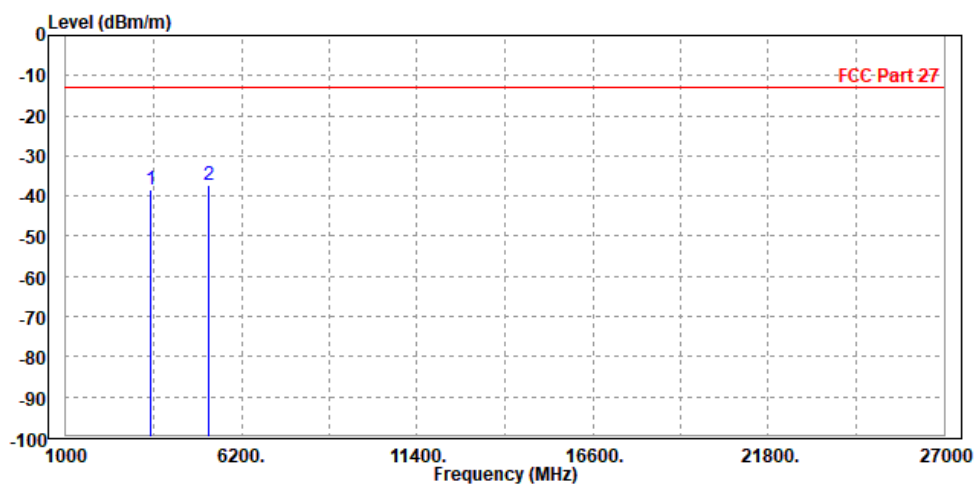

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3496.000	-42.42	-51.61	-13.00	-29.42	9.19	Peak	Vertical
2 PP	5235.000	-37.86	-47.67	-13.00	-24.86	9.81	Peak	Vertical

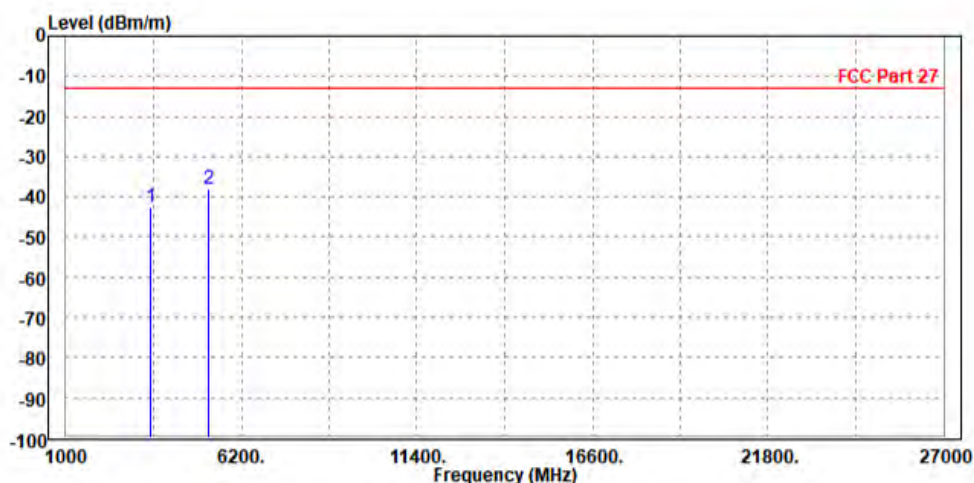




Test Report No.: RFA210222W001-3

CHANNEL BANDWIDTH: 3MHz / QPSK


MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3496.000	-37.35	-45.92	-13.00	-24.35	8.57	Peak	Horizontal
2		5235.000	-38.10	-47.33	-13.00	-25.10	9.23	Peak	Horizontal

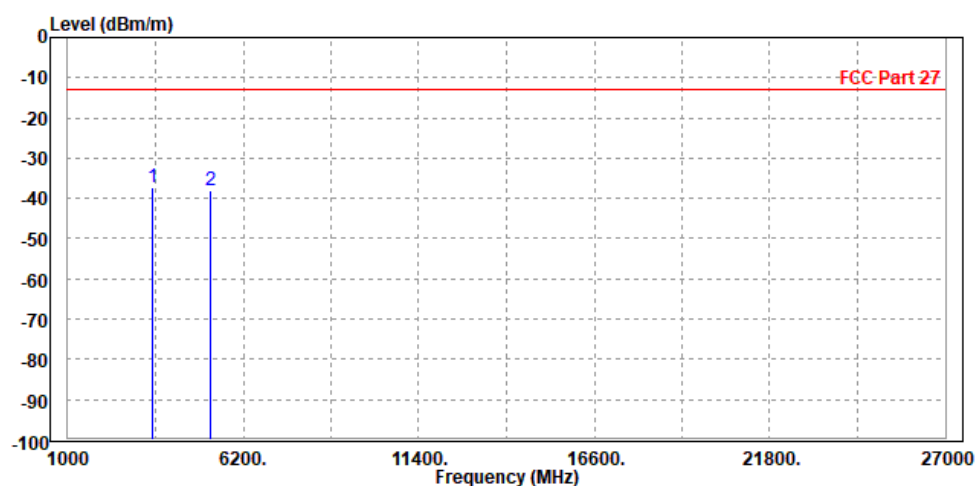

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3496.000	-40.76	-49.95	-13.00	-27.76	9.19	Peak	Vertical
2 PP	5235.000	-37.16	-46.97	-13.00	-24.16	9.81	Peak	Vertical

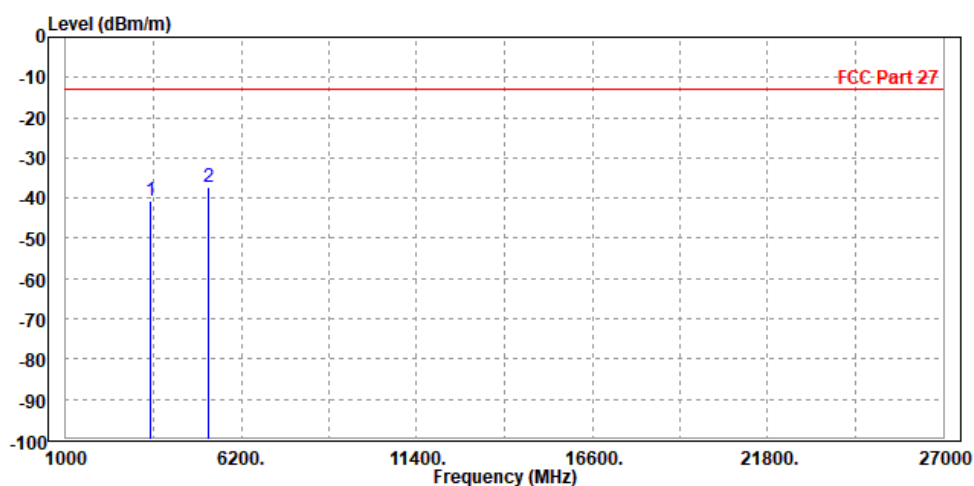




Test Report No.: RFA210222W001-3

CHANNEL BANDWIDTH: 5MHz / QPSK

CH131997

MODE	TX channel 131997	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3418.000	-44.22	-52.81	-13.00	-31.22	8.59	Peak	Horizontal
2 PP	5137.500	-42.45	-51.39	-13.00	-29.45	8.94	Peak	Horizontal

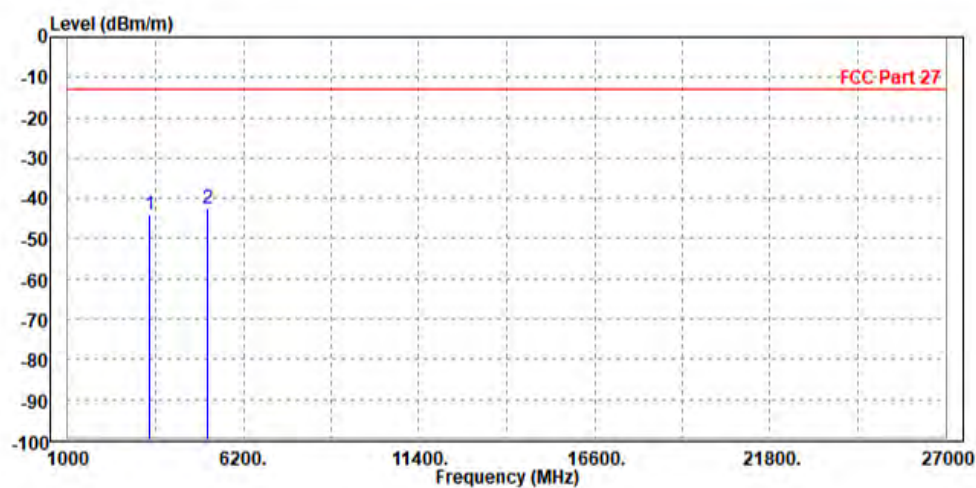




Test Report No.: RFA210222W001-3

MODE	TX channel 131997	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3418.000	-44.86	-53.97	-13.00	-31.86	9.11	Peak	Vertical
2 PP	5137.500	-43.23	-53.08	-13.00	-30.23	9.85	Peak	Vertical

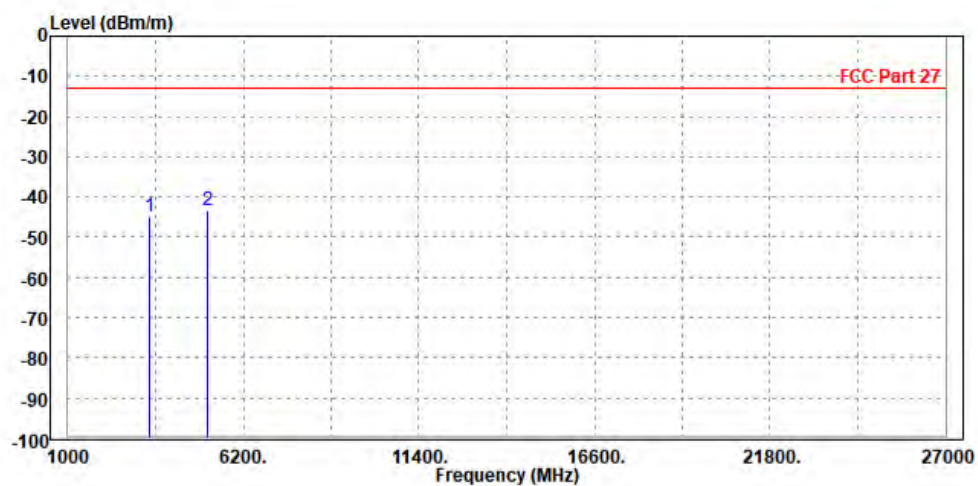

CH132322

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3496.000	-36.52	-45.09	-13.00	-23.52	8.57	Peak	Horizontal
2	5235.000	-36.67	-45.90	-13.00	-23.67	9.23	Peak	Horizontal

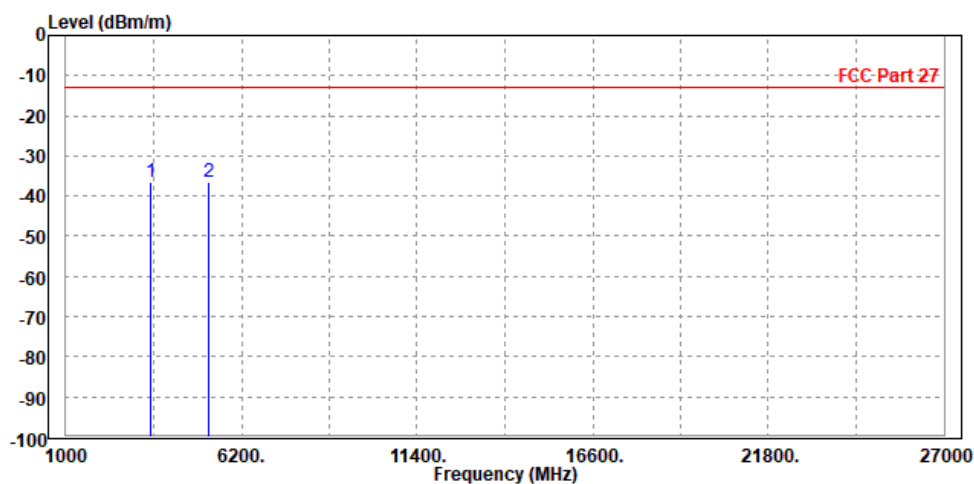




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3496.000	-41.16	-50.35	-13.00	-28.16	9.19	Peak	Vertical
2 PP	5235.000	-39.14	-48.95	-13.00	-26.14	9.81	Peak	Vertical

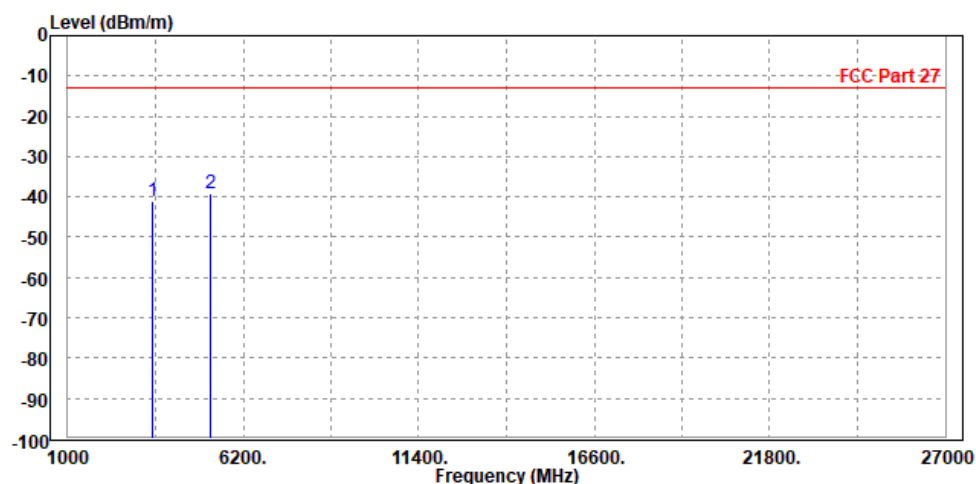




Test Report No.: RFA210222W001-3

CH132647


MODE	TX channel 132647	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3548.000	-41.59	-50.21	-13.00	-28.59	8.62	Peak	Horizontal
2		5332.500	-45.70	-55.22	-13.00	-32.70	9.52	Peak	Horizontal

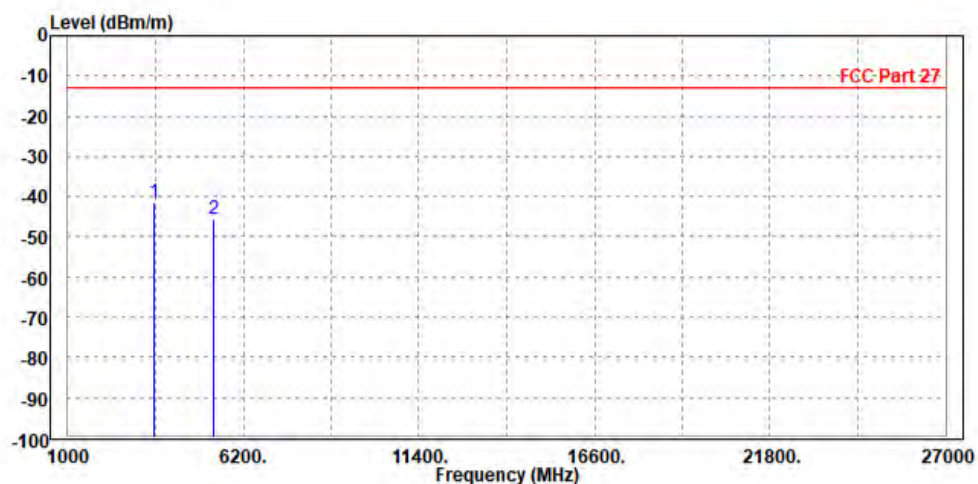

MODE	TX channel 132647	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3548.000	-44.70	-53.91	-13.00	-31.70	9.21	Peak	Vertical
2		5332.500	-47.37	-57.14	-13.00	-34.37	9.77	Peak	Vertical

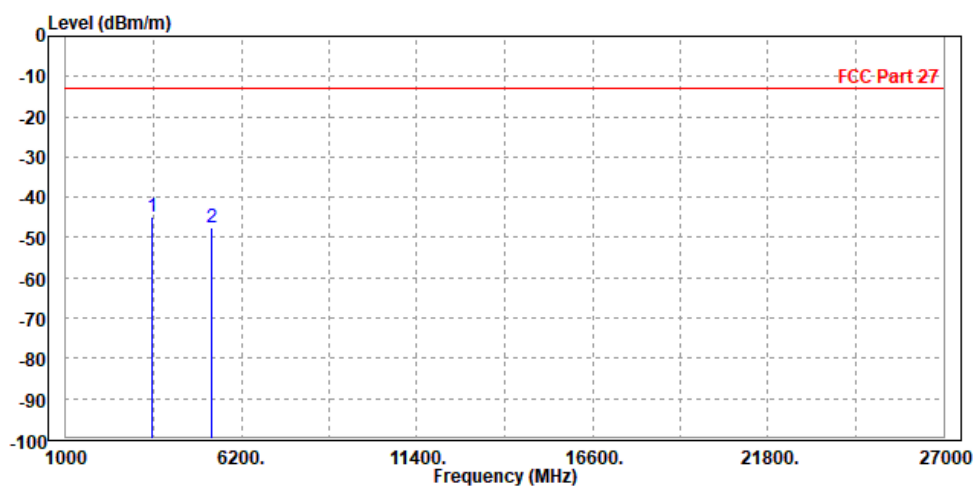




Test Report No.: RFA210222W001-3

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3496.000	-40.40	-48.97	-13.00	-27.40	8.57	Peak	Horizontal
2	PP 5235.000	-37.39	-46.62	-13.00	-24.39	9.23	Peak	Horizontal

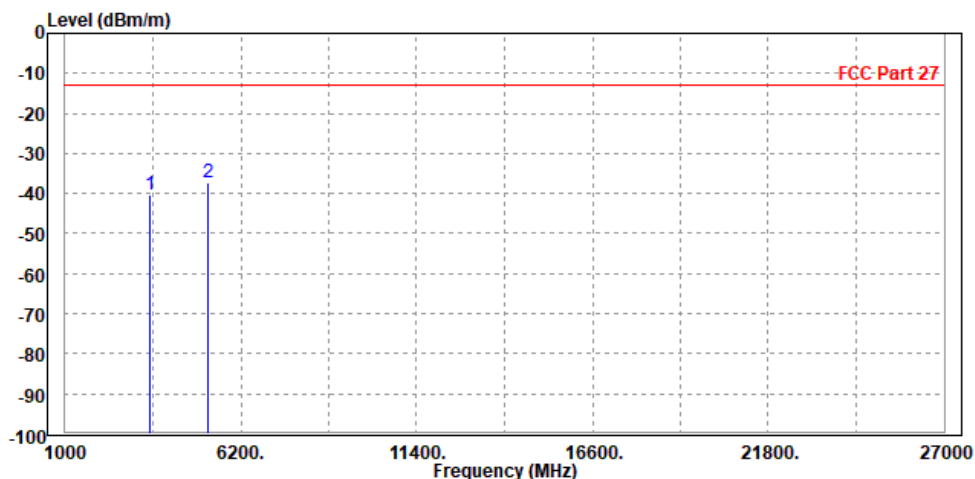




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3496.000	-47.80	-56.99	-13.00	-34.80	9.19	Peak	Vertical
2	5235.000	-48.40	-58.21	-13.00	-35.40	9.81	Peak	Vertical

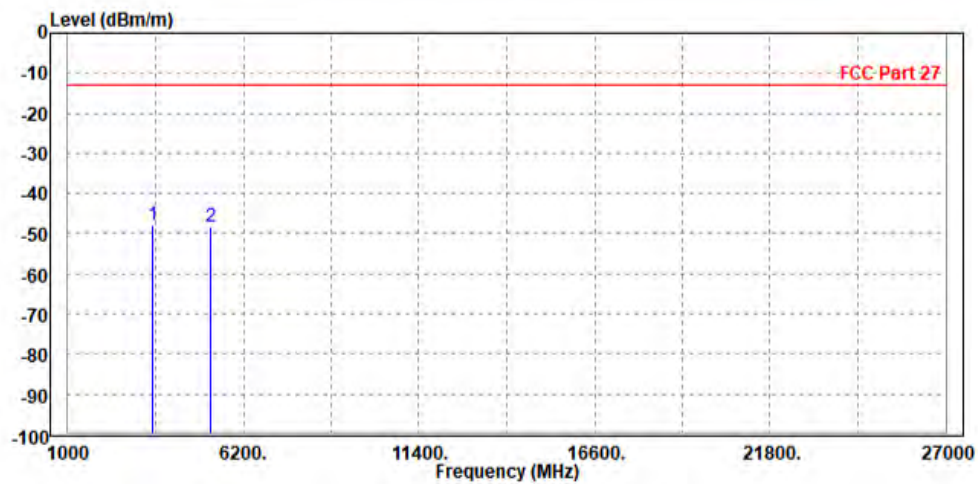

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3496.000	-48.09	-56.66	-13.00	-35.09	8.57	Peak	Horizontal
2		5235.000	-48.18	-57.41	-13.00	-35.18	9.23	Peak	Horizontal

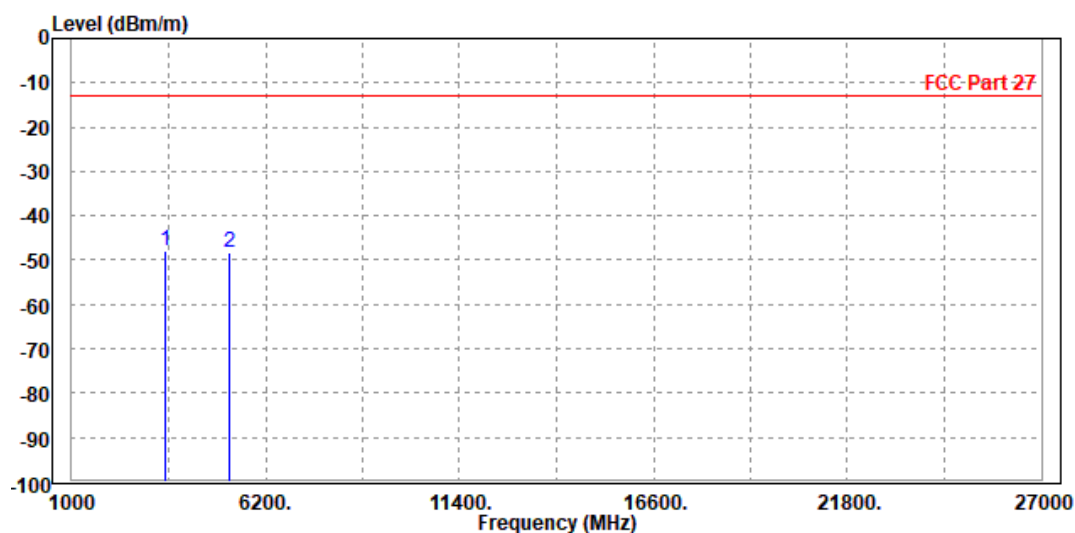




Test Report No.: RFA210222W001-3

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3496.000	-47.82	-57.01	-13.00	-34.82	9.19	Peak	Vertical
2 PP	5235.000	-47.81	-57.62	-13.00	-34.81	9.81	Peak	Vertical

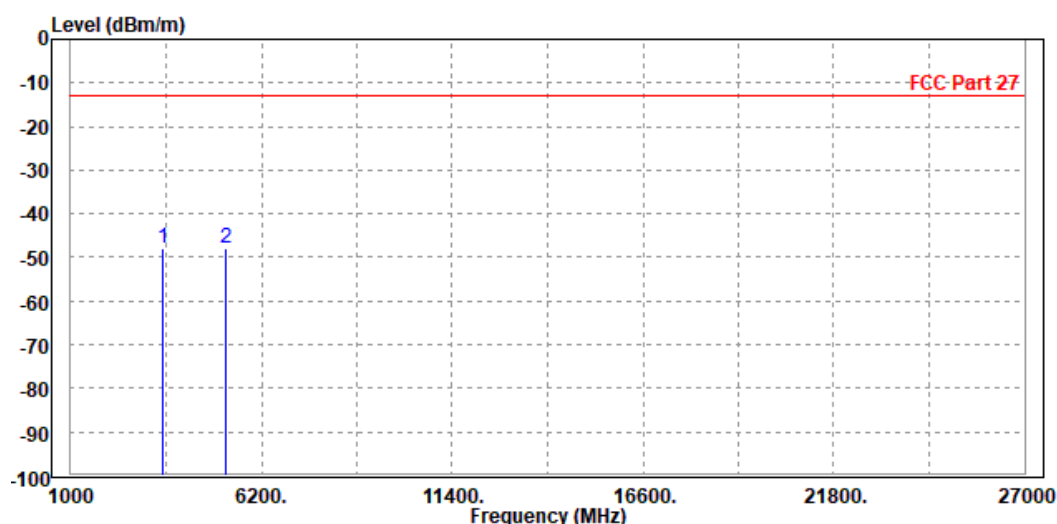




Test Report No.: RFA210222W001-3

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3496.000	-47.72	-56.29	-13.00	-34.72	8.57	Peak	Horizontal
2 PP	5235.000	-47.37	-56.60	-13.00	-34.37	9.23	Peak	Horizontal

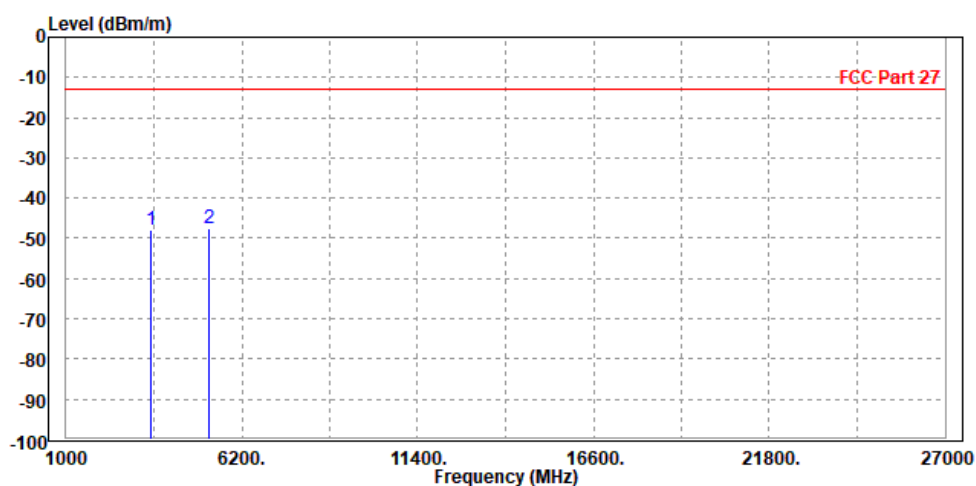

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
------	-------------------	-----------------	---------------




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3496.000	-47.16	-56.35	-13.00	-34.16	9.19	Peak	Vertical
2	PP 5235.000	-47.14	-56.95	-13.00	-34.14	9.81	Peak	Vertical

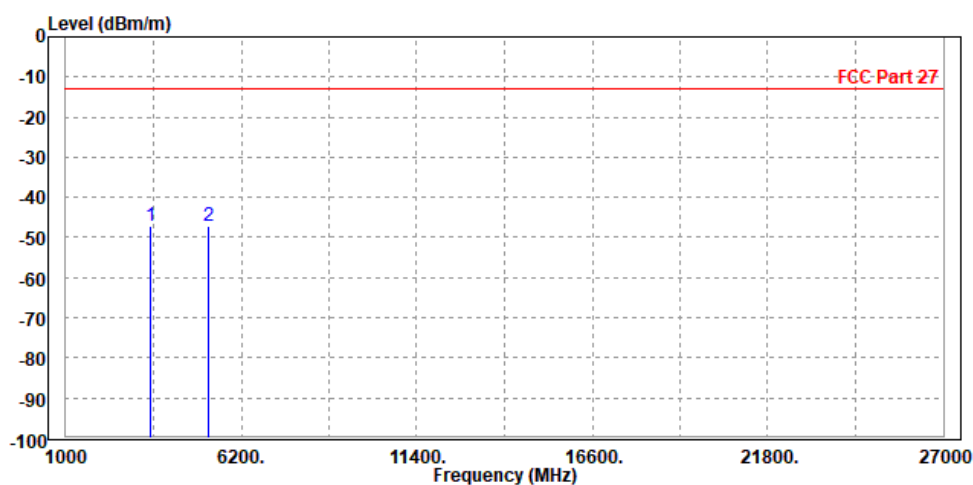




Test Report No.: RFA210222W001-3

LTE B71

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 133247	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1364.000	-50.70	-51.55	-13.00	-37.70	0.85	Peak	Horizontal
2 PP	2041.500	-45.54	-53.13	-13.00	-32.54	7.59	Peak	Horizontal

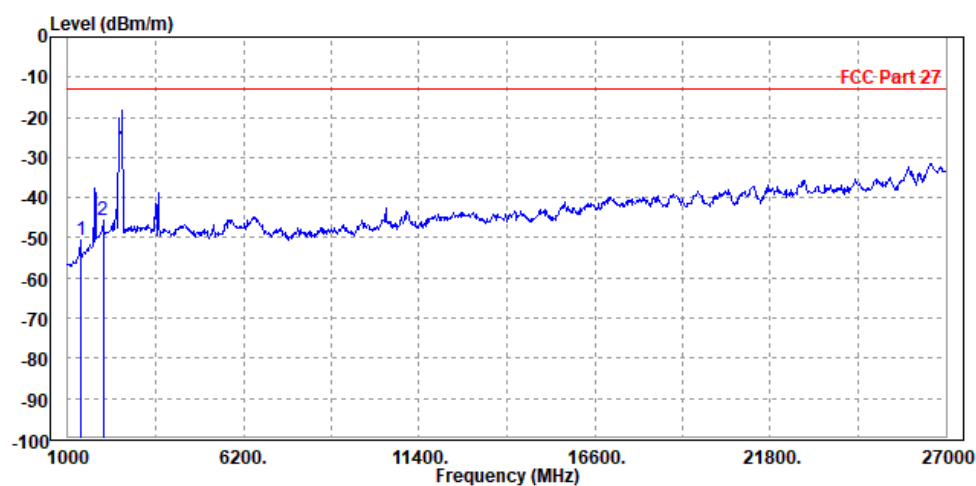

MODE	TX channel 133247	FREQUENCY RANGE	Above 1000MHz
------	-------------------	-----------------	---------------




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1364.000	-51.15	-52.62	-13.00	-38.15	1.47	Peak	Vertical
2 PP	2041.500	-47.29	-53.90	-13.00	-34.29	6.61	Peak	Vertical

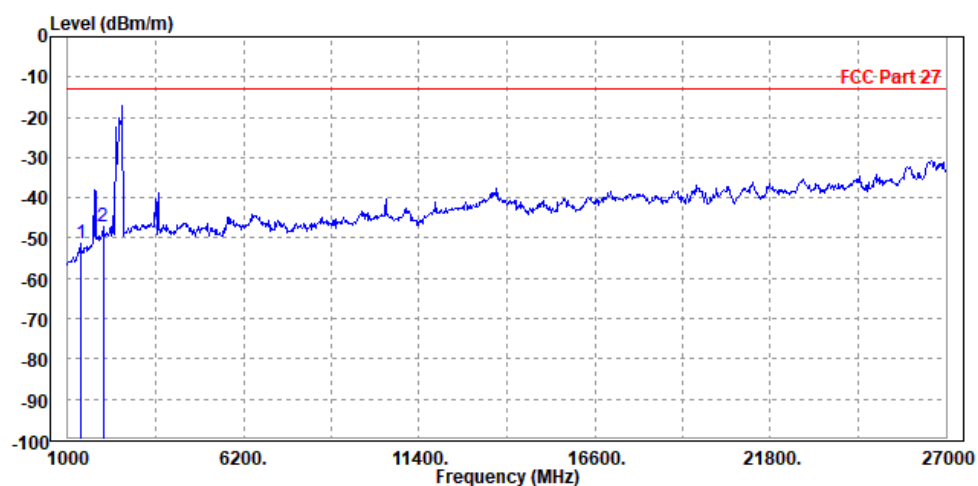

CHANNEL BANDWIDTH: 10MHz / QPSK