


CH133172


MODE	TX channel 133172	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1338.000	-46.08	-46.82	-13.00	-33.08	0.74	Peak	Horizontal
2	2004.000	-47.56	-55.11	-13.00	-34.56	7.55	Peak	Horizontal

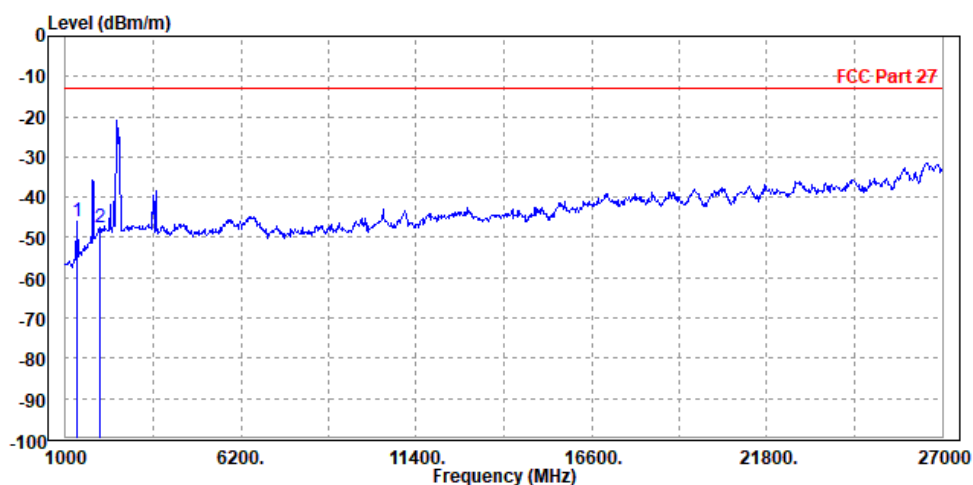

MODE	TX channel 133172	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	1338.000	-48.22	-49.58	-13.00	-35.22	1.36	Peak	Vertical
2		2004.000	-49.20	-55.77	-13.00	-36.20	6.57	Peak	Vertical

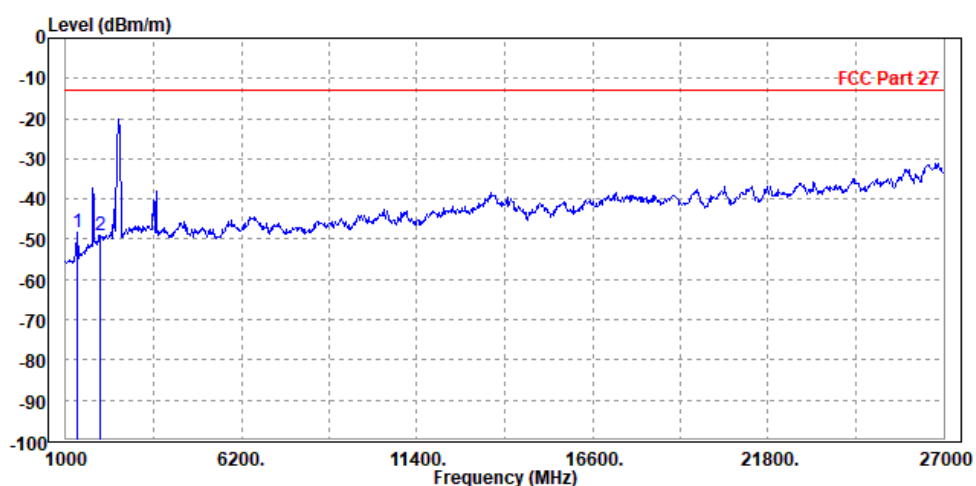




Test Report No.: RFA210222W001-3

CH133272

MODE	TX channel 133272	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Read	Limit	Over				
	Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1364.000	-40.25	-41.10	-13.00	-27.25	0.85	Peak	Horizontal
2	2041.500	-46.28	-53.87	-13.00	-33.28	7.59	Peak	Horizontal

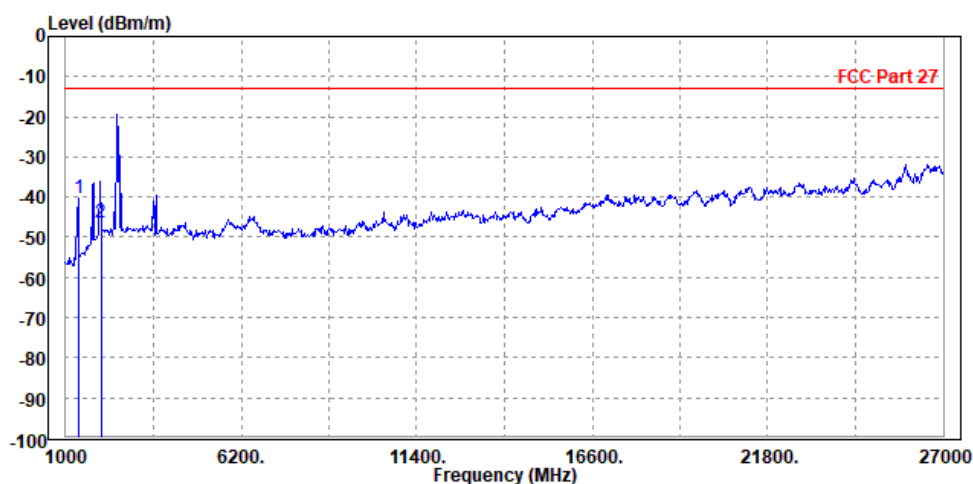




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-3

MODE	TX channel 133272	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1364.000	-41.06	-42.53	-13.00	-28.06	1.47	Peak	Vertical
2	2041.500	-47.16	-53.77	-13.00	-34.16	6.61	Peak	Vertical

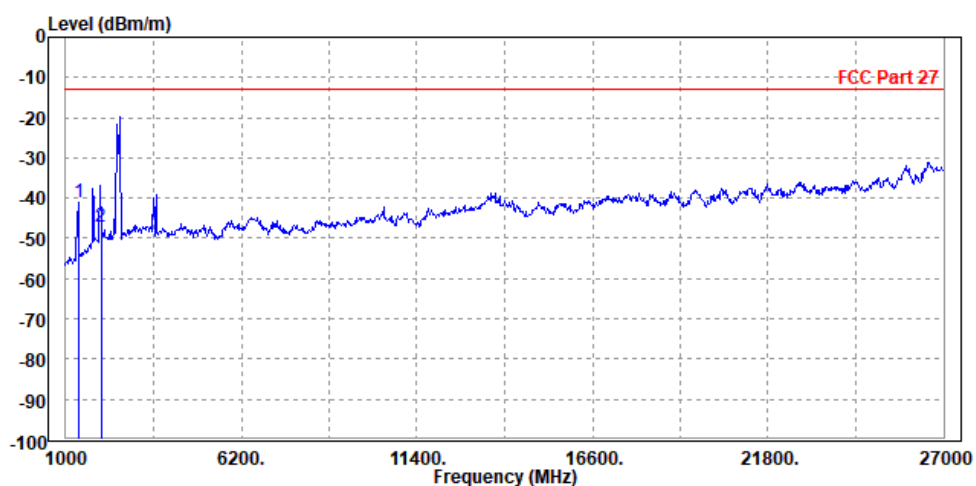

CH133422




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

MODE	TX channel 133422	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1390.000	-44.50	-45.47	-13.00	-31.50	0.97	Peak	Horizontal
2	2079.000	-47.83	-55.46	-13.00	-34.83	7.63	Peak	Horizontal

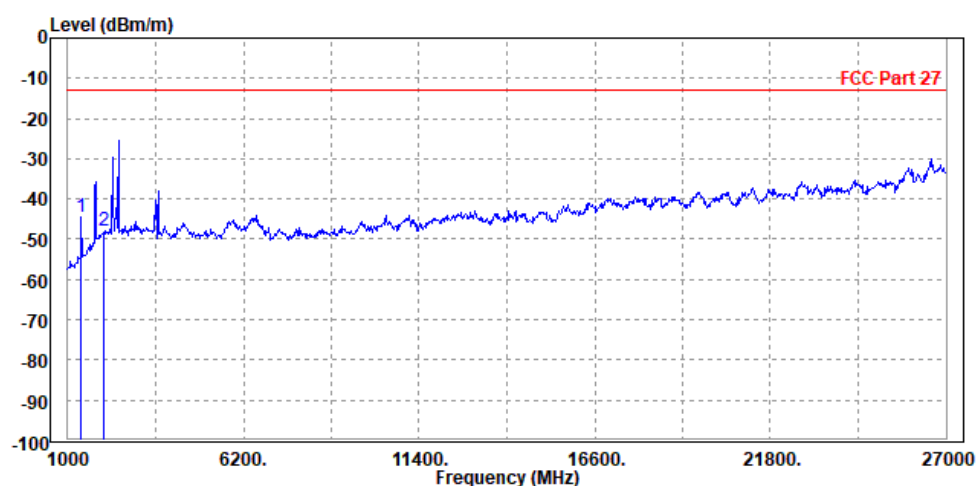




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-3

MODE	TX channel 133422	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1390.000	-49.56	-51.14	-13.00	-36.56	1.58	Peak	Vertical
2	2079.000	-50.00	-56.64	-13.00	-37.00	6.64	Peak	Vertical

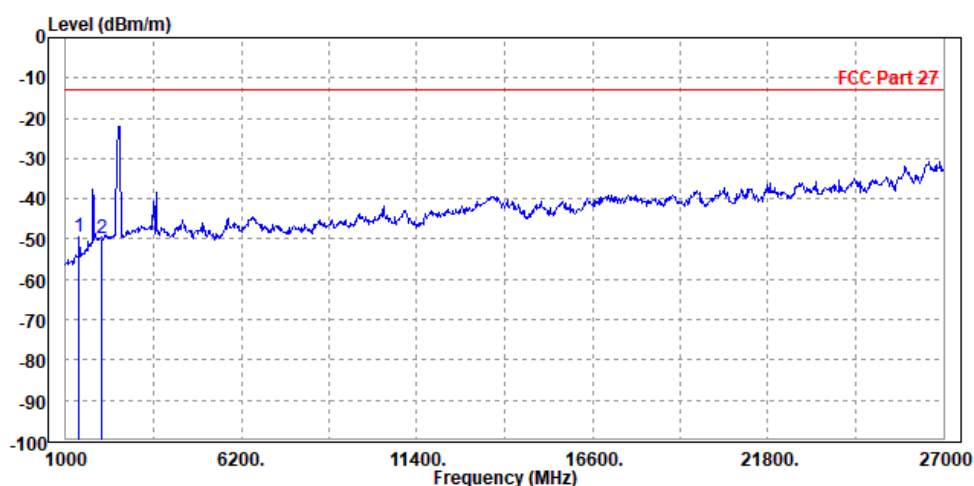




Test Report No.: RFA210222W001-3

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1364.000	-52.00	-52.85	-13.00	-39.00	0.85	Peak	Horizontal
2	PP 2041.500	-43.28	-50.87	-13.00	-30.28	7.59	Peak	Horizontal

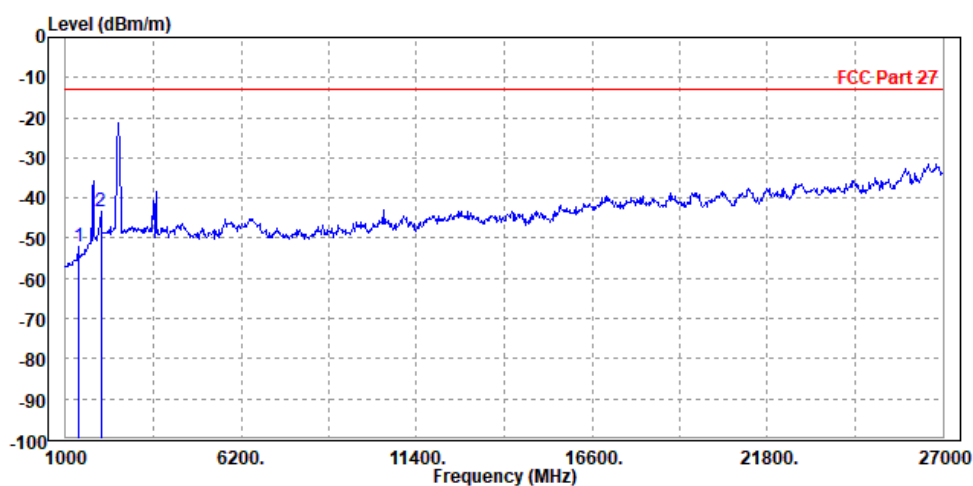




BUREAU
VERITAS

Test Report No.: RFA210222W001-3

MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1364.000	-52.00	-53.47	-13.00	-39.00	1.47	Peak	Vertical
2 PP	2041.500	-48.23	-54.84	-13.00	-35.23	6.61	Peak	Vertical

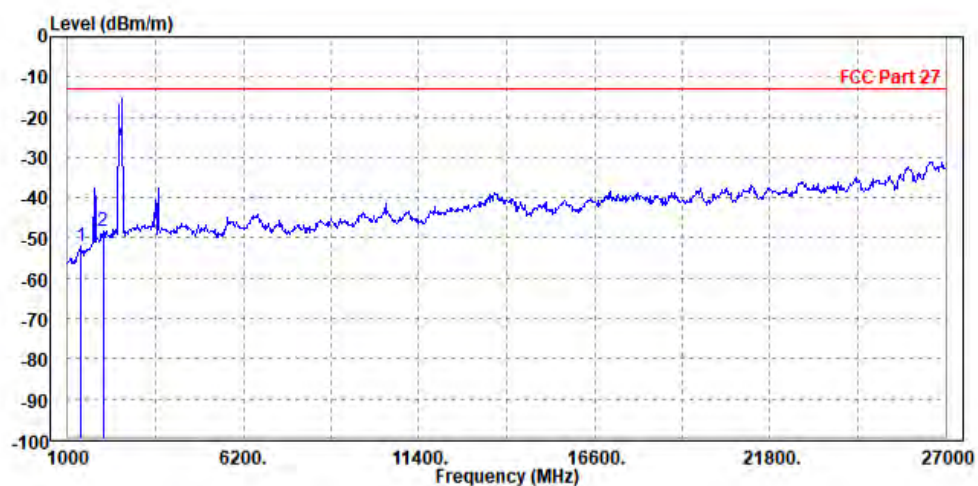




Test Report No.: RFA210222W001-3

CHANNEL BANDWIDTH: 20MHz / QPSK


MODE	TX channel 133322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1364.000	-54.28	-55.13	-13.00	-41.28	0.85	Peak	Horizontal
2	PP 2049.000	-44.90	-52.50	-13.00	-31.90	7.60	Peak	Horizontal

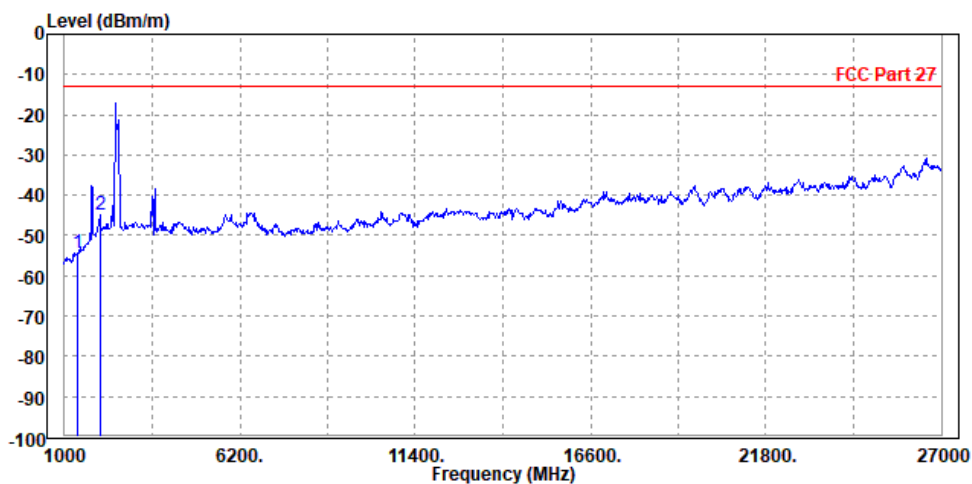

MODE	TX channel 133322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1364.000	-50.43	-51.90	-13.00	-37.43	1.47	Peak	Vertical
2 PP	2049.000	-46.88	-53.49	-13.00	-33.88	6.61	Peak	Vertical

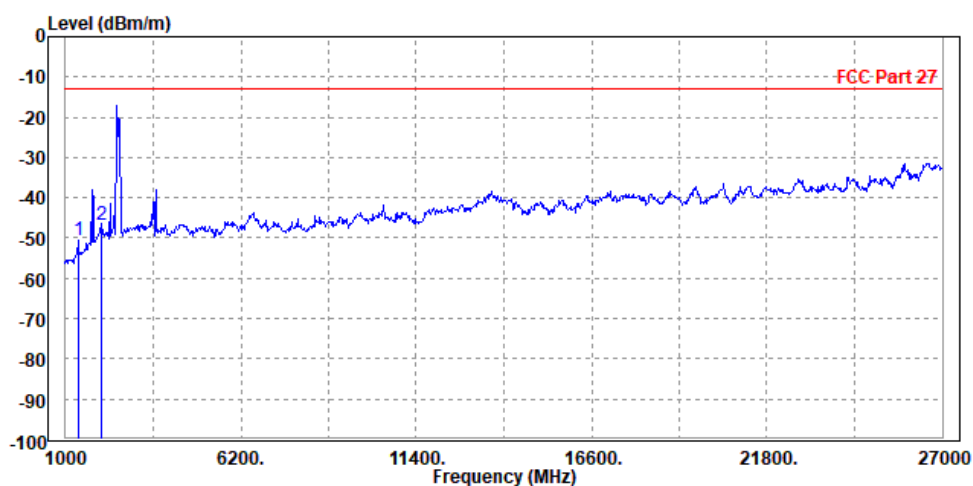


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

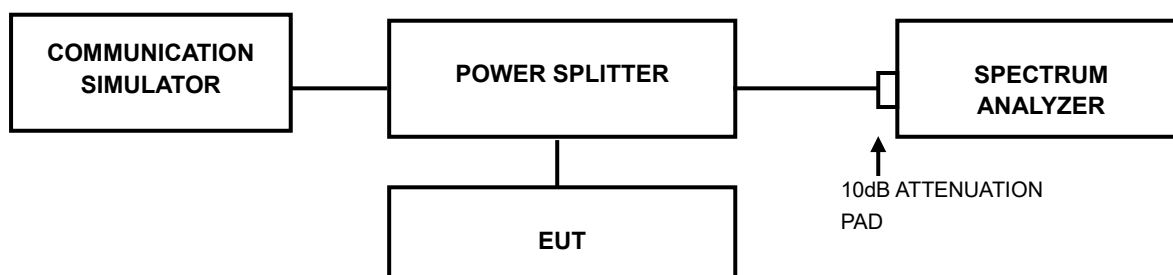


3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.


3.7.4 TEST RESULTS

WCDMA Band IV


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
1312	1712.4	2.94

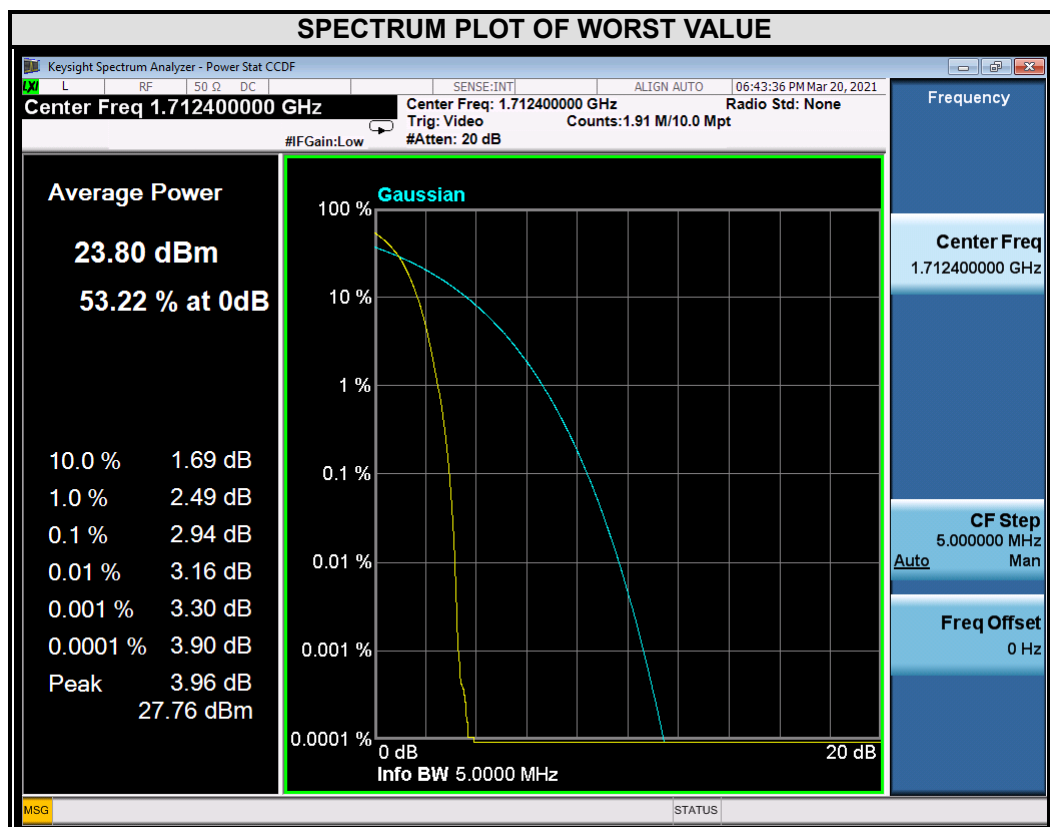

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
1413	1732.6	3.08

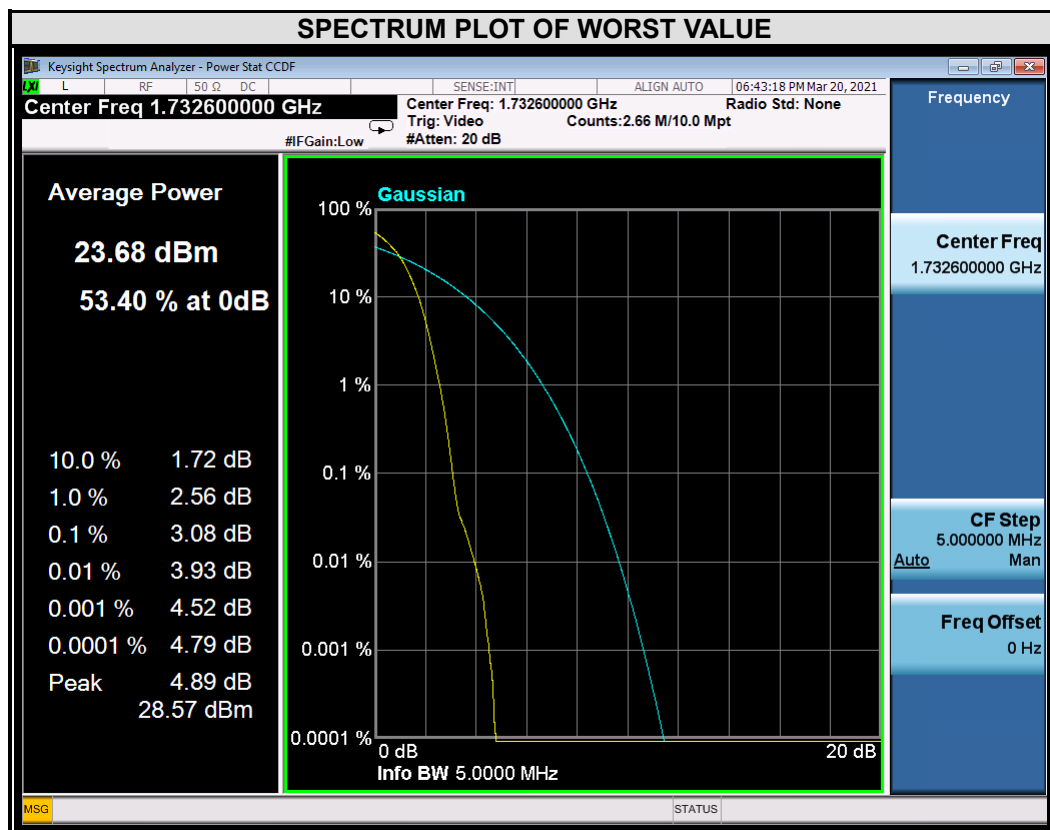

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
1513	1752.6	2.94

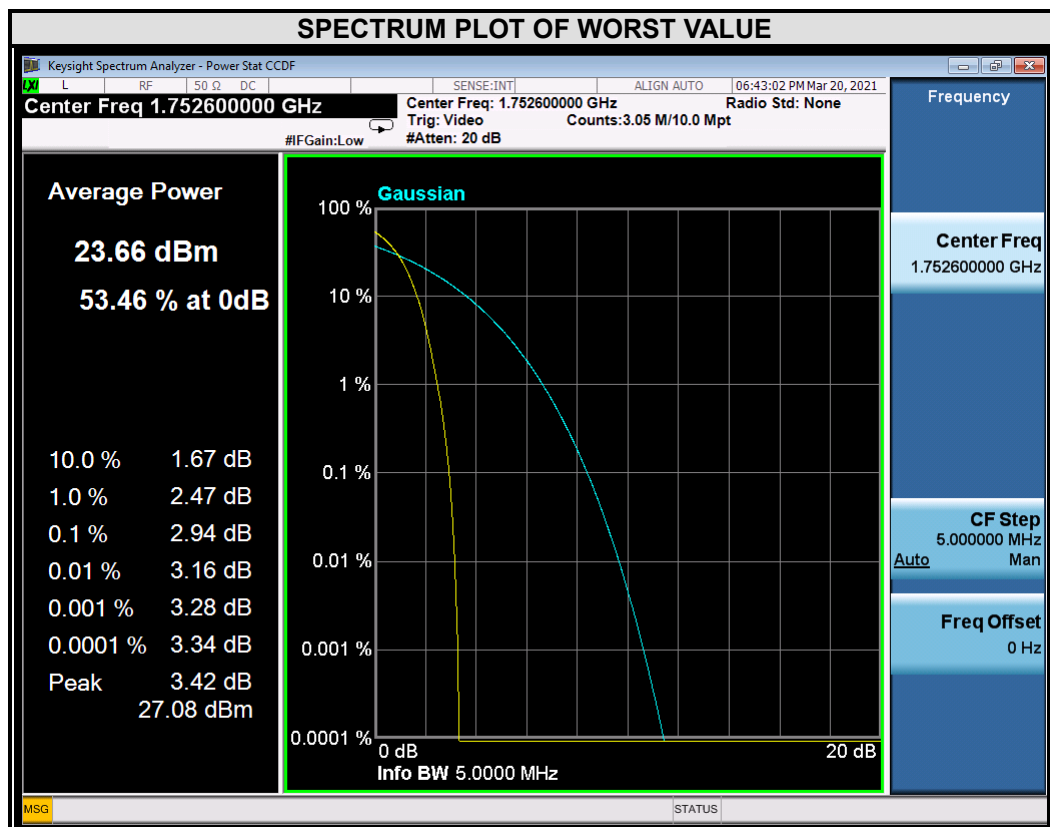




BUREAU
VERITAS


Test Report No.: RFA210222W001-3

LTE BAND 4


CHANNEL BANDWIDTH: 1.4MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
19957	1710.7	5.20	6.06
20175	1732.5	5.28	6.09
20393	1754.3	5.36	6.12

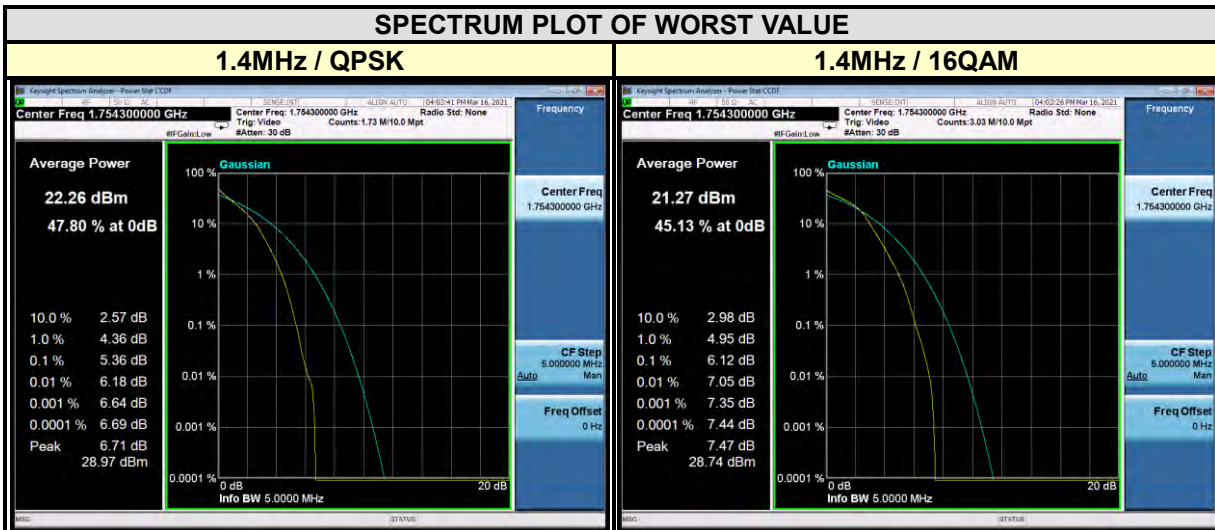


CHANNEL BANDWIDTH: 3MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
19965	1711.5	5.36	6.16
20175	1732.5	5.36	6.18
20385	1753.5	5.47	6.28

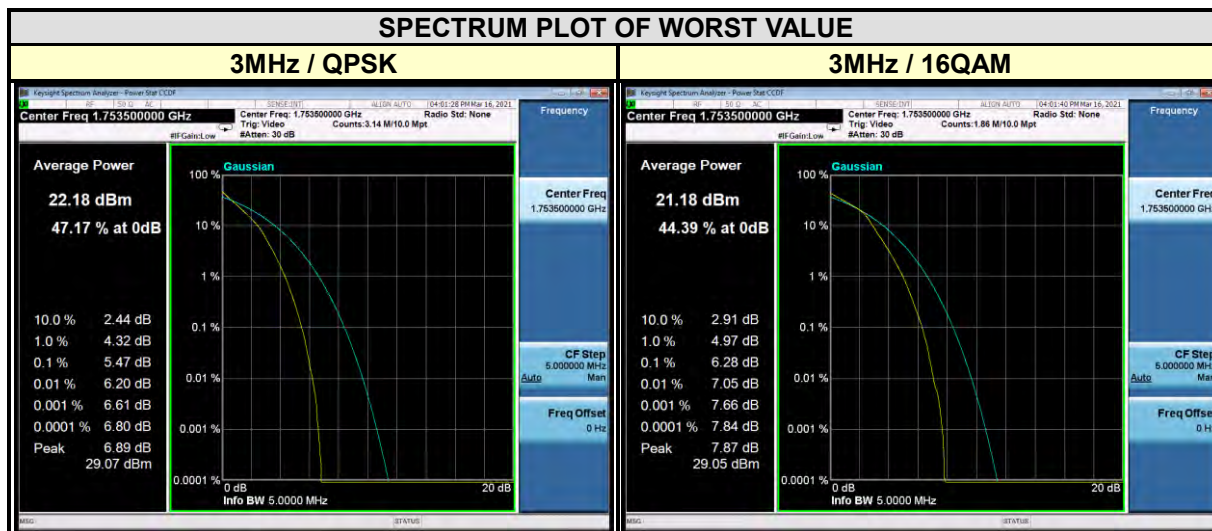


CHANNEL BANDWIDTH: 5MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
19975	1712.5	5.53	6.23
20175	1732.5	5.55	6.30
20375	1752.5	5.59	6.26

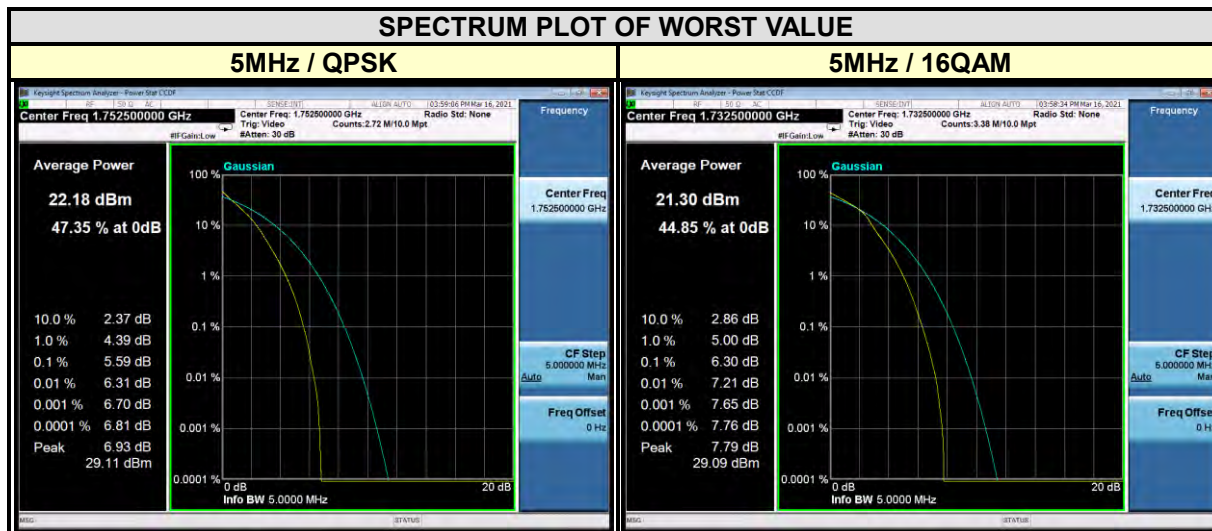


CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
20000	1715	5.41	6.20
20175	1732.5	5.43	6.24
20350	1750	5.46	6.21

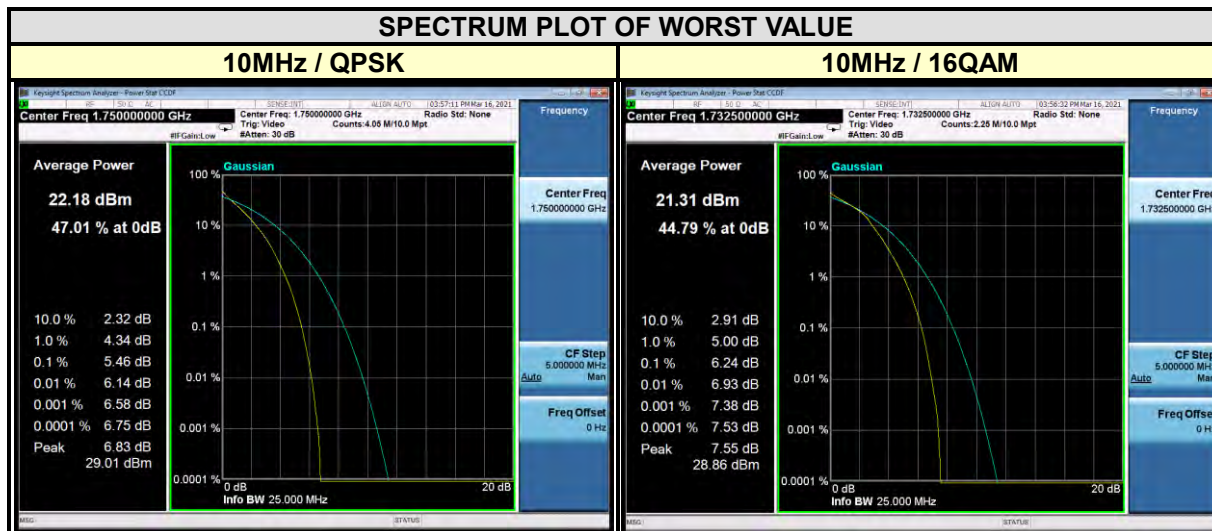

CHANNEL BANDWIDTH: 15MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
20025	1717.5	5.77	6.33
20175	1732.5	5.77	6.31
20325	1747.5	5.78	6.32

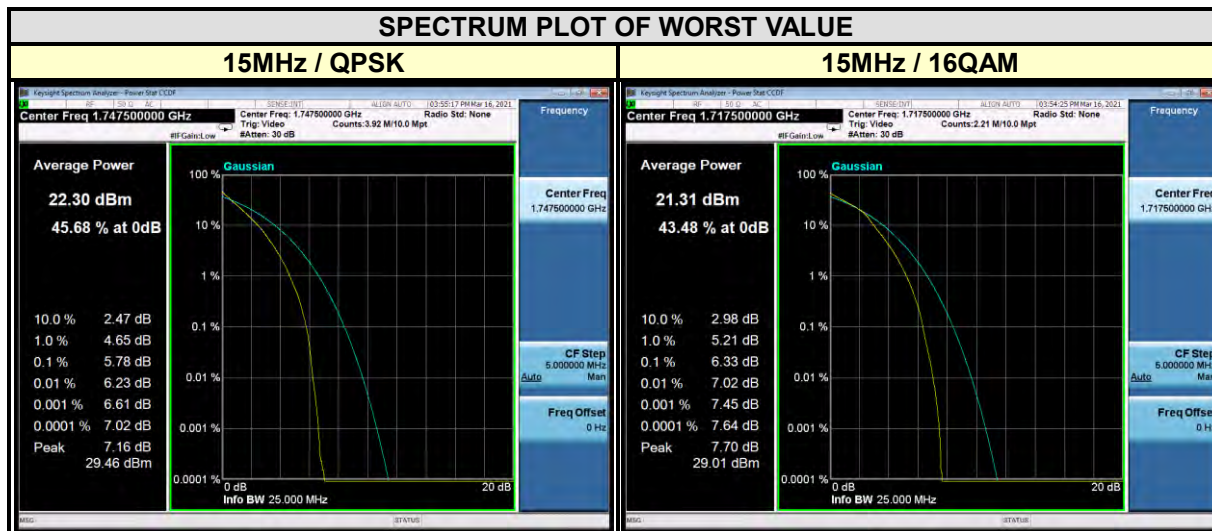

CHANNEL BANDWIDTH: 20MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
20050	1720	5.59	6.33
20175	1732.5	5.56	6.28
20300	1745	5.53	6.33

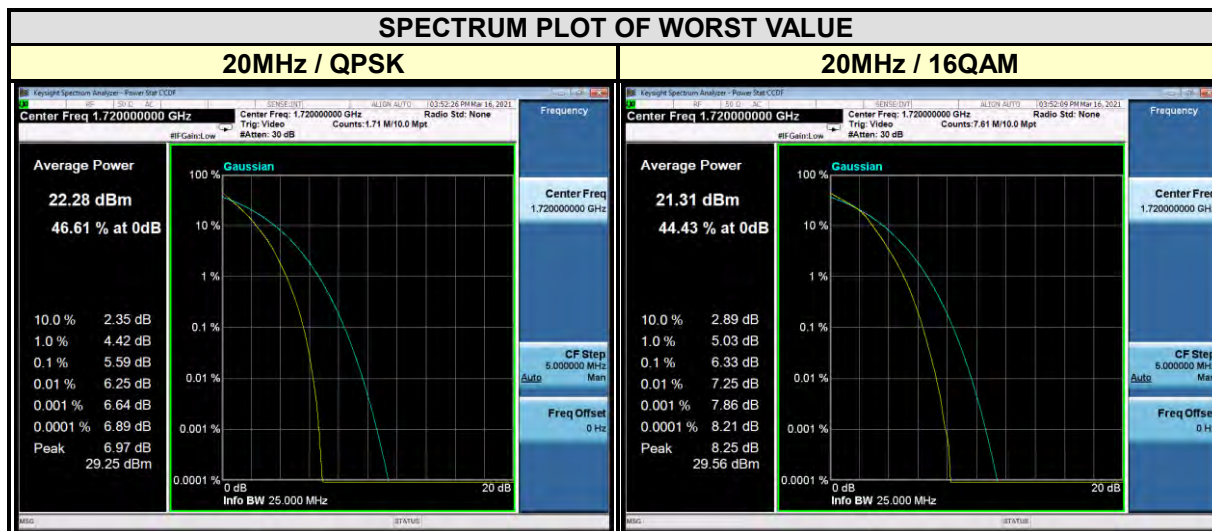




**BUREAU
VERITAS**


Test Report No.: RFA210222W001-3

LTE BAND 12


CHANNEL BANDWIDTH: 1.4MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
23017	699.7	5.34	6.17
23095	707.5	5.29	6.11
23173	715.3	5.30	6.01

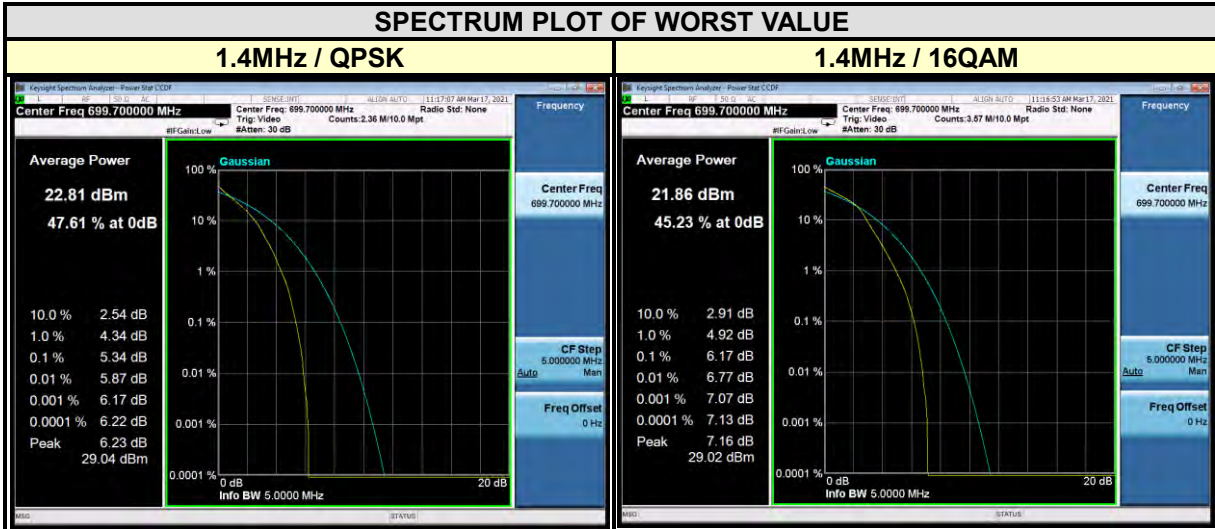


CHANNEL BANDWIDTH: 3MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
23025	700.5	5.50	6.31
23095	707.5	5.35	6.19
23165	714.5	5.49	6.23

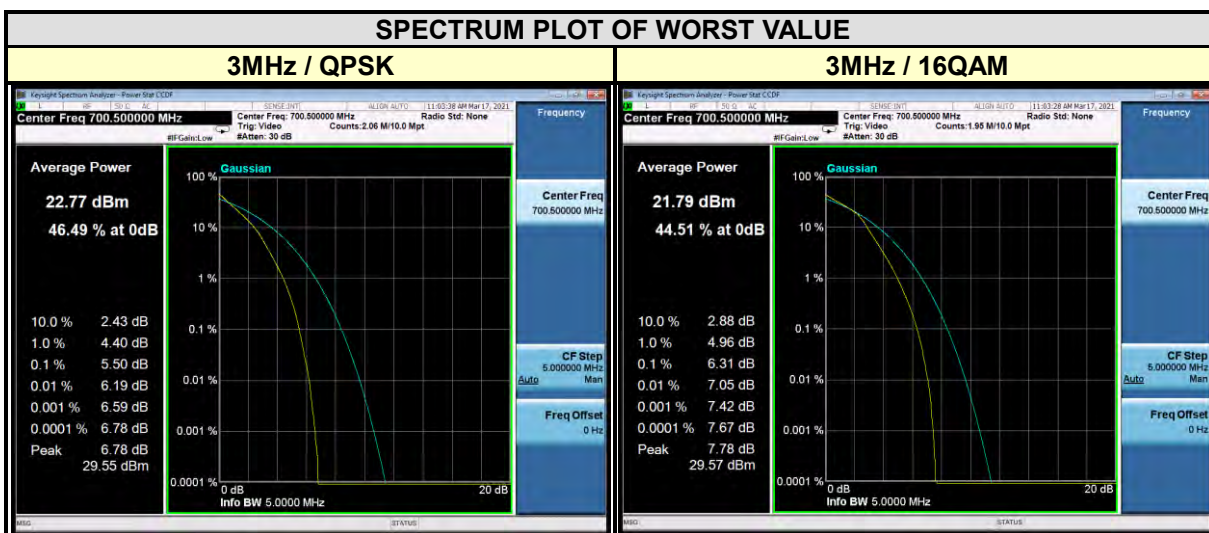

CHANNEL BANDWIDTH: 5MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
23035	701.5	5.69	6.37
23095	707.5	5.57	6.28
23155	713.5	5.65	6.27

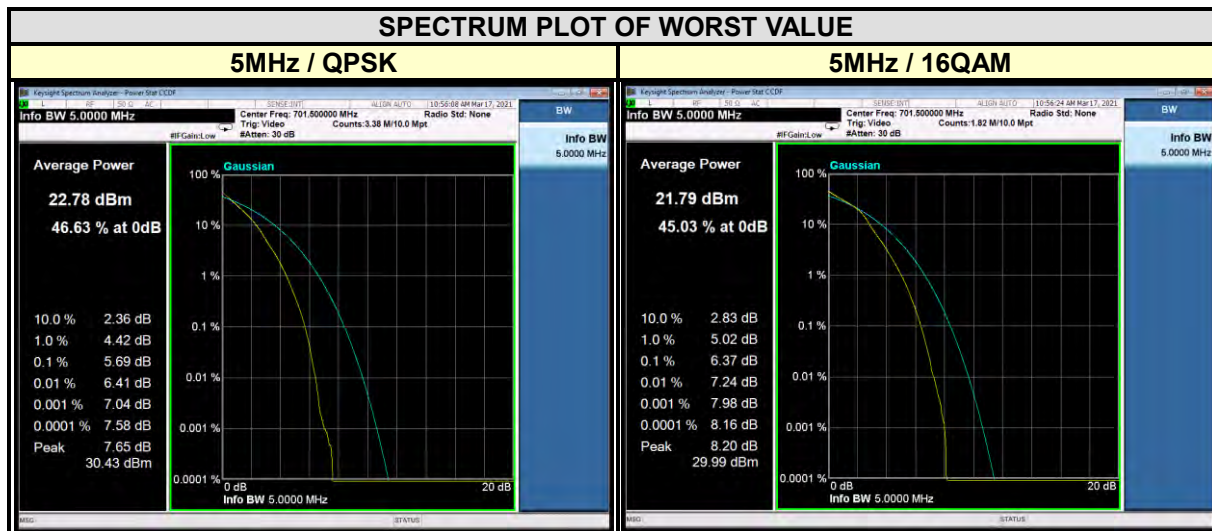

CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
23060	704	5.56	6.32
23095	707.5	5.48	6.22
23130	711	5.43	6.22

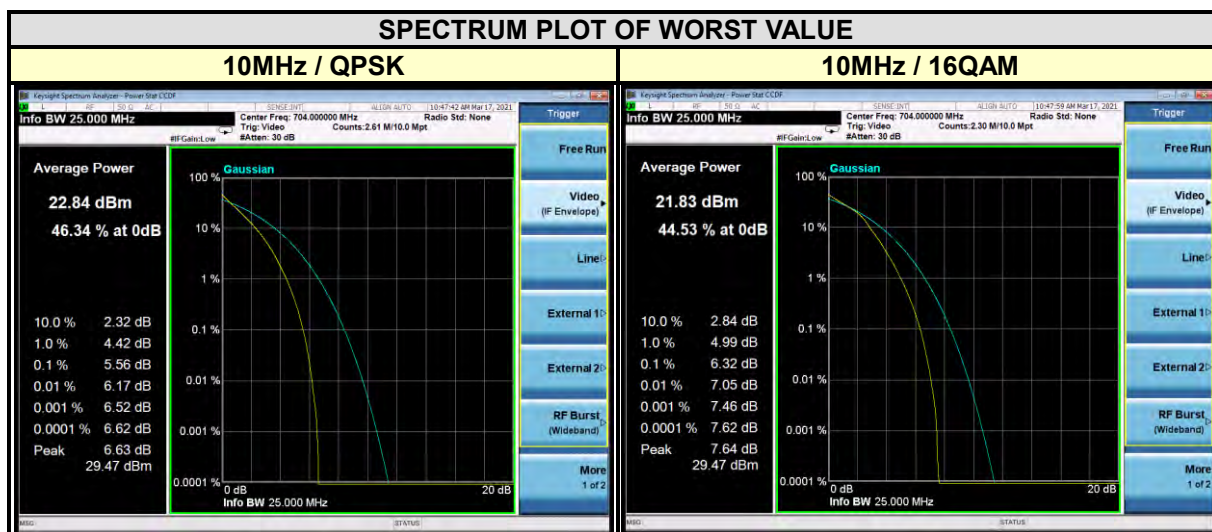




**BUREAU
VERITAS**


Test Report No.: RFA210222W001-3

LTE BAND 13

CHANNEL BANDWIDTH: 5MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
	779.5	5.55	6.30
23230	782	5.73	6.47
23255	784.5	5.88	6.55

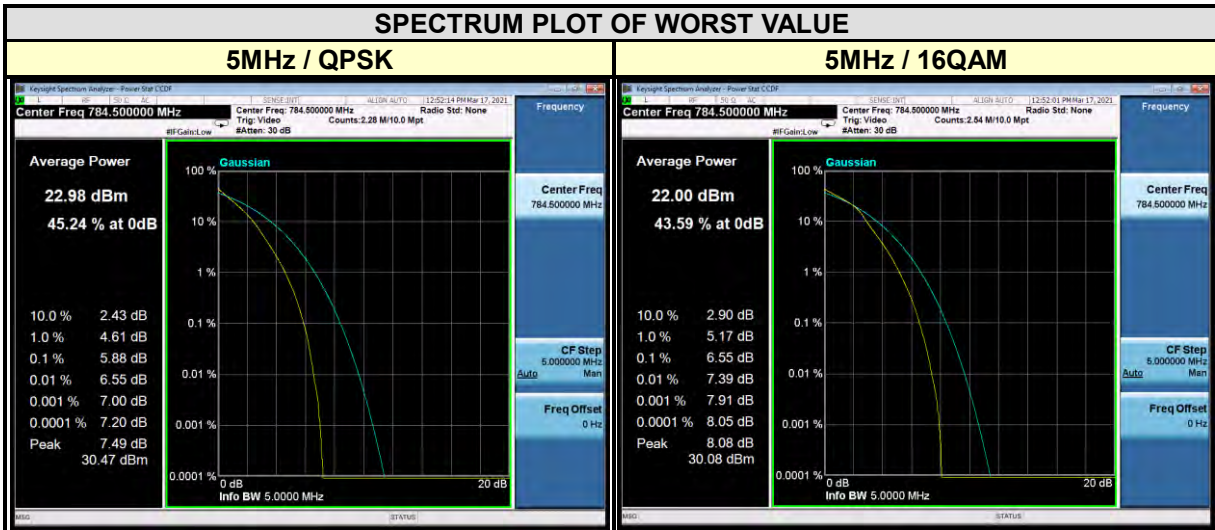

CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
-	-	-	-
23230	782	5.73	6.48
-	-	-	-

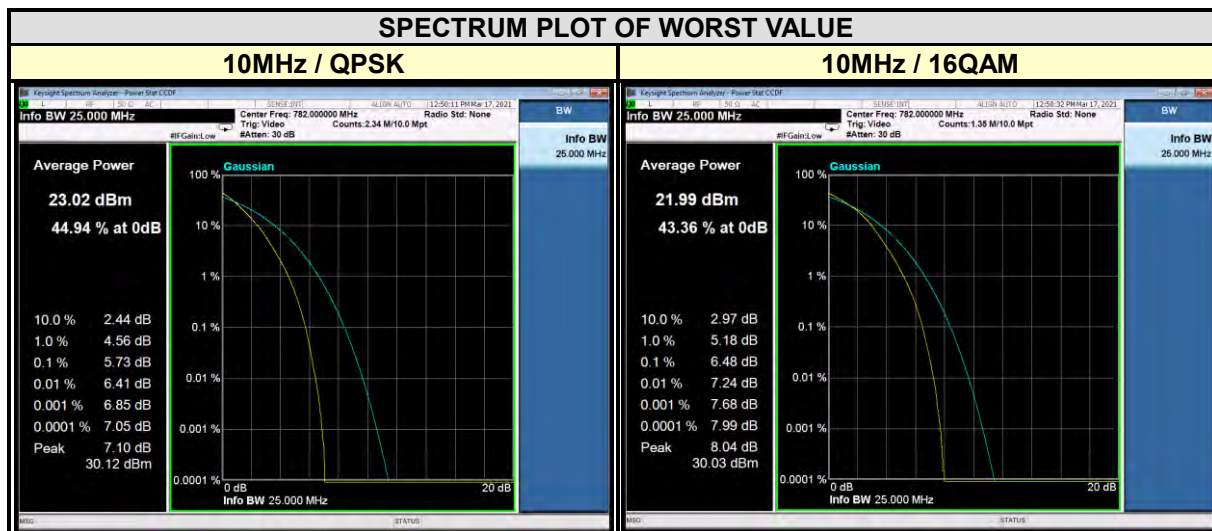




**BUREAU
VERITAS**


Test Report No.: RFA210222W001-3

LTE BAND 14

CHANNEL BANDWIDTH: 5MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
23305	790.5	5.70	6.44
23330	793	5.79	6.47
23355	795.5	5.72	6.40

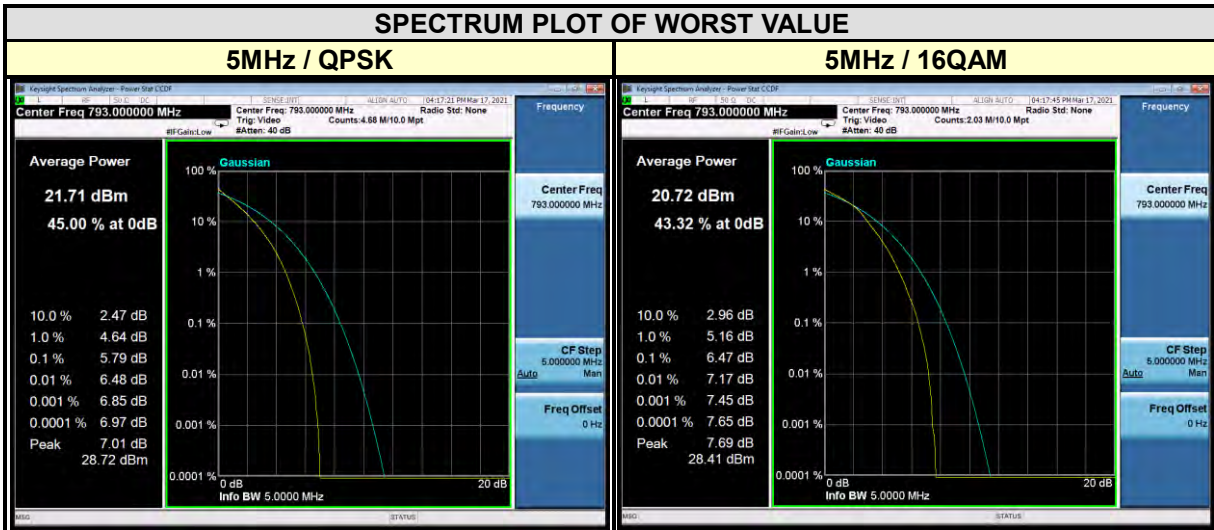

CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
-	-	-	-
23330	793	5.63	6.38
-	-	-	-

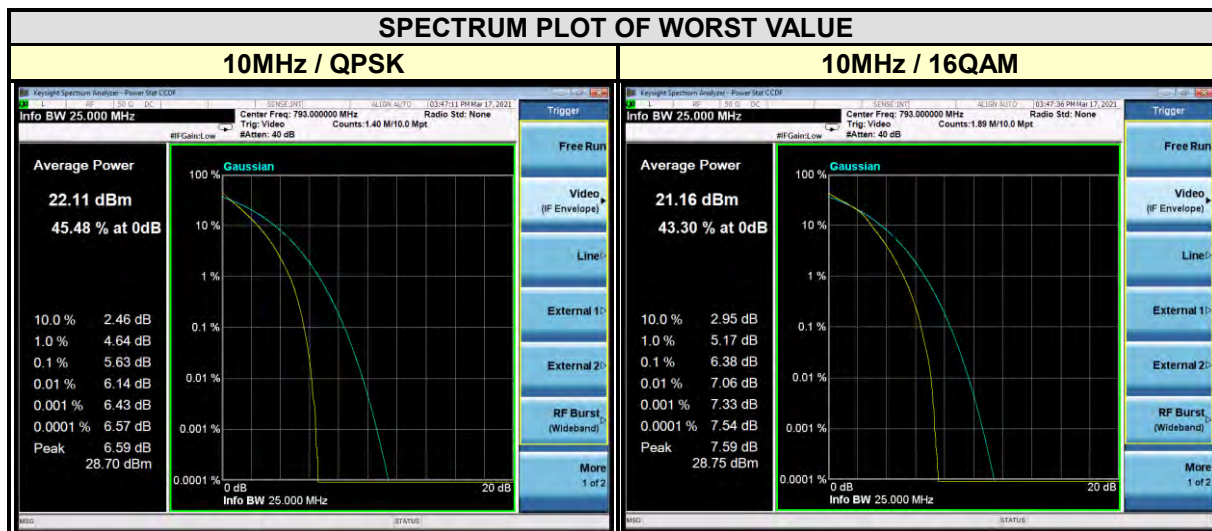




**BUREAU
VERITAS**


Test Report No.: RFA210222W001-3

LTE BAND 17

CHANNEL BANDWIDTH: 5MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
23755	706.5	5.69	6.30
23790	710	5.64	6.26
23825	713.5	5.68	6.33

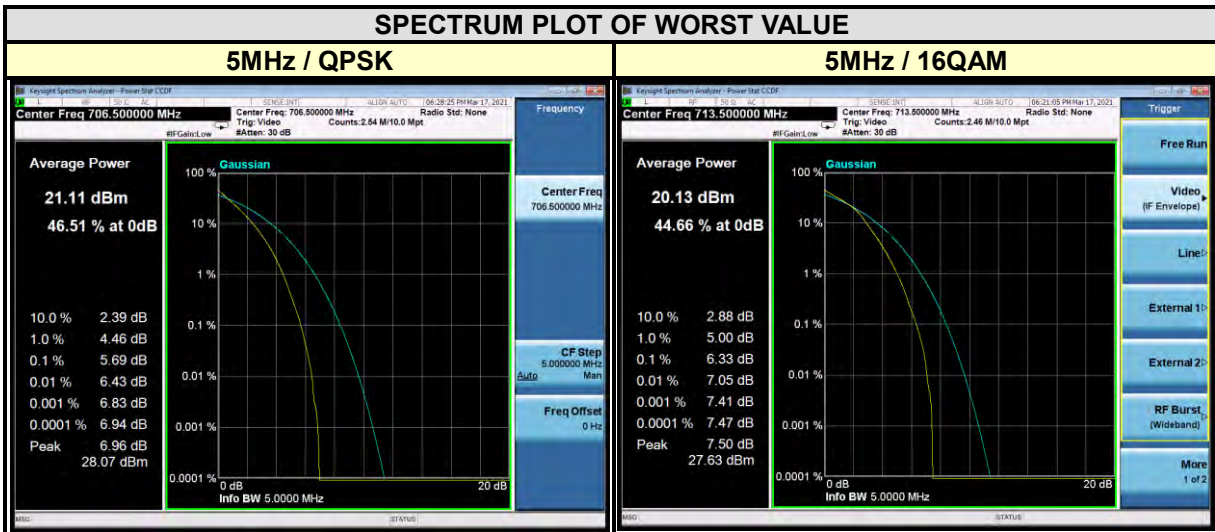


CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
23780	709	5.55	6.20
23790	710	5.54	6.15
23800	711	5.51	6.17

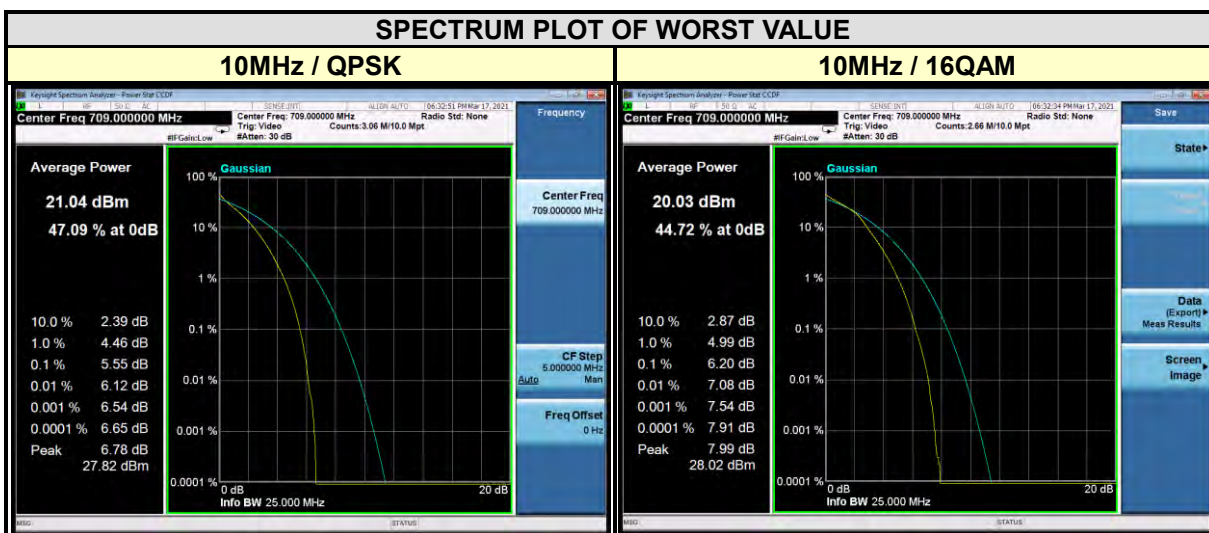


LTE BAND 30

CHANNEL BANDWIDTH: 5MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
27685	2307.5	5.53	6.20
27710	2310	5.47	6.19
27735	2312.5	5.51	6.13

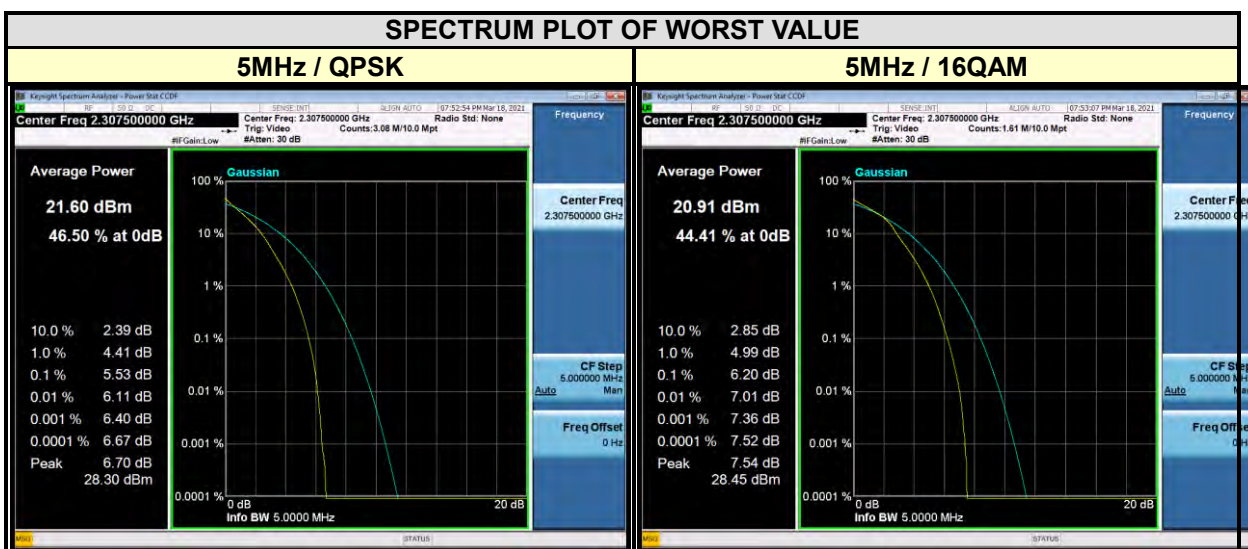


CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
-	-	-	-
27710	2310	5.26	6.08
-	-	-	-

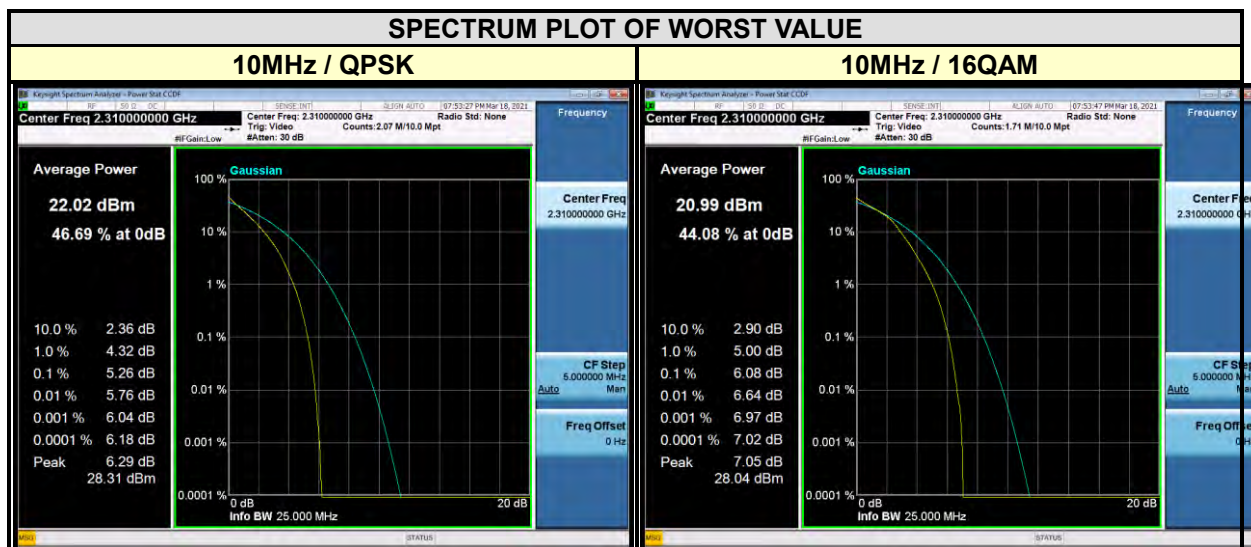


LTE BAND 66


CHANNEL BANDWIDTH: 1.4MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
131979	1710.7	5.20	6.05
132322	1745	5.42	6.19
132665	1779.3	5.09	5.87

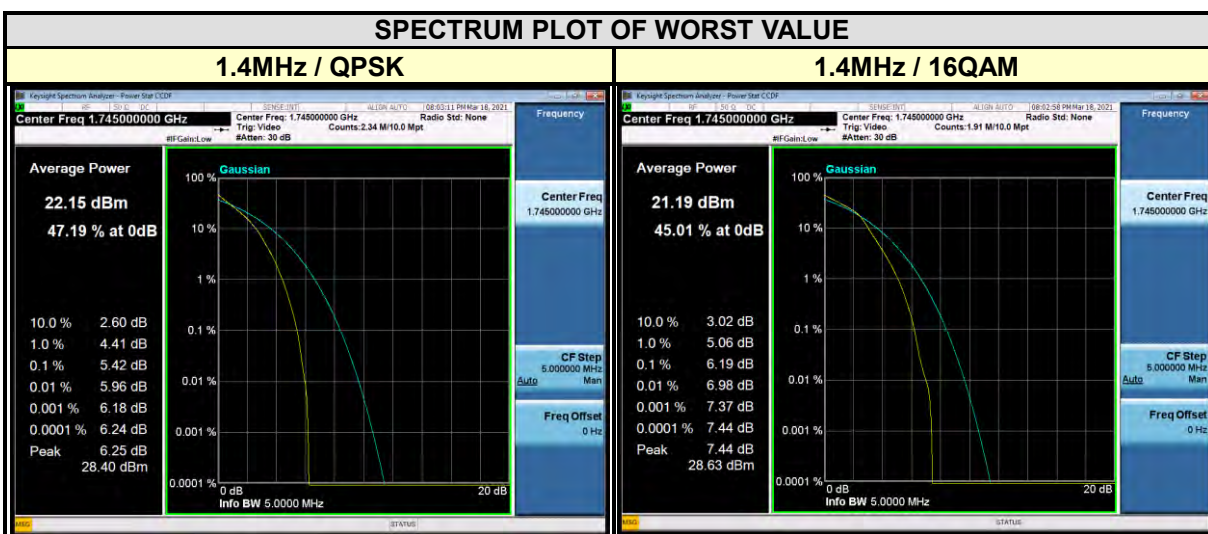


CHANNEL BANDWIDTH: 3MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
131987	1711.5	5.33	6.17
132322	1745	5.45	6.29
132657	1778.5	5.21	6.05

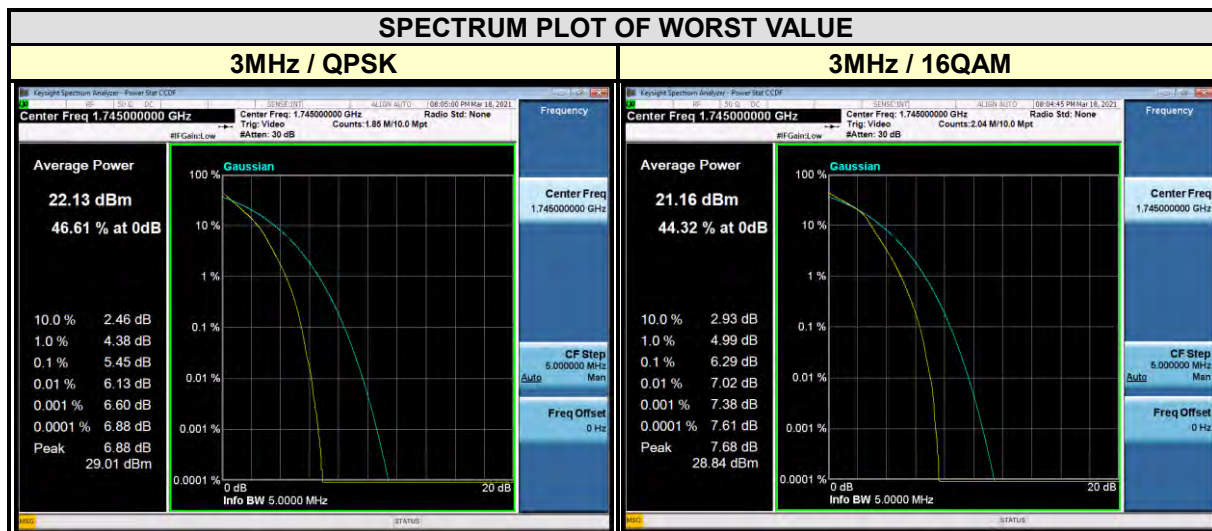


CHANNEL BANDWIDTH: 5MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
131997	1712.5	5.55	6.24
132322	1745	5.54	6.29
132647	1777.5	5.52	6.15

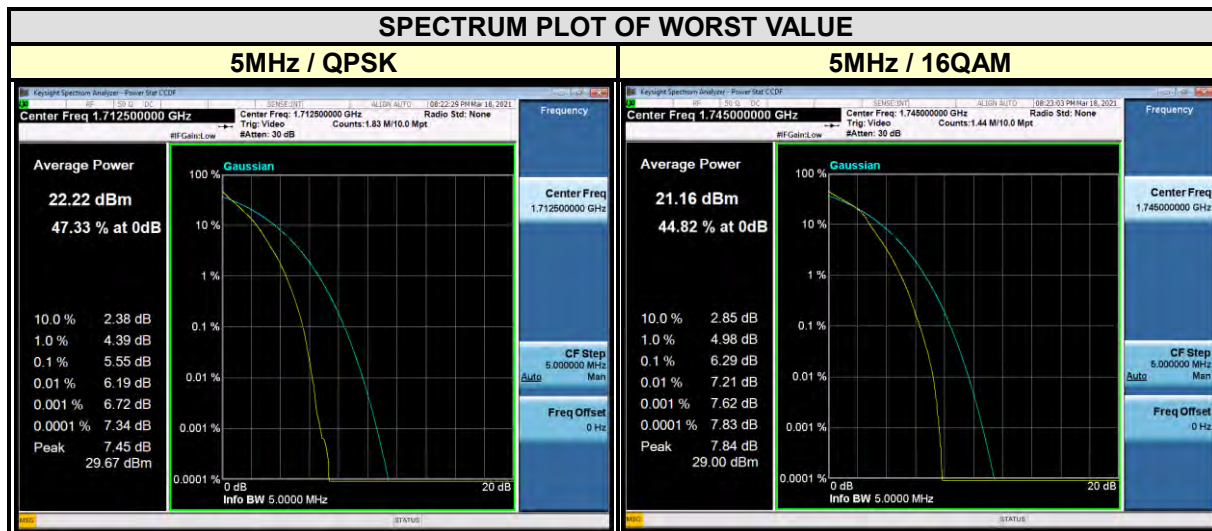


CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
132022	1715	5.44	6.21
132322	1745	5.46	6.24
132622	1775	5.34	6.14

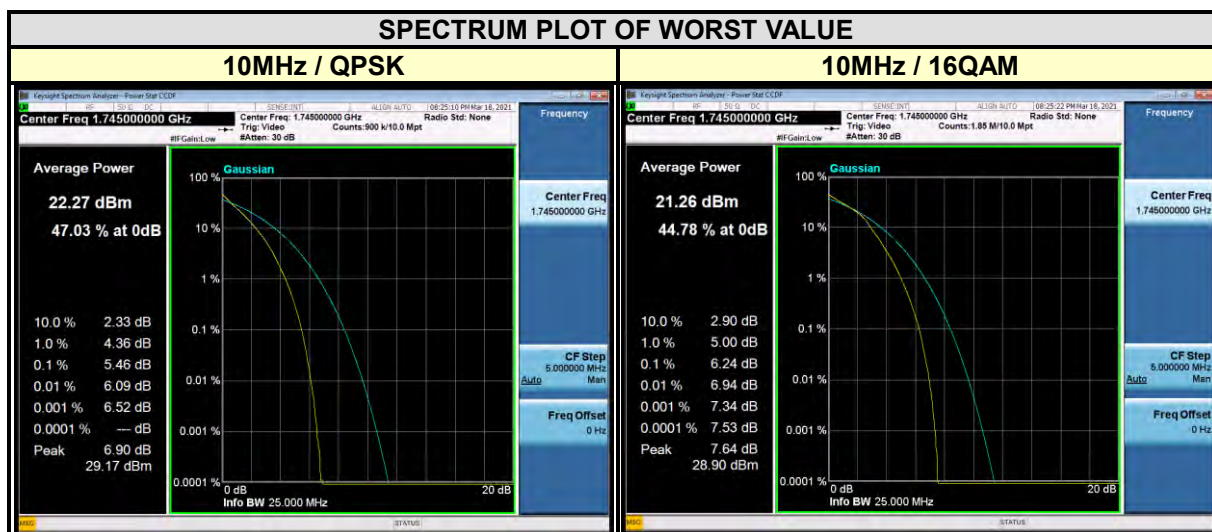

CHANNEL BANDWIDTH: 15MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
132047	1717.5	5.76	6.35
132322	1745	5.80	6.32
132597	1772.5	5.74	6.20

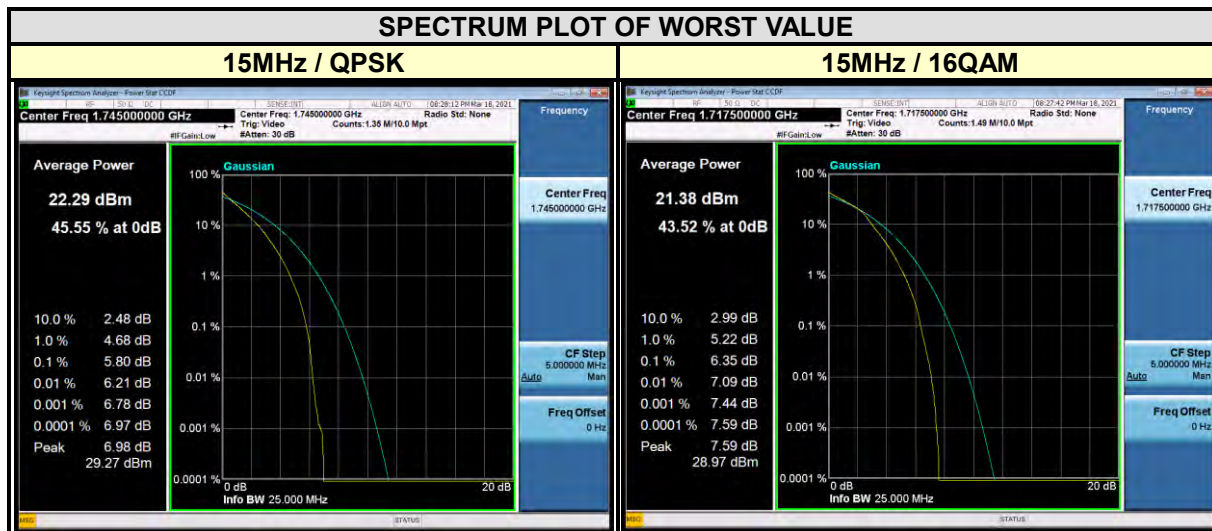

CHANNEL BANDWIDTH: 20MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
132072	1720	5.56	6.32
132322	1745	5.63	6.32
132572	1770	5.45	6.19

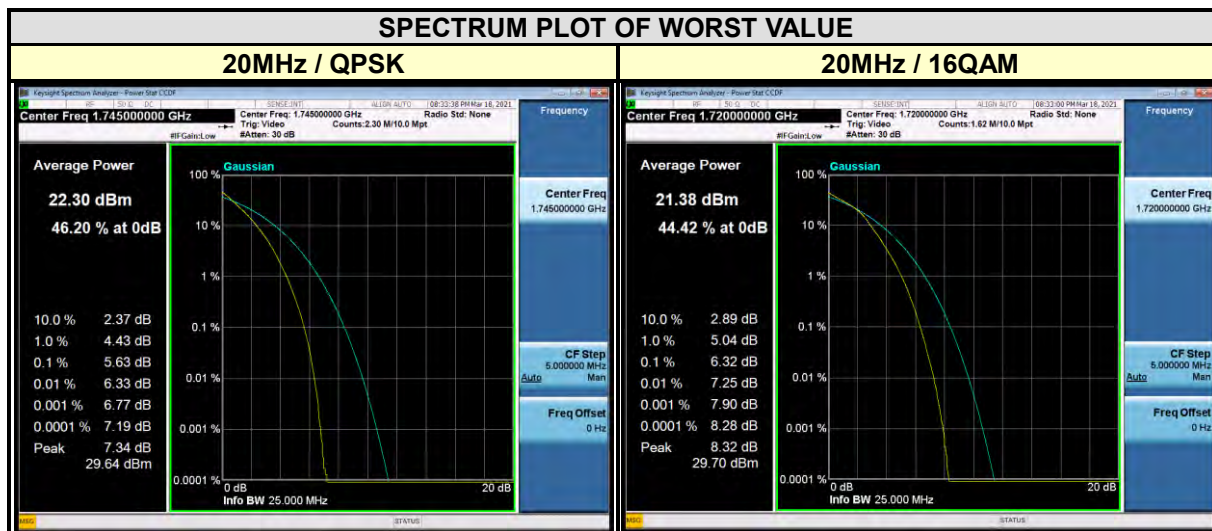




**BUREAU
VERITAS**


Test Report No.: RFA210222W001-3

LTE BAND 71


CHANNEL BANDWIDTH: 5MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
133147	665.5	5.46	6.18
133247	675.5	5.63	6.35
133447	695.5	5.53	6.22

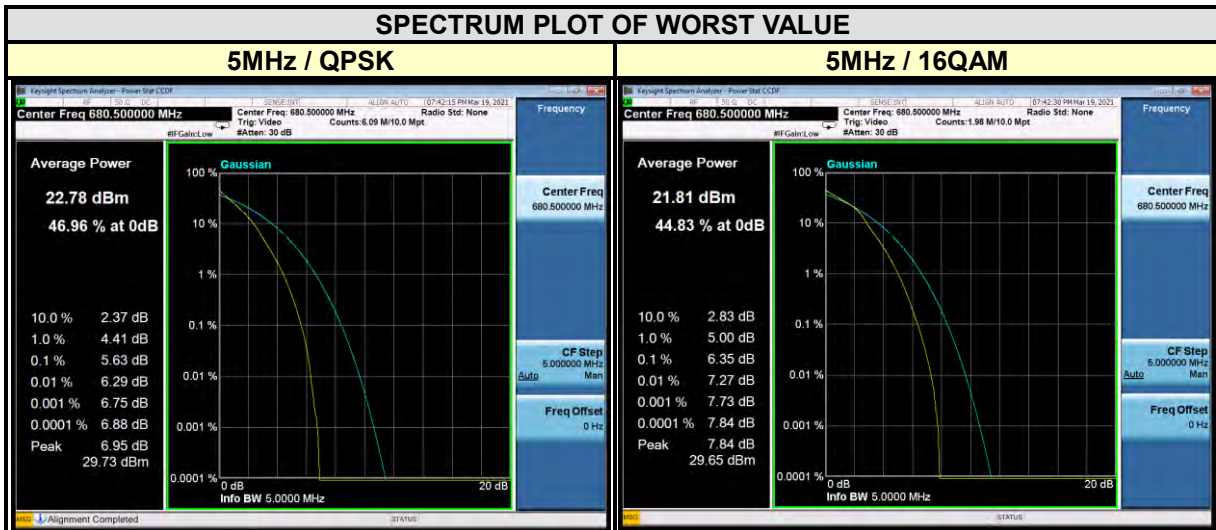


CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
133172	668	5.36	6.18
133272	678	5.53	6.33
133422	693	5.46	6.20

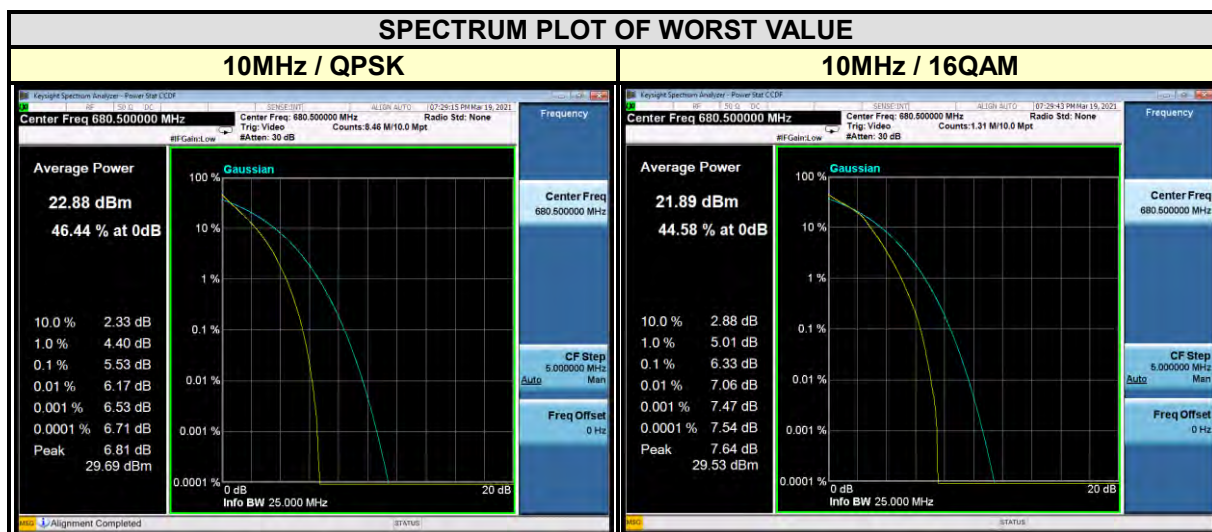

CHANNEL BANDWIDTH: 15MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
133197	670.5	5.69	6.32
133297	680.5	5.87	6.37
133397	690.5	5.78	6.32

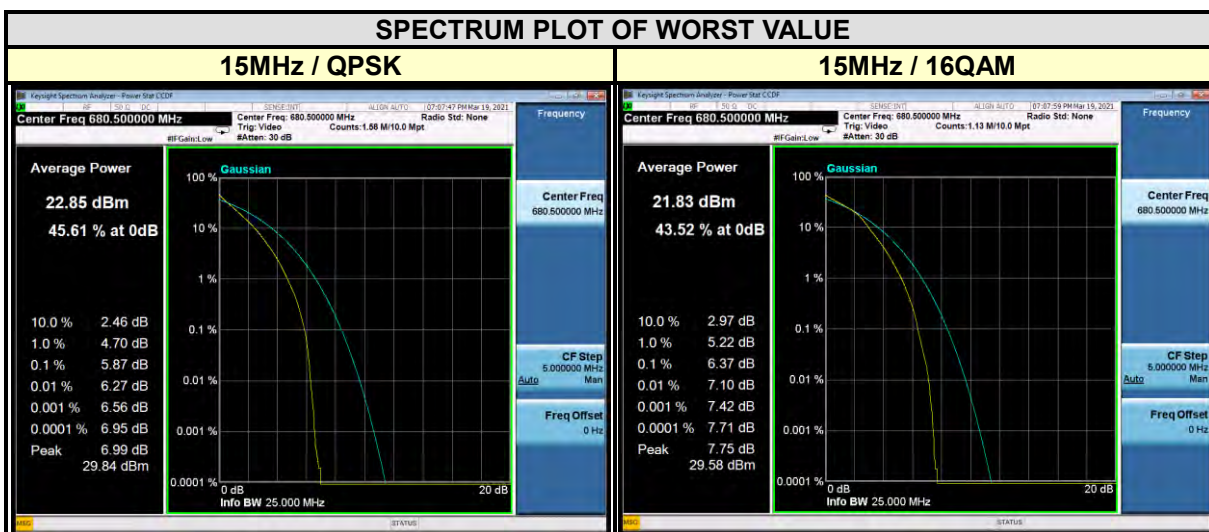

CHANNEL BANDWIDTH: 20MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
133222	673	5.56	6.31
133322	683	5.67	6.34
133372	688	5.57	6.34

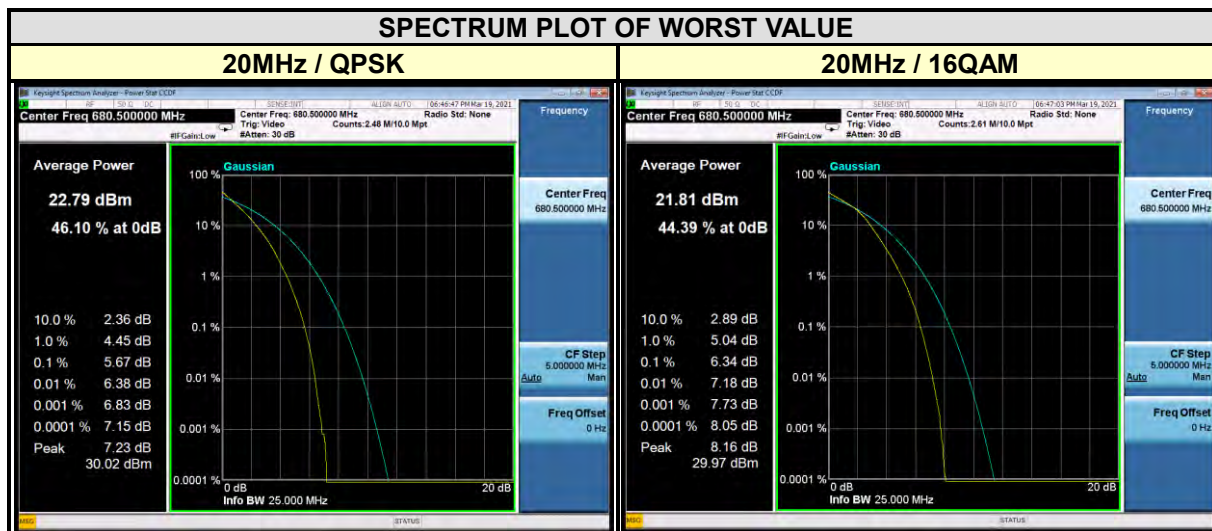



Test Report No.: RFA210222W001-3

4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: RFA210222W001-3

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---