



Test Report

Product Name : Wireless Keyboard
Model No. : IM230,AM530,x530,AM330,x330
FCC ID. : O62IM230

Applicant : Darfon Electronics Corp.
Address : 6, Feng-Shu Tsuen, Gueishan, Taoyuan 333,
Taiwan, R.O.C.

Date of Receipt : Mar. 20, 2006
Issued Date : April 13, 2006
Report No. : 063L124-RF-US-P03V01

The Test Results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Test Date : April 13, 2006

Report No.: 063L124-RF-US-P03V01



Accredited by NIST (NVLAP)

NVLAP Lab Code: 200533-0

Product Name : Wireless Keyboard

Applicant : Darfon Electronics Corp.

Address : 6, Feng-Shu Tsuen, Gueishan, Taoyuan 333, Taiwan, R.O.C.

Manufacturer : Darfon Electronics (Suzhou) Co., Ltd.

Model No. : IM230,AM530,x530,AM330,x330

FCC ID. : O62IM230

Rated Voltage : AC 120V / 60 Hz

Working Voltage : Battery 1.5V*2

Trade Name : BenQ

Measurement Standard : FCC CFR Title 47 Part 15 Subpart C: 2005

Measurement Procedure : ANSI C63.4: 2003


Test Result : Complied

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By :



(L e v e n H u a n g)



NVLAP Lab Code: 200533-0

Tested By :



(T i m S u n g)

Approved By :



(G e n e C h a n g)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description.....	4
1.2. Operation Description	5
1.3. Test System Details	6
1.4. Configuration of Test System.....	6
1.5. EUT Exercise Software	6
1.6. Test Facility	7
2. Conducted Emission.....	8
2.1. Test Equipment.....	8
2.2. Test Setup	8
2.3. Limits	8
2.4. Test Procedure	9
2.5. Uncertainty	9
2.6. Test Data of Conducted Emission	10
3. Radiated Emission.....	11
3.1. Test Equipment.....	11
3.2. Test Setup	11
3.3. Limits	12
3.4. Test Procedure	13
3.5. Uncertainty	13
3.6. Test Data of Radiated Emission	14
4. Band Edge	17
4.1. Test Equipment.....	17
4.2. Test Setup	17
4.3. Limit	18
4.4. Test Procedure	18
4.5. Uncertainty	18
4.6. Test Result of Band Edge	19
5. Occupied Bandwidth.....	20
5.1. Test Equipment.....	20
5.2. Test Setup	20
5.3. Uncertainty	20
5.4. Test Result of Occupied Bandwidth	21
6. EMI Reduction Method During Compliance Testing	22
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name : Wireless Keyboard
 Trade Name : BenQ
 FCC ID. : O62IM230
 Model No. : IM230,AM530,x530,AM330,x330
 Working Voltage : Battery 1.5V*2
 Frequency Range : 27.145MHz
 Type of Modulation : FSK
 Type of antenna : Loop Antenna
 Number of Channel : 1
 Channel Control : N/A

Frequency of Each Channel:

Channel	Frequency
1	27.145 MHz

Note:

1. The EUT is a Wireless Keyboard.
2. IM230、AM530 and AM330 with the same PC board and the different appearance among each mode. AM530 and x530 with the same appearance . AM330 and x330 with the same appearance.
3. The worst case IM230 is shown on the report.
4. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC CFR Title 47 Part 15 Subpart C: 2005 Paragraph 15.227.

Pre-Test Mode	
EMI	Mode 1: Transmitter
Final Test Mode	
EMI	Mode 1: Transmitter

1.2. Operation Description

The EUT is a Wireless Keyboard used in household and office PC system.

The device adapts FSK modulation. The loop antenna provides diversity function to improve the transmitting function.

The super generation type receiver was used. An external excitation was used when the test of receiver was performed.

1.3. Test System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
(1)	Notebook PC	DELL	PPT	N/A	DoC	Non-Shielded, 0.8m

	Signal Cable Type	Signal cable Description
A.	USB Cable	Non-Shielded, 1.2m

1.4. Configuration of Test System



1.5. EUT Exercise Software

- (1) Setup the EUT(TX) as shown in section 1.4.
- (2) Install the batteries.
- (3) Press and hold a key.
- (4) Check that the EUT works correctly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: June 22, 2001 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2



July 03, 2001 Accreditation on NVLAP
NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation

Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,
Lin-Kou Shiang, Taipei,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com



2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/838251/001	May, 2005	
2	L.I.S.N.	R & S	ESH3-Z5/836679/0023	May, 2005	EUT
3	L.I.S.N.	R & S	ENV 4200/833209/0023	May, 2005	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	May, 2005	
6	No.1 Shielded Room				

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2. Test Setup

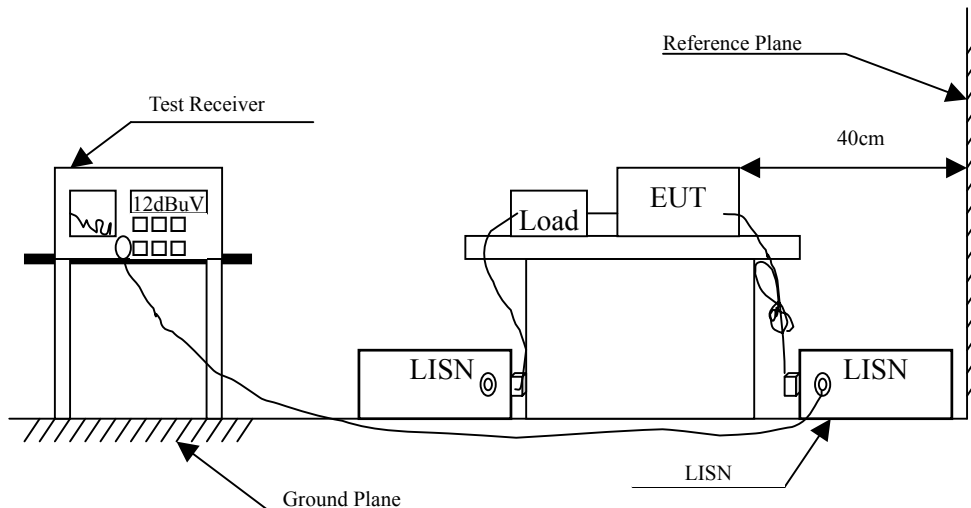

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

The measurement uncertainty is evaluated as ± 2.26 dB

2.6. Test Data of Conducted Emission

The EUT is powered by batteries. This test item is not performed

3. Radiated Emission


3.1. Test Equipment

The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☐ Site # 1	Test Receiver	R & S	ESVS 10 / 834468/003	July, 2005
	Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2005
	Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2005
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Nov., 2005
☐ Site # 2	Test Receiver	R & S	ESCS 30 / 836858 / 022	Nov., 2005
	Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2005
	Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2005
	Bilog Antenna	SCHAFFNER	CBL6112B / 2705	Oct., 2005
☒ Site # 3	Test Receiver	R & S	ESI 26 / 838786 / 004	May, 2005
	Spectrum Analyzer	Advantest	R3162 / 100803480	May, 2005
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2005
	Horn Antenna	ETS	3115 / 0005-6160	July, 2005
	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2005
	Broadband Antenna	Schwarzbeck	VULB9166/1085	April, 2005
	Loop Antenna	R&S	HFH2-Z2/833799/004	July, 2005

- Note:
1. All equipments that need to calibrate are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

3.2. Test Setup

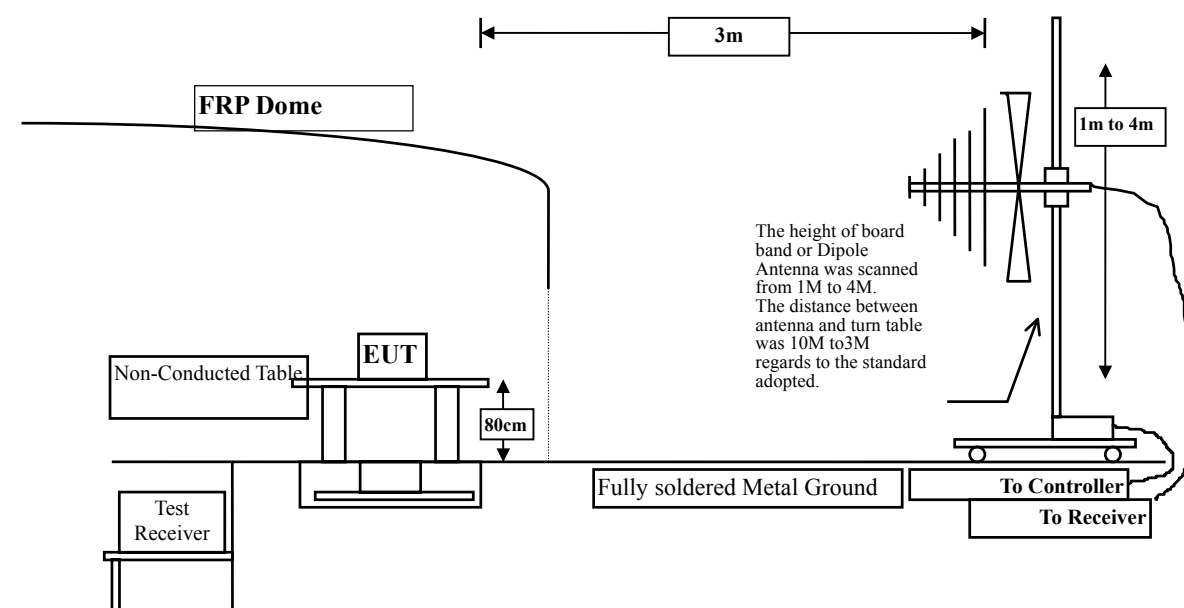

3.3. Limits

➤ FCC Part 15 Subpart C Paragraph 15.227 Limit

FCC Part 15 Subpart C Paragraph 15.227 Limits		
Fundamental Frequency MHz	Field strength of fundamental	
	uV/m	dBuV/m
26.96-27.28	10000	80.0

Remarks :

1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

➤ Frequencies in restricted band are complied to limits on Paragraph 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120kHz. Radiated was performed at an antenna to EUT distance of 3 meters.

The frequency range from 30MHz to 10th harmonics is checked.

3.5. Uncertainty

The measurement uncertainty is defined as ± 3.19 dB

3.6. Test Data of Radiated Emission

Product : Wireless Keyboard
 Test Item : Fundamental Radiated Emission
 Test Site : No.3 OATS
 Test Voltage : DC 3V
 Test Mode : Mode 1: Transmitter

Polarity	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)
Peak Detector							
X	27.145	-18.760	71.614	52.854	-47.146	100.000	80.000
Y	27.145	-18.760	73.354	54.594	-45.406	100.000	80.000
Z	27.145	-18.760	72.974	54.214	-45.786	100.000	80.000

Product : Wireless Keyboard
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Voltage : DC 3V
 Test Mode : Mode 1: Transmitter

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
304.025	13.965	9.172	23.136	-22.864	46.000
350.100	14.731	14.139	28.870	-17.130	46.000
* 471.350	18.757	11.866	30.623	-15.377	46.000
544.100	19.945	8.028	27.973	-18.027	46.000
655.650	20.805	5.016	25.821	-20.179	46.000
798.725	21.908	6.316	28.224	-17.776	46.000

Note:

1. Reading values below 1GHz are quasi-peak and reading values above 1GHz are peak and/or average.
2. “ * ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Wireless Keyboard
Test Item : General Radiated Emission
Test Site : No.3 OATS
Test Voltage : DC 3V
Test Mode : Mode 1: Transmitter

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Vertical					
287.050	13.637	2.763	16.400	-29.600	46.000
500.450	18.354	4.726	23.080	-22.920	46.000
570.780	21.148	-2.608	18.540	-27.460	46.000
595.030	21.868	-0.968	20.900	-25.100	46.000
619.275	21.591	2.549	24.140	-21.860	46.000
*689.600	20.441	3.869	24.310	-21.690	46.000

Note:

1. Reading values below 1GHz are quasi-peak and reading values above 1GHz are peak and/or average.
2. “ * ” means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

4. Band Edge

4.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☐ Site # 1	Test Receiver	R & S	ESVS 10 / 834468/003	July, 2005
	Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2005
	Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2005
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Nov., 2005
☐ Site # 2	Test Receiver	R & S	ESCS 30 / 836858 / 022	Nov., 2005
	Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2005
	Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2005
	Bilog Antenna	SCHAFFNER	CBL6112B / 2705	Oct., 2005
☒ Site # 3	Test Receiver	R & S	ESI 26 / 838786 / 004	May, 2005
	Spectrum Analyzer	HP	E4407B / US39440758	May, 2005
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2005
	Broadband Antenna	Schwarzbeck	VULB9166/1085	April, 2005
	Horn Antenna	ETS	3115 / 0005-6160	July, 2005
	Loop Antenna	R&S	HFH2-Z2/833799/004	July, 2005
	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2005

- Note:
1. All equipments that need to calibrate are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

4.2. Test Setup

RF Radiated Measurement:

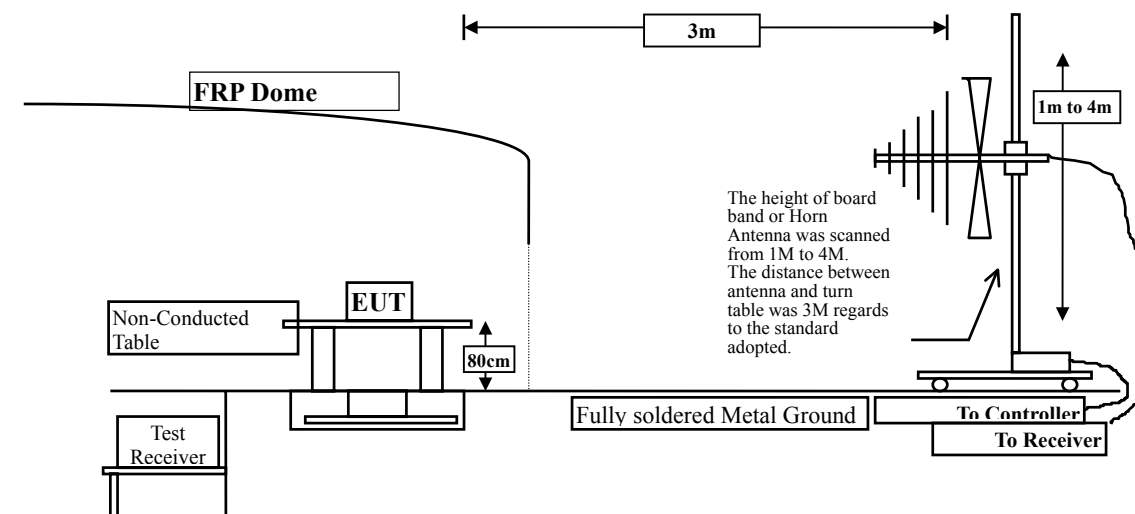

4.3. Limit

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 30MHz setting on the field strength meter is 10 kHz

4.5. Uncertainty


The measurement uncertainty is evaluated as 3.19dB.

4.6. Test Result of Band Edge

Product : Wireless Keyboard
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

RF Radiated Measurement: (Q-Peak Detector)

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
25.640	-17.546	28.666	11.120	11.120	0.000

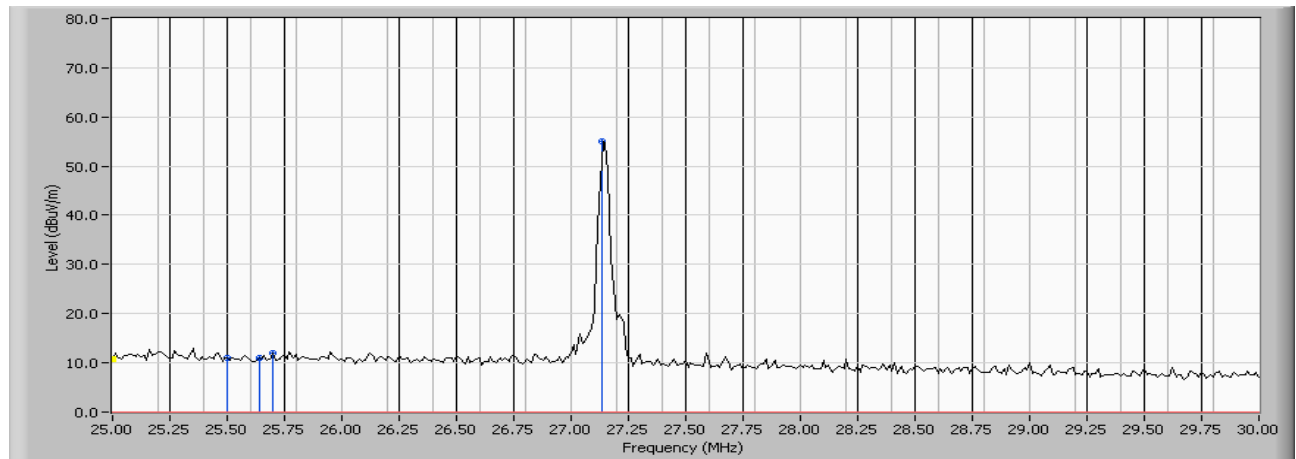

5. Occupied Bandwidth


5.1. Test Equipment

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Test Receiver	R & S	ESI 26 / 838786 / 004	May, 2005

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

5.2. Test Setup

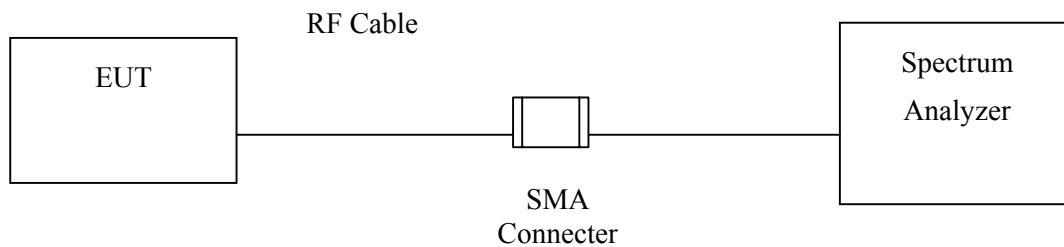


5.3. Uncertainty

The measurement uncertainty is evaluated as 500Hz.

5.4. Test Result of Occupied Bandwidth

Product : Wireless Keyboard
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 Shielded Room
 Test Mode : Channel 1

Channel No.	Frequency (MHz)	Measurement Level (kHz)
1	27.145	9.62

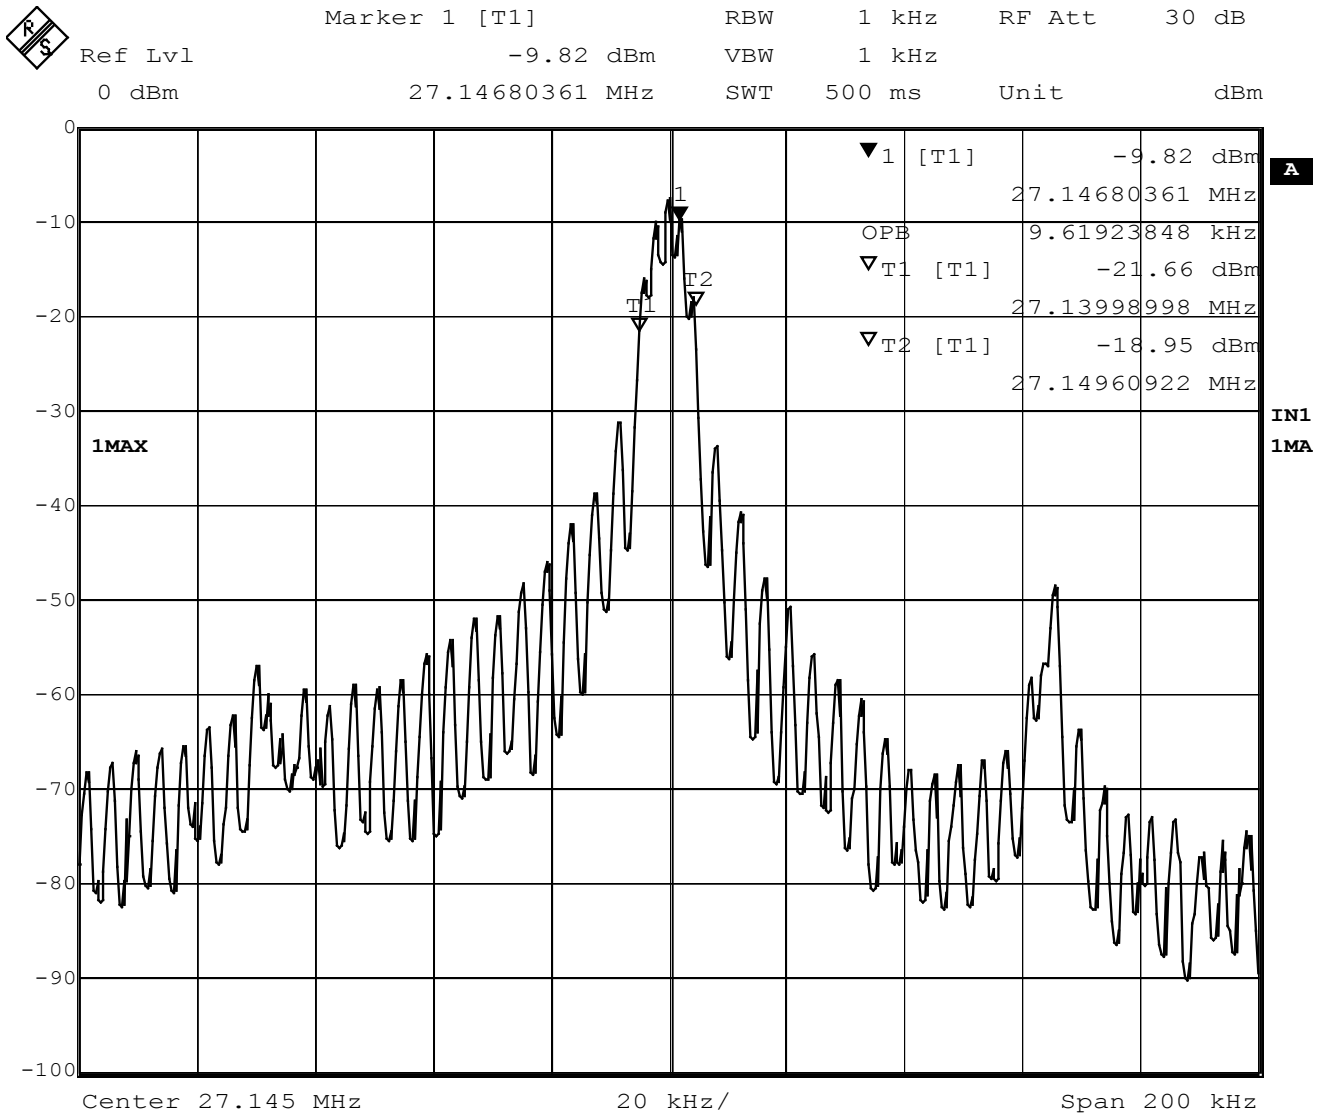

Date: 7.APR.2006 15:59:49

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 1: EUT Test Setup Photographs

Front View of Radiated Test



Back View of Radiated Test



Front View of Radiated Test



Back View of Radiated Test



Attachment 2: EUT Detailed Photographs

Attachment 2 : EUT Detailed Photographs

(1) EUT Photo-M/N:IM230



(2) EUT Photo



(3) EUT Photo



(4) EUT Photo




(5) EUT Photo



(6) EUT Photo



(7) EUT Photo

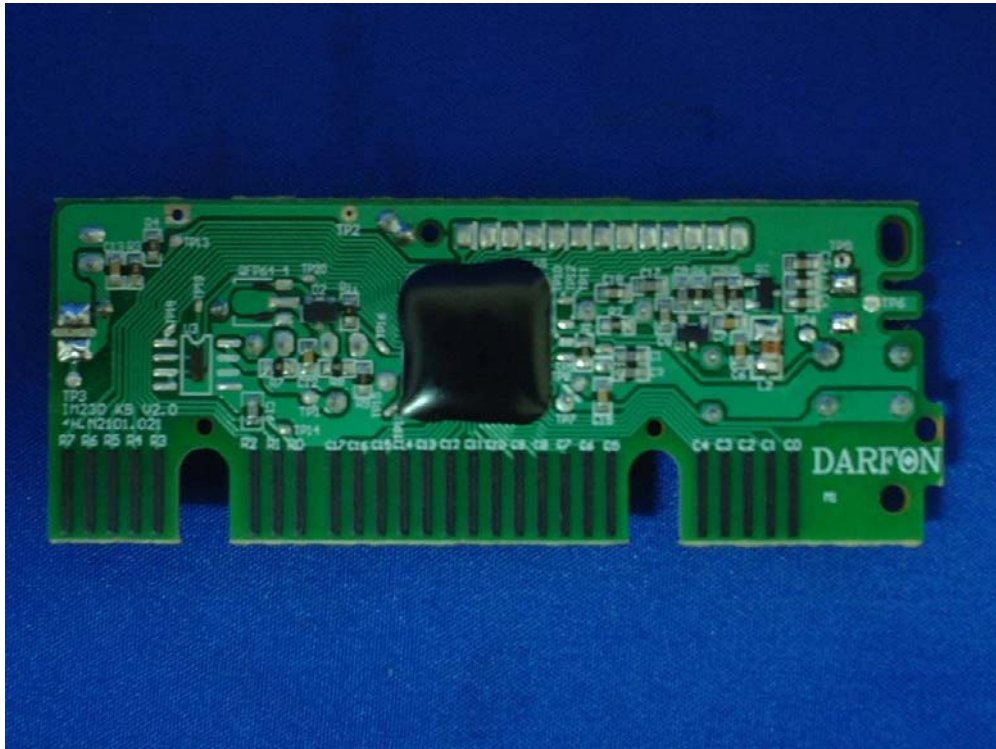

(8) EUT Photo



(9) EUT Photo



(10) EUT Photo-M/N:AM530



(11) EUT Photo



(12) EUT Photo-M/N:AM330



(13) EUT Photo

