

FCC PART 15 Subpart C

EMI MEASUREMENT AND TEST REPORT

For

Lionda Technology Company Limited

Block 2 Laodong 2nd Industrial Area, Xixian, Baoan,
Shenzhen, Guangdong, China 518102

FCC ID: O63GH9762DLD02

November 21, 2002

This Report Concerns: ☒ Original Report	Equipment Type: 2.4GHz Digital Cordless Telephone System - Household Appliances
Test Engineer: Benjamin Jin	
Report Number: R0211061	
Test Date: November 12, 2002	
Reviewed By: Jeff Lee	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is specially limited to the above client company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

1 - GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 OBJECTIVE	4
1.3 RELATED SUBMITTAL(S)/GRANT(S).....	4
1.4 TEST METHODOLOGY	4
1.5 TEST FACILITY	4
1.6 TEST EQUIPMENT LIST	5
1.7 LOCAL SUPPORT EQUIPMENT	5
1.8 POWER SUPPLY AND LINE FILTERS OF EUT	5
1.9 EXTERNAL I/O CABLING LIST AND DETAILS.....	6
2 - SYSTEM TEST CONFIGURATION.....	7
2.1 DESCRIPTION OF TEST CONFIGURATION.....	7
2.2 EQUIPMENT MODIFICATIONS.....	7
2.3 CONFIGURATION OF TEST SYSTEM.....	8
2.4 TEST SETUP BLOCK DIAGRAM	8
3 - SUMMARY OF TEST RESULTS	9
4 - CONDUCTED OUTPUT POWER MEASUREMENT.....	10
4.1 STANDARD APPLICABLE.....	10
4.2 MEASUREMENT PROCEDURE	10
4.3 MEASUREMENT RESULT	10
5 - 6 DB BANDWIDTH.....	11
5.1 STANDARD APPLICABLE.....	11
5.2 MEASUREMENT PROCEDURE	11
5.3 MEASUREMENT DATA	11
6 - SPURIOUS EMISSION	12
6.1 STANDARD APPLICABLE.....	12
6.2 MEASUREMENT PROCEDURE	12
6.3 MEASUREMENT DATA	12
7 - 100 KHZ BANDWIDTH OF BAND EDGES MEASUREMENT.....	13
7.1 STANDARD APPLICABLE.....	13
7.2 MEASUREMENT PROCEDURE	13
7.3 TEST RESULTS.....	13
8 - POWER DENSITY.....	14
8.1 STANDARD APPLICABLE.....	14
8.2 MEASUREMENT PROCEDURE	14
8.3 TEST RESULTS.....	14
9 - ANTENNA REQUIREMENT.....	15
9.1 STANDARD APPLICABLE.....	15
9.2 ANTENNA CONNECTED CONSTRUCTION	15
10 - RF SAFETY REQUIREMENTS TO 2.1091	16
11 - SPURIOUS RADIATED EMISSION DATA.....	18
11.1 MEASUREMENT UNCERTAINTY.....	18
11.2 EUT SETUP	18
11.3 SPECTRUM ANALYZER SETUP	18
11.4 TEST PROCEDURE	19
11.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
11.6 SUMMARY OF TEST RESULTS.....	19
BASE, 30MHZ TO 25000MHZ, 3 METERS	20
12 - CONDUCTED EMISSIONS	26

12.1 MEASUREMENT UNCERTAINTY.....	26
12.2 EUT SETUP	26
12.3 SPECTRUM ANALYZER SETUP	26
12.4 TEST PROCEDURE	27
12.5 SUMMARY OF TEST RESULTS.....	27
12.6 CONDUCTED EMISSIONS TEST DATA	27
12.7 PLOT OF CONDUCTED EMISSIONS TEST DATA.....	27

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Lionda Technology Company Limited's product, FCC ID: O63GH9762DLD02, Model No.: GH9762/GH9763 or the "EUT" as referred to in this report is a 2.4GHz 77-Channel Digital Cordless Telephone with Digital Answering, Speakerphone, CID and Call Waiting on Handset. The EUT was composed of two parts, one is the base which measures approximately 7.2" L x 4.5"W x 3.0" H, and the other is the handset which measures 6.5"L x 2.0" W x 1.55" H.

1.2 Objective

This type approval report is prepared on behalf of *Lionda Technology Company Limited* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules for Output Power, Antenna Requirements, 6 dB Bandwidth, power density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Spurious Radiated Emission, and processing gain.

1.3 Related Submittal(s)/Grant(s)

No Related Submittals.

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 –1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.5 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1998, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

1.6 Test Equipment List

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8568B	2610A02165	12/6/02
HP	Spectrum Analyzer	8593B	2919A00242	12/20/02
HP	Amplifier	8349B	2644A02662	12/20/02
HP	Quasi-Peak Adapter	85650A	917059	12/6/02
HP	Amplifier	8447E	1937A01046	12/6/02
A.H. System	Horn Antenna	SAS0200/571	261	12/27/02
Com-Power	Log Periodic Antenna	AL-100	16005	11/2/03
Com-Power	Biconical Antenna	AB-100	14012	11/2/03
Solar Electronics	LISN	8012-50-R-24-BNC	968447	12/28/02
Com-Power	LISN	LI-200	12208	12/20/02
Com-Power	LISN	LI-200	12005	12/20/02
BACL	Data Entry Software	DES1	0001	12/20/02

*** Statement of Traceability:** Bay Area Compliance Laboratory Corp. certifies that all calibration has been performed using suitable standards traceable to the NATIONAL INSTITUTE of STANDARDS and TECHNOLOGY (NIST).

1.7 Local Support Equipment

Manufacturer	Description	Model	Serial Number	FCC ID
Telton Corp.	Simulator	TLS-3B-01	80071	DOC
Panasonic	Telephone	KX-T3175	6IBTB142741	ACJMLA-75986-MT-E

1.8 Power Supply and Line Filters of EUT

Manufacturer	Description	Model	Serial Number	FCC ID
Bell South	AC/DC Adapter	U090050D	None	None

1.9 External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
Unshielded Telephone Cable	2.0	RJ11 Port/Simulator	EUT
Unshielded Telephone Cable	2.0	RJ11 Port/Simulator	Telephone

2 - SYSTEM TEST CONFIGURATION

2.1 Description of Test Configuration

The EUT was configured for testing in a typical fashion (as normally used by a typical user).


Handset being tested: The Cordless Telephone - Handset, Model GH9762/GH9763 was placed on the wooden table and tested in three orthogonal axis. The Low, middle, and high channels were tested. The handset was transmitting to and receiving from the base unit. The EUT was investigated for emissions while off hook. The radiated data was taken in this mode of operation. All initial and final investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the 2.3.

Base being tested: The Cordless Telephone – Base, Model GH9762/GH9763 was placed on the wooden table. The Low, middle, and high channels were tested. The base was connected to the line simulator and an AC adapter via its Tel Line and power ports, respectively. The base was transmitting and receiving from the handset. The conducted as well as radiated data was taken in this mode of operation. All initial and final investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the 2.3.


2.2 Equipment Modifications

No modification(s) was made by BACL Corp. to ensure the EUT complies with the applicable limits and standards.

2.3 Configuration of Test System

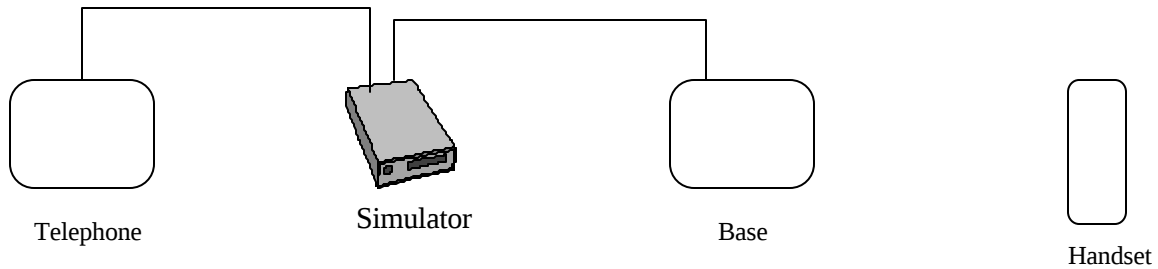

2.4 Test Setup Block Diagram

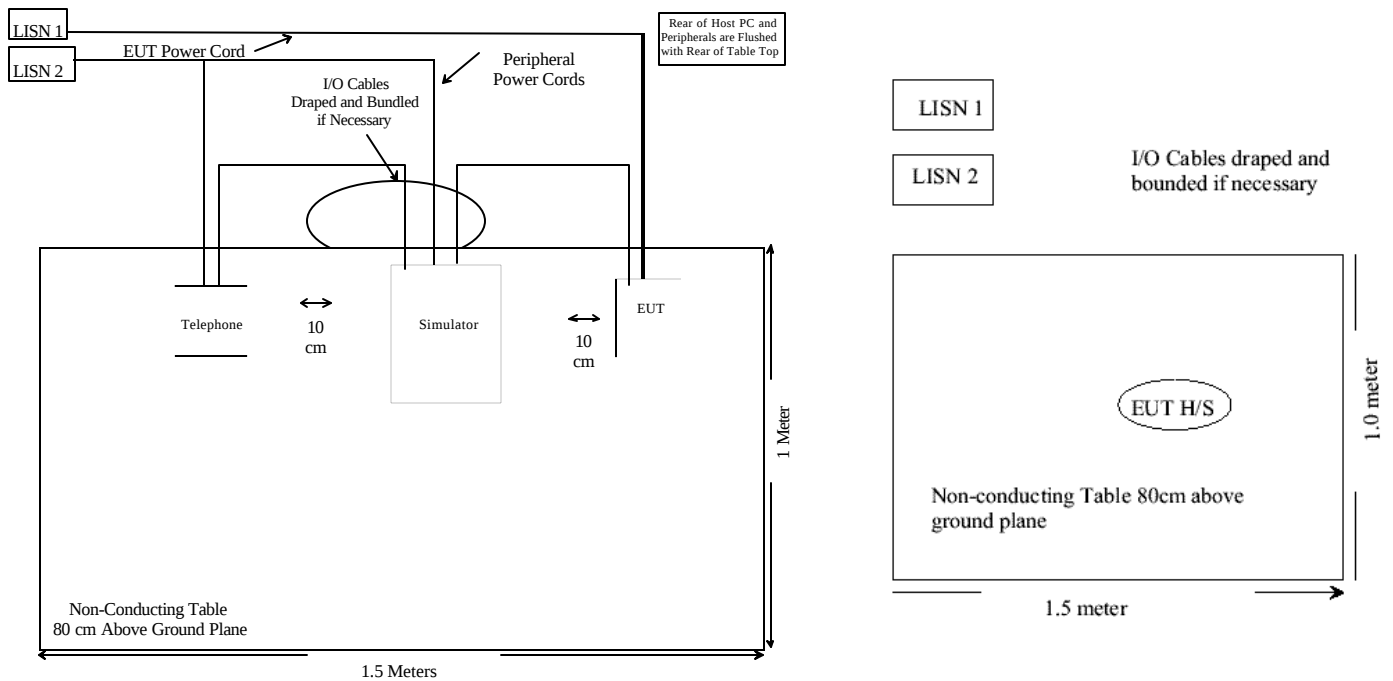

3 - SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT	Section Reference
§ 15.205	Restricted Bands	Compliant	Section 12
§ 2.1091	RF Safety Requirements	Compliant	Section 10
§ 15.203	Antenna Requirement	Compliant	Section 9
§ 15.207 (a)	Conducted Emission	Compliant	Section 12
§ 15.209 (a)	Radiated Emission	Compliant	Section 11
§ 15.209 (f)	Spurious Emission	Compliant	Section 6
§ 15.247 (a) (2)	6 dB Bandwidth	Compliant	Section 5
§ 15.247 (b) (2)	Peak Output Power	Compliant	Section 4
§ 15.247 (b) (4)	RF Exposure	Compliant	Section 10
§ 15.247 (c)	100 kHz Bandwidth of Frequency Band Edges	Compliant	Section 7
§ 15.247 (d)	Peak Power Spectral Density	Compliant	Section 8
§ 15.247 (e)	Processing Gain	Compliant	Section 13

4 - CONDUCTED OUTPUT POWER MEASUREMENT

4.1 Standard Applicable

According to §15.247(b) (2), for all direct sequence systems, the maximum peak output power of the intentional radiator shall not exceed 1 Watt.

4.2 Measurement Procedure

1. Place the EUT on the turntable and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

4.3 Measurement Result

Please refer to the attached pictures for more information.

Unit	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Standard (W)	Result
Base	2402.27	0	1	$\leq 1W$	Compliant
Base	2440.32	1.50	1.413	$\leq 1W$	Compliant
Base	2480.23	-1.67	0.681	$\leq 1W$	Compliant
Handset	2402.30	-3.33	0.465	$\leq 1W$	Compliant
Handset	2440.19	-2.83	0.521	$\leq 1W$	Compliant
Handset	2480.23	-3.83	0.414	$\leq 1W$	Compliant

4.4 Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Due Date
HP	8568B	2610A02165	12/6/02
HP	8593B	2919A0242	12/20/02

ATTEN 30dB

RL 20.0dBm

10dB/

MKR 0dBm

2.40280GHz

LIONDA

GH9762


BASE

LOW CH.

MKR

2.40280 GHz

0 dBm

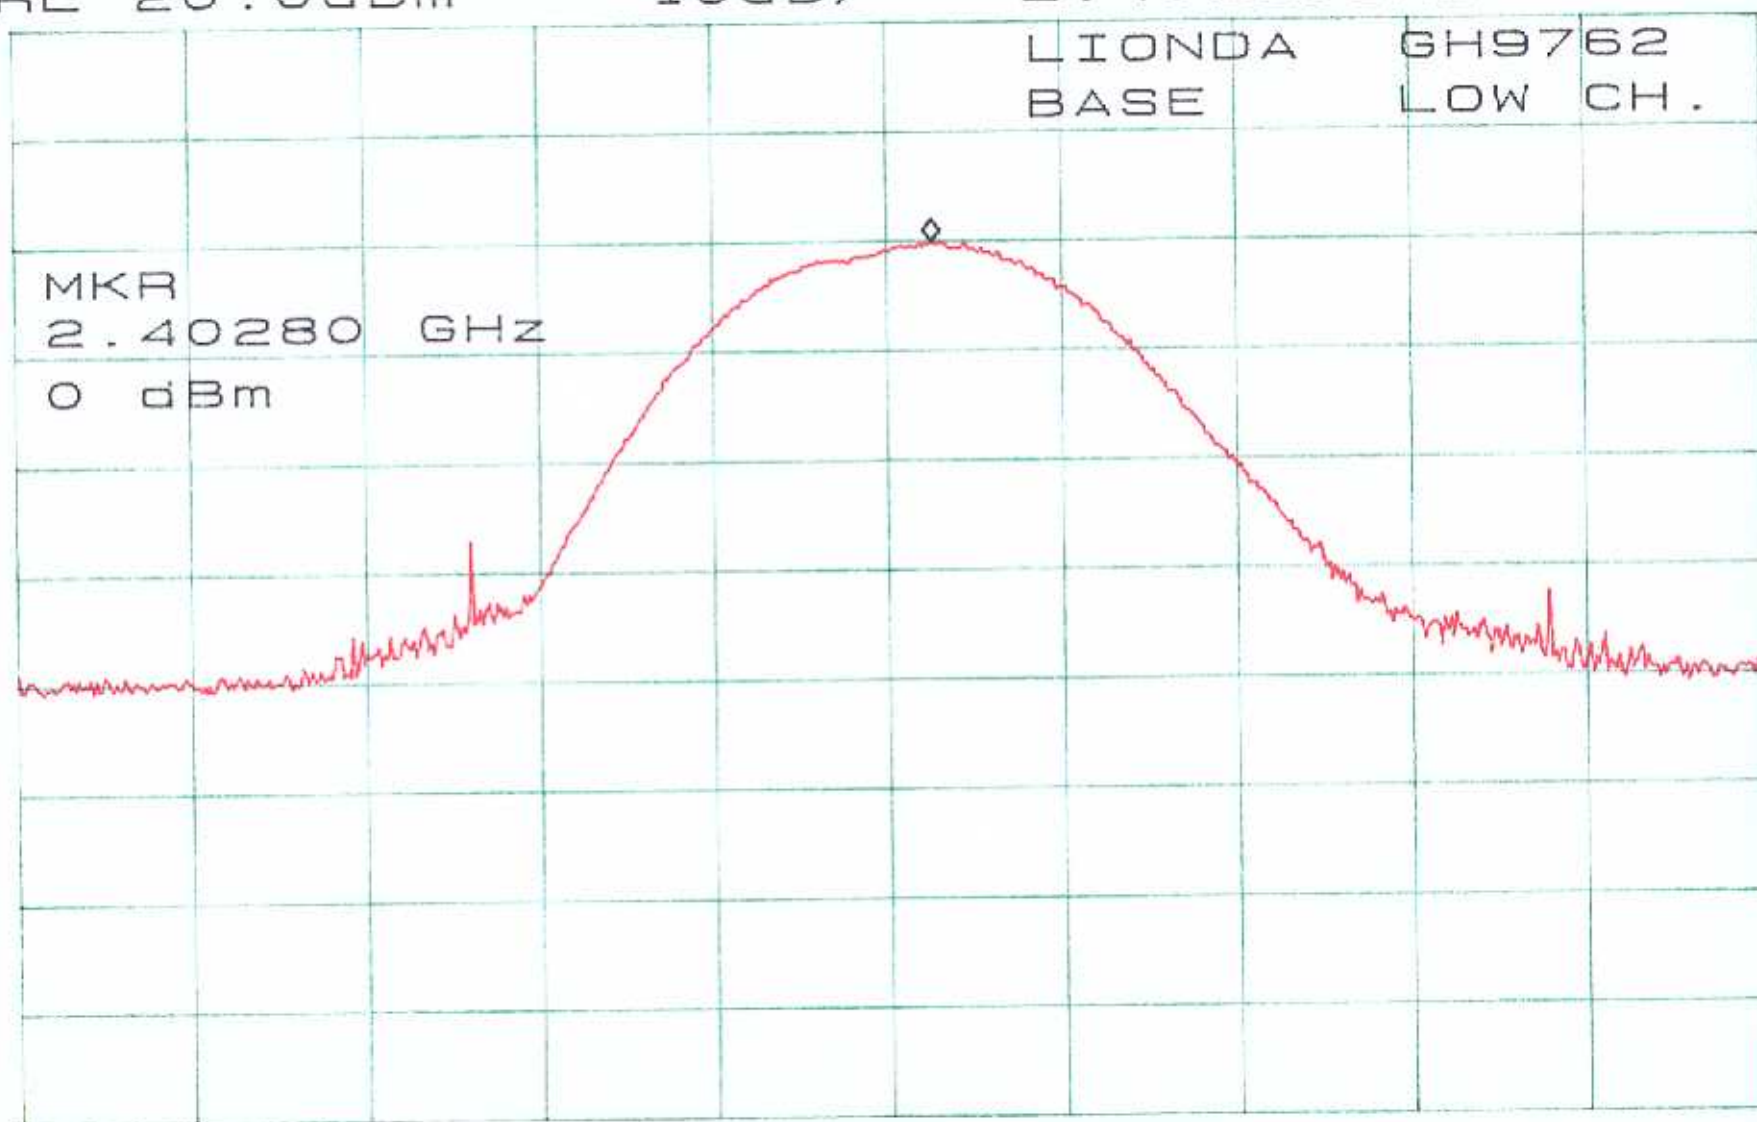

CENTER 2.40230GHz

SPAN 20.00MHz

*RBW 2.0MHz

*VBW 3.0MHz

*SWP 50.0ms

ATTEN 30dB
RL 20.0dBm

10dB/

MKR 1.50dBm

2.44158GHz


LIONDA

GH9762

BASE

MID CH.

MKR
2.44158 GHz
1.50 dBm

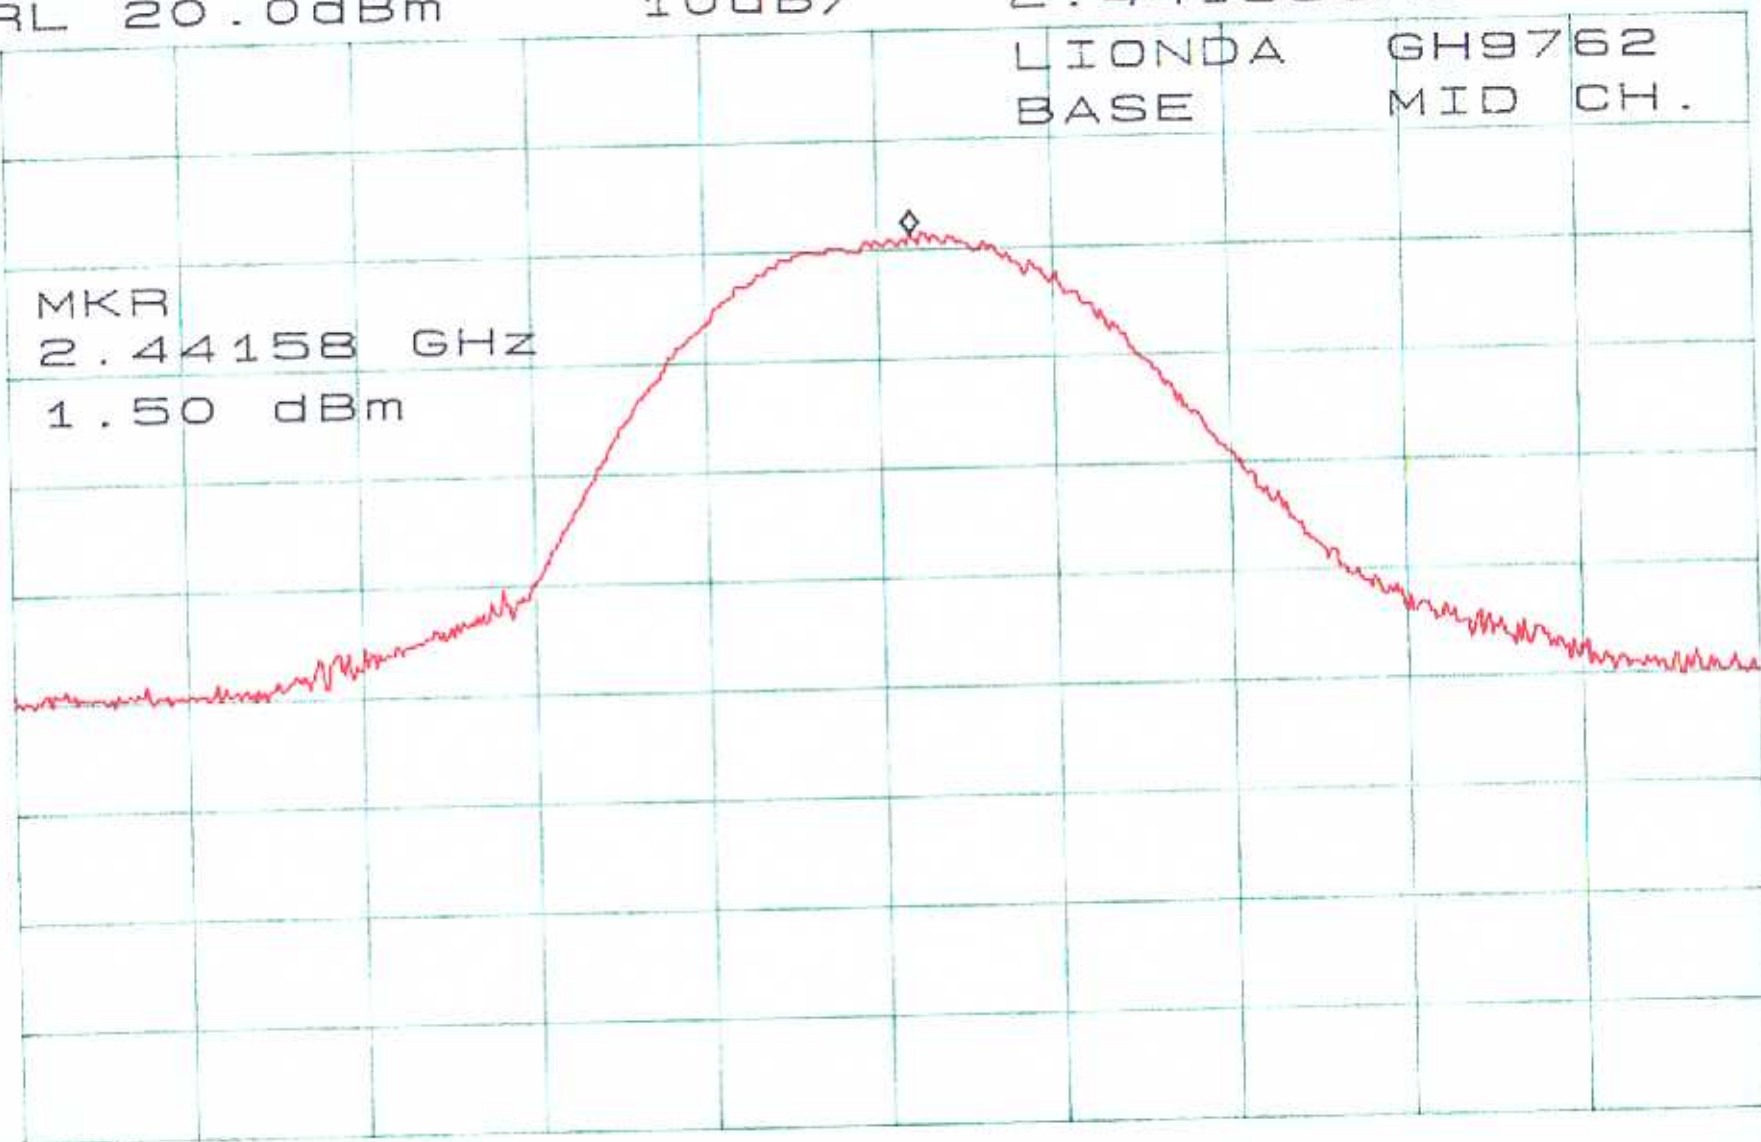

CENTER 2.44122GHz

SPAN 20.00MHz

*RBW 2.0MHz

VBW 3.0MHz

SWP 50.0ms

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -1.67dBm

2.48063GHz

LIONDA

GH9762


BASE

HIGH CH.

MKR

2.48063 GHz

-1.67 dBm

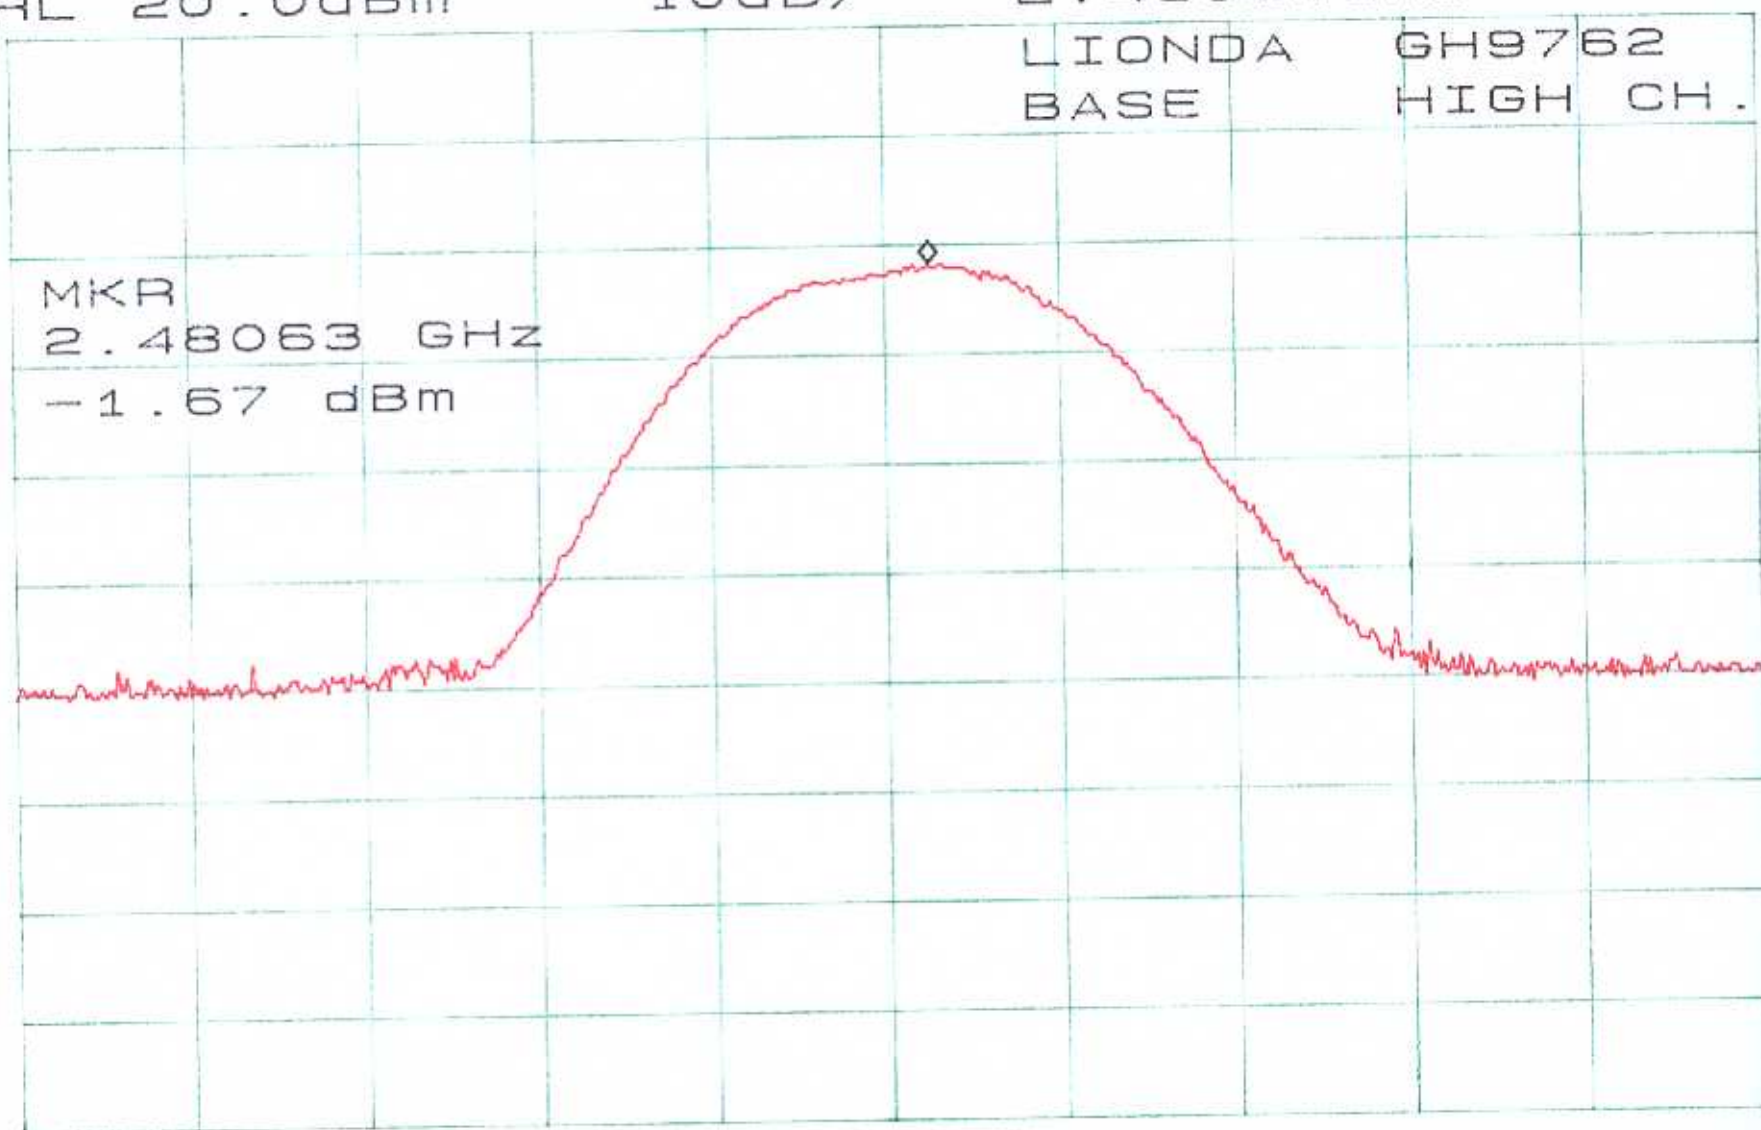

CENTER 2.48013GHz

SPAN 20.00MHz

*RBW 2.0MHz

VBW 3.0MHz

SWP 50.0ms

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -3.33dBm

2.40227GHz

LIONDA

GH9762


H/S

LOW CH.

MKR

2.40227 GHz

-3.33 dBm

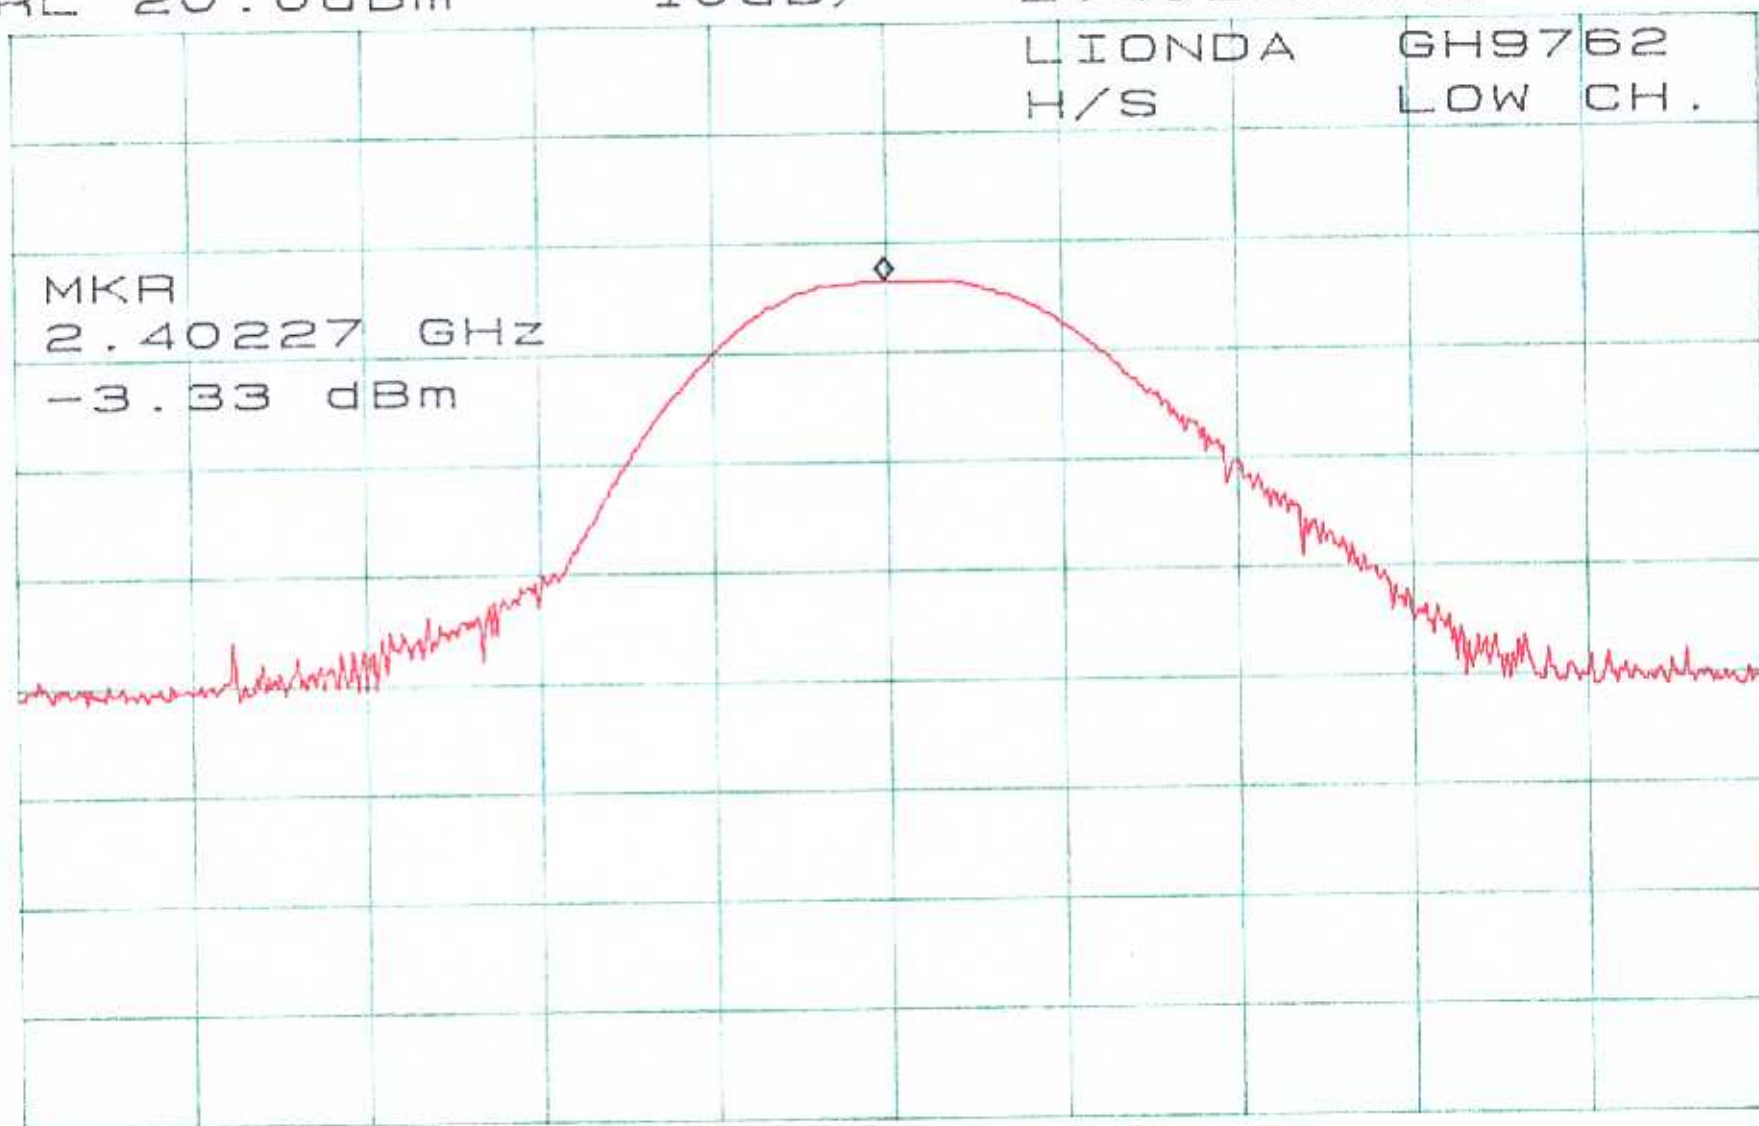

CENTER 2.40230GHz

SPAN 20.00MHz

*RBW 2.0MHz

*VBW 3.0MHz

*SWP 50.0ms

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -2.83dBm

2.44135GHz

LIONDA

GH9762


H/S

MID CH.

MKR

2.44135 GHz

-2.83 dBm

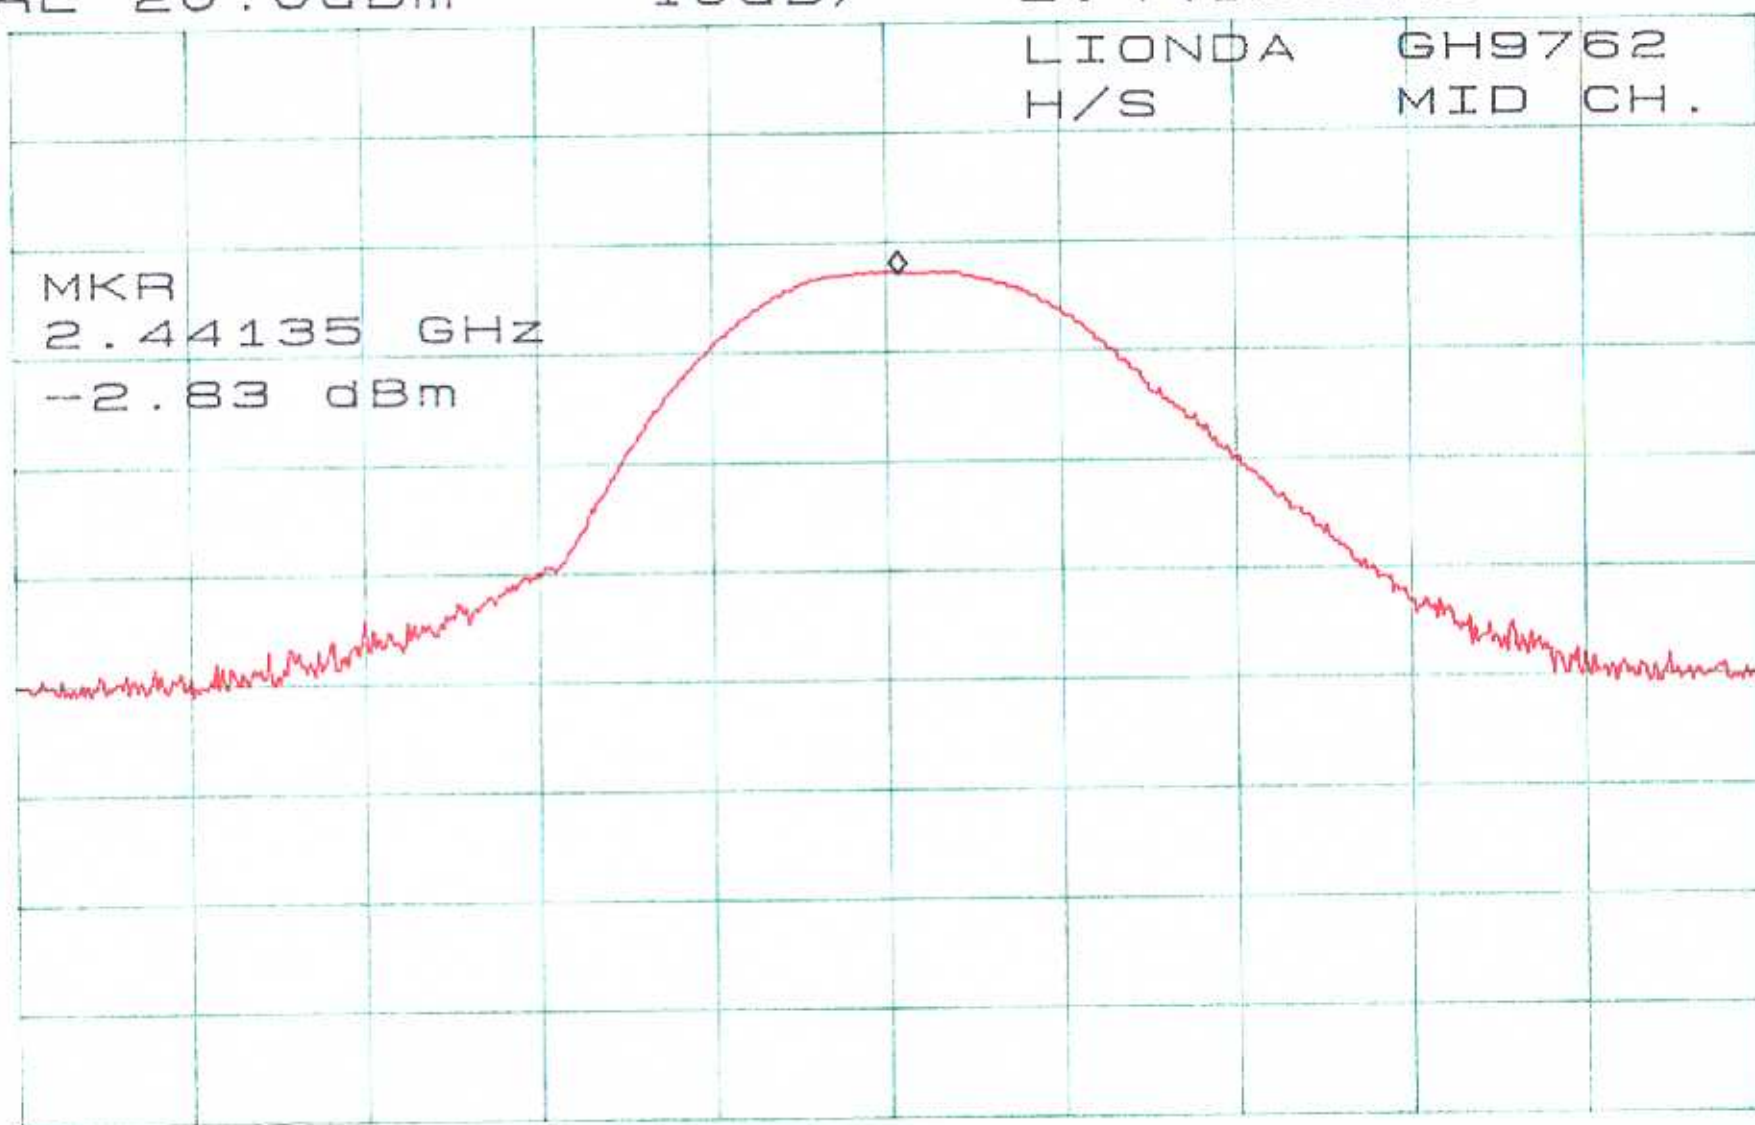

CENTER 2.44122GHz

SPAN 20.00MHz

*RBW 2.0MHz

*VBW 3.0MHz

*SWP 750ms


ATTEN 30dB
RL 20.0dBm

10dB/

MKR -3.83dBm
2.48013GHz

LIONDA GH9762
H/S HIGH CH.

MKR
2.48013 GHz
-3.83 dBm

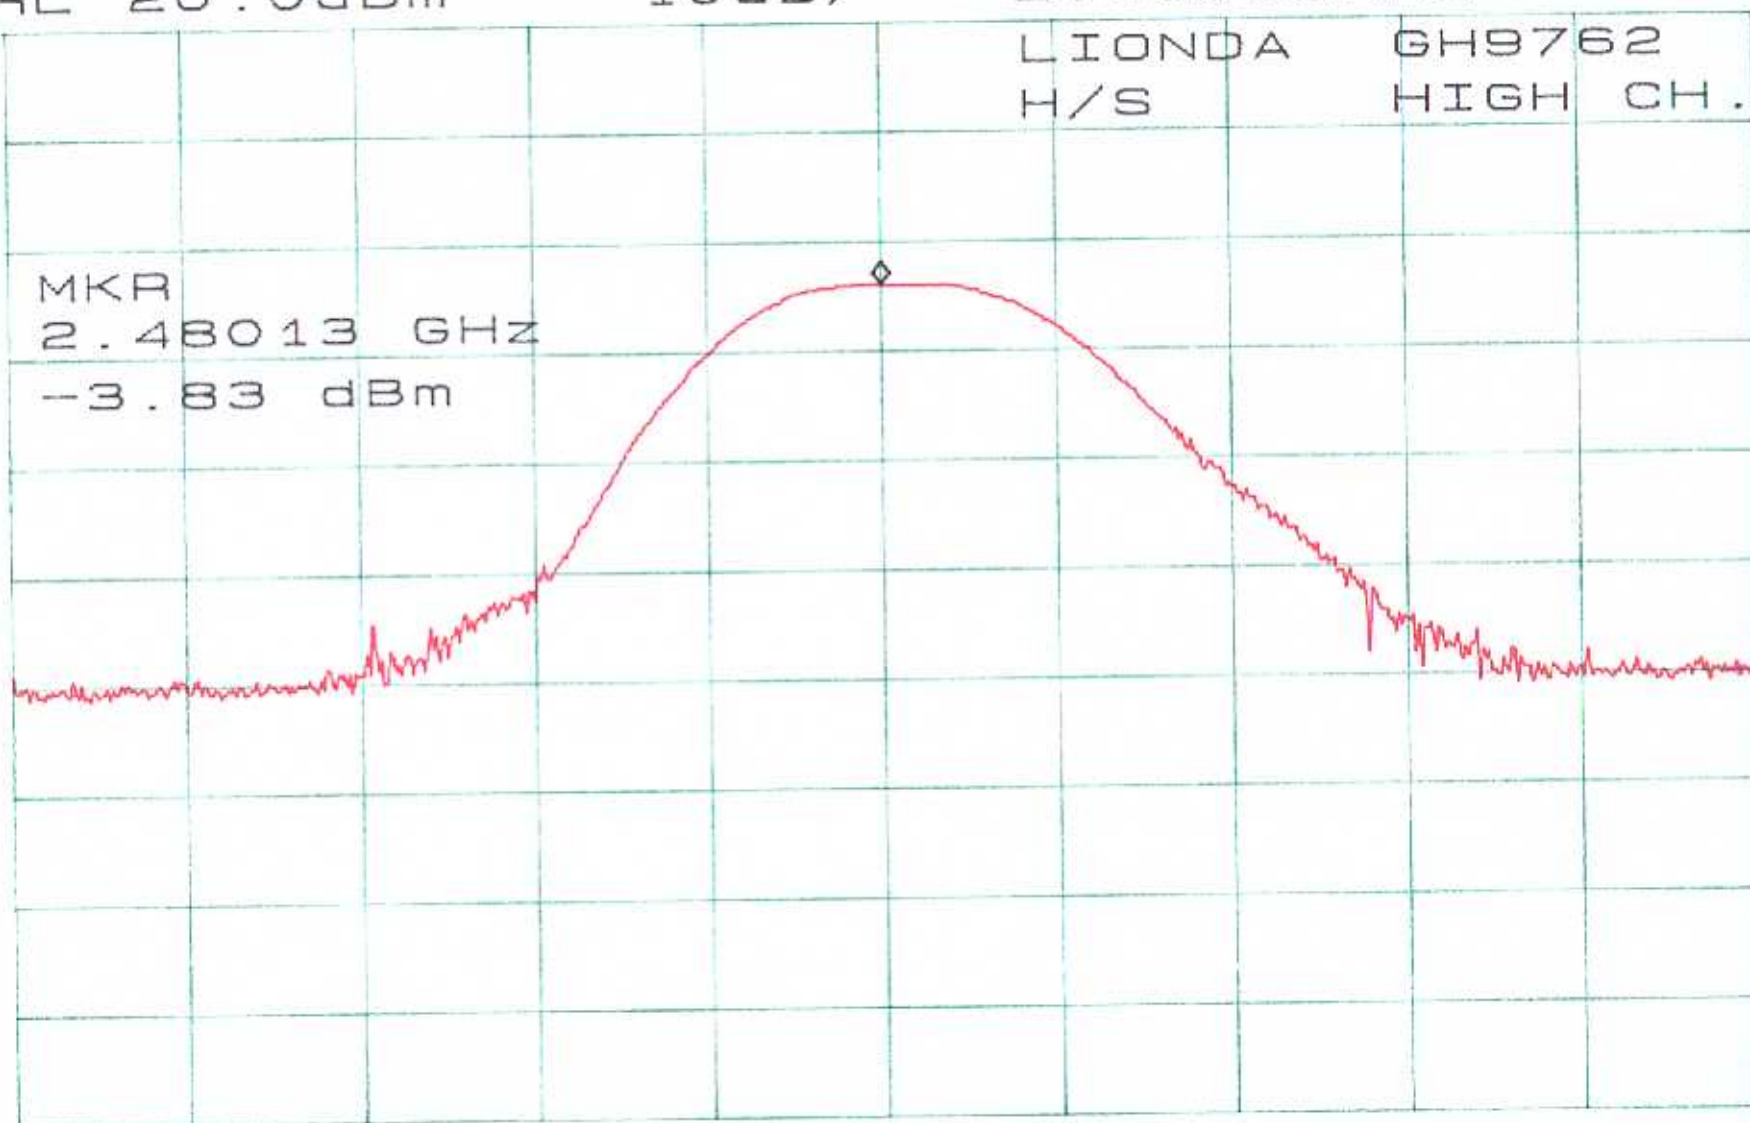

CENTER 2.48013GHz
*RBW 2.0MHz *VBW 3.0MHz

SPAN 20.00MHz
*SWP 50.0ms

5 - 6 DB BANDWIDTH

5.1 Standard Applicable

According to §15.247(a)(2), for direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

5.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

5.3 Measurement Data

Please refer to the following pages.

Channel Bandwidth	Test Result (Base and Handset)
Low Channel	Compliant
Middle Channel	Compliant
High Channel	Compliant


ATTEN 30dB
RL 20.0dBm

10dB/

Δ MKR .17dB
1.32MHz

LIONDA GH9762
BASE LOW CH.

Δ MKR
1.32 MHz
.17 dB

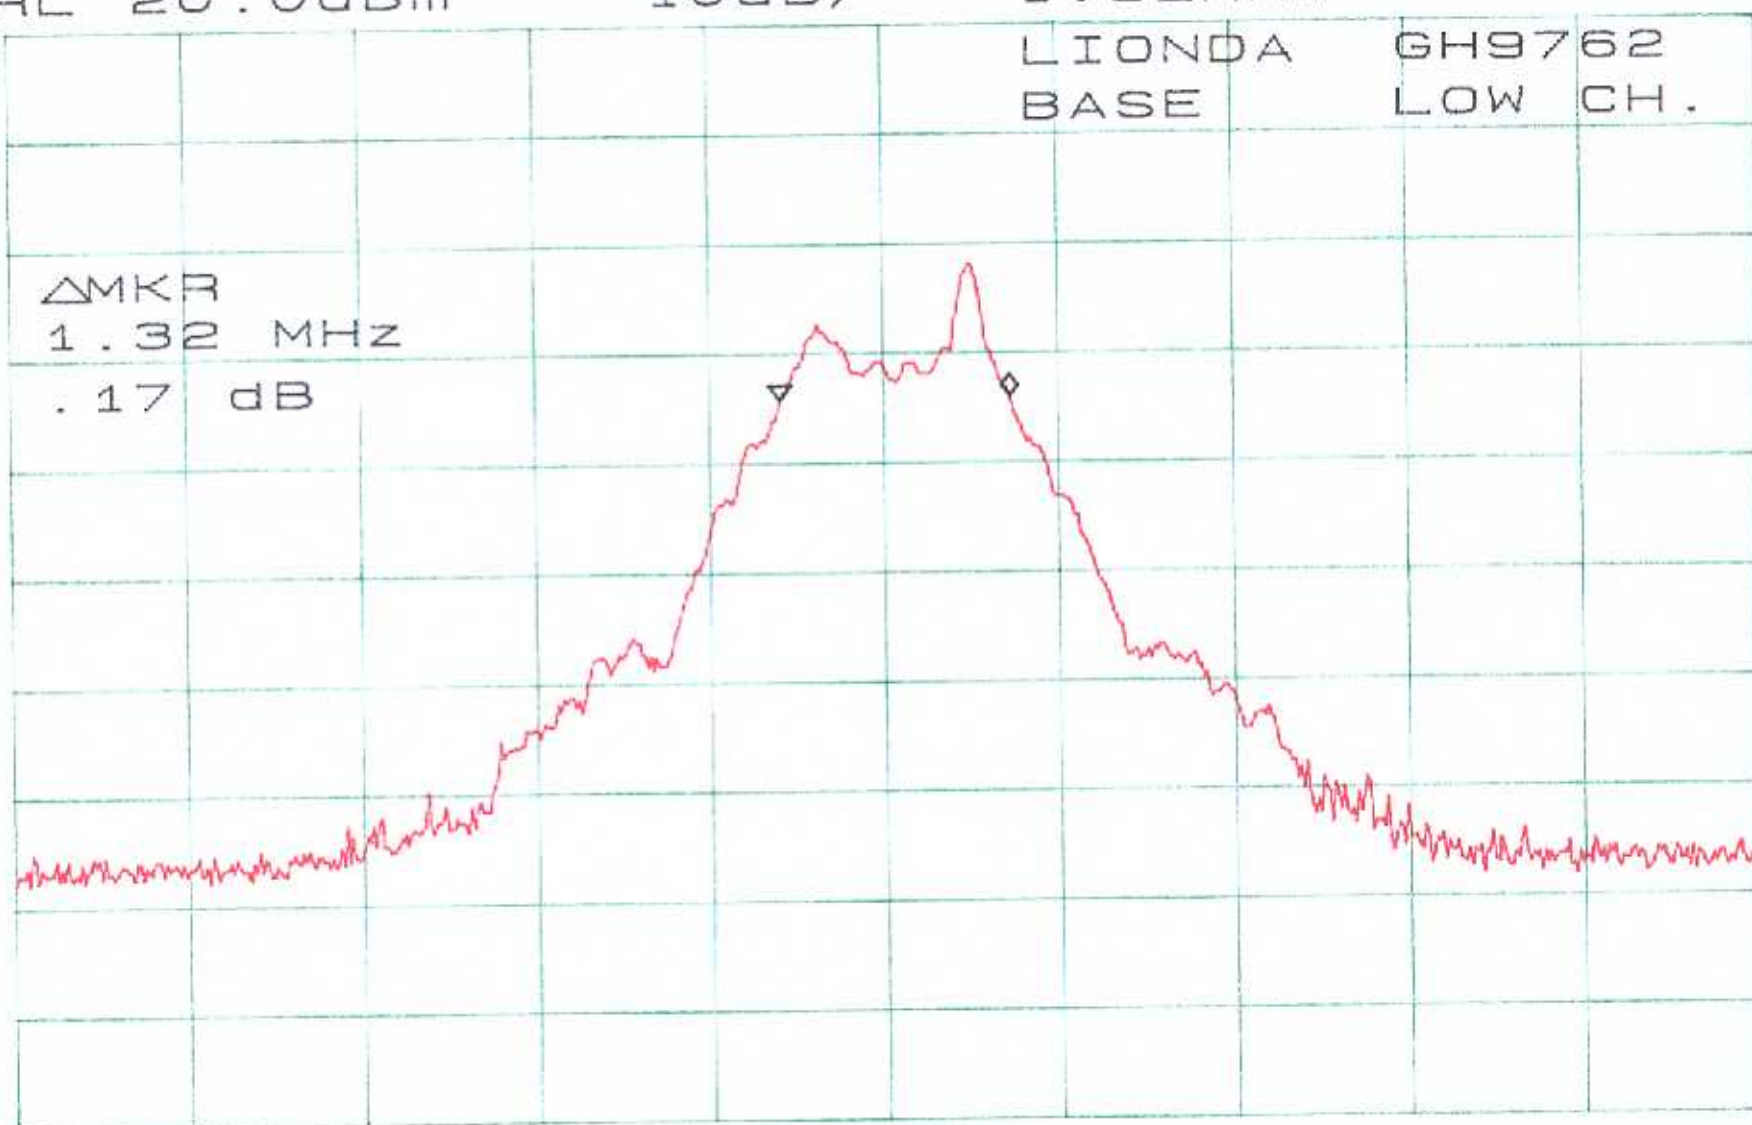

CENTER 2.40230GHz
*RBW 100kHz *VBW 100kHz

SPAN 10.00MHz
*SWP 50.0ms

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR -.16dB

1.37MHz

LIONDA

GH9762


BASE

MID CH.

Δ MKR

1.37 MHz

-.16 dB

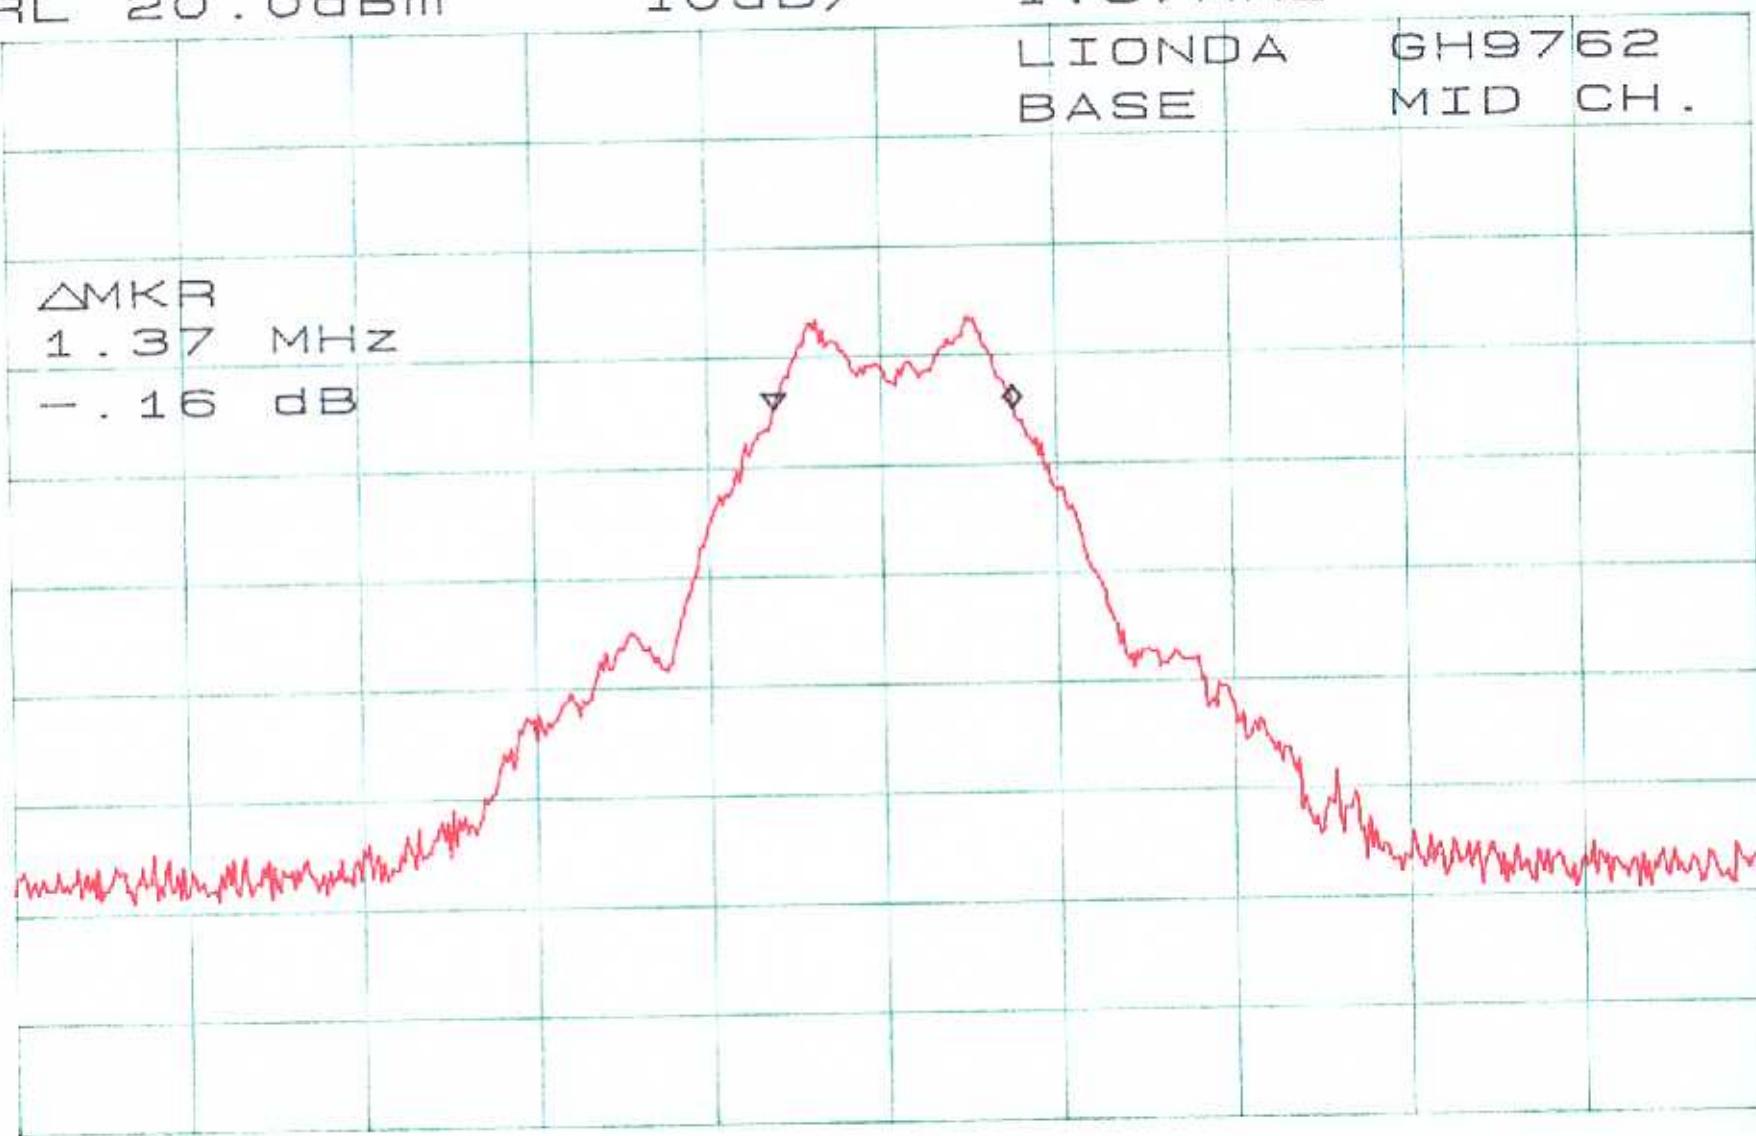

CENTER 2.44122GHz

SPAN 10.00MHz

*RBW 100kHz

VBW 100kHz

SWP 50.0ms

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR .50dB

1.33MHz


LIONDA

GH9762

BASE

HIGH CH.

Δ MKR
1.33 MHz
.50 dB

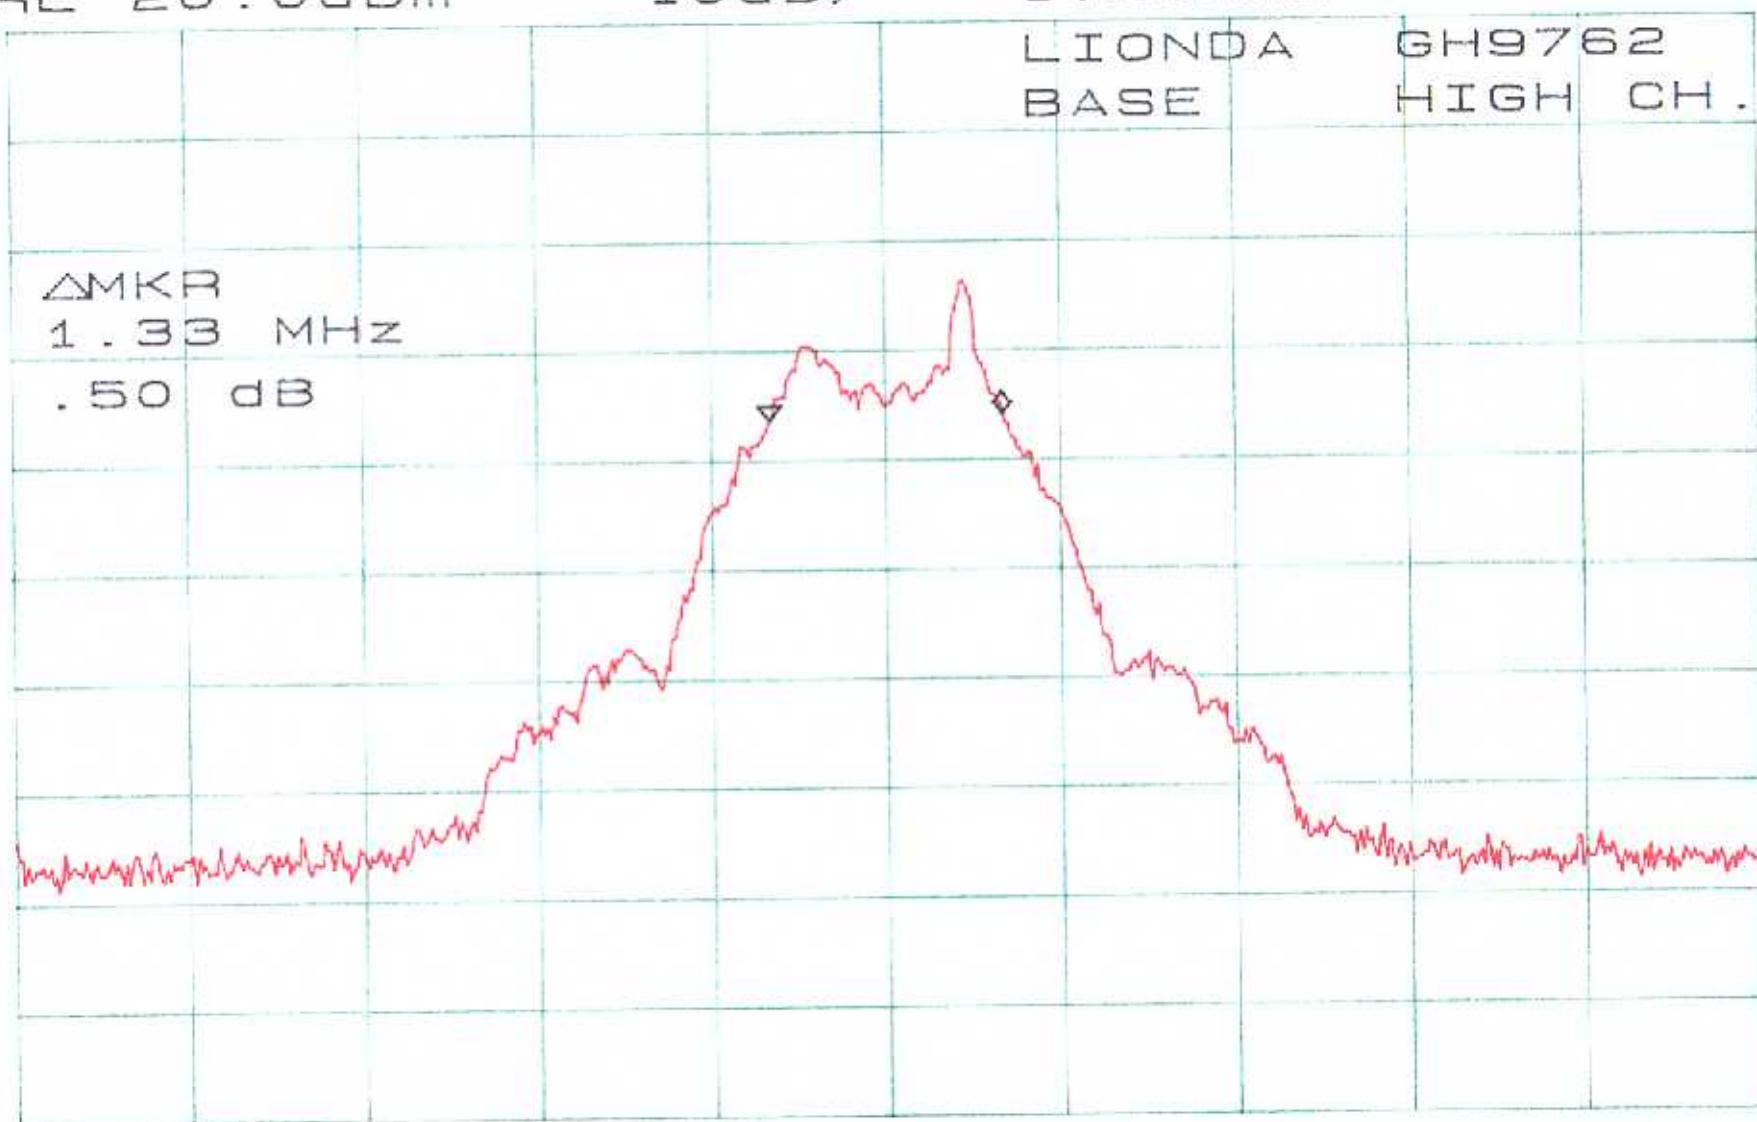

CENTER 2.48013GHz

SPAN 10.00MHz

*RBW 100kHz

VBW 100kHz

SWP 50.0ms

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR .33dB

1.32MHz

LIONDA

GH9762


H/S

LOW CH.

Δ MKR

1.32 MHz

.33 dB

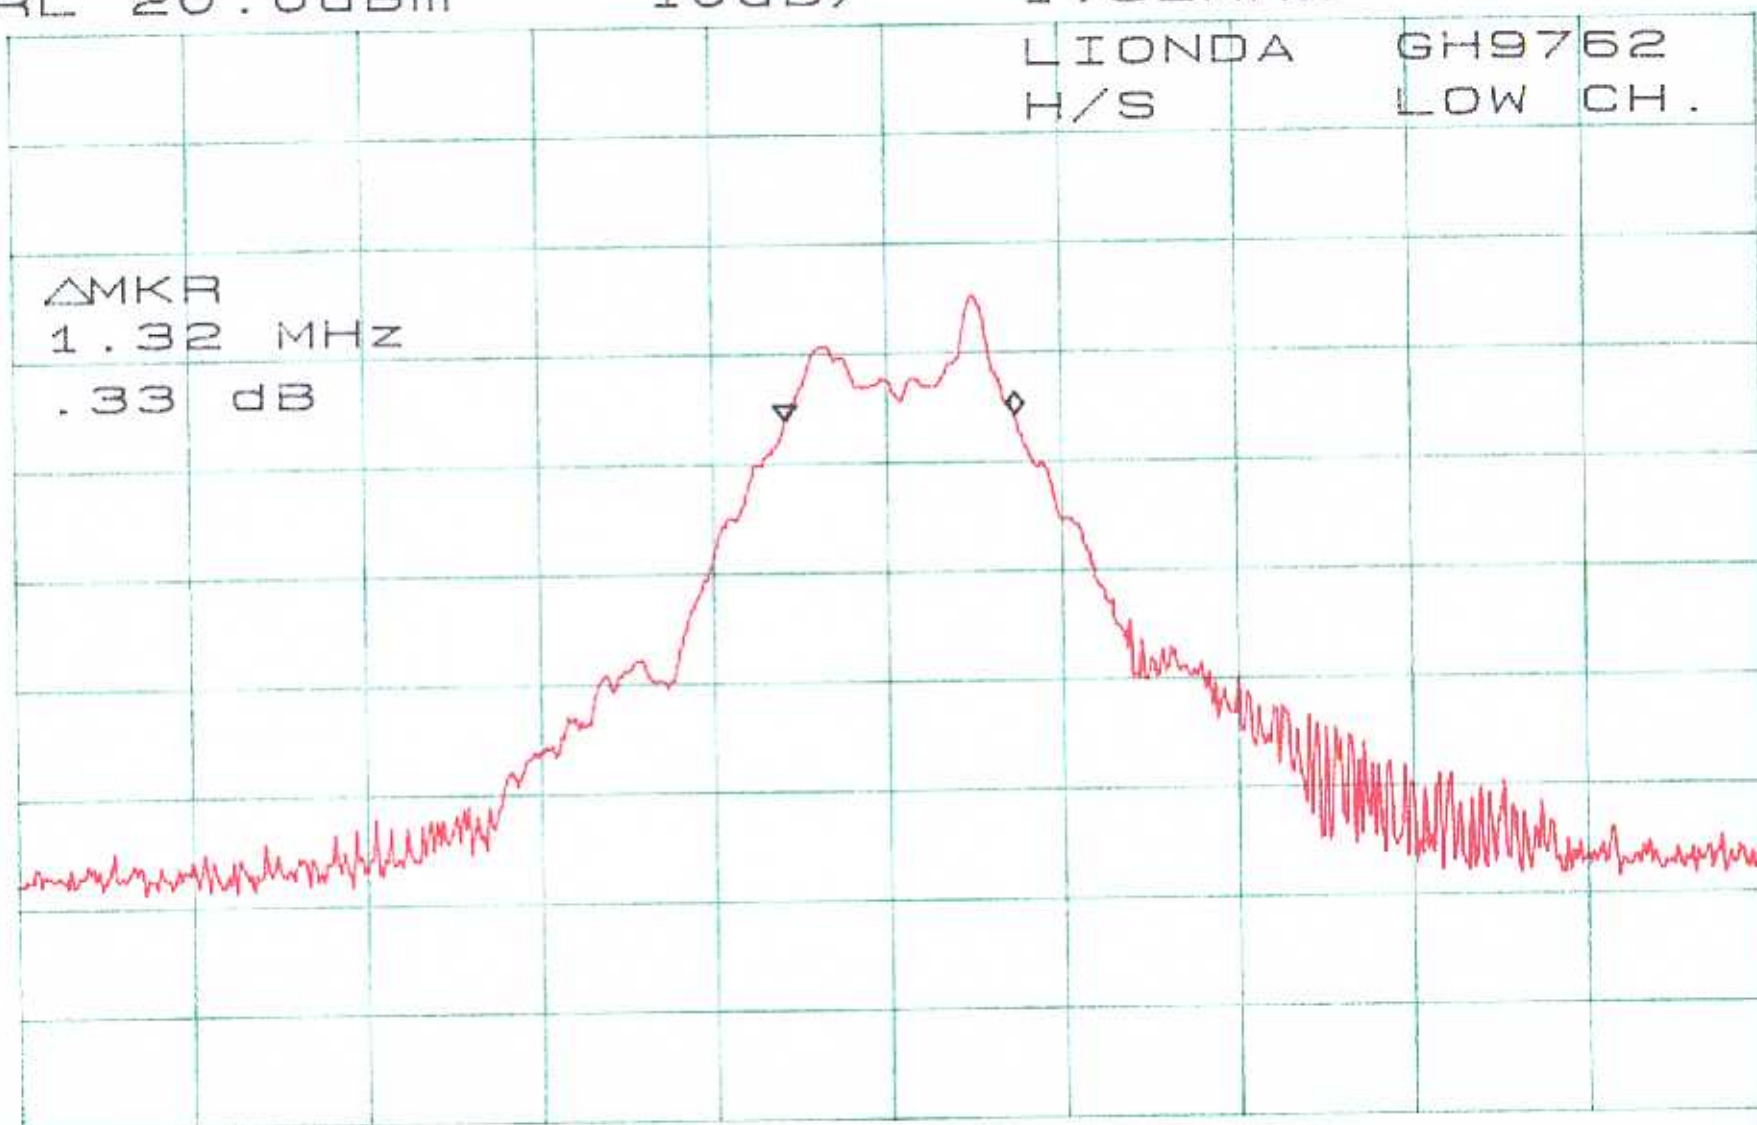

CENTER 2.40230GHz

SPAN 10.00MHz

*RBW 100kHz

*VBW 100kHz

*SWP 50.0ms

ATTEN 30dB
RL 20.0dBm


10dB/

Δ MKR 0dB
1.32MHz

LIONDA
H/S

GH9762
HIGH CH.

Δ MKR
1.32 MHz
0 dB

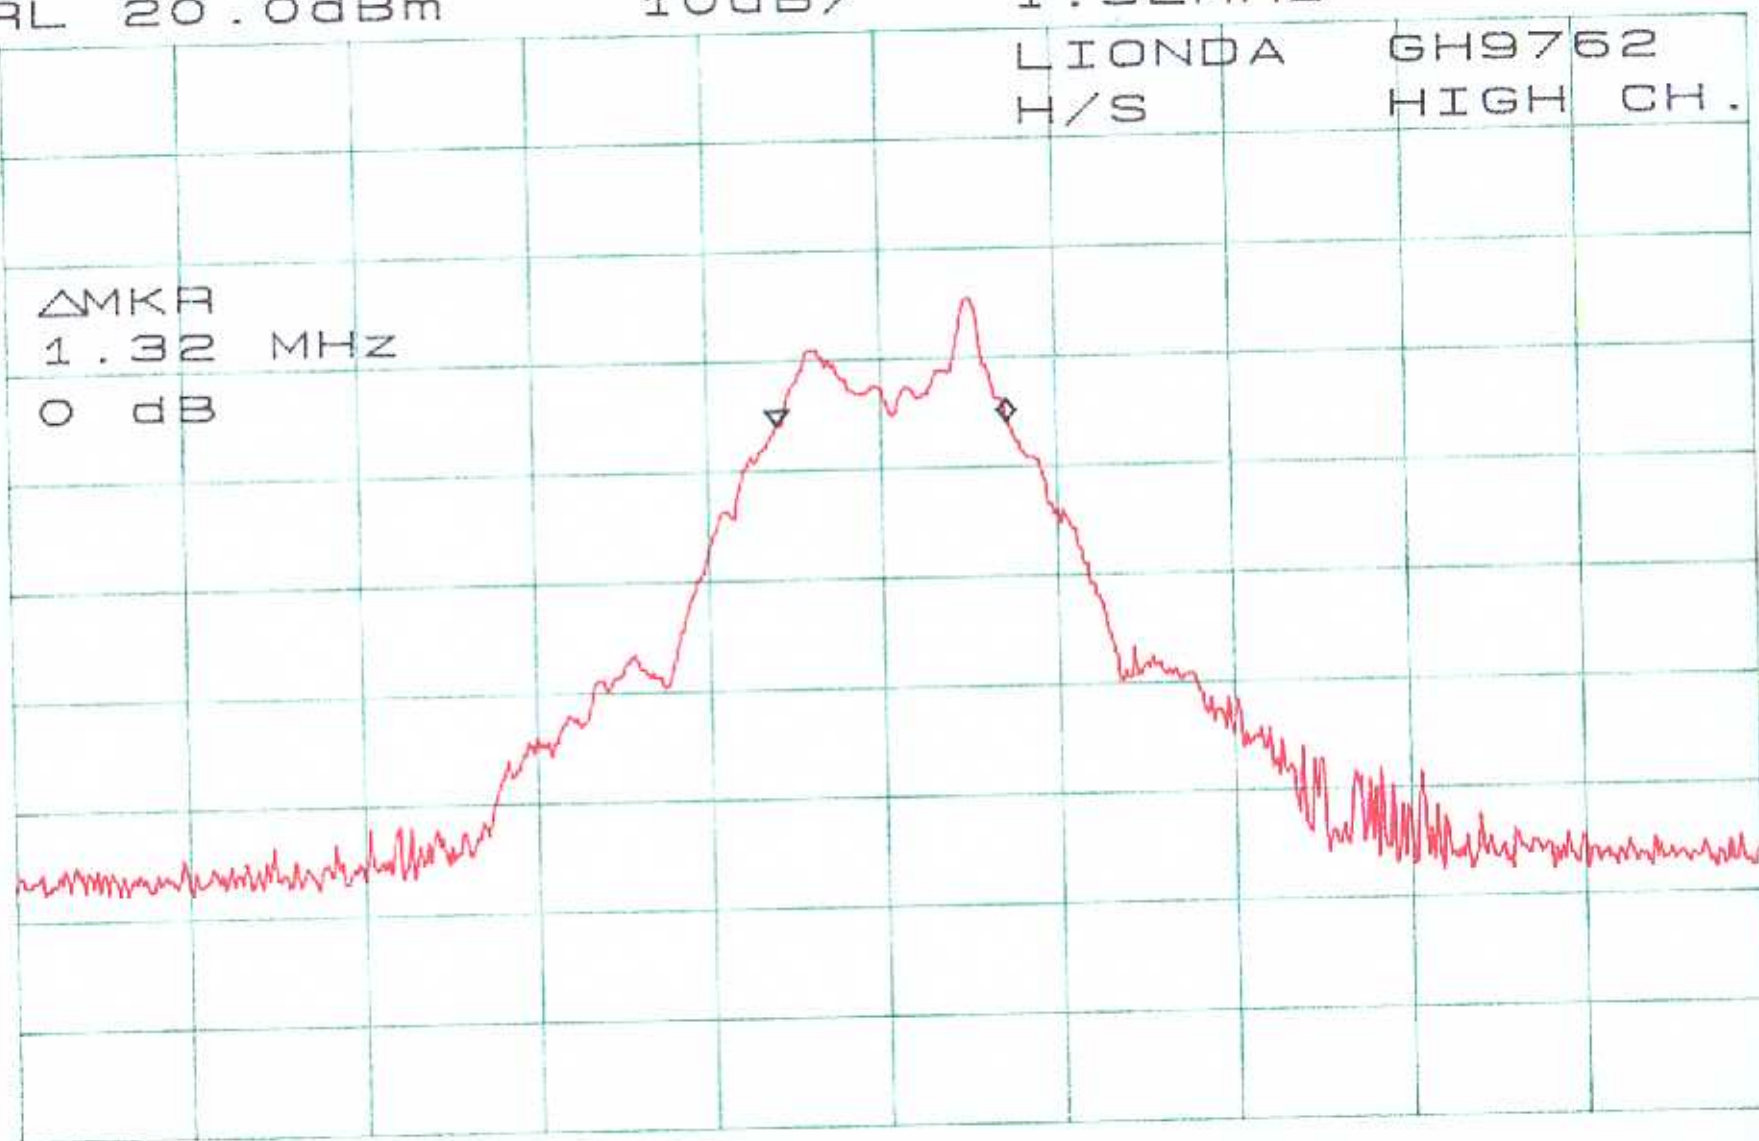

CENTER 2.48013GHz
*RBW 100kHz *VBW 100kHz

SPAN 10.00MHz
*SWP 50.0ms


ATTEN 30dB
RL 20.0dBm

10dB/

Δ MKR -.17dB
1.30MHz

LIONDA GH9762
H/S MID CH.

Δ MKR
1.30 MHz
-.17 dB

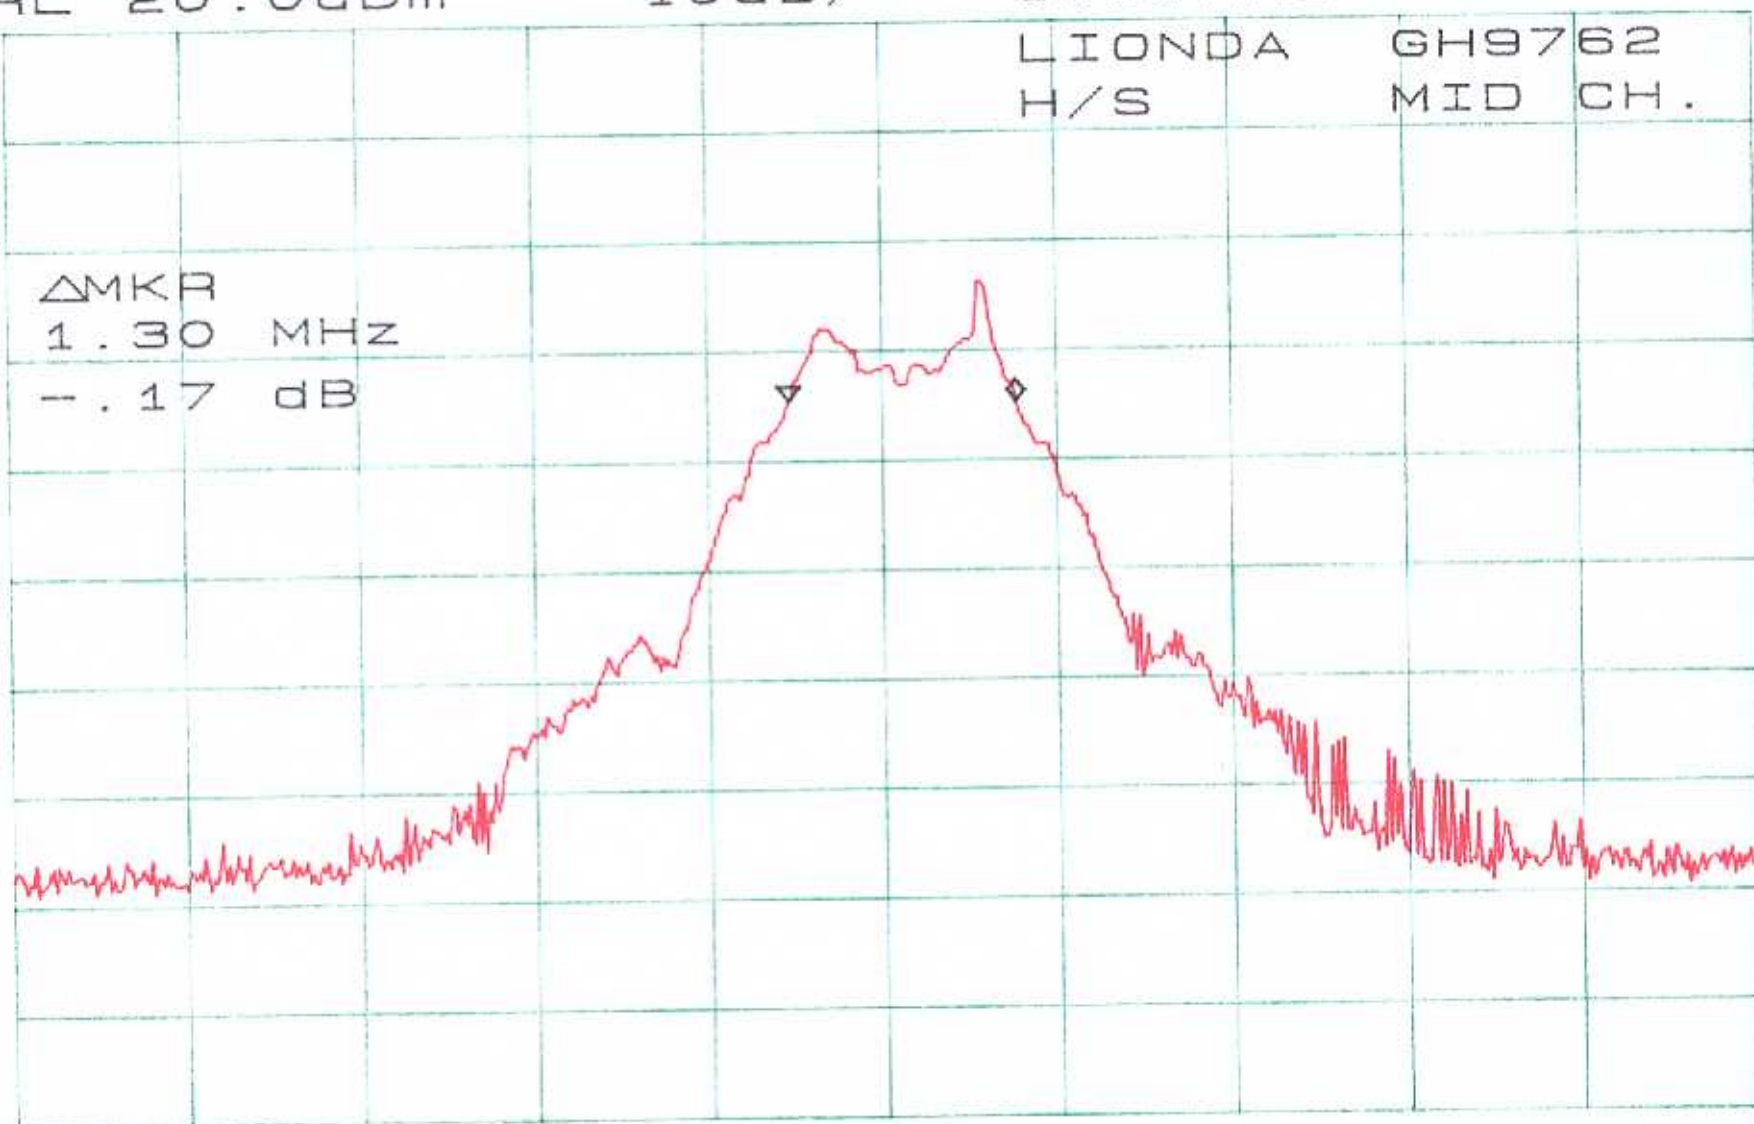

CENTER 2.44122GHz
*RBW 100kHz *VBW 100kHz

SPAN 10.00MHz
*SWP 50.0ms

6 - SPURIOUS EMISSION

6.1 Standard Applicable

According to §15.209 (f) and §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit.

6.2 Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

6.3 Measurement Data

Please refer to the following pages.

Spurious Emission	Test Result (base and handset)
Low Channel	Compliant
Middle Channel	Compliant
High Channel	Compliant

ATTEN 30dB
RL 20.0dBm

10dB/

Δ MKR -52.83dB
-2.148GHz

LIONDA
BASE

GH9762
LOW CH.

Δ MKR
-2.148 GHz
-52.83 dB



START 30MHz

STOP 3.000GHz

*RBW 100kHz

*VBW 100kHz

*SWP 750ms


ATTEN 30dB
RL 20.0dBm

10dB/

MKR -45.17dBm
23.97GHz

LIONDA GH9762
BASE LOW CH.

MKR
23.97 GHz
-45.17 dBm

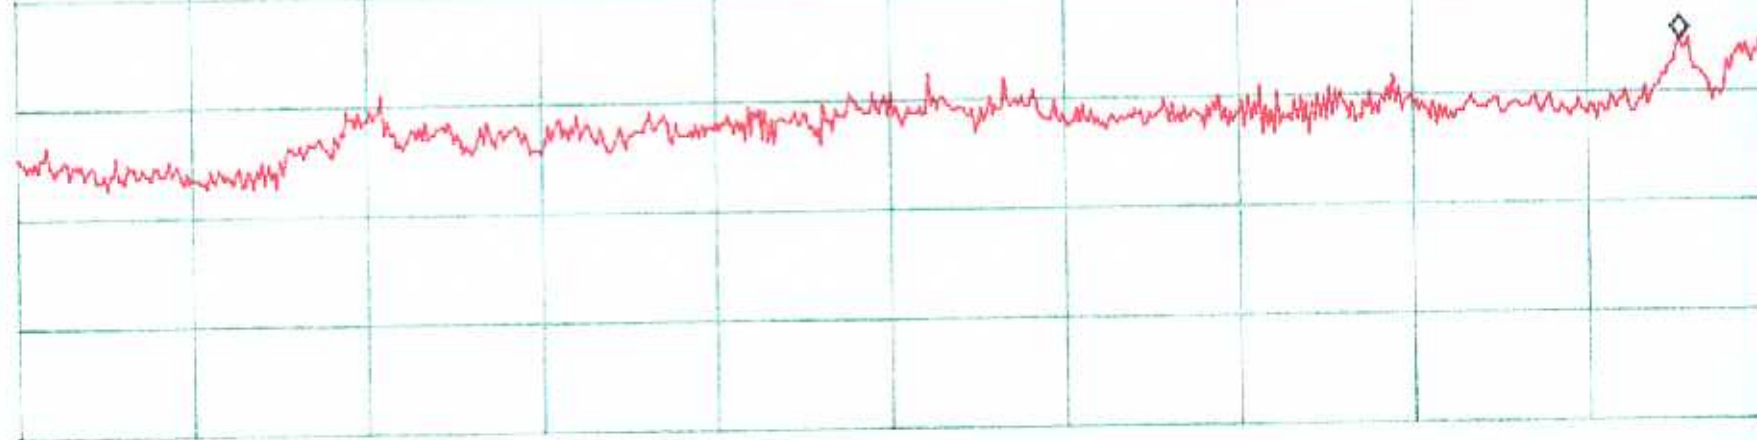

START 3.00GHz STOP 25.00GHz
*RBW 100kHz *VBW 100kHz *SWP 5.50sec

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR -46.00dB

-2.242GHz

LIONDA

GH9762

BASE

MID CH.

Δ MKR

-2.242 GHz

-46.00 dB



START 30MHz

STOP 3.000GHz

*RBW 100kHz

VBW 100kHz

SWP 750ms

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -44.83dBm

24.01GHz

LIONDA

GH9762


BASE

MID CH.

MKR

24.01 GHz

-44.83 dBm

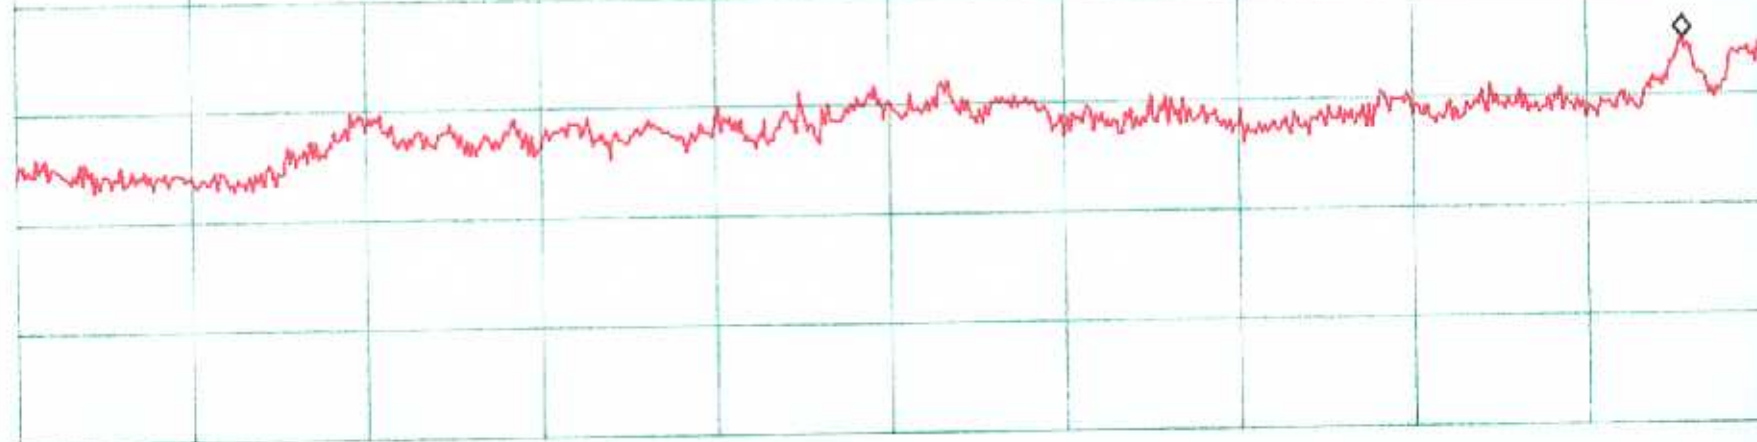

START 3.00GHz

STOP 25.00GHz

*RBW 100kHz

VBW 100kHz

SWP 5.50sec

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR -46.00dB

-2.015GHz

LIONDA

GH9762

BASE


HIGH CH.

Δ MKR

-2.015 GHz

-46.00 dB

V

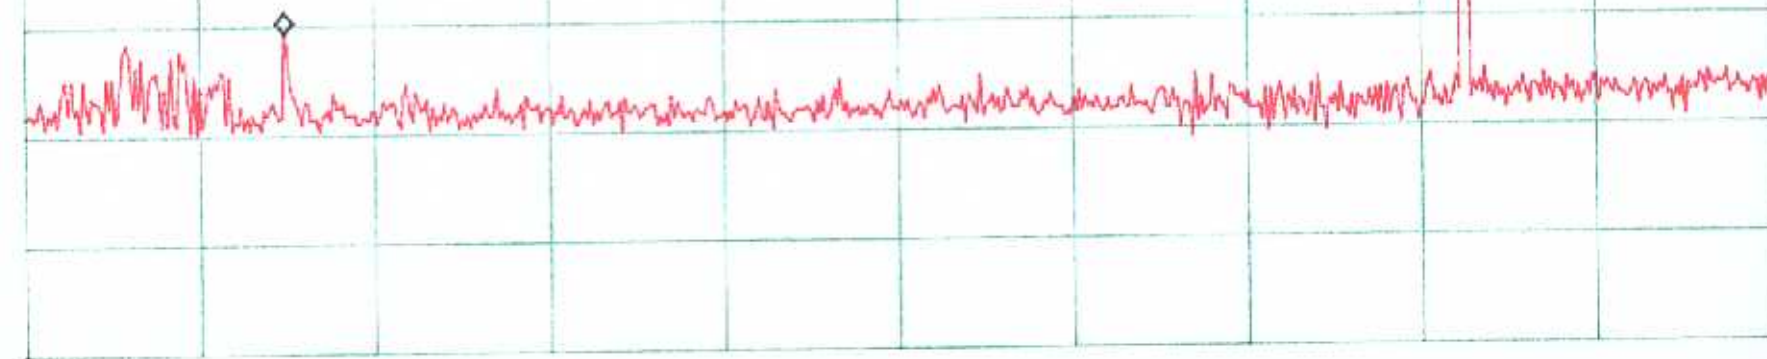

START 30MHz

STOP 3.000GHz

*RBW 100kHz

VBW 100kHz

SWP 750ms


ATTEN 30dB
RL 20.00dBm

10dB/

MKR -46.00dBm
24.01GHz

LIONDA GH9762
BASE HIGH CH.

MKR
24.01 GHz
-46.00 dBm

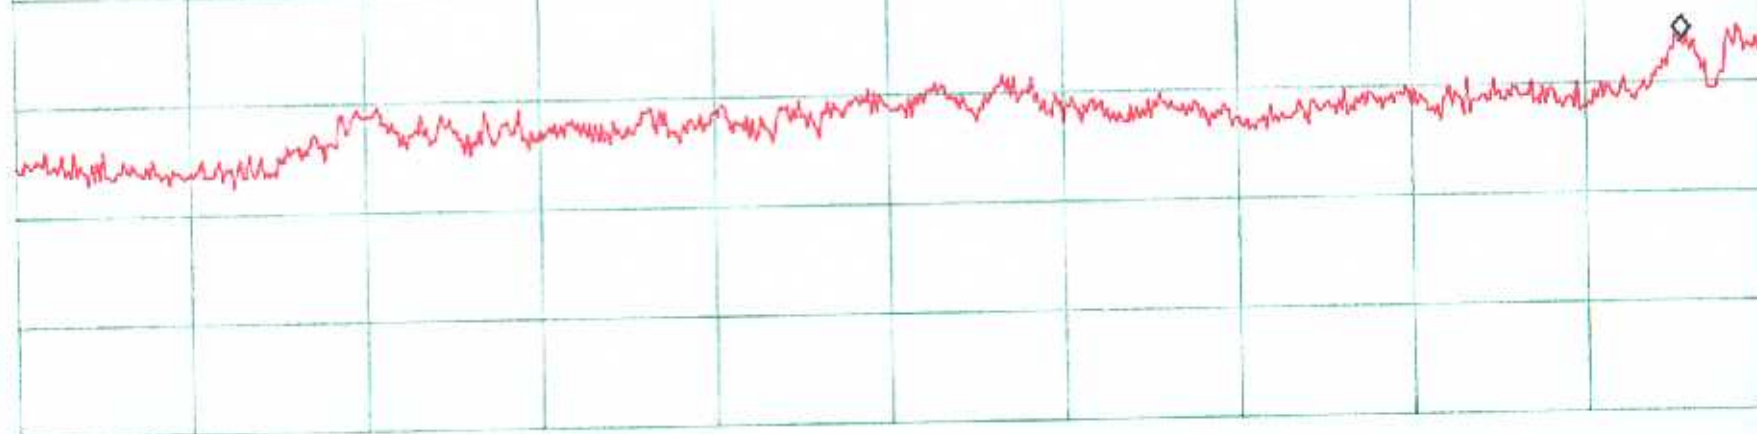

START 3.00GHz STOP 25.00GHz
*RBW 100kHz VBW 100kHz SWP 5.50sec

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR -43.16dB

-2.005GHz

LIONDA

GH9762

H/S


HIGH CH.

Δ MKR

-2.005 GHz

-43.16 dB

▼

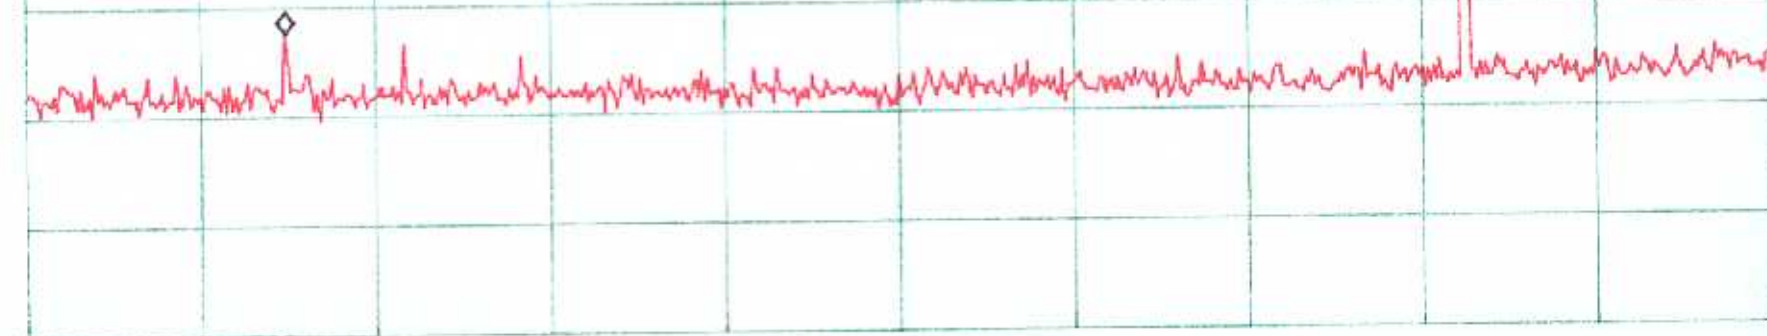

START 30MHz

STOP 3.000GHz

*RBW 100kHz

*VBW 100kHz

*SWP 750ms

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -44.50dBm

24.05GHz

LIONDA

GH9762


H/S

HIGH CH.

MKR

24.05 GHz

-44.50 dBm

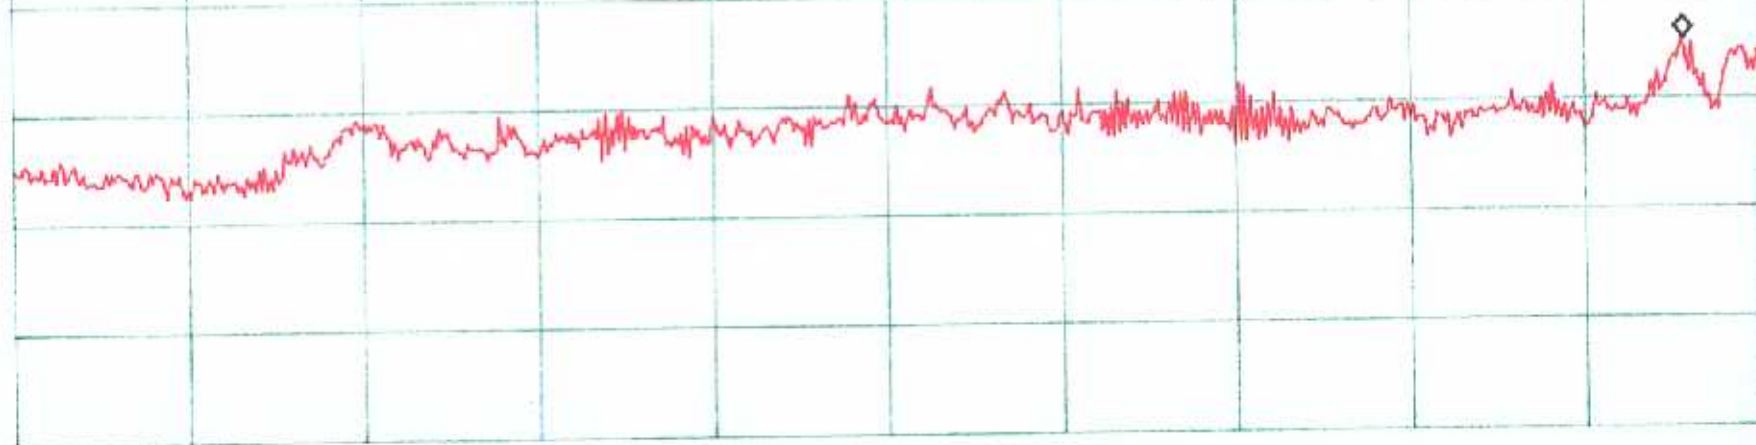

START 3.00GHz

STOP 25.00GHz

*RBW 100kHz

*VBW 100kHz

*SWP 5.50sec

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR -49.00dB

-1.980GHz

LIONDA

GH9762


H/S

MID CH.

Δ MKR

-1.980 GHz

-49.00 dB

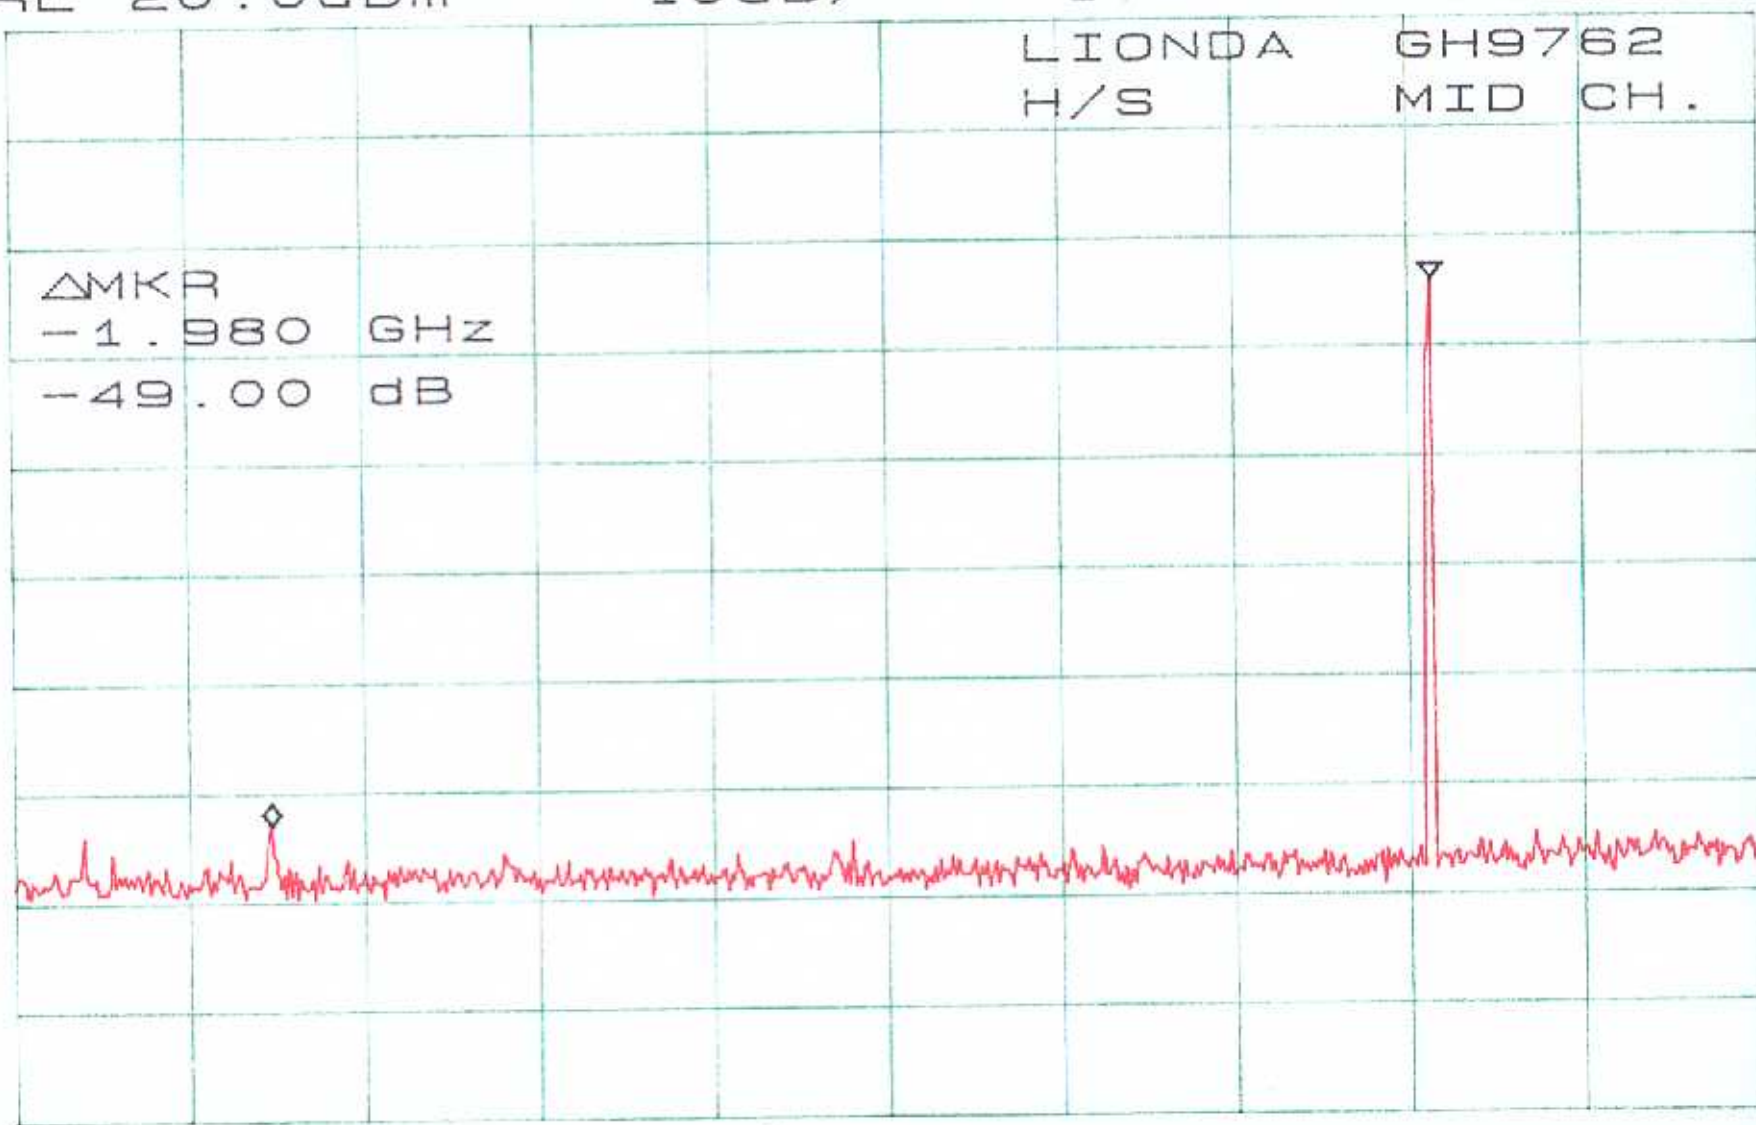

START 30MHz

STOP 3.000GHz

*RBW 100kHz

*VBW 100kHz

*SWP 750ms

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -45.17dBm

23.94GHz

LIONDA

GH9762


H/S

MID CH.

MKR

23.94 GHz

-45.17 dBm

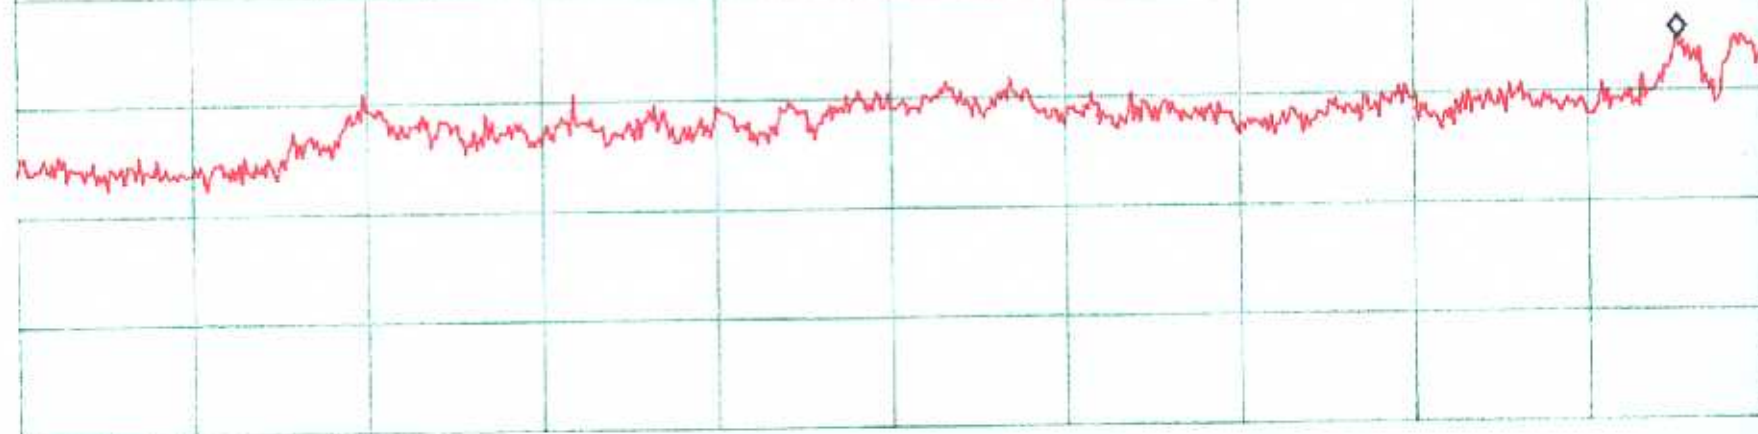

START 3.00GHz

STOP 25.00GHz

*RBW 100KHz

*VBW 100KHz

*SWP 5.50sec

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR -39.33dB

-1.940GHz

LIONDA

GH9762

H/S

LOW CH.

Δ MKR

-1.940 GHz

-39.33 dB



START 30MHz

STOP 3.000GHz

*RBW 100kHz

*VBW 100kHz

*SWP 750ms

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -45.67dBm

24.01GHz

LIONDA

GH9762


H/S

LOW CH.

MKR

24.01 GHz

-45.67 dBm

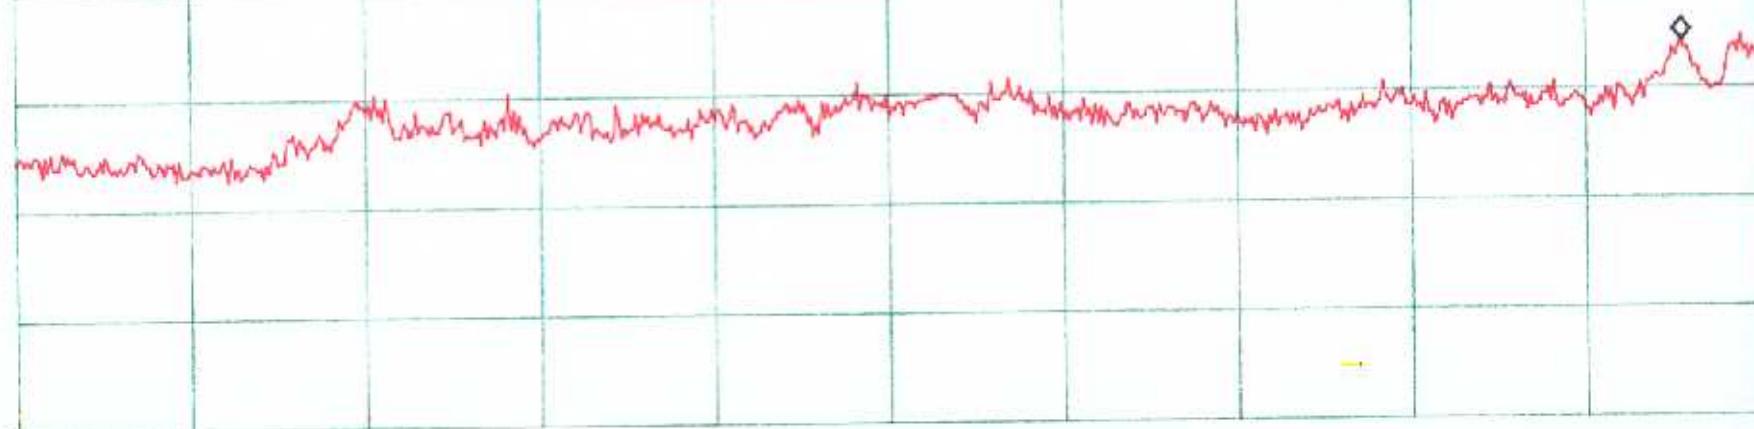

START 3.00GHz

STOP 25.00GHz

*RBW 100kHz

*VBW 100kHz

*SWP 5.50sec

7 - 100 KHZ BANDWIDTH OF BAND EDGES MEASUREMENT

7.1 Standard Applicable

According to §15.247(c), if *any* 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a), whichever results in the lesser attenuation.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

7.3 Test Results

Please refer to the following pages.

Band Edge Bandwidth	Test Result (base and handset)
Low Channel	Compliant
Middle Channel	Compliant
High Channel	Compliant

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR -44.84dB


-2.78MHz

LIONDA

GH9762

H/S

LOW CH.

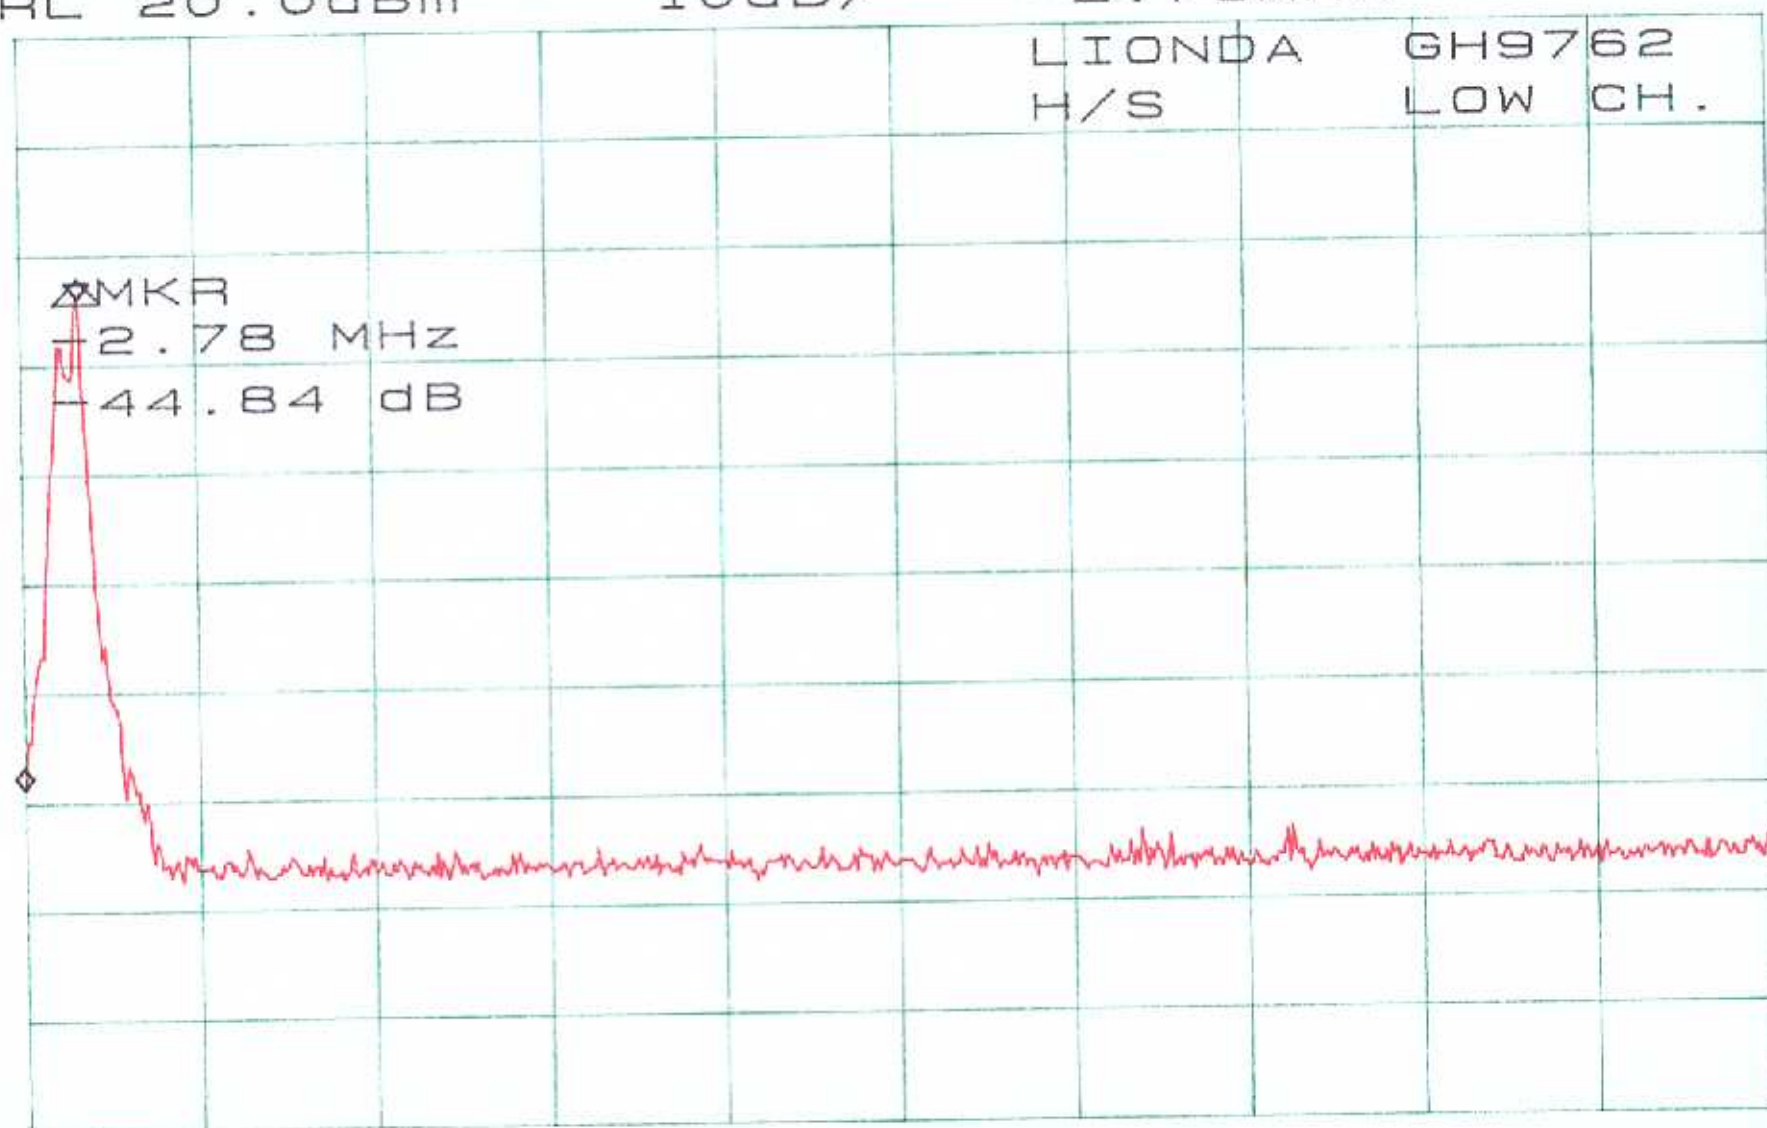

START 2.40000GHz

STOP 2.48350GHz

*RBW 100kHz

*VBW 100kHz

*SWP 50.0ms

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR -53.16dB

41.33MHz

LIONDA

GH9762


H/S

MID CH.

Δ MKR

41.33 MHz

-53.16 dB

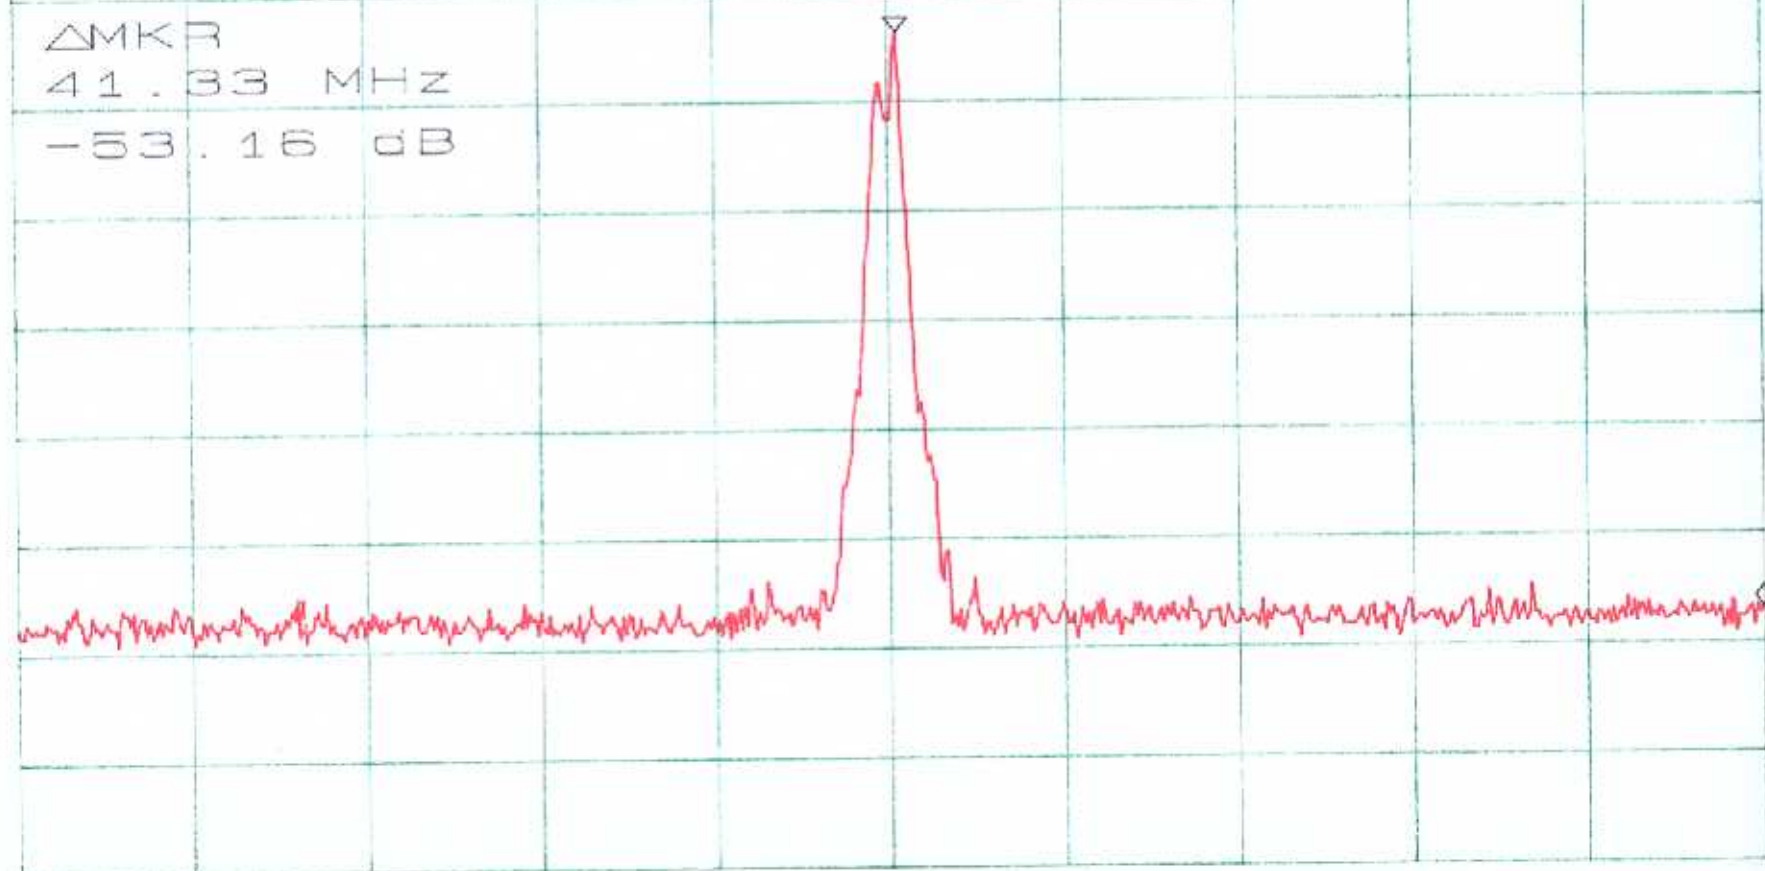

START 2.40000GHz

STOP 2.48350GHz

*RBW 100kHz

*VBW 100kHz

*SWP 50.0ms


ATTEN 30dB
RL 20.0dBm

10dB/

Δ MKR -44.00dB
2.23MHz

LIONDA GH9762
H/S HIGH CH.

Δ MKR
2.23 MHz
-44.00 dB

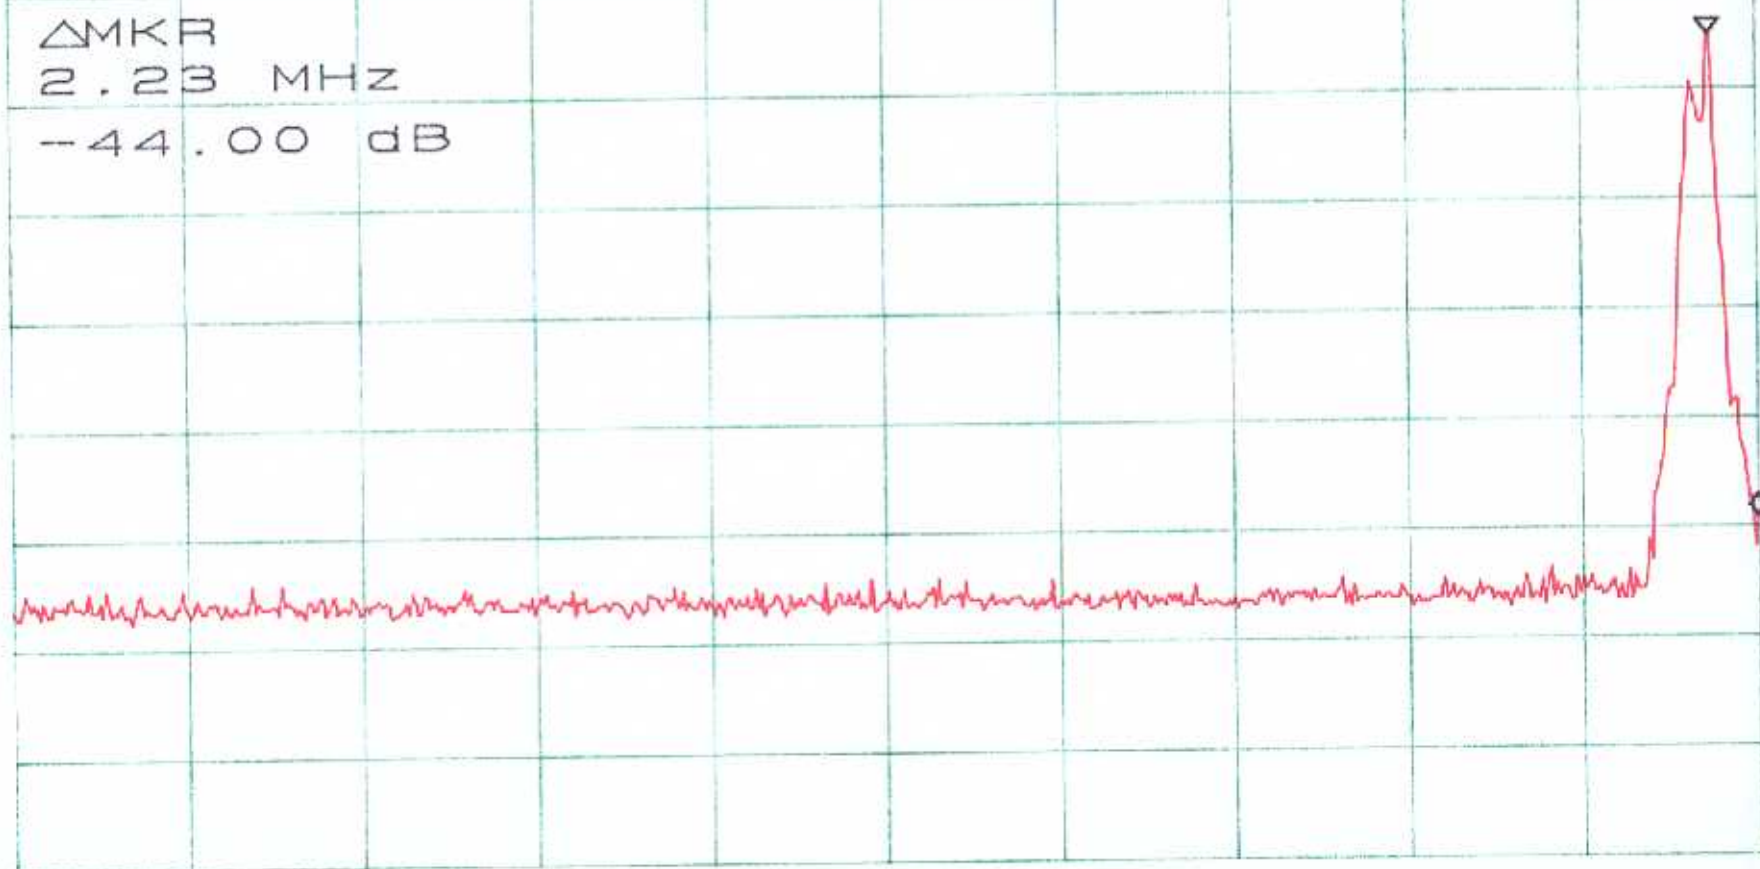

START 2.40000GHz STOP 2.48350GHz
*RBW 100kHz *VBW 100kHz *SWP 50.0ms

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR -45.33dB

-2.78MHz


LIONDA

GH9762

BASE

LOW CH.

Δ MKR
-2.78 MHz
-45.33 dB

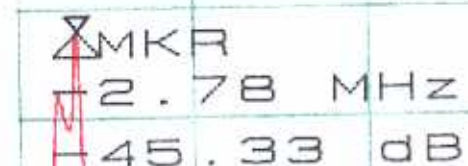

START 2.40000GHz

STOP 2.48350GHz

*RBW 100kHz

*VBW 100kHz

*SWP 50.0ms

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR -49.34dB

42.17MHz

LIONDA

GH9762


BASE

MID CH.

Δ MKR

42.17 MHz

-49.34 dB

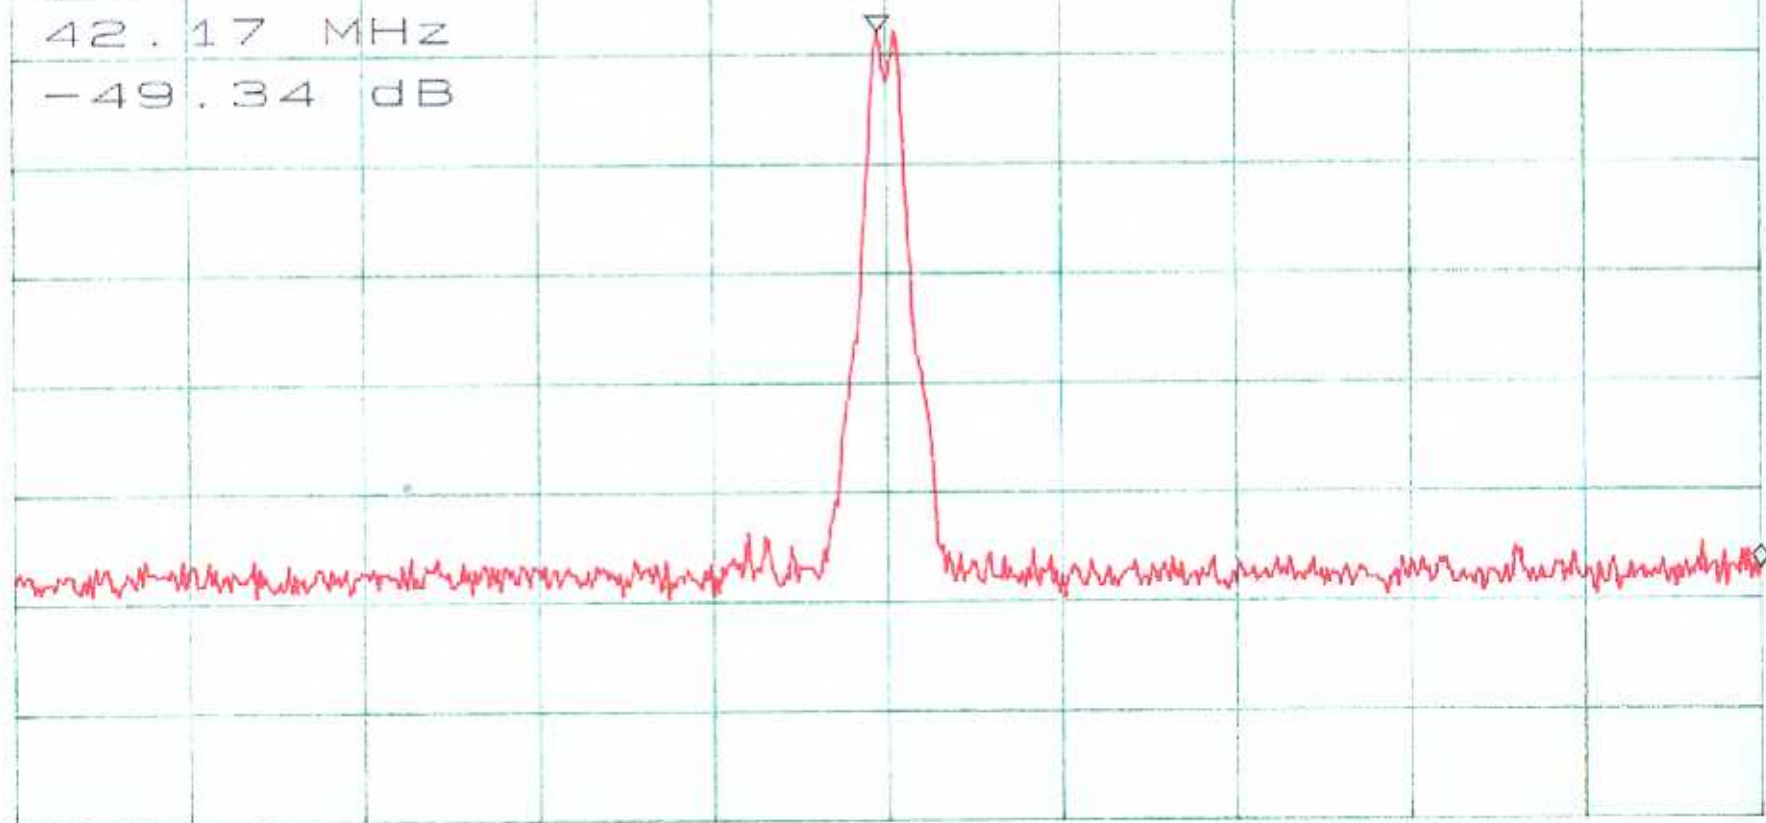

START 2.40000GHz

STOP 2.48350GHz

*RBW 100kHz

*VBW 100kHz

*SWP 50.0ms

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR -50.50dB

1.95MHz

LIONDA

GH9762


BASE

HIGH CH.

Δ MKR

1.95 MHz

-50.50 dB

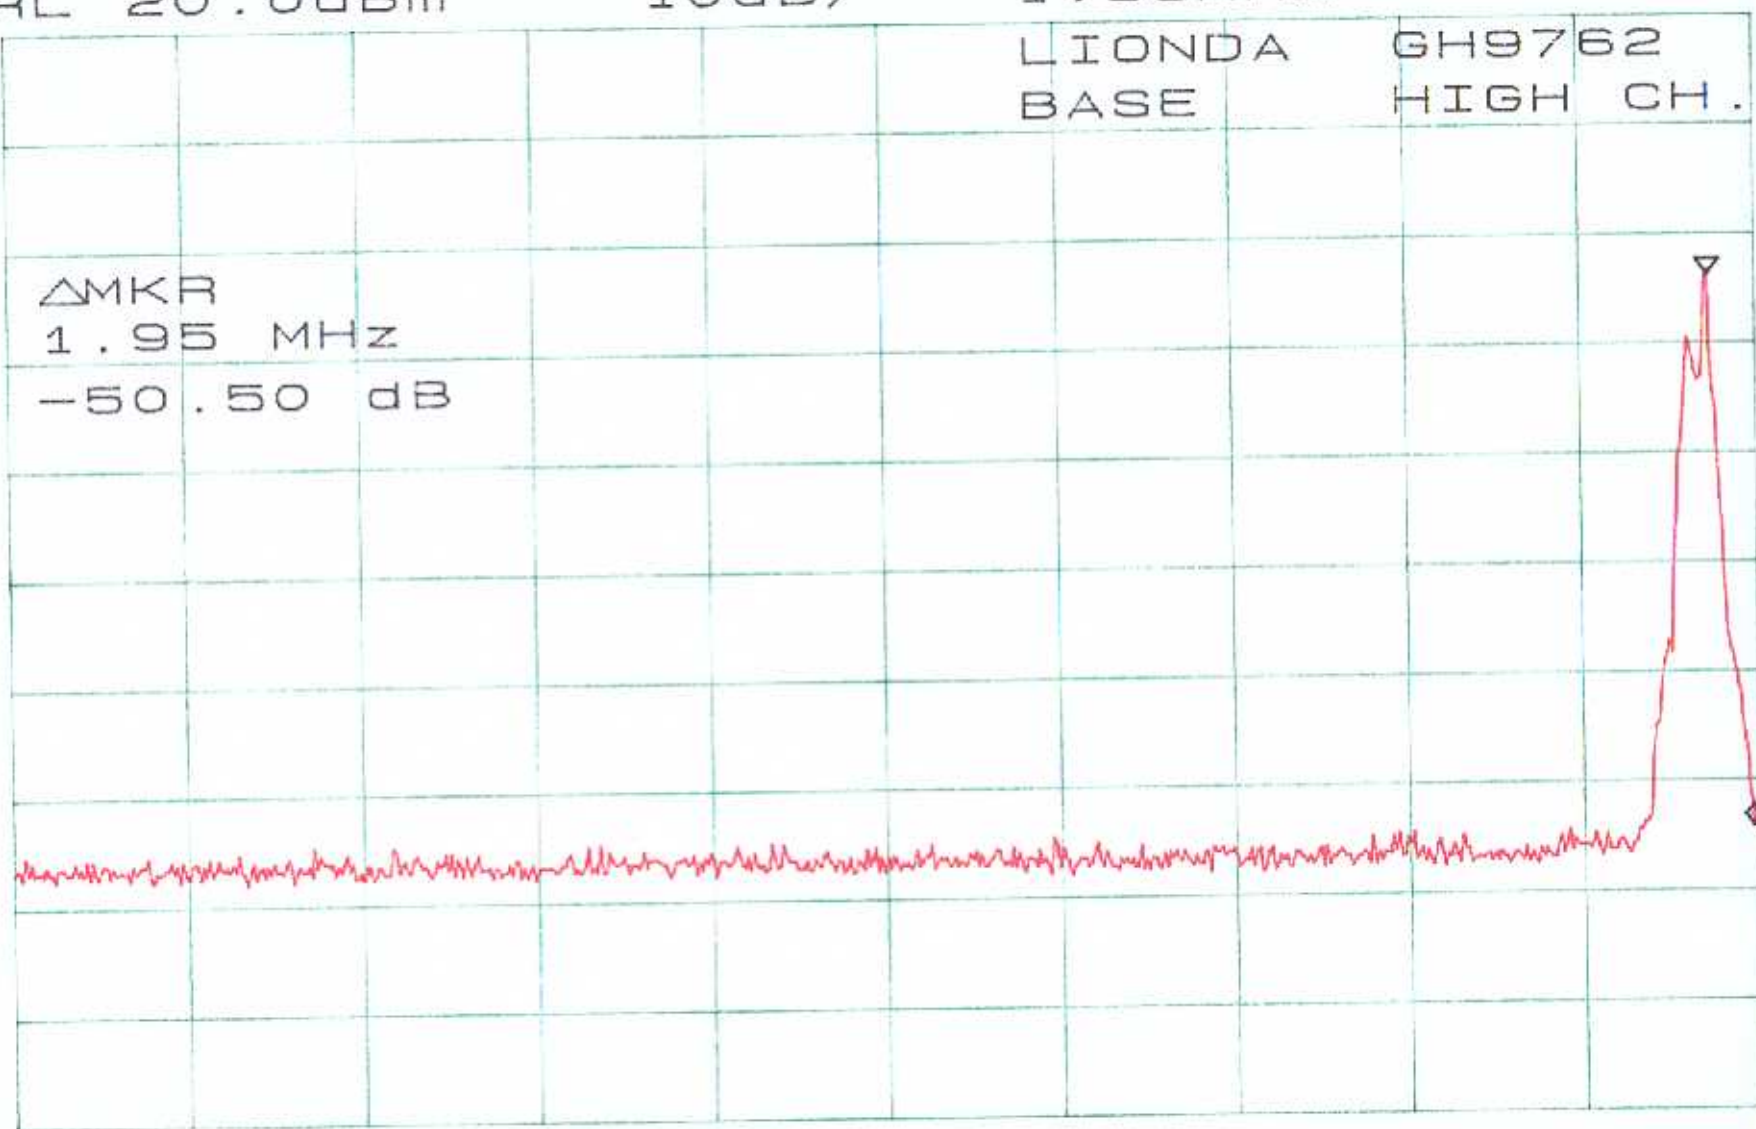

START 2.40000GHz

STOP 2.48350GHz

*RBW 100kHz

VBW 100kHz

SWP 50.0ms

8 - POWER DENSITY

8.1 Standard Applicable

According to §15.247 (d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Repeat above procedures until all frequencies measured were complete.

8.3 Test Results

Please refer to the following plot(s).

Power Density	Test Result (Base and Handset)
Low Channel	Compliant
Middle Channel	Compliant
High Channel	Compliant

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -3.83dBm

2.402657GHz

LIONDA

GH9762

BASE

LOW CH.

MKR

2.402657 GHz

-3.83 dBm



CENTER 2.402300GHz

SPAN 1.000MHz

*RBW 3.0kHz

*VBW 3.0kHz

*SWP 1.0ksec

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -3.67dBm

2.441586GHz

LIONDA

GH9762


BASE

MID CH.

MKR

2.441586 GHz

-3.67 dBm

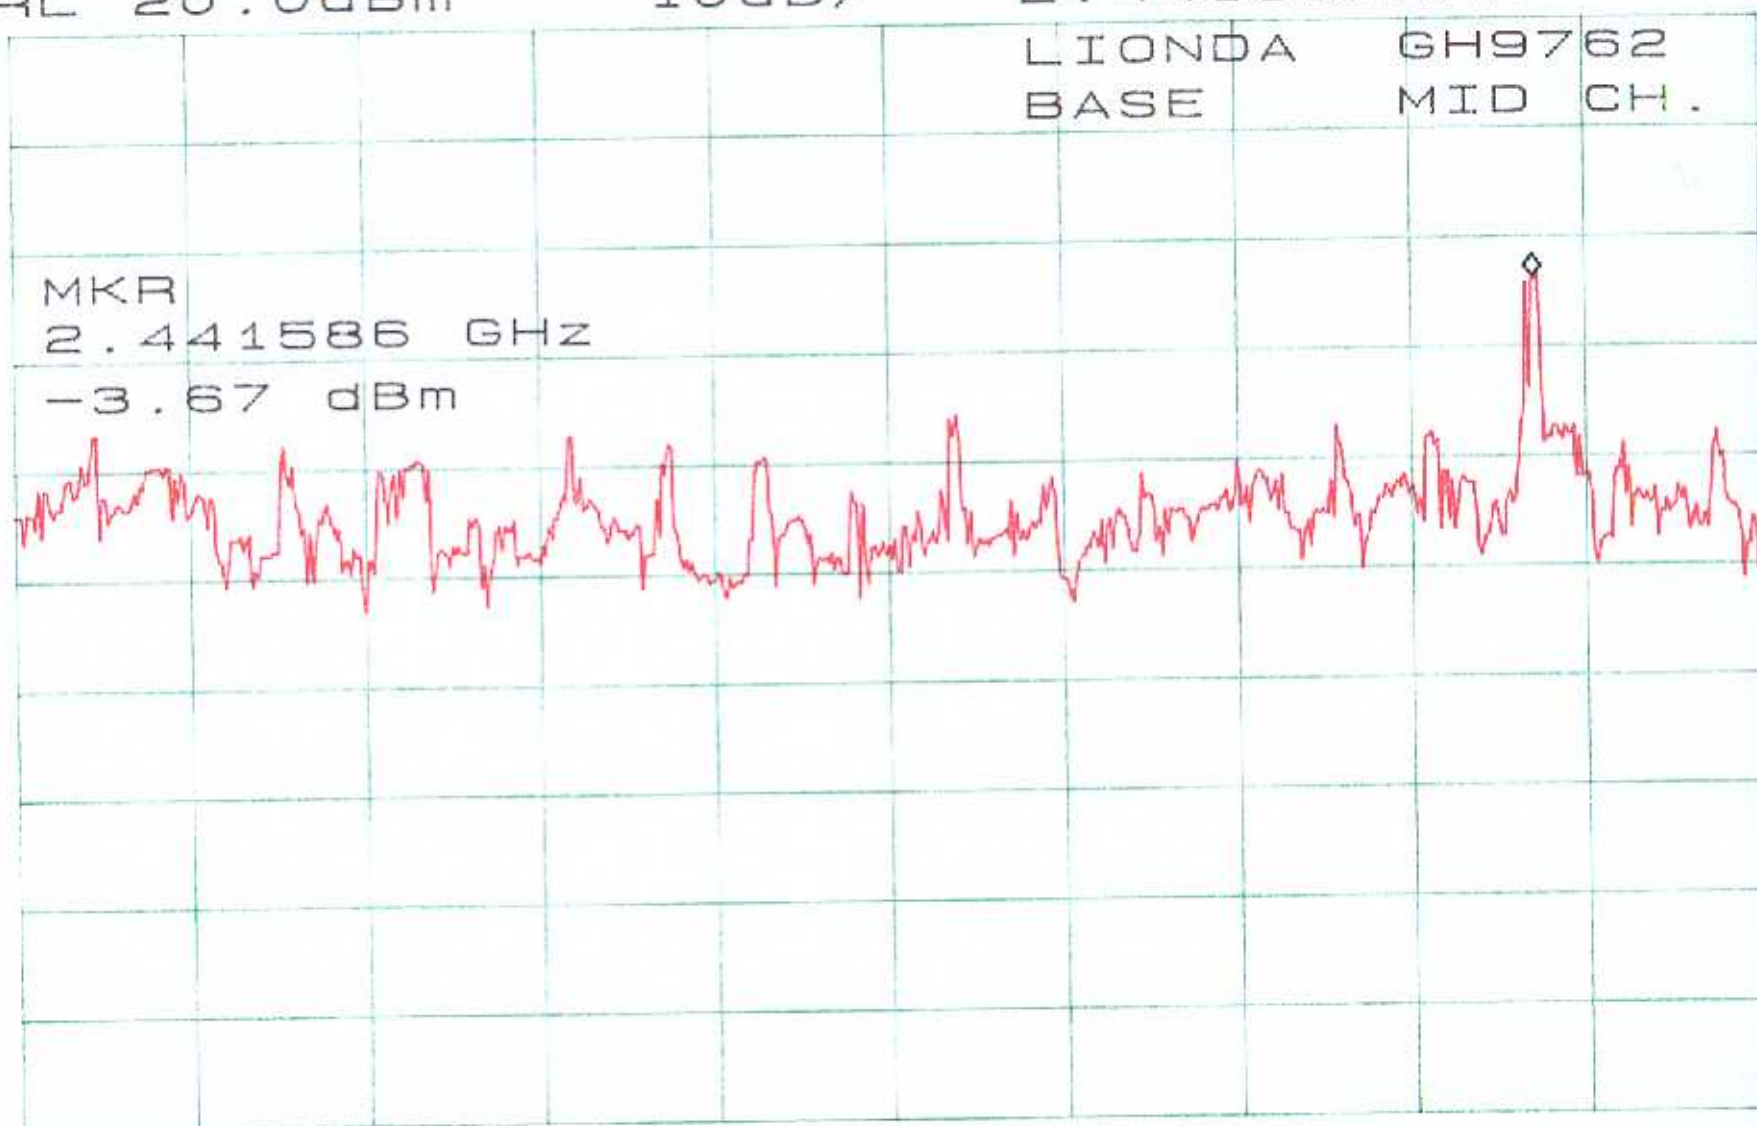

CENTER 2.441216GHz

SPAN 1.000MHz

*RBW 3.0kHz

*VBW 3.0kHz

*SWP 1.0ksec

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -5.00dBm

2.480470GHz

LIONDA

GH9762


BASE

HIGH CH.

MKR

2.480470 GHz

-5.00 dBm

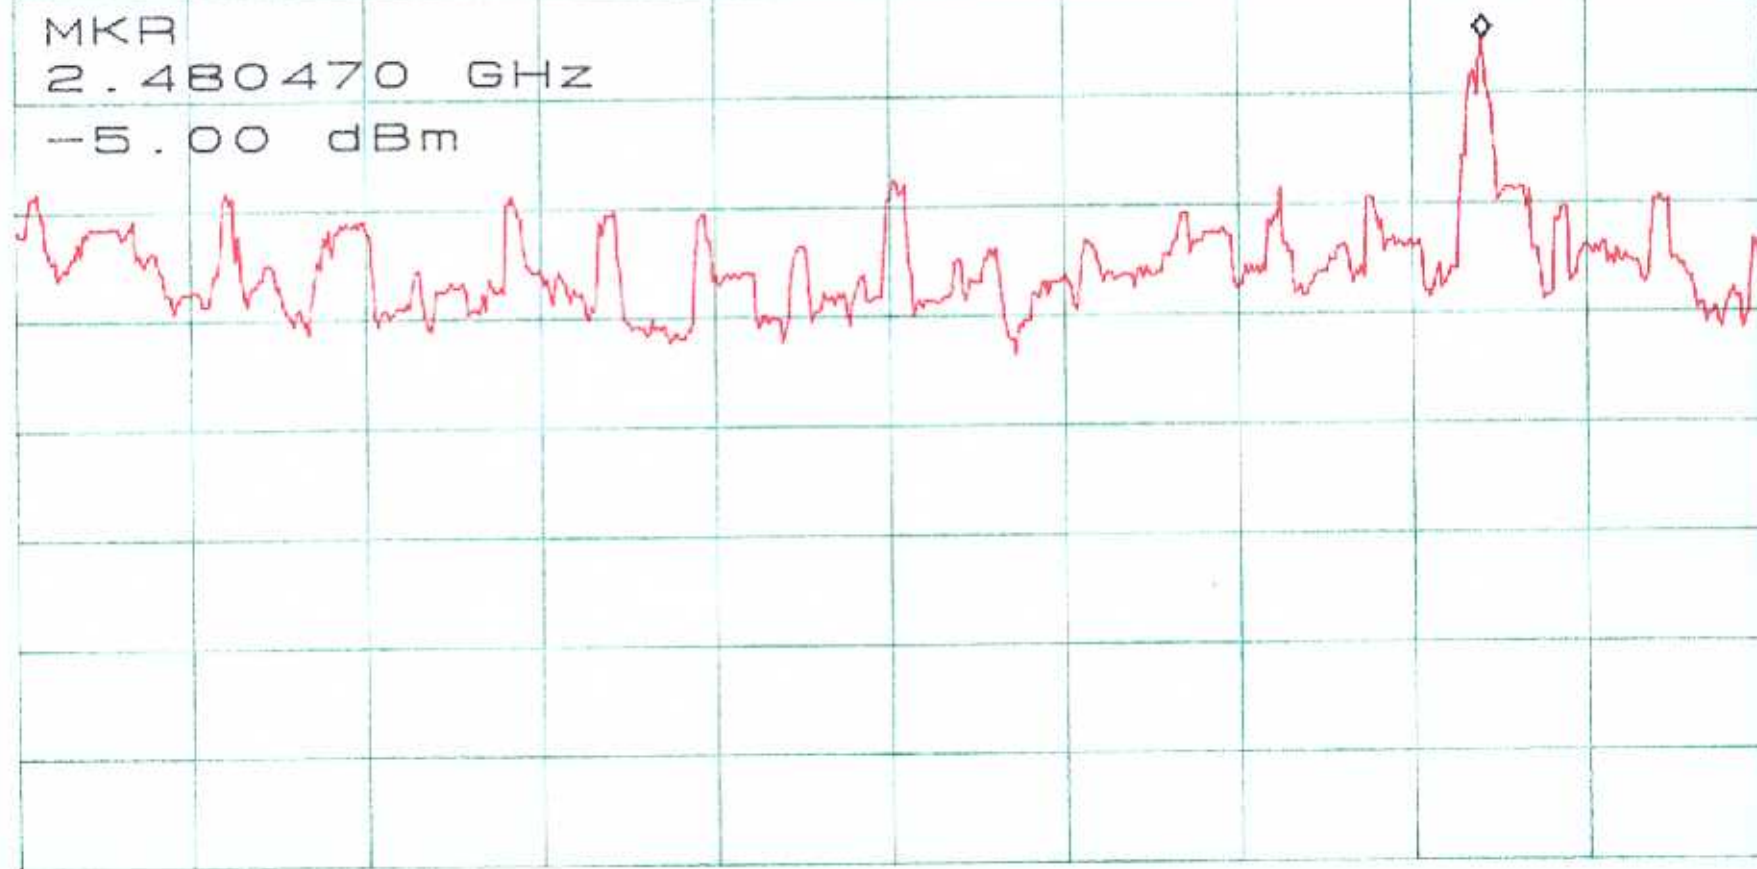

CENTER 2.480130GHz

SPAN 1.000MHz

*RBW 3.0kHz

VBW 3.0kHz

*SWP 1.0ksec

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -6.00dBm

2.402667GHz

LIONDA

GH9762


H/S

LOW CH.

MKR

2.402667 GHz

-6.00 dBm

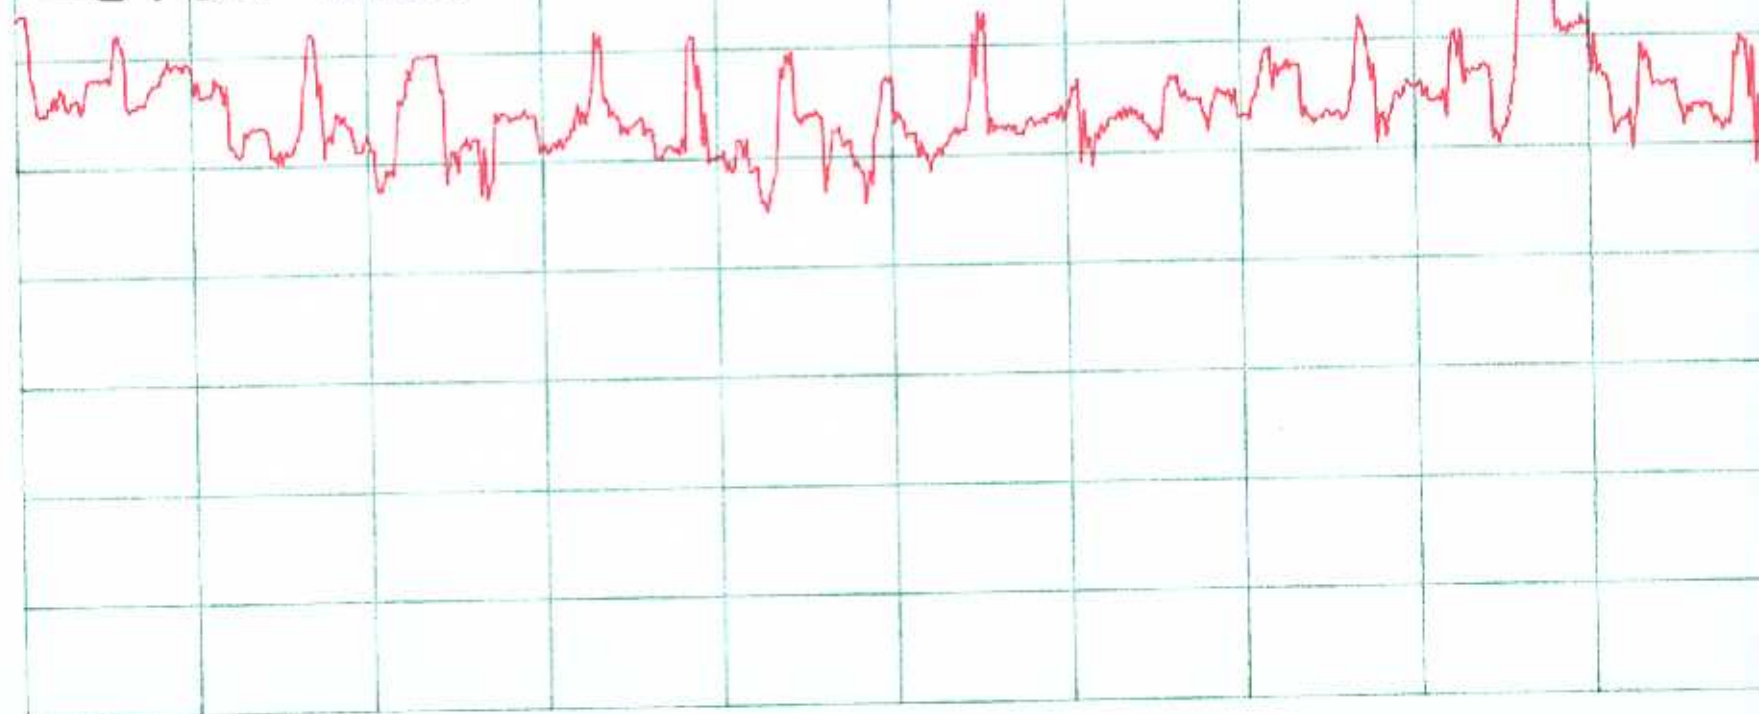

CENTER 2.402300GHz

SPAN 1.000MHz

*RBW 3.0kHz

*VBW 3.0kHz

*SWP 1.0ksec

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -6.00dBm

2.441638GHz

LIONDA

GH9762


H/S

MID CH.

MKR

2.441638 GHz

-6.00 dBm

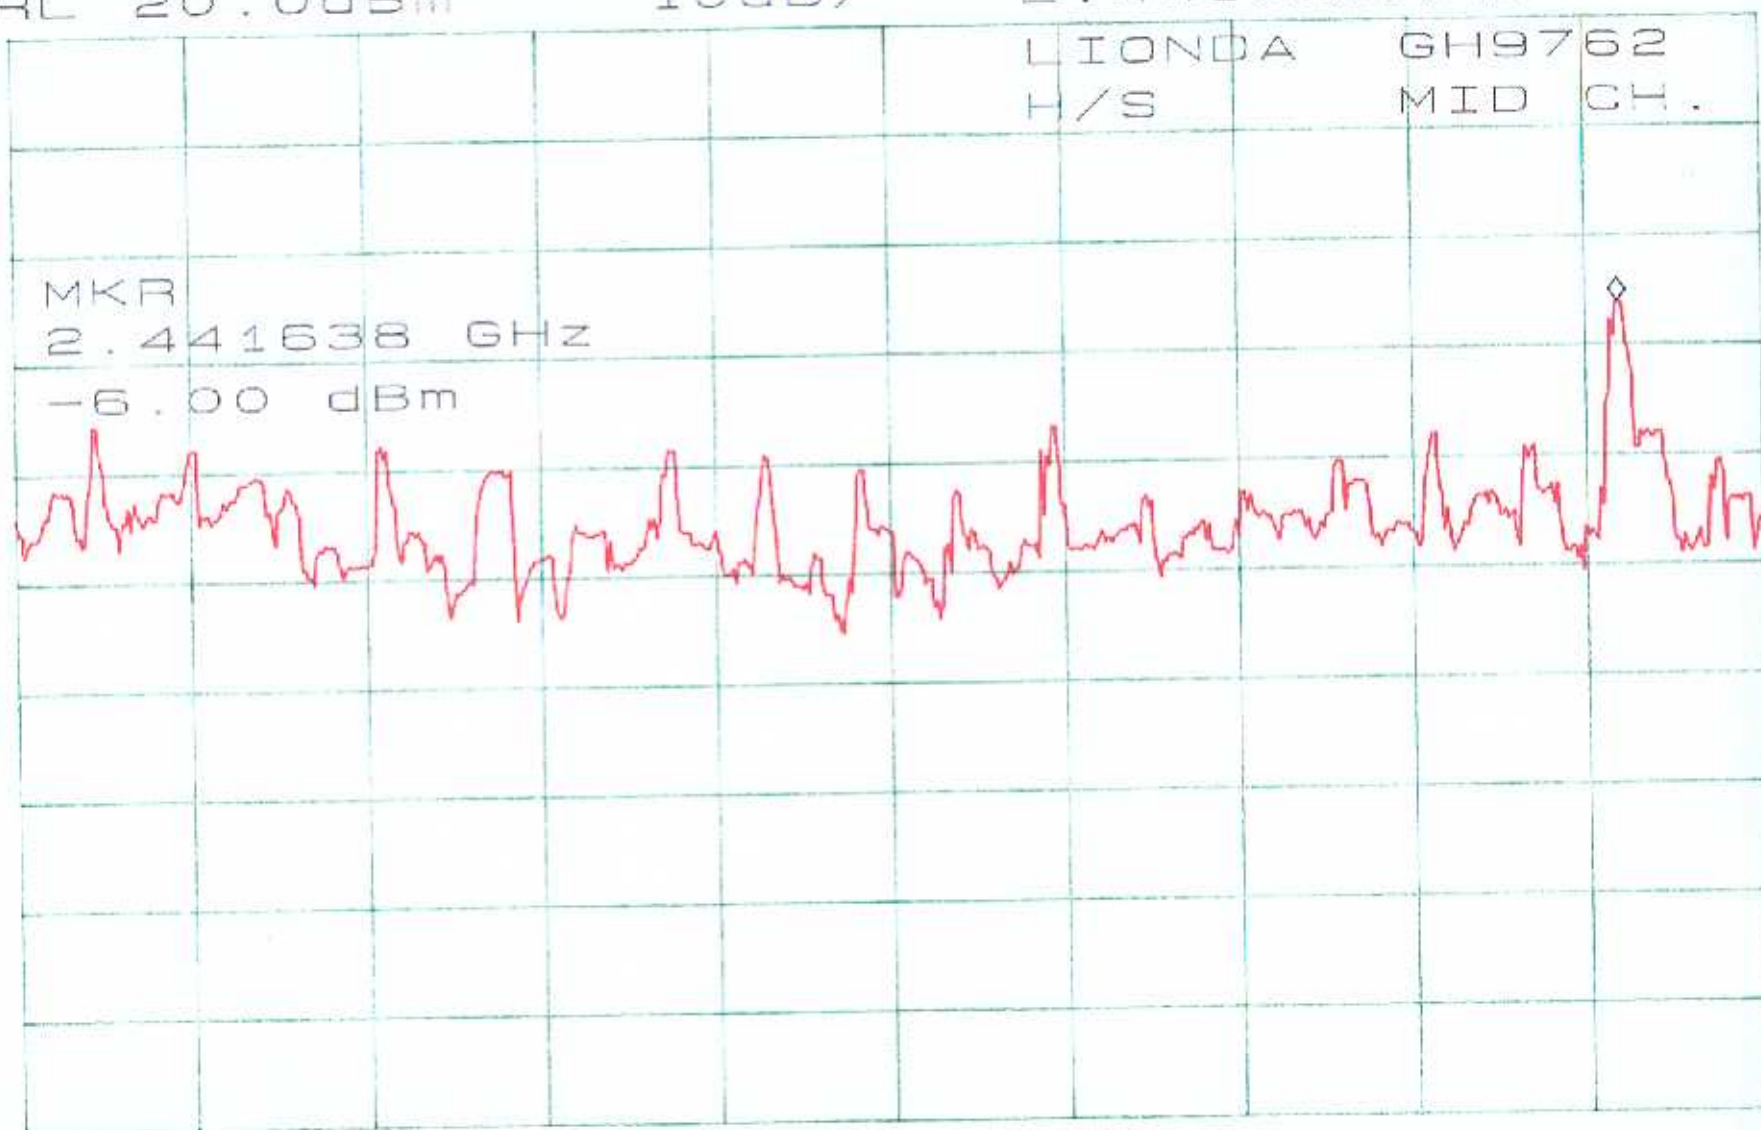

CENTER 2.441220GHz

SPAN 1.000MHz

*RBW 3.0kHz

*VBW 3.0kHz

*SWP 1.0ksec

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -6.33dBm

2.480520GHz

LIONDA

GH9762


H/S

HIGH CH.

MKR

2.480520 GHz

-6.33 dBm

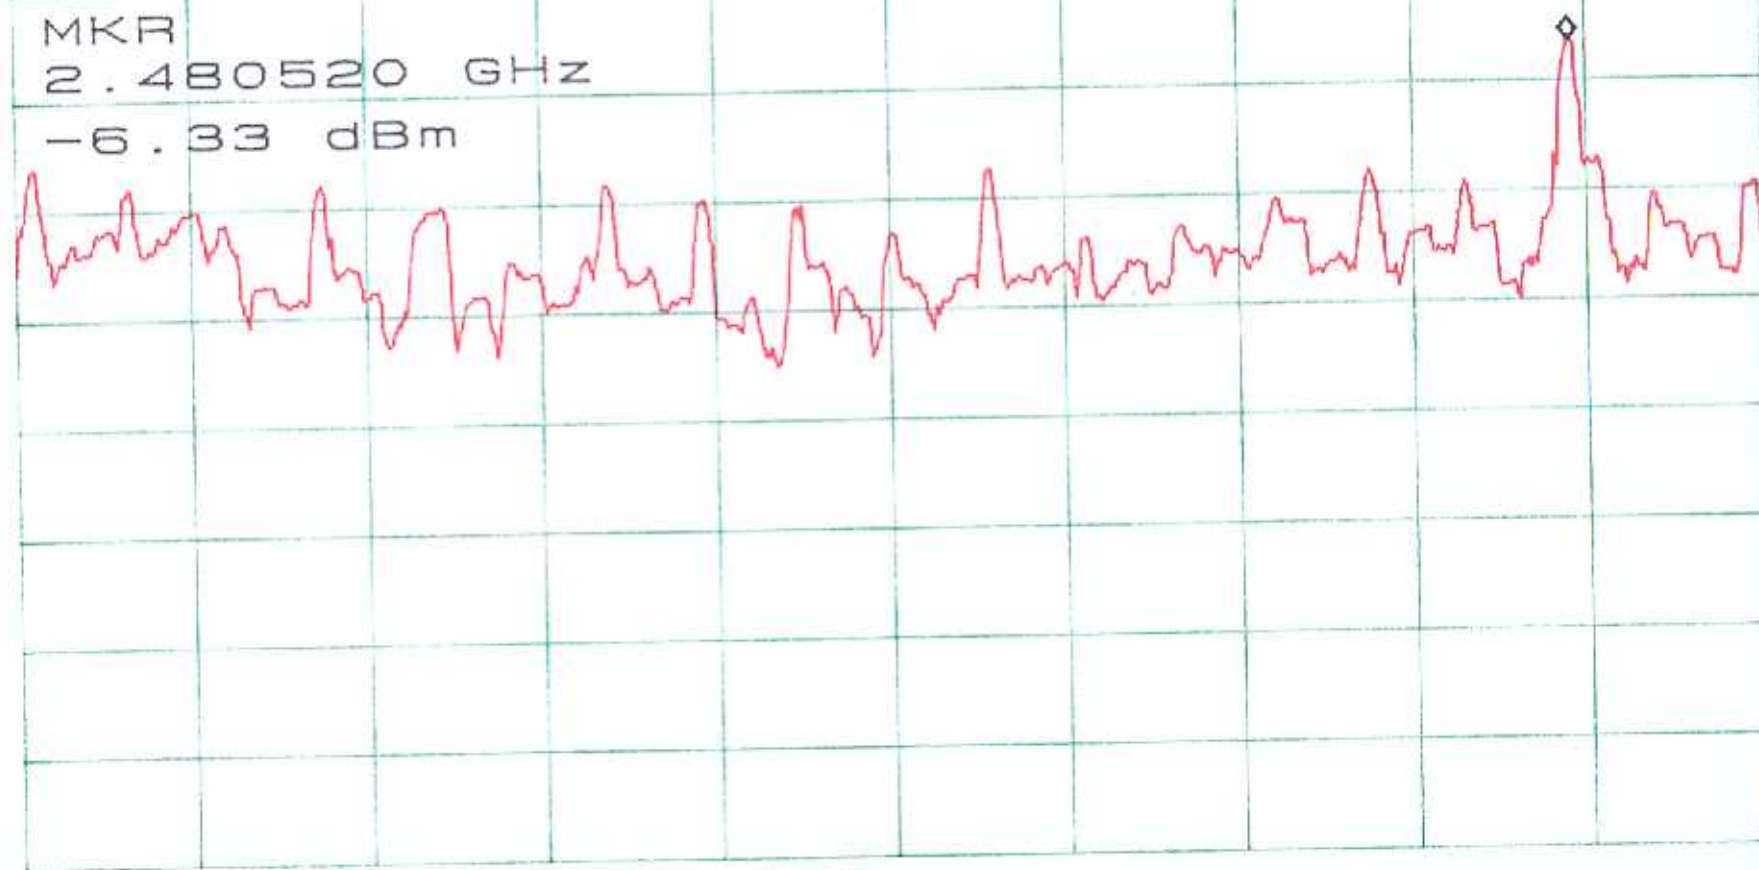

CENTER 2.480130GHz

SPAN 1.000MHz

*RBW 3.0kHz

*VBW 3.0kHz

*SWP 1.0ksec

9 - ANTENNA REQUIREMENT

9.1 Standard Applicable

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (1), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

9.2 Antenna Connected Construction

The directional gain of antenna used for transmitting is 0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

10 - RF SAFETY REQUIREMENTS TO 2.1091

According to section 3 of Supplement C to OET Bulletin 65, Part 15 Transmitters are categorically excluded from Routine Environmental Evaluation by measurement or precise computations unless otherwise required by the Commissions.

According to §15.247(b)(4) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1093 RF exposure is calculated.

Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-15000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

MPE Prediction

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

For handset of the EUT:

Maximum peak output power at antenna input terminal: -2.83 (dBm)

Maximum peak output power at antenna input terminal: 0.521 (mW)

Antenna Gain (typical): 2 (dBi)

Maximum antenna gain: 1.58 (numeric)

Prediction distance: 3 (cm)

Predication frequency: 2400 (MHz)

MPE limit for uncontrolled exposure at predication frequency: 1 (mW/cm²)

Power density at predication frequency: 0.009 (mW/cm²)

Test Result

The predicted power density level at 3 cm is 0.009mW/cm². This is below the uncontrolled exposure limit of 1mW/cm² at 2400 MHz.

11 - SPURIOUS RADIATED EMISSION DATA

11.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

11.2 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with the ANSI C63.4 - 1992. The specification used was the FCC 15 Subpart C limits.

The EUT was connected to a 110 VAC / 60 Hz power source and it was placed on the back edge of the test table. The simulator was placed on one side of the EUT, and the telephone was placed on the other side of the EUT. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.

The spacing between the peripherals was 10 centimeters.

Input / Output cables were draped along the edge of the test table and bundle when necessary.

11.3 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR §15.33 (a) (1), the system was tested to 25000 MHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
Below 30MHz	10kHz	10KHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

11.4 Test Procedure

For the radiated emissions test, both the EUT and all support equipment power cords were connected to the AC floor outlet since the power supply used in the EUT did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.

11.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

11.6 Summary of Test Results

According to the data in section 11.7, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207, and 15.247, and had the worst margin of:

Base, 30MHz to 25000MHz, 3 meters

Low channel, -10.7 dB μ V at 2337.3 MHz in the Vertical polarization
Middle channel, --4.8 dB μ V at 2337.60 MHz in the Vertical polarization
High channel, -10.1 dB μ V at 2337.11 MHz in the Vertical polarization

Handset, 30MHz to 25000MHz, 3 meters

Low channel, -10.9 dB μ V at 2337.3 MHz in the Vertical polarization
Handset, middle channel, -1.7 dB μ V at 4882.44 MHz in the Vertical polarization
Handset, high channel, -1.4 dB μ V at 4960.26 MHz in the Horizontal polarization

Base, 30MHz to 25000MHz, 3 meters

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dB μ V/m	Comments	Angle Degree	Height Meter	Polar H/V	Antenna dB μ V/m	Cable DB	Amp. DB	Corr. Ampl. dB μ V/m	Limit dB μ V/m	Margin dB
Low Channel											
2402.30	98.6	Ave.	290	1.2	v	28.1	3.4	30.0	100.1	/	/
2402.30	92.3	Ave.	270	1.2	h	28.1	3.4	30.0	93.8	/	/
2402.30	100.8	Peak	290	1.2	v	28.1	3.4	30.0	102.3	/	/
2402.30	94.7	Peak	270	1.2	h	28.1	3.4	30.0	96.2	/	/
2337.3	41.9	Ave.	110	1.5	v	28.1	3.4	30.0	43.4	54.0	-10.7
7206.90	31.5	Ave.	90	1.5	v	35.1	5.6	30.0	42.2	54.0	-11.8
4804.60	32.8	Ave.	110	2.2	v	32.5	4.9	30.0	40.2	54.0	-13.8
9609.20	28.3	Ave.	45	1.5	v	35.1	5.6	30.0	39.0	54.0	-15.0
7206.90	27.4	Ave.	120	1.5	h	35.1	5.6	30.0	38.1	54.0	-15.9
2337.3	36.6	Ave.	120	1.2	h	28.1	3.4	30.0	38.1	54.0	-16.0
9609.20	26.7	Ave.	30	1.8	h	35.1	5.6	30.0	37.4	54.0	-16.6
4804.60	29.7	Ave.	0	2.0	h	32.5	4.9	30.0	37.1	54.0	-16.9
2403.3	33.4	Ave.	0	1.2	v	28.1	3.4	30.0	34.9	54.0	-19.2
2403.3	30.1	Ave.	60	1.5	h	28.1	3.4	30.0	31.6	54.0	-22.5
2337.3	45.8	Peak	110	1.5	v	28.1	3.4	30.0	47.3	74.0	-26.8
7206.90	33.7	Peak	90	1.5	v	35.1	5.6	30.0	44.4	74.0	-29.6
9609.20	31.7	Peak	30	1.8	h	35.1	5.6	30.0	42.4	74.0	-31.6
4804.60	34.4	Peak	110	2.2	v	32.5	4.9	30.0	41.8	74.0	-32.2
9609.20	30.6	Peak	45	1.5	v	35.1	5.6	30.0	41.3	74.0	-32.7
7206.90	30.2	Peak	120	1.5	h	35.1	5.6	30.0	40.9	74.0	-33.1
4804.60	32.9	Peak	0	2.0	h	32.5	4.9	30.0	40.3	74.0	-33.7
2337.3	38.7	Peak	120	1.2	h	28.1	3.4	30.0	40.2	74.0	-33.9
2403.3	35.6	Peak	0	1.2	v	28.1	3.4	30.0	37.1	74.0	-37.0
2403.3	33.9	Peak	60	1.5	h	28.1	3.4	30.0	35.4	74.0	-38.7

Middle Channel											
2441.22	98.1	Ave.	90	1.5	v	28.1	3.4	30.0	99.6	/	/
2441.22	91.7	Ave.	250	1.2	h	28.1	3.4	30.0	93.2	/	/
2441.22	100.5	Peak	90	1.5	v	28.1	3.4	30.0	102.0	/	/
2441.22	93.9	Peak	250	1.2	h	28.1	3.4	30.0	95.4	/	/
2337.60	47.7	Ave.	45	1.2	v	28.1	3.4	30.0	49.2	54.0	-4.8
7323.66	30.4	Ave.	270	1.5	v	35.1	5.6	30.0	41.1	54.0	-12.9
4882.44	33.2	Ave.	120	1.0	v	32.5	4.9	30.0	40.6	54.0	-13.4
9764.88	29.3	Ave.	0	1.0	v	35.1	5.6	30.0	40.0	54.0	-14.0
7323.66	29.2	Ave.	230	1.5	h	35.1	5.6	30.0	39.9	54.0	-14.1
4882.44	31.1	Ave.	160	1.5	h	32.5	4.9	30.0	38.5	54.0	-15.5
9764.88	27.2	Ave.	45	1.5	h	35.1	5.6	30.0	37.9	54.0	-16.1
2337.60	36.4	Ave.	90	1.5	h	28.1	3.4	30.0	37.9	54.0	-16.2
2442.24	33.5	Ave.	220	1.8	v	28.1	3.4	30.0	35.0	54.0	-19.1
2337.60	50.7	Peak	45	1.2	v	28.1	3.4	30.0	52.2	74.0	-21.9
2442.24	29.2	Ave.	240	2.2	h	28.1	3.4	30.0	30.7	54.0	-23.4
7323.66	33.8	Peak	270	1.5	v	35.1	5.6	30.0	44.5	74.0	-29.5
4882.44	36.1	Peak	120	1.0	v	32.5	4.9	30.0	43.5	74.0	-30.5
7323.66	32.2	Peak	230	1.5	h	35.1	5.6	30.0	42.9	74.0	-31.1
4882.44	34.5	Peak	160	1.5	h	32.5	4.9	30.0	41.9	74.0	-32.1
9764.88	30.3	Peak	0	1.0	v	35.1	5.6	30.0	41.0	74.0	-33.0
9764.88	29.8	Peak	45	1.5	h	35.1	5.6	30.0	40.5	74.0	-33.5
2337.60	38.9	Peak	90	1.5	h	28.1	3.4	30.0	40.4	74.0	-33.7
2442.24	36.5	Peak	220	1.8	v	28.1	3.4	30.0	38.0	74.0	-36.1
2442.24	33.4	Peak	240	2.2	h	28.1	3.4	30.0	34.9	74.0	-39.2

High Channel											
2480.13	97.6	Ave.	160	1.2	v	28.1	3.4	30.0	99.1	/	/
2480.13	91.2	Ave.	180	1.2	h	28.1	3.4	30.0	92.7	/	/
2480.13	99.8	Peak	160	1.2	v	28.1	3.4	30.0	101.3	/	/
2480.13	93.4	Peak	180	1.2	h	28.1	3.4	30.0	94.9	/	/
2337.11	42.5	Ave.	90	1.5	v	28.1	3.4	30.0	44.0	54.0	-10.1
7440.39	31.4	Ave.	90	1.2	v	35.1	5.6	30.0	42.1	54.0	-11.9
4960.26	32.9	Ave.	0	1.5	v	32.5	4.9	30.0	40.3	54.0	-13.7
7440.39	29.5	Ave.	70	1.5	h	35.1	5.6	30.0	40.2	54.0	-13.8
9920.52	29.4	Ave.	110	1.5	v	35.1	5.6	30.0	40.1	54.0	-13.9
2337.11	36.8	Ave.	110	1.2	h	28.1	3.4	30.0	38.3	54.0	-15.8
9920.52	27.3	Ave.	140	1.5	h	35.1	5.6	30.0	38.0	54.0	-16.0
4960.26	30.2	Ave.	330	1.5	h	32.5	4.9	30.0	37.6	54.0	-16.4
2481.15	33.1	Ave.	0	1.2	v	28.1	3.4	30.0	34.6	54.0	-19.5
2481.15	29.7	Ave.	45	1.5	h	28.1	3.4	30.0	31.2	54.0	-22.9
2337.11	45.8	Peak	90	1.5	v	28.1	3.4	30.0	47.3	74.0	-26.8
7440.39	34.7	Peak	90	1.2	v	35.1	5.6	30.0	45.4	74.0	-28.6
7440.39	32.6	Peak	70	1.5	h	35.1	5.6	30.0	43.3	74.0	-30.7
4960.26	35.5	Peak	0	1.5	v	32.5	4.9	30.0	42.9	74.0	-31.1
9920.52	32.1	Peak	110	1.5	v	35.1	5.6	30.0	42.8	74.0	-31.2
9920.52	30.2	Peak	140	1.5	h	35.1	5.6	30.0	40.9	74.0	-33.1
2337.11	39.4	Peak	110	1.2	h	28.1	3.4	30.0	40.9	74.0	-33.2
4960.26	33.1	Peak	330	1.5	h	32.5	4.9	30.0	40.5	74.0	-33.5
2481.15	36.2	Peak	0	1.2	v	28.1	3.4	30.0	37.7	74.0	-36.4
2481.15	33.1	Peak	45	1.5	h	28.1	3.4	30.0	34.6	74.0	-39.5
Unintentional Emission, 30MHz to 1000MHz											
184.26	29.5	/	90	1.5	v	13.6	4.0	25.0	22.1	43.5	-21.4
159.73	31.4	/	250	1.2	h	13.0	2.0	25.0	21.4	43.5	-22.1
84.40	30.6	/	110	1.5	h	9.6	1.4	25.0	16.6	40.0	-23.4
117.53	28.8	/	0	1.2	h	11.9	1.8	25.0	17.5	43.5	-26.0
230.91	30.7	/	240	1.2	v	12.0	1.2	25.0	18.9	46.0	-27.1

Handset, 30MHz to 25000MHz, 3 meters

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART B	
Frequency MHz	Ampl. dB μ V/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dB μ V/m	Cable DB	Amp. DB	Corr. Ampl. dB μ V/m	Limit dB μ V/m	Margin dB
Low Channel											
2402.30	97.6	Ave.	30	1.6	v	28.1	3.4	30.0	99.1	/	/
2402.30	90.9	Ave.	0	1.2	h	28.1	3.4	30.0	92.4	/	/
2402.30	99.3	Peak	30	1.6	v	28.1	3.4	30.0	100.8	/	/
2402.30	92.8	Peak	0	1.2	h	28.1	3.4	30.0	94.3	/	/
2337.3	41.7	Ave.	150	1.5	v	28.1	3.4	30.0	43.2	54.0	-10.9
7206.9	31.5	Ave.	180	1.5	v	35.1	5.6	30.0	42.2	54.0	-11.8
7206.9	29.8	Ave.	170	1.2	h	35.1	5.6	30.0	40.5	54.0	-13.5
9609.2	29.4	Ave.	0	1.2	v	35.1	5.6	30.0	40.1	54.0	-13.9
4804.6	31.6	Ave.	270	1.5	v	32.5	4.9	30.0	39.0	54.0	-15.0
9609.2	27.6	Ave.	330	1.5	h	35.1	5.6	30.0	38.3	54.0	-15.7
2337.3	36.4	Ave.	120	1.2	h	28.1	3.4	30.0	37.9	54.0	-16.2
4804.6	30.3	Ave.	240	1.5	h	32.5	4.9	30.0	37.7	54.0	-16.3
2403.3	33.2	Ave.	0	1.2	v	28.1	3.4	30.0	34.7	54.0	-19.4
2403.3	29.5	Ave.	45	1.5	h	28.1	3.4	30.0	31.0	54.0	-23.1
2337.3	44.6	Peak	150	1.5	v	28.1	3.4	30.0	46.1	74.0	-28.0
7206.9	34.2	Peak	180	1.5	v	35.1	5.6	30.0	44.9	74.0	-29.1
7206.9	33.0	Peak	170	1.2	h	35.1	5.6	30.0	43.7	74.0	-30.3
9609.2	32.3	Peak	0	1.2	v	35.1	5.6	30.0	43.0	74.0	-31.0
4804.6	34.7	Peak	270	1.5	v	32.5	4.9	30.0	42.1	74.0	-31.9
4804.6	33.5	Peak	240	1.5	h	32.5	4.9	30.0	40.9	74.0	-33.1
2337.3	39.5	Peak	120	1.2	h	28.1	3.4	30.0	41.0	74.0	-33.1
9609.2	30.1	Peak	330	1.5	h	35.1	5.6	30.0	40.8	74.0	-33.2
2403.3	35.8	Peak	0	1.2	v	28.1	3.4	30.0	37.3	74.0	-36.8
2403.3	32.4	Peak	45	1.5	h	28.1	3.4	30.0	33.9	74.0	-40.2

Middle Channel											
2441.22	98.4	Ave.	180	2.2	v	28.1	3.4	30.0	99.9	/	/
2441.22	96.5	Ave.	230	1.8	h	28.1	3.4	30.0	98.0	/	/
2441.22	100.6	Peak	180	2.2	v	28.1	3.4	30.0	102.1	/	/
2441.22	98.4	Peak	230	1.8	h	28.1	3.4	30.0	99.9	/	/
4882.44	34.9	Peak	90	1.5	v	32.5	4.9	30.0	42.3	74.0	-1.7
2337.60	47.9	Ave.	45	1.2	v	28.1	3.4	30.0	49.4	54.0	-4.7
7323.66	31.7	Ave.	30	1.2	v	35.1	5.6	30.0	42.4	54.0	-11.6
7323.66	30.0	Ave.	0	1.5	h	35.1	5.6	30.0	40.7	54.0	-13.3
9764.88	29.6	Ave.	270	1.8	v	35.1	5.6	30.0	40.3	54.0	-13.7
4882.44	31.9	Ave.	90	1.5	v	32.5	4.9	30.0	39.3	54.0	-14.7
9764.88	27.8	Ave.	290	2.2	h	35.1	5.6	30.0	38.5	54.0	-15.5
4882.44	30.6	Ave.	110	1.2	h	32.5	4.9	30.0	38.0	54.0	-16.0
2337.60	36.6	Ave.	0	1.5	h	28.1	3.4	30.0	38.1	54.0	-16.0
2442.24	33.9	Ave.	270	1.8	v	28.1	3.4	30.0	35.4	54.0	-18.7
2337.60	51.2	Peak	45	1.2	v	28.1	3.4	30.0	52.7	74.0	-21.4
2442.24	30.2	Ave.	240	2.2	h	28.1	3.4	30.0	31.7	54.0	-22.4
7323.66	34.4	Peak	30	1.2	v	35.1	5.6	30.0	45.1	74.0	-28.9
7323.66	33.1	Peak	0	1.5	h	35.1	5.6	30.0	43.8	74.0	-30.2
9764.88	32.5	Peak	270	1.8	v	35.1	5.6	30.0	43.2	74.0	-30.8
9764.88	30.6	Peak	290	2.2	h	35.1	5.6	30.0	41.3	74.0	-32.7
2337.60	39.9	Peak	0	1.5	h	28.1	3.4	30.0	41.4	74.0	-32.7
4882.44	33.7	Peak	110	1.2	h	32.5	4.9	30.0	41.1	74.0	-32.9
2442.24	36.7	Peak	270	1.8	v	28.1	3.4	30.0	38.2	74.0	-35.9
2442.24	33.4	Peak	240	2.2	h	28.1	3.4	30.0	34.9	74.0	-39.2

High Channel											
2480.13	97.1	Ave.	30	1.5	v	28.1	3.4	30.0	98.6	/	/
2480.13	89.5	Ave.	210	1.2	h	28.1	3.4	30.0	91.0	/	/
2480.13	99.3	Peak	30	1.5	v	28.1	3.4	30.0	100.8	/	/
2480.13	91.7	Peak	210	1.2	h	28.1	3.4	30.0	93.2	/	/
4960.26	33.5	Peak	60	1.5	h	32.5	4.9	30.0	40.9	74.0	-1.4
4960.26	34.7	Peak	0	1.5	v	32.5	4.9	30.0	42.1	74.0	-2.5
2337.11	41.4	Ave.	90	1.5	v	28.1	3.4	30.0	42.9	54.0	-11.2
7440.39	31.6	Ave.	270	1.2	v	35.1	5.6	30.0	42.3	54.0	-11.7
7440.39	30.1	Ave.	290	1.2	h	35.1	5.6	30.0	40.8	54.0	-13.2
9920.52	29.8	Ave.	130	1.5	v	35.1	5.6	30.0	40.5	54.0	-13.5
4960.26	31.8	Ave.	0	1.5	v	32.5	4.9	30.0	39.2	54.0	-14.8
9920.52	27.4	Ave.	160	1.5	h	35.1	5.6	30.0	38.1	54.0	-15.9
4960.26	30.4	Ave.	60	1.5	h	32.5	4.9	30.0	37.8	54.0	-16.2
2337.11	36.2	Ave.	120	1.2	h	28.1	3.4	30.0	37.7	54.0	-16.4
2481.15	32.9	Ave.	60	1.2	v	28.1	3.4	30.0	34.4	54.0	-19.7
2481.15	29.1	Ave.	45	1.5	h	28.1	3.4	30.0	30.6	54.0	-23.5
2337.11	43.8	Peak	90	1.5	v	28.1	3.4	30.0	45.3	74.0	-28.8
7440.39	34.1	Peak	270	1.2	v	35.1	5.6	30.0	44.8	74.0	-29.2
7440.39	32.9	Peak	290	1.2	h	35.1	5.6	30.0	43.6	74.0	-30.4
9920.52	32.2	Peak	130	1.5	v	35.1	5.6	30.0	42.9	74.0	-31.1
9920.52	30.5	Peak	160	1.5	h	35.1	5.6	30.0	41.2	74.0	-32.8
2337.11	38.4	Peak	120	1.2	h	28.1	3.4	30.0	39.9	74.0	-34.2
2481.15	35.1	Peak	60	1.2	v	28.1	3.4	30.0	36.6	74.0	-37.5
2481.15	32.6	Peak	45	1.5	h	28.1	3.4	30.0	34.1	74.0	-40.0
Unintentional Emission, 30MHz to 1000MHz											
191.76	29.5	/	310	1.2	h	14.4	2.7	25.0	21.6	43.5	-21.9
147.40	30.1	/	90	1.2	h	13.4	1.6	25.0	20.1	43.5	-23.4
83.62	30.4	/	270	1.5	h	9.6	1.4	25.0	16.4	40.0	-23.6
241.75	31.9	/	120	1.5	v	12.6	2.3	25.0	21.8	46.0	-24.2
152.88	29.7	/	30	1.5	v	13.0	0.7	25.0	18.4	43.5	-25.1

12 - CONDUCTED EMISSIONS

12.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is ± 2.4 dB.

12.2 EUT Setup

The measurement was performed at the **Open Area Test Site**, using the same setup per ANSI C63.4 - 1992 measurement procedure. The specification used was FCC Class B limits.

The EUT was connected to a 110 VAC / 60 Hz power source and it was placed on the back edge of the test table. The simulator was placed on one side of the EUT, and the telephone was placed on the other side of the EUT. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.

The spacing between the peripherals was 10 centimeters.

Input / Output cables were draped along the edge of the test table and bundle when necessary.

12.3 Spectrum Analyzer Setup

The spectrum analyzer was set with the following configurations during the conduction test:

Start Frequency	450 kHz
Stop Frequency	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10 kHz
Video Bandwidth	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal

12.4 Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of each modes tested to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within -4 dB μ V of specification limits). Quasi-peak readings are distinguished with a "Qp".

12.5 Summary of Test Results

According to the data in section 12.6, the EUT complied with the FCC Conducted margin for a Class B device and these test results is deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations, with the *worst* margin reading of:

-2.2 dB μ V at 0.710 MHz in the Neutral mode, 450kHz – 30 MHz

12.6 Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC CLASS B	
Frequency MHz	Amplitude dB μ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB μ V	Margin dB
0.710	45.8	QP	Neutral	48	-2.2
0.690	45.3	QP	Line	48	-2.7
1.240	41.3	QP	Line	48	-6.7
9.760	30.1	QP	Line	48	-17.9
10.020	29.2	QP	Neutral	48	-18.8
18.480	21.5	QP	Neutral	48	-26.5

12.7 Plot of Conducted Emissions Test Data

Plot(s) of Conducted Emissions Test Data is presented in the following page as reference.

